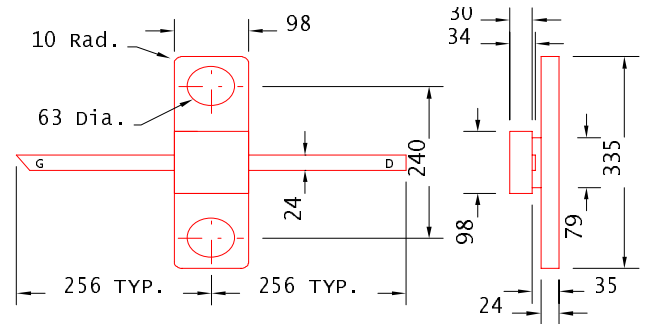


PRELIMINARY DATA SHEET
High Efficiency Heterojunction Power FET

- HERMETIC 100mil CERAMIC FLANGE PACKAGE
- +29.5dBm TYPICAL OUTPUT POWER
- 7.0dB TYPICAL POWER GAIN AT 12GHz
- 0.3 X 1200 MICRON RECESSED “MUSHROOM” GATE
- Si₃N₄ PASSIVATION
- ADVANCED EPITAXIAL HETEROJUNCTION PROFILE PROVIDES EXTRA HIGH POWER EFFICIENCY, AND HIGH RELIABILITY


ELECTRICAL CHARACTERISTICS (T_a = 25 °C)

All Dimensions In mils

SYMBOLS	PARAMETERS/TEST CONDITIONS	MIN	TYP	MAX	UNIT
P_{1dB}	Output Power at 1dB Compression f=12GHz V _{ds} =8V, I _{ds} =50% I _{dss}	28.0	29.5		dBm
G_{1dB}	Gain at 1dB Compression f=12GHz V _{ds} =8V, I _{ds} =50% I _{dss}	6.0	7.0		dB
I_{dss}	Saturated Drain Current V _{ds} =3V, V _{gs} =0V	220	360	500	mA
G_m	Transconductance V _{ds} =3V, V _{gs} =0V	240	380		mS
V_p	Pinch-off Voltage V _{ds} =3V, I _{ds} =3.0mA		-1.0	-2.5	V
BV_{gd}	Drain Breakdown Voltage I _{gd} =1.2mA	-12	-15		V
BV_{gs}	Source Breakdown Voltage I _{gs} =1.2mA	-7	-14		V
R_{th}	Thermal Resistance		43*		°C/W

 * Overall R_{th} depends on case mounting.

MAXIMUM RATINGS AT 25°C

SYMBOLS	PARAMETERS	ABSOLUTE ¹	CONTINUOUS ²
V_{ds}	Drain-Source Voltage	12V	8V
V_{gs}	Gate-Source Voltage	-8V	-3V
I_{ds}	Drain Current	I _{dss}	340mA
I_{gsf}	Forward Gate Current	60mA	10mA
P_{in}	Input Power	27dBm	@3dB Compression
T_{ch}	Channel Temperature	175°C	150°C
T_{stg}	Storage Temperature	-65/175°C	-65/150°C
P_t	Total Power Dissipation	3.2W	2.7W

Note: 1. Exceeding any of the above ratings may result in permanent damage.

2. Exceeding any of the above ratings may reduce MTTF below design goals.

Excelics Semiconductor, Inc., 2908 Scott Blvd., Santa Clara, CA 95054
Phone: (408) 970-8664 Fax: (408) 970-8998 Web Site: www.excelics.com

EPA120B-100F

PRELIMINARY DATA SHEET

High Efficiency Heterojunction Power FET

S-PARAMETERS

8V, 1/2 Idss

FREQ (GHz)	--- S11 ---		--- S21 ---		--- S12 ---		--- S22 ---	
	MAG	ANG	MAG	ANG	MAG	ANG	MAG	ANG
1.0	0.842	-98.6	14.877	118.2	0.029	44.5	0.278	-77.1
2.0	0.772	-136.2	9.103	90.9	0.037	33.0	0.245	-98.2
3.0	0.740	-154.9	6.574	72.9	0.043	29.9	0.231	-105.6
4.0	0.720	-173.4	5.257	56.2	0.049	26.0	0.227	-111.1
5.0	0.710	168.0	4.420	39.6	0.056	20.5	0.204	-117.8
6.0	0.710	154.6	3.811	23.7	0.063	13.8	0.155	-141.7
7.0	0.716	140.2	3.303	7.8	0.069	5.3	0.156	-175.1
8.0	0.723	127.4	2.879	-7.0	0.074	-2.7	0.198	160.8
9.0	0.744	110.6	2.477	-22.0	0.078	-11.0	0.216	156.8
10.0	0.765	100.8	2.186	-35.9	0.084	-19.7	0.222	146.7
11.0	0.748	97.7	2.064	-49.6	0.096	-29.0	0.265	127.2
12.0	0.703	91.6	1.975	-64.3	0.110	-39.7	0.302	119.6
13.0	0.697	77.4	1.848	-79.1	0.126	-50.2	0.270	119.2
14.0	0.702	61.9	1.740	-95.4	0.143	-63.7	0.223	104.3
15.0	0.668	49.3	1.646	-114.0	0.166	-79.5	0.283	80.1
16.0	0.636	37.2	1.550	-132.7	0.193	-95.5	0.316	69.6
17.0	0.630	27.9	1.482	-149.6	0.231	-109.8	0.264	72.8
18.0	0.607	19.6	1.419	-168.1	0.282	-126.4	0.240	71.7
19.0	0.576	14.3	1.320	171.7	0.342	-146.7	0.313	66.3
20.0	0.653	7.2	1.283	151.8	0.438	-168.1	0.378	68.4