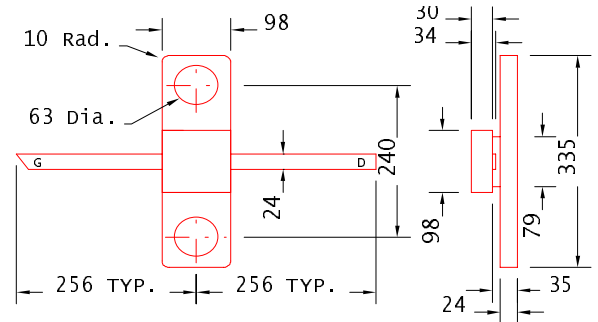


DATA SHEET
High Efficiency Heterojunction Power FET

- **HERMETIC 100mil CERAMIC FLANGE PACKAGE**
- **+31.0dBm TYPICAL OUTPUT POWER**
- **5.5dB TYPICAL POWER GAIN AT 12GHz**
- **0.3 X 1600 MICRON RECESSED “MUSHROOM” GATE**
- **Si₃N₄ PASSIVATION**
- **ADVANCED EPITAXIAL HETEROJUNCTION PROFILE PROVIDES EXTRA HIGH POWER EFFICIENCY, AND HIGH RELIABILITY**


ELECTRICAL CHARACTERISTICS (T_a = 25 °C)

All Dimensions In mils

SYMBOLS	PARAMETERS/TEST CONDITIONS	MIN	TYP	MAX	UNIT
P_{1dB}	Output Power at 1dB Compression V _{ds} =8V, I _{ds} =50% I _{dss} f=12GHz	29.0	31.0		dBm
G_{1dB}	Gain at 1dB Compression V _{ds} =8V, I _{ds} =50% I _{dss} f=12GHz	4.5	5.5		dB
PAE	Power Added Efficiency at 1dB Compression V _{ds} =8V, I _{ds} =50% I _{dss} f=12GHz		38		%
I_{dss}	Saturated Drain Current V _{ds} =3V, V _{gs} =0V	290	480	660	mA
G_m	Transconductance V _{ds} =3V, V _{gs} =0V	320	500		mS
V_p	Pinch-off Voltage V _{ds} =3V, I _{ds} =4.5mA		-1.0	-2.5	V
BV_{gd}	Drain Breakdown Voltage I _{gd} =1.6mA	-11	-15		V
BV_{gs}	Source Breakdown Voltage I _{gs} =1.6mA	-7	-14		V
R_{th}	Thermal Resistance		35*		°C/W

 * Overall R_{th} depends on case mounting.

MAXIMUM RATINGS AT 25°C

SYMBOLS	PARAMETERS	ABSOLUTE ¹	CONTINUOUS ²
V_{ds}	Drain-Source Voltage	12V	8V
V_{gs}	Gate-Source Voltage	-8V	-3V
I_{ds}	Drain Current	I _{dss}	410mA
I_{gsf}	Forward Gate Current	80mA	14mA
P_{in}	Input Power	28dBm	@3dB Compression
T_{ch}	Channel Temperature	175°C	150°C
T_{stg}	Storage Temperature	-65/175°C	-65/150°C
P_t	Total Power Dissipation	4.0W	3.3W

Note: 1. Exceeding any of the above ratings may result in permanent damage.

2. Exceeding any of the above ratings may reduce MTTF below design goals.

Excelics Semiconductor, Inc., 2908 Scott Blvd., Santa Clara, CA 95054
Phone: (408) 970-8664 Fax: (408) 970-8998 Web Site: www.excelics.com

EPA160B-100F

DATA SHEET

High Efficiency Heterojunction Power FET

S-PARAMETERS

8V, 1/2 Idss

FREQ (GHz)	--- S11 ---		--- S21 ---		--- S12 ---		--- S22 ---	
	MAG	ANG	MAG	ANG	MAG	ANG	MAG	ANG
1.0	0.816	-114.7	14.973	112.1	0.026	44.1	0.238	-125.0
2.0	0.764	-149.8	8.770	85.9	0.035	38.9	0.234	-145.2
3.0	0.738	-167.1	6.236	68.2	0.045	37.9	0.219	-154.4
4.0	0.722	175.5	4.917	51.8	0.054	33.9	0.217	-159.9
5.0	0.716	158.4	4.084	35.4	0.064	26.3	0.204	-169.1
6.0	0.710	147.3	3.489	19.9	0.075	18.2	0.204	168.1
7.0	0.708	135.2	3.022	4.9	0.083	9.8	0.231	152.6
8.0	0.703	123.8	2.658	-9.0	0.093	1.6	0.266	143.8
9.0	0.710	108.2	2.342	-23.4	0.101	-8.2	0.258	145.3
10.0	0.714	98.5	2.125	-37.4	0.113	-18.0	0.235	139.8
11.0	0.679	93.5	2.051	-52.2	0.133	-29.3	0.254	124.4
12.0	0.626	83.5	1.999	-68.5	0.156	-42.0	0.278	118.8
13.0	0.622	65.9	1.877	-85.7	0.178	-56.2	0.232	117.6
14.0	0.625	49.7	1.750	-102.7	0.202	-70.9	0.169	103.0
15.0	0.576	34.8	1.652	-122.4	0.234	-88.9	0.241	75.7
16.0	0.532	22.8	1.529	-141.1	0.268	-105.9	0.247	66.0
17.0	0.546	13.3	1.493	-159.2	0.327	-122.7	0.197	79.9
18.0	0.516	3.1	1.428	-179.6	0.399	-142.7	0.177	84.7
19.0	0.529	-4.4	1.306	159.0	0.472	-165.7	0.254	79.4
20.0	0.641	-17.8	1.259	137.8	0.593	169.3	0.319	78.6