


■ EX202

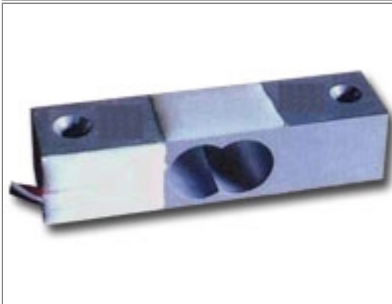


Aluminum load cell.

Mainly used for electronic scale,
kitchen scale and portable scale.

Specifications	Unit	Technical Index
Capacity : 5, 6, 10, 15, 20 kg		
Rated Output	mV / V	1.6 ± 10%
Zero Balance	% F.S.	± 1
Non - Linearity	% F.S.	0.05
Hysteresis	% F.S.	0.05
Repeatability	% F.S.	0.05
Creep (30min)	% F.S.	0.05
Temperature Effect on Output	% F.S. / 10°C	0.5
Temperature Effect on Zero	% F.S. / 10°C	0.2
Input Impedance	Ω	800 ± 40
Output Impedance	Ω	750 ± 10
Insulation	M Ω	> 1000 / 50 VDC
Recommended Excitation	V	5
Maximum Excitation	V	10
Operation Temperature Range	°C	- 10 ~ 50
Safe Overload	% F.S.	150
Ultimate Overload	% F.S.	300
Cable Size	mm	AWG 26 × 450

Red : + Excitation Black : + Excitation Green : + Signal White : + Signal

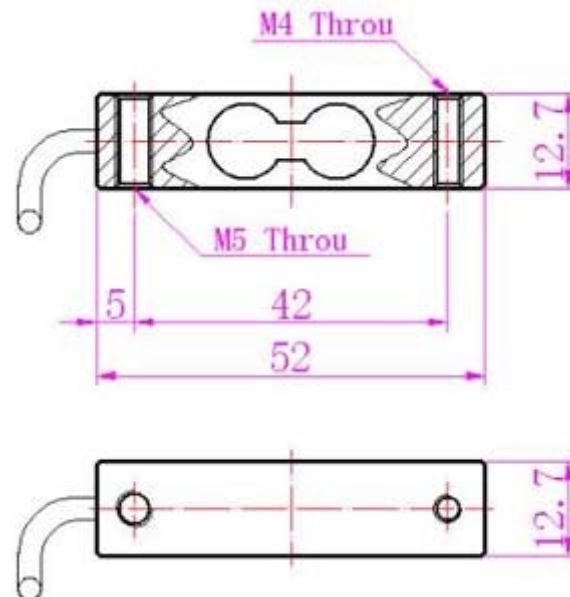

EXACT Sensor Technology Research & Development Center

www.exactchina.com

EXACT © 2003