


■ EX801C



Bridge, alloy steel load cell.
Mainly used for vehicle scales,
hanging scales and industrial
weighing system.

Specifications	Unit	Technical Index
Rated Output	mV / V	3.0 ± 1%
Zero Balance	% F.S.	± 1
Non - Linearity	% F.S.	0.03
Hysteresis	% F.S.	0.03
Repeatability	% F.S.	0.02
Creep (30min)	% F.S.	0.05
Temperature Effect on Output	% F.S. / 10°C	0.03
Temperature Effect on Zero	% F.S. / 10°C	0.03
Input Impedance	Ω	780 ± 10
Output Impedance	Ω	700 ± 5
Insulation	M Ω	> 2000 / 50 VDC
Recommended Excitation	V	10
Maximum Excitation	V	15
Compensated Temperature Range	°C	- 10 ~ 40
Operation Temperature Range	°C	- 20 ~ 60
Safe Overload	% F.S.	150
Ultimate Overload	% F.S.	200
Cable Size	mm	Ø 5 × 6000

Red : + Excitation Black : + Excitation Green : + Signal White : + Signal

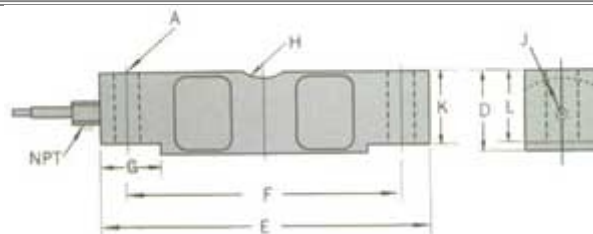

Cap lb	Size inch									
	A	B	C	D	E	F	G	H	J	K
25 ~ 40 k	8.25	0.50	1.63	2.00	0.50	0.50	7.25	1.75	1.94	2.44
50 ~ 75 k	11.25	0.75	1.70	2.20	0.75	1.00	10.0	2.00	1.94	2.94
100 ~ 125 k	14.5	1.00	2.44	3.20	1.00	1.50	12.5	2.75	2.90	3.86

EXACT Sensor Technology Research & Development Center

www.exactchina.com

EXACT © 2003