


ET-2型拉式称重传感器
TYPE TENSION LOAD CELL

材质: 合金钢
Materials: Tool steel



Main technical data	Unit	Technical quota	
Sensitivity	mv/v	2±0.01	
Nonlinearity	%FS	±0.03	
Hysteresis			
Repeatability	%FS	0.02	
Creep	%FS/30min	±0.03	
Zero balance	%FS	±1	
Zero temperature coefficient	%FS/10℃	±0.03	
Rated output temperature coefficient			
Input resistance	Ω	385±10	710±15
Output resistance	Ω	350±3	650±5
Insulation resistance	MΩ	≥5000	
Supply Voltage	V	10 (DC/AC)	MAX: 15 (DC/AC)
Temperature compensation range	℃	-10~+50	
Safe temperature range	℃	-20~+60	
Safe overload	%FS	120	
Connect cable	mm	Φ5×5000	
Method of connecting wire	input: Red (+) Black (-)	output: Green (+) White (-)	

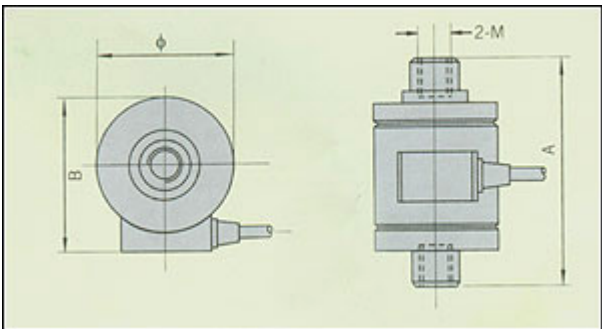

RATED LOAD		Size:mm			
t	0.1, 0.2	2, 3	10	15	30
	0.3, 0.5			20	
	0.7, 1.0	5, 7			
A	104	120	156	164	210
B	68	78	88	121	140
Φ	56	64	75	100	110
M	16×1.5	24×2	33×2	36×2	45×4.5