

EPB5100G




- Designed to work with Conexant HPNA 2.0 Applications •
- Robust construction allows for IR/VP processes •
- 1500 Vrms Isolation •
- Enhanced Common Mode Attenuation to pass FCC Class B •
- Temperature Range -40°C to +85°C •

Electrical Parameters @ 25° C


Cut-off Frequency		Insertion Loss (dB Max.)	Return Loss (dB Min.)	Attenuation (dB Min.)			CMRR (dB Min.)
Lower Band	Upper Band	4.25 - 9.75 MHz	4.25 - 9.75 MHz	@ 1.1 MHz	@ 22 MHz	@ 54 MHz	1-10 MHz
3.5	11.5	-2.2	-8.0	-60	-35	-50	-50

• Characteristic Filter Impedance : 100 Ω •

Schematic

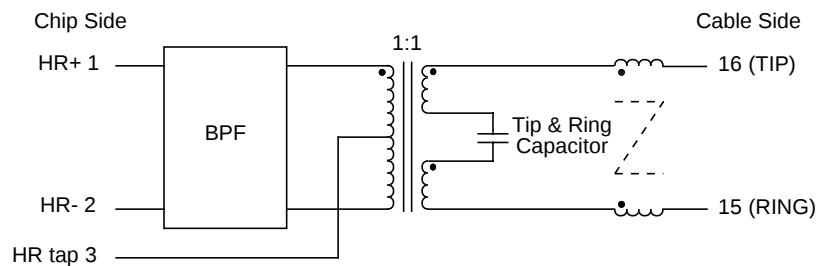

Package

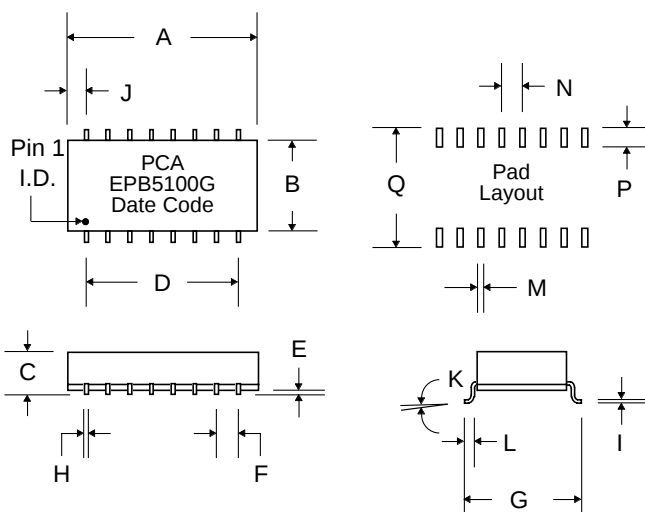

Dimensions

Dim.	(Inches)			(Millimeters)		
	Min.	Max.	Nom.	Min.	Max.	Nom.
A	.990	1.01	1.00	25.15	25.65	25.40
B	.470	.490	.480	11.94	12.45	12.19
C	.250	.270	.260	6.35	6.86	6.60
D	---	---	.700	---	---	17.78
E	.010	.015	.012	.254	.381	.305
F	---	---	.100	---	---	2.54
G	.590	.610	.600	14.99	15.49	15.24
H	.016	.022	.018	.406	.559	.457
I	.008	.012	.010	.203	.305	.254
J	---	---	.150	---	---	3.81
K	0°	8°	4°	0°	8°	4°
L	.025	.045	.035	.635	1.14	.889
M	---	---	.030	---	---	.762
N	---	---	.100	---	---	2.54
P	---	---	.090	---	---	2.29
Q	---	---	.670	---	---	17.02