


# Ethernet DC/DC Regulated Converter EPC1110P & EPC1110H

- Features**
- 65 % Typical efficiency at full load
  - Regulated with Enable Low
  - Input / Output Isolation
  - Input filter to reduce input ripple current
  - Designed for low common mode noise


## Electrical Specifications

| PCA P/N  | Standard Package | Optional Packages | Input Voltage V | Output Voltage V | Output Current mA Max. | Output Ripple & Noise @ 20 MHz BW mV p-p | Isolation Vrms |
|----------|------------------|-------------------|-----------------|------------------|------------------------|------------------------------------------|----------------|
| EPC1110P | N2               | N2-G              | 5 ±10%          | -9 ± 5%          | 120                    | 50 Max.                                  | 500            |
| EPC1110H | N2               | N2-G              | 5 ±10%          | -9 ± 5%          | 120                    | 50 Max.                                  | 2000           |

## PIN CONNECTIONS



## PACKAGE N2

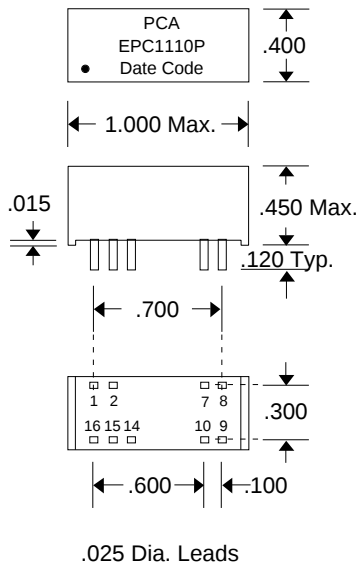

## PACKAGE N2-G

