



Low Profile 10 Base-T PCMCIA Module

PCA Part Number(s) EPE6219S					
Electrical Specifications @ 25°C					
Parameter	Frequency	Specification	XMIT	RCV	Unit
Cut-off Frequency		17.0 ± 1.0			MHz
Insertion Loss (Note 1)	1-10 MHz		1.0	1.0	dB Max.
Attenuation	30 MHz		30	20	dB Min.
	50 MHz		35	35	dB Min.
	100 MHz		30	30	dB Min.
Return Loss	5-10 MHz		18	18	dB Min.
Common Mode Rejection	10 MHz		50	50	dB Min.
	50 MHz		50	50	dB Min.
	100 MHz		50	50	dB Min.
	200 MHz		40	40	dB Min.
Crosstalk	5-10 MHz	50			dB Min.
Hipot			1500	1500	Vrms
OCL			140	140	μH Min.

Notes : 1. Measured without the resistor network.

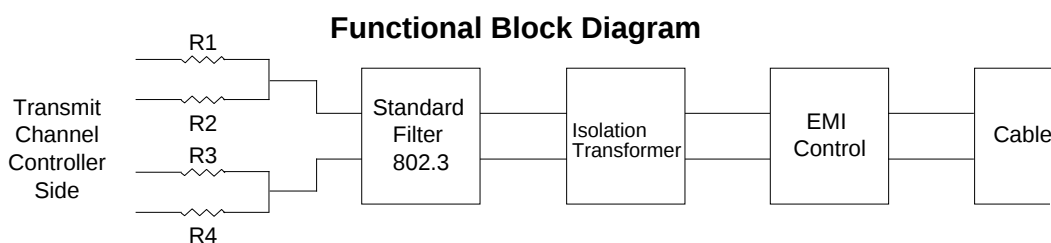


Schematic

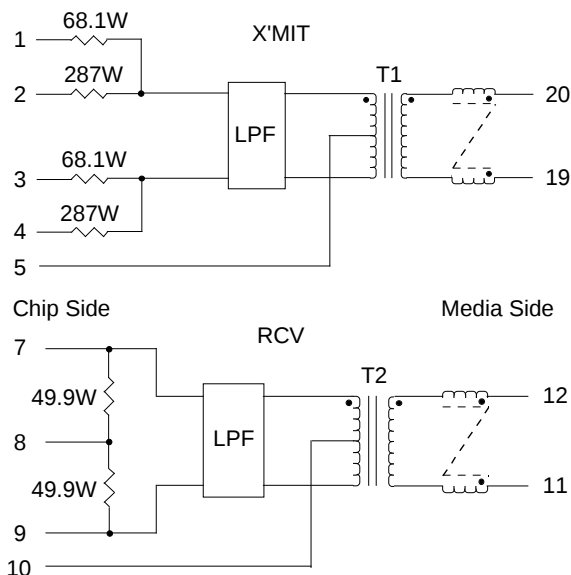

Package

Markings :

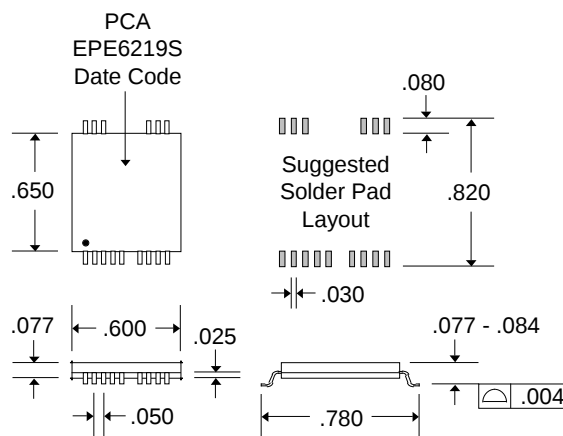

Note : All resistors are ± 1%, unless otherwise specified.