

ASYNCHRONOUS SRAM

256K x 4 SRAM

WITH SINGLE CHIP ENABLE
TRADITIONAL PINOUT

FEATURES

- Fast access times: 10, 12, 15 and 20ns
- Fast OE# access times: 5, 6, 7 and 8ns
- Single +5V $\pm 10\%$ power supply
- Fully static -- no clock or timing strobes necessary
- All inputs and outputs are TTL-compatible
- Three state outputs
- Easy memory expansion with CE# and OE# options
- Automatic CE# power down
- High-performance, low-power consumption, CMOS double-poly, double-metal process

OPTIONS

- Timing

10ns access	-10
12ns access	-12
15ns access	-15
20ns access	-20
- Packages

28-pin SOJ (400 mil)	J
28-pin SOJ (300 mil)	SJ
- Power consumption

Standard	None
Low	L
- Temperature

Commercial	None	(0°C to 70°C)
Industrial	I	(-40°C to 85°C)

Part Number Examples

PART NO.	Pkg
GVT72028A4J-10L	28-pin SOJ (400 mil)


GENERAL DESCRIPTION

The GVT72028A4 is organized as a 262,144 x 4 SRAM using a four-transistor memory cell with a high performance, silicon gate, low-power CMOS process. Galvantech SRAMs are fabricated using double-layer polysilicon, double-layer metal technology.


Static design eliminates the need for external clocks or timing strobes. For increased system flexibility and eliminating bus contention problems, this device offers chip enable (CE#) and output enable (OE#) with this organization.

Writing to these devices is accomplished when write enable (WE#) and chip enable (CE#) inputs are both LOW. Reading is accomplished when (CE#) and (OE#) go LOW with (WE#) remaining HIGH. The device offers a low power standby mode when chip is not selected. This allows system designers to meet low standby power requirements.

PIN ASSIGNMENT 28-Pin SOJ

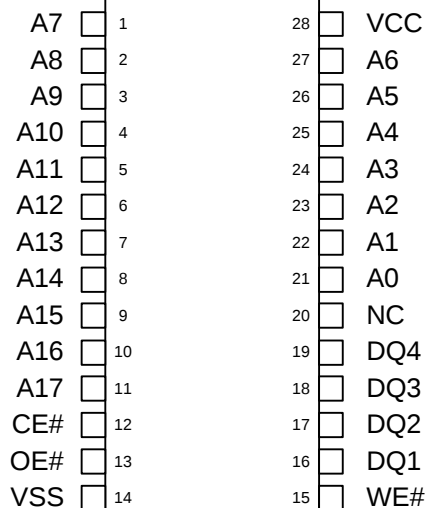

FUNCTIONAL BLOCK DIAGRAM

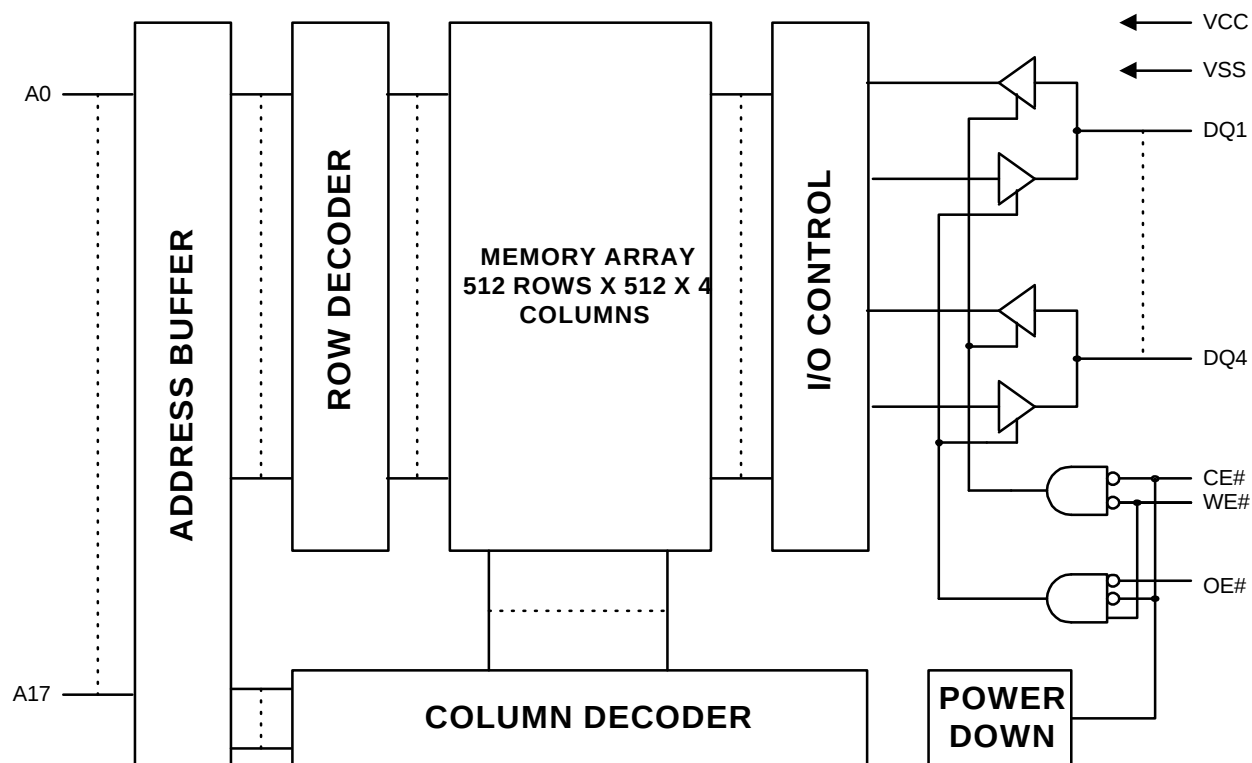

TRUTH TABLE

MODE	CE#	WE#	OE#	DQ	POWER
READ	L	H	L	Q	ACTIVE
WRITE	L	L	X	D	ACTIVE
OUTPUT DISABLE	L	H	H	HIGH-Z	ACTIVE
STANDBY	H	X	X	HIGH-Z	STANDBY

PIN DESCRIPTIONS

SOJ Pin Numbers	SYMBOL	TYPE	DESCRIPTION
21-27, 1-11	A0-A17	Input	Addresses Inputs: These inputs determine which cell is addressed .
15	WE#	Input	Write Enable: This input determines if the cycle is a READ or WRITE cycle. WE# is LOW for a WRITE cycle and HIGH for a READ cycle .
12	CE#	Input	Chip Enable: This active LOW input is used to enable the device. When CE# is LOW, the chip is selected. When CE# is HIGH, the chip is disabled and automatically goes into standby power mode .
13	OE#	Input	Output Enable: This active LOW input enables the output drivers .
16, 17, 18, 19	DQ1-DQ4	Input/Output	SRAM Data I/O: Data inputs and data output s
28	VCC	Supply	Power Supply: 5V $\pm 10\%$
14	VSS	Supply	Ground

ABSOLUTE MAXIMUM RATINGS *

Voltage on VCC Supply Relative to VSS.....-0.5V to +7.0V
 V_{IN} -0.5V to VCC+0.5V
 Storage Temperature (plastic)-55°C to +125°
 Junction Temperature+125°
 Power Dissipation1.2W
 Short Circuit Output Current50mA

*Stresses greater than those listed under “Absolute Maximum Ratings” may cause permanent damage to the device. This is a stress rating only and functional operation of the device at these or any other conditions above those indicated in the operational sections of this specification is not implied. Exposure to absolute maximum rating conditions for extended periods may affect reliability

DC ELECTRICAL CHARACTERISTICS AND RECOMMENDED OPERATING CONDITIONS

(All Temperature Ranges; VCC = 5V $\pm$ 10% unless otherwise noted)

DESCRIPTION	CONDITIONS	SYMBOL	MIN	MAX	UNITS	NOTES
Input High (Logic 1) voltage		V_{IH}	2.2	VCC+1	V	1, 2
Input Low (Logic 0) Voltage		V_{IL}	-0.5	0.8	V	1, 2
Input Leakage Current	$0V \leq V_{IN} \leq VCC$	IL_I	-5	5	uA	
Output Leakage Current	Output(s) disabled, $0V \leq V_{OUT} \leq VCC$	IL_O	-5	5	uA	
Output High Voltage	$I_{OH} = -4.0mA$	V_{OH}	2.4		V	1
Output Low Voltage	$I_{OL} = 8.0mA$	V_{OL}		0.4	V	1
Supply Voltage		VCC	4.5	5.5	V	1

DESCRIPTION	CONDITIONS	SYM	TYP	POWER	-10	-12	-15	-20	UNITS	NOTES
Power Supply Current: Operating	Device selected; CE# $\leq V_{IL}$; VCC =MAX; f=f _{MAX} ; outputs open	I _{CC}	80	standard	240	220	180	140	mA	3, 14
				low	210	180	150	110		
TTL Standby	CE# $\geq V_{IH}$; VCC = MAX; f=f _{MAX}	I _{SB1}	20	standard	60	55	50	40	mA	14
				low	45	40	35	30		
CMOS Standby	CE# $\geq VCC - 0.2$; VCC = MAX; all other inputs $\leq VSS + 0.2$ or $\geq VCC - 0.2$; all inputs static; f= 0	I _{SB2}	0.75	standard	10	10	10	10	mA	14
				low	1.0	1.0	1.0	1.0		

CAPACITANCE

DESCRIPTION	CONDITIONS	SYMBOL	MAX	UNITS	NOTES
Input Capacitance	$T_A = 25^\circ C$; f = 1 MHz VCC = 5V	C_I	6	pF	4
Input/Output Capacitance (DQ)		$C_{I/O}$	8	pF	4

AC ELECTRICAL CHARACTERISTICS

(Note 5) (All Temperature Ranges; VCC = 5V $\pm 10\%$)

DESCRIPTION		- 10		- 12		- 15		- 20			
	SYM	MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAN	UNITS	NOTES
READ Cycle											
READ cycle tim e	^t RC	10		12		15		20		ns	
Address access tim e	^t AA		10		12		15		20	ns	
Chip Enable access tim e	^t ACE		10		12		15		20	ns	
Output hold from address chang e	^t OH	3		4		4		4		ns	
Chip Enable to output in Low- Z	^t LZCE	3		4		4		4		ns	4, 7
Chip disable to output in High- Z	^t HZCE		5		6		7		8	ns	4, 6, 7
Output Enable access tim e	^t AOE		5		6		7		8	ns	
Output Enable to output in Low- Z	^t LZOE	0		0		0		0		ns	
Output Enable to output in High- Z	^t HZOE		5		6		7		8	ns	4, 6
Chip Enable to power-up tim e	^t PU	0		0		0		0		ns	4
Chip disable to power-down tim e	^t PD		10		12		15		20	ns	4
WRITE Cycle											
WRITE cycle tim e	^t WC	10		12		15		20		ns	
Chip Enable to end of writ e	^t CW	8		8		9		10		ns	
Address valid to end of write, with OE# HIGH	^t AW	8		8		9		10		ns	
Address setup tim e	^t AS	0		0		0		0		ns	
Address hold from end of writ e	^t AH	0		0		0		0		ns	
WRITE pulse widt h	^t WP2	10		10		11		12		ns	
WRITE pulse width, with OE# HIG H	^t WP1	8		8		9		10		ns	
Data setup tim e	^t DS	6		6		7		8		ns	
Data hold tim e	^t DH	0		0		0		0		ns	
Write disable to output in Low- Z	^t LZWE	3		4		5		5		ns	4, 7
Write Enable to output in High- Z	^t HZWE		5		6		7		8	ns	4, 6, 7

AC TEST CONDITIONS

Input pulse levels	0V to 3.0V
Input rise and fall times	1.5ns
Input timing reference levels	1.5V
Output reference levels	1.5V
Output load	See Figures 1 and 2

OUTPUT LOADS

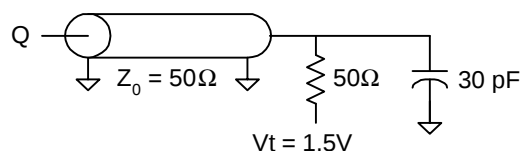


Fig. 1 OUTPUT LOAD EQUIVALENT

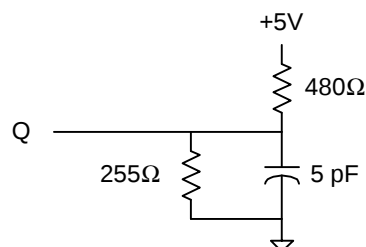


Fig. 2 OUTPUT LOAD EQUIVALENT


NOTES

- All voltages referenced to VSS (GND)
- Overshoot: $V_{IH} \leq +7.0V$ for $t \leq t_{RC}/2$.
Undershoot: $V_{IL} \leq -2.0V$ for $t \leq t_{RC}/2$
- I_{CC} is given with no output current. I_{CC} increases with greater output loading and faster cycle times
- This parameter is sampled.
- Test conditions as specified with the output loading as shown in Fig. 1 unless otherwise noted.
- Output loading is specified with $C_L = 5pF$ as in Fig. 2. Transition is measured $\pm 500mV$ from steady state voltage.
- At any given temperature and voltage condition, t_{HZCE} is less than t_{LZCE} and t_{HZWE} is less than t_{LZWE} .
- WE# is HIGH for READ cycle
- Device is continuously selected. Chip enable and output enables are held in their active state.
- Address valid prior to, or coincident with, latest occurring chip enable.
- t_{RC} = Read Cycle Time.
- Chip Enable and Write Enable can initiate and terminate a WRITE cycle.
- Capacitance derating applies to capacitance different from the load capacitance shown in Fig. 1.
- Typical values are measured at 5V, 25°C and 20ns cycle time.


DATA RETENTION ELECTRICAL CHARACTERISTICS (L Version Only)

DESCRIPTION	CONDITIONS	SYMBOL	MIN	TYP	MAX	UNITS	NOTES
Vcc for Retention Data		V_{DR}	2			V	
Data Retention Current	CE# $\geq V_{CC} - 0.2$; all other inputs $\leq V_{SS} + 0.2$; or $\geq V_{CC} - 0.2$; all inputs static; f = 0	Vcc = 2V	I_{CCDR}	100	400	uA	13
		Vcc = 3V	I_{CCDR}	200	600	uA	13
Chip Deselect to Data Retention Time		t_{CDR}	0			ns	4
Operation Recovery Time		t_{tr}	t_{RC}			ns	4, 11


LOW VCC DATA RETENTION WAVEFORM

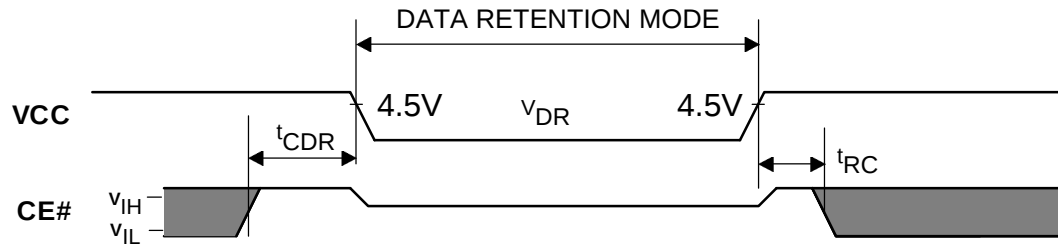

READ CYCLE NO. 1^(8, 9)

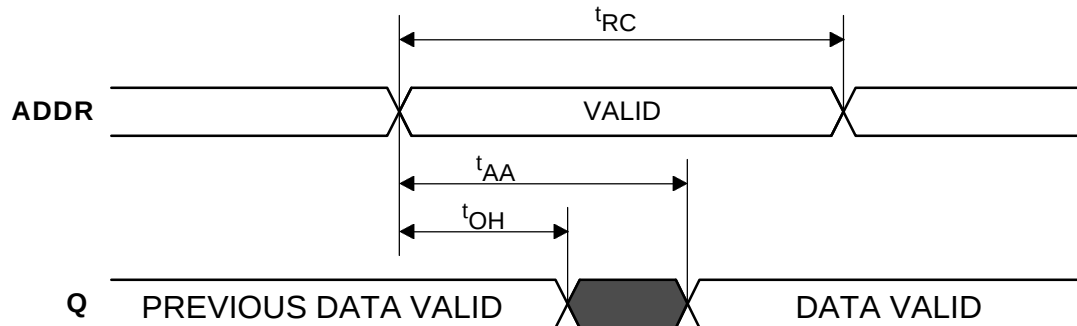


READ CYCLE NO. 2^(7, 8, 10, 12)

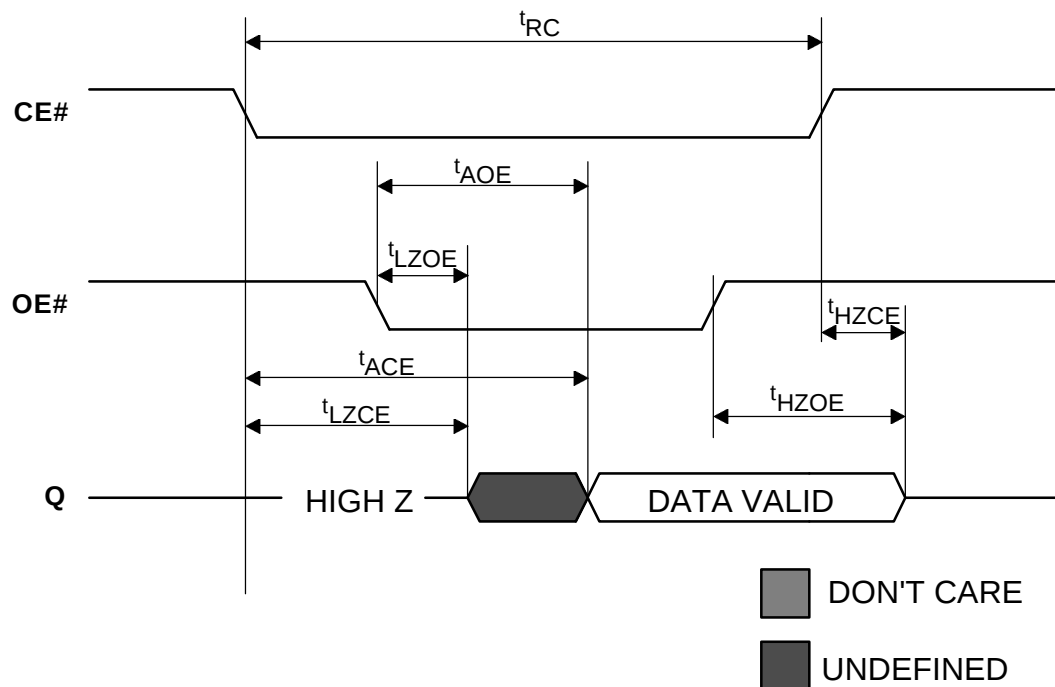


WRITE CYCLE NO. 1^(7, 12, 13)

(Write Enable Controlled with Output Enable OE# active LOW)

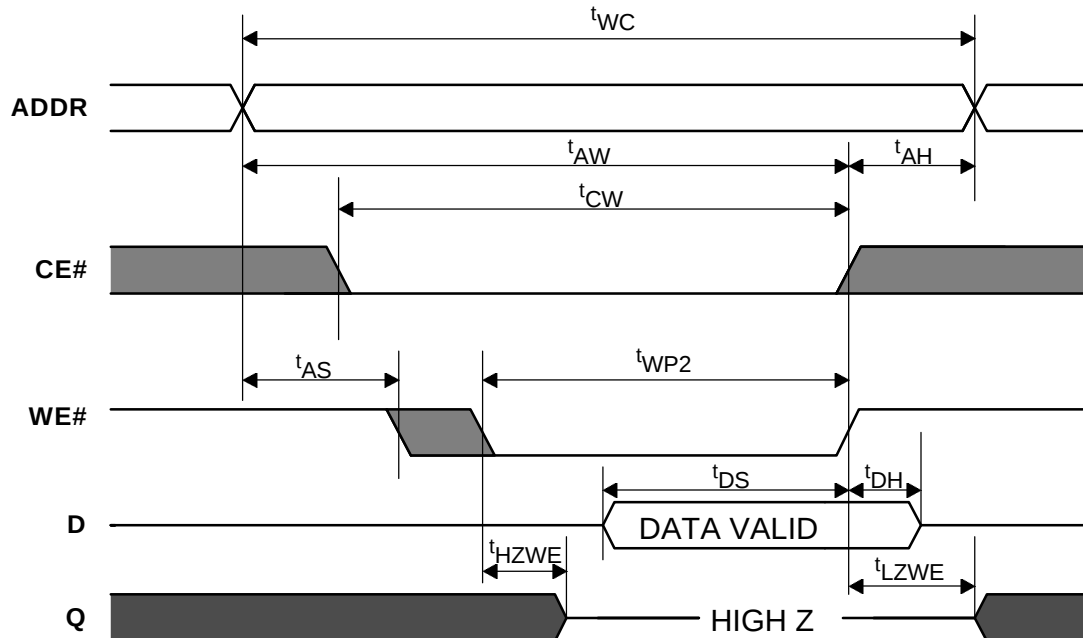


WRITE CYCLE NO. 2^(12, 13)

(Write Enable Controlled with Output Enable OE# inactive HIGH)

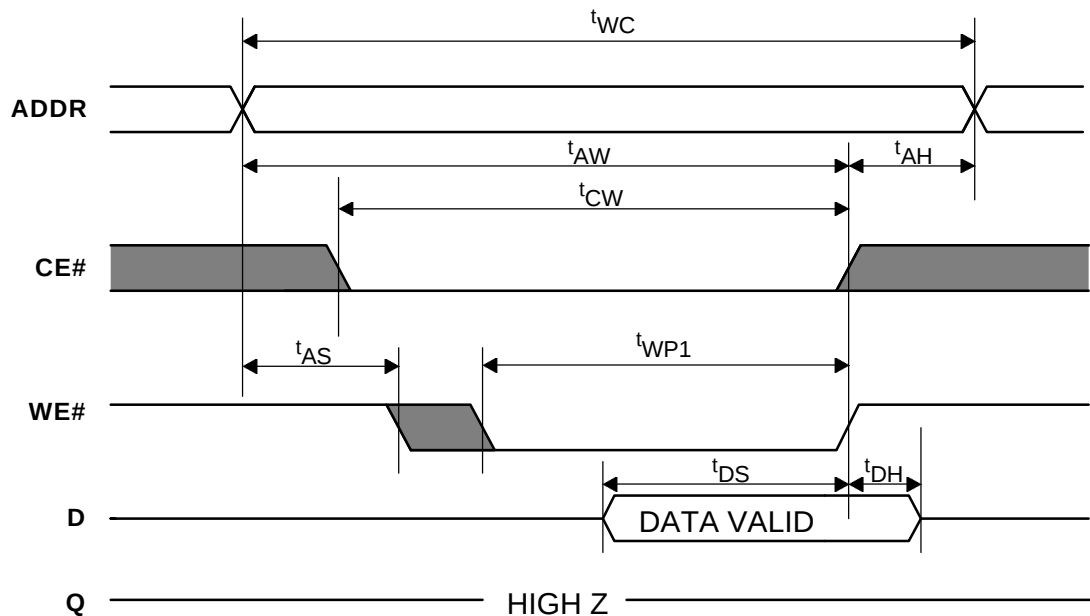

 DON'T CARE
 UNDEFINED


WRITE CYCLE NO. 3^(12, 13) (Chip Enable Controlled)

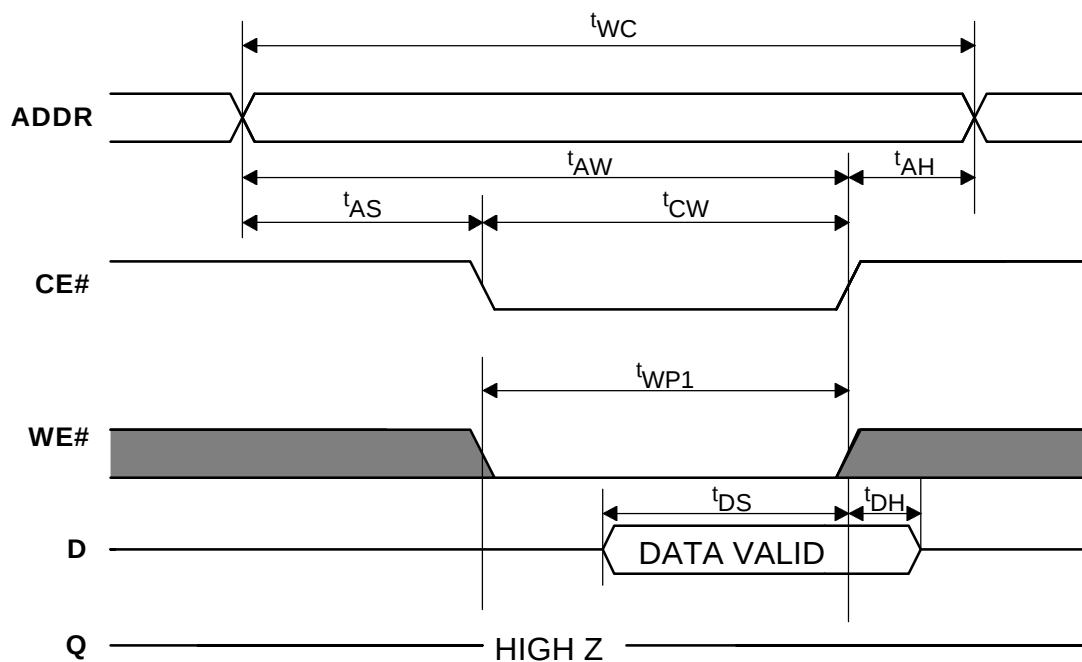

 DON'T CARE


Package Dimensions

28-pin 400 Mil Plastic SOJ (J)

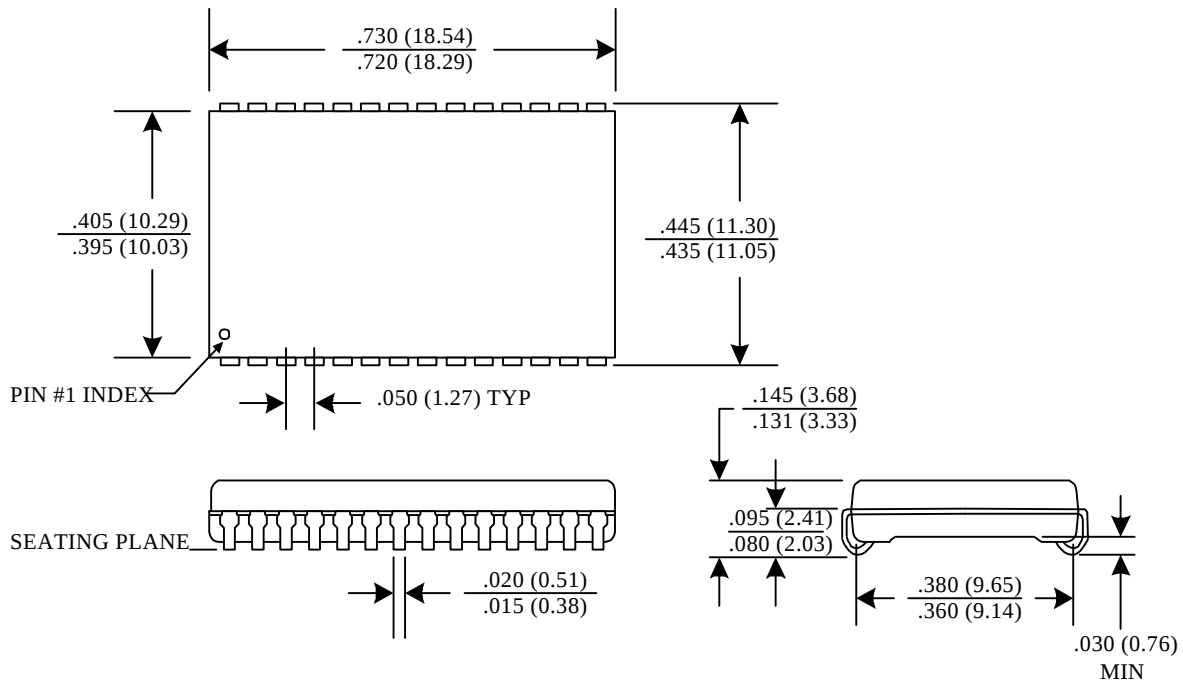

Note: All dimensions in inches (millimeters) $\frac{\text{MAX}}{\text{MIN}}$ or typical, min where noted.

28-pin 300 Mil Plastic SOJ (SJ)

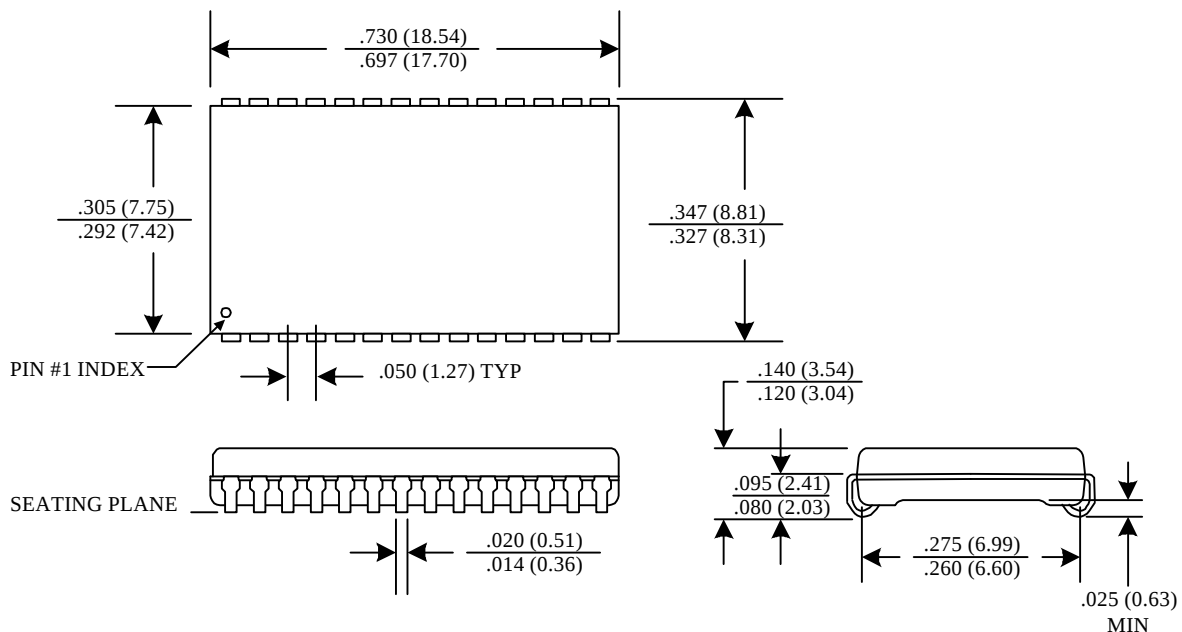

Note: All dimensions in inches (millimeters) $\frac{\text{MAX}}{\text{MIN}}$ or typical, min where noted.

Ordering Information

GVT 72028A4 XX - XX X X

Galvantech Prefix

Part Number

Temperature (Blank = Commercial
I = Industrial)

Power (Blank= Standard,
L= Low Power)

Speed (10 = 10ns, 12= 12ns
15 = 15ns, 20 = 20ns)

Package (J = 400 mil SOJ,
SJ= 300 mil SOJ)