


SBD Type : GCQ10A04

OUTLINE DRAWING

FEATURES

- *Similar to TO-220AB Case
- *Dual Diodes – Cathode Common
- *Low Forward Voltage Drop
- *High Surge Capability
- * $T_j=150^\circ\text{C}$ operation

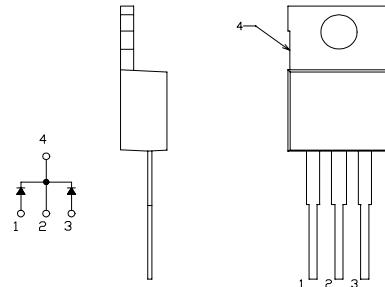


Maximum Ratings

Approx Net Weight: 1.9g

| Rating | Symbol | GCQ10A04 | | | Unit | | |
|-------------------------------------|--------------|--------------------------|--|-------------------------------------|------|--|--|
| Repetitive Peak Reverse Voltage | V_{RRM} | 40 | | | V | | |
| Non-repetitive Peak Reverse Voltage | V_{RSM} | 45 | | | V | | |
| Average Rectified Output Current | I_o | 10 | $T_c=116^\circ\text{C}$ | 50 Hz Full Sine Wave Resistive Load | A | | |
| RMS Forward Current | $I_{F(RMS)}$ | 11.1 | | | A | | |
| Surge Forward Current | I_{FSM} | 120 | 50Hz Full Sine Wave ,1cycle Non-repetitive | | A | | |
| Operating JunctionTemperature Range | T_{jw} | -40 to +150 | | | °C | | |
| Storage Temperature Range | T_{stg} | -40 to +150 | | | °C | | |
| Mounting torque | Ftor | recommended torque = 0.5 | | | N•m | | |

Electrical • Thermal Characteristics

| Characteristics | Symbol | Conditions | Min. | Typ. | Max. | Unit |
|----------------------|---------------|---|------|------|------|-------|
| Peak Reverse Current | I_{RM} | $T_j= 25^\circ\text{C}, V_{RM}= V_{RRM}$ per arm | - | - | 5 | mA |
| Peak Forward Voltage | V_{FM} | $T_j= 25^\circ\text{C}, I_{FM}= 5 \text{ A}$ per arm | - | - | 0.55 | V |
| Thermal Resistance | $R_{th(j-c)}$ | Junction to Case | - | - | 3 | °C /W |

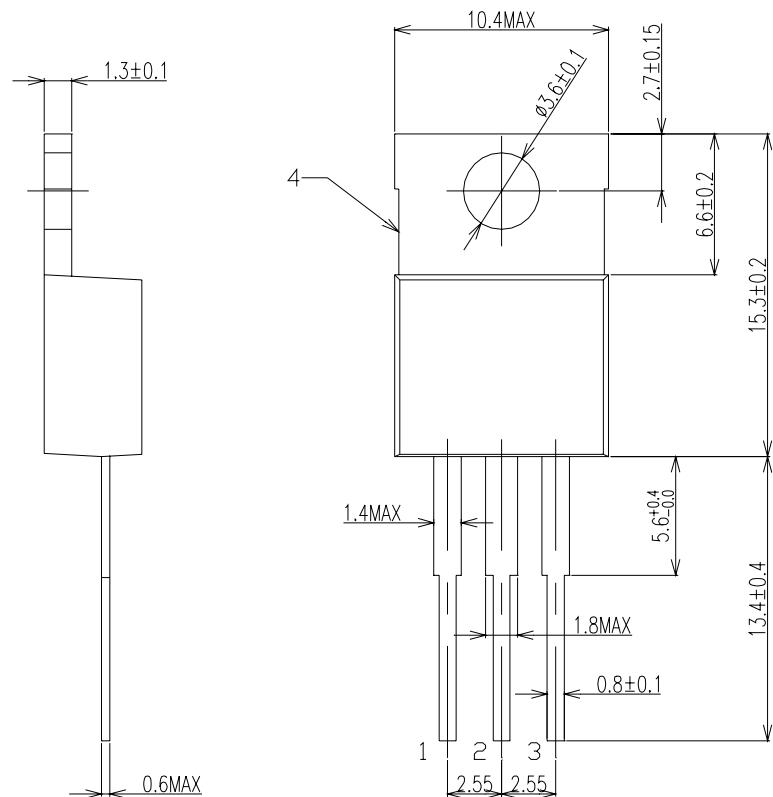GCQ10A04 OUTLINE DRAWING (Dimensions in mm)


Center Tap

