



Glass Passivated Single-Phase Bridge Rectifier

Reverse Voltage 50 and 1000 V


Forward Current 12 to 35 A

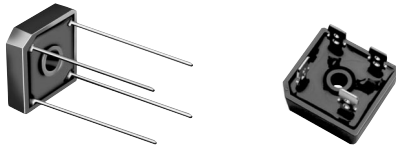

GBPC-W

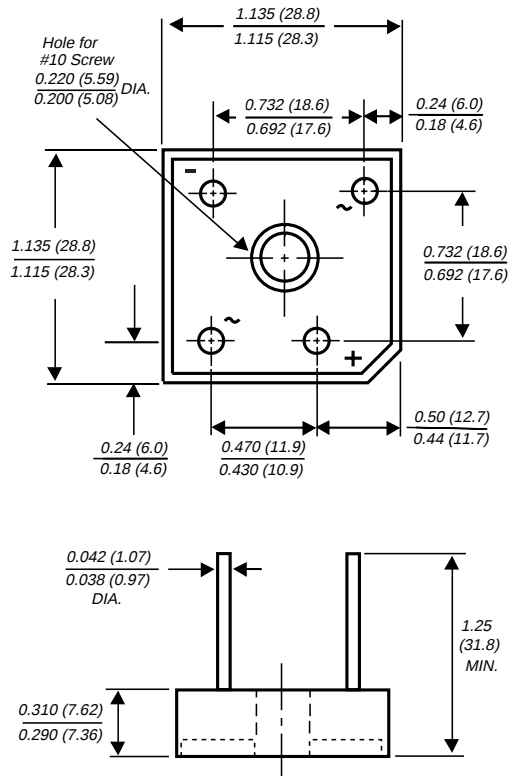

GBPC

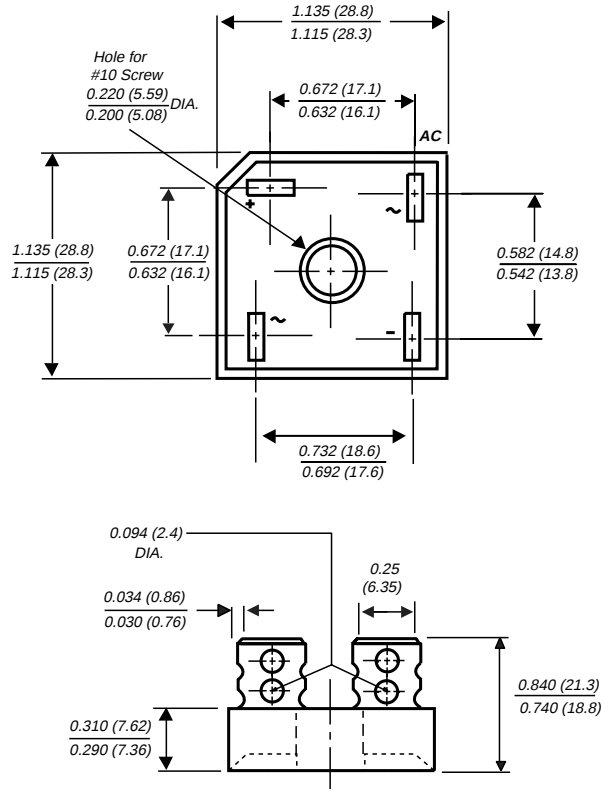

Mechanical Data

Case: Molded plastic with heatsink integrally mounted in the bridge encapsulation

Terminals: Either plated 0.25" (6.35mm) Faston lugs or plated copper leads 0.040" (1.02mm) diameter. Suffix letter "W" added to indicate wire leads (e.g. GBPC12005W)

Mounting Position: See NOTE 2

Polarity: Polarity symbols molded on body

Mounting Torque: 20 in. - lb. max.

Weight: 0.53 ounce, 15 grams

Features

- Plastic package has Underwriters Laboratory Flammability Classification 94V-0
- This series is UL listed under the Recognized Component Index, file number E54214
- Integrally molded heatsink provides very low thermal resistance for maximum heat dissipation
- Universal 3-way terminals; snap-on, wire wrap-around, or P.C.B. mounting
- High forward surge current capability
- Glass passivated chip junctions
- Typical I_R less than 0.3μA
- High temperature soldering guaranteed: 260°C/10 seconds at 5lbs. (2.3kg) tension

GBPC12, 15, 25 and 35

Series

Glass Passivated Single-Phase Bridge Rectifier

Maximum Ratings & Thermal Characteristics Ratings at 25°C ambient temperature unless otherwise specified.

		Symbols	GBPC12, 15, 25, 35						Units	
			005	01	02	04	06	08		10
Maximum repetitive peak reverse voltage		V _{RRM}	50	100	200	400	600	800	1000	V
Maximum RMS voltage		V _{RMS}	35	70	140	280	420	560	700	V
Maximum DC blocking voltage		V _{DC}	50	100	200	400	600	800	1000	V
Maximum average forward rectified output current (SEE FIG.1)	GBPC12 GBPC15 GBPC25 GBPC35	I _{F(AV)}	12 15 25 35						A	
Peak forward surge current single sine-wave superimposed on rated load (JEDEC Method)	GBPC12 GBPC15 GBPC25 GBPC35	I _{FSM}	200 300 300 400						A	
Rating (non-repetitive, for t greater than 1ms and less than 8.3ms) for fusing	GBPC12 GBPC15 GBPC25 GBPC35	I ² t	160 375 375 660						A ² sec	
RMS isolation voltage from case to leads		V _{ISO}	2500						V	
Typical thermal resistance per leg (NOTE 1) GBPC12-25 GBPC35		R _{ΘJC}	1.9 1.4						°C/W	
Operating junction storage temperature range		T _J , T _{STG}	-55 to +150						°C	

Electrical Characteristics Ratings at 25°C ambient temperature unless otherwise specified.

			Symbols	GBPC12, 15, 25, 35							Units
				005	01	02	04	06	08	10	
Maximum instantaneous forward voltage drop per leg at	GBPC12	I _F =6.0A	V _F	1.1							V
	GBPC15	I _F =7.5A									
	GBPC25	I _F =12.5A									
	GBPC35	I _F =17.5A									
Maximum reverse DC current at rated		T _A =25°C	I _R	5.0							μA
DC blocking voltage per leg		T _A =125°C									
Typical junction capacitance per leg at 4V, 1MHz			C _J	300							pF

NOTES:

- (1) Thermal resistance from junction to case per leg
 (2) Bolt down on heatsink with silicone thermal compound between bridge and mounting surface for maximum heat transfer with #10 screw

Glass Passivated Single-Phase Bridge Rectifier

Ratings and Characteristic Curves ($T_A = 25^\circ\text{C}$ unless otherwise noted)

FIG. 1 - MAXIMUM OUTPUT RECTIFIED CURRENT

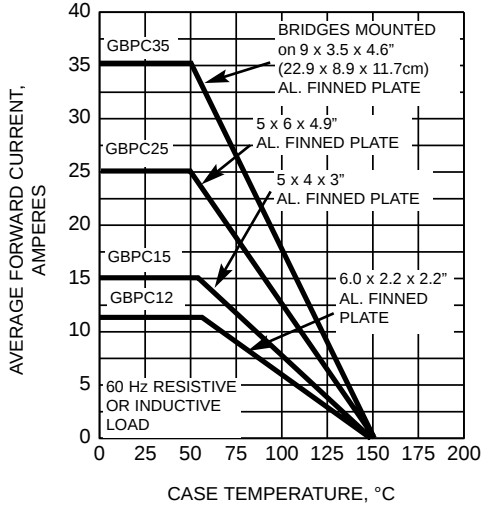


FIG. 2 - MAXIMUM OUTPUT RECTIFIED CURRENT

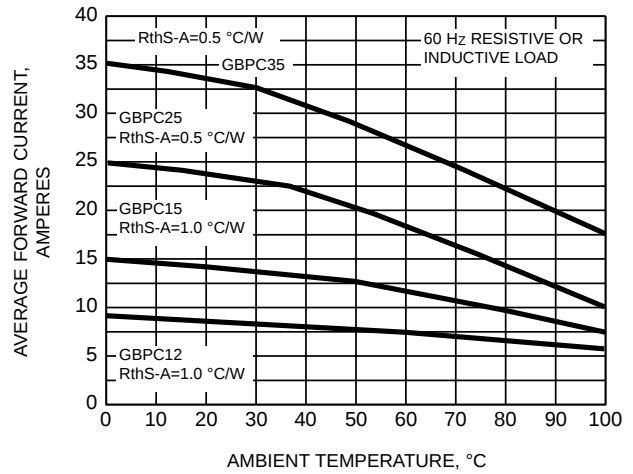


FIG. 3 - MAXIMUM POWER DISSIPATION


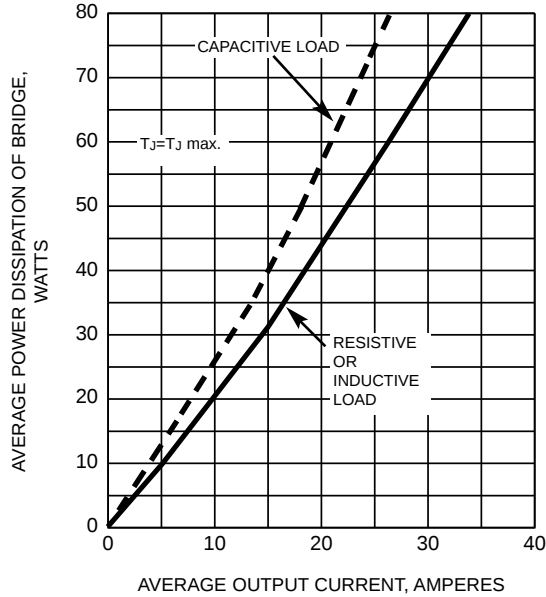


FIG. 4 - MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT PER LEG

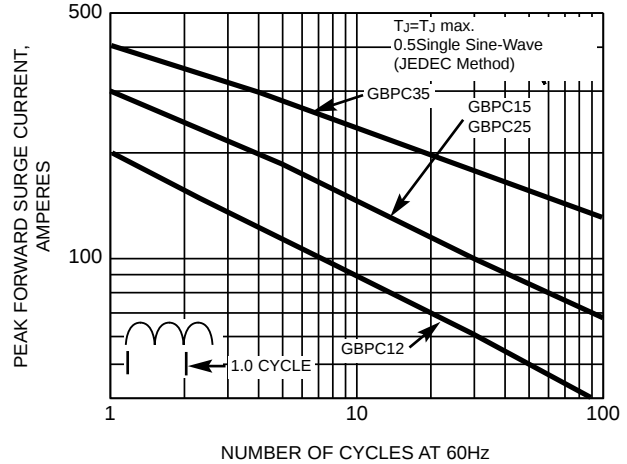

Glass Passivated Single-Phase Bridge Rectifier

Ratings and Characteristic Curves ($T_A = 25^\circ\text{C}$ unless otherwise noted)

FIG. 5 - TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS PER LEG

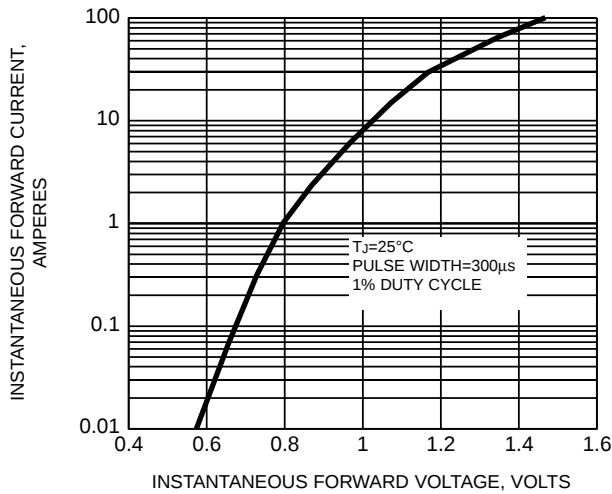


FIG. 6 - TYPICAL REVERSE LEAKAGE CHARACTERISTICS PER LEG

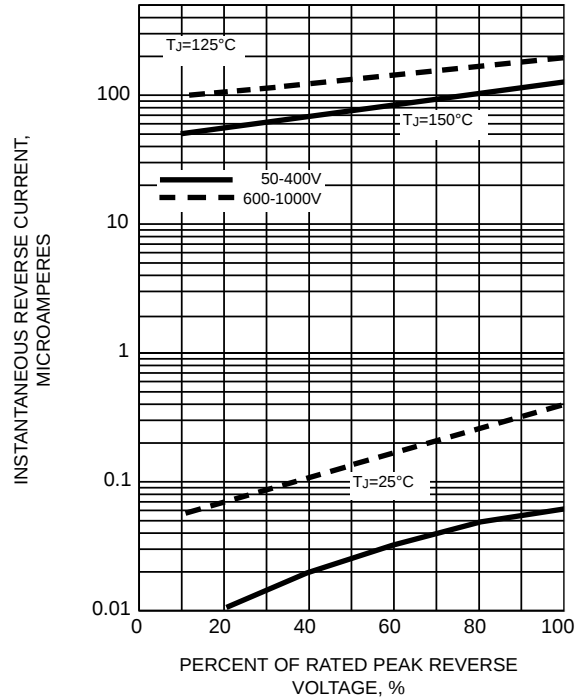


FIG. 7 - TYPICAL JUNCTION CAPACITANCE PER LEG

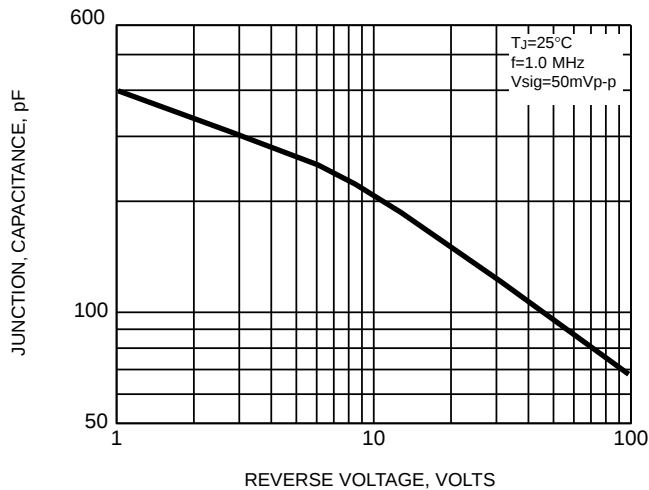


FIG. 8 - TYPICAL TRANSIENT THERMAL IMPEDANCE PER LEG

