



SAW Components

Data Sheet G 1984 M

Data Sheet

An abstract graphic featuring the word "EPCOS" in large, glowing, 3D letters. The letters are white with a bright, circular highlight in the center of each, giving them a three-dimensional appearance. They are set against a dark, textured background that includes a faint, glowing globe and circuitry patterns, suggesting a high-tech or electronic theme.



SAW Components

G 1984 M

IF Filter for Intercarrier Applications

38,90 MHz

Data Sheet

Standard

Plastic package **SIP5K**


- B/G

Features

- TV IF filter with Nyquist slope and sound shelf
- High color carrier level
- Reduced group delay predistortion as compared with standard B/G, half
- Extended sound shelf for NICAM reception
- Suitable for CENELEC EN 55020

Terminals


- Tinned CuFe alloy

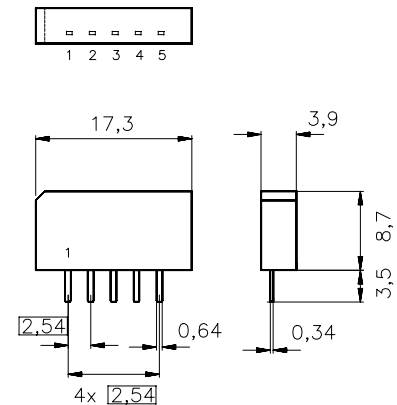

Dimensions in mm, approx. weight 1,0 g

Pin configuration

- 1 Input
- 2 Input - ground
- 3 Chip carrier - ground
- 4 Output
- 5 Output



Type	Ordering code	Marking and package according to	Packing according to
G 1984 M	B39389-G1984-M100	C61157-A1-A15	F61074-V8067-Z000

Maximum ratings

Operable temperature range	T_A	-25/+65	°C	
Storage temperature range	T_{stg}	-40/+85	°C	
DC voltage	V_{DC}	12	V	between any terminals
AC voltage	V_{pp}	10	V	between any terminals



SAW Components

G 1984 M

IF Filter for Intercarrier Applications

38,90 MHz

Data Sheet

Characteristics

Reference temperature: $T_A = 25\text{ °C}$
Terminating source impedance: $Z_S = 50\text{ }\Omega$
Terminating load impedance: $Z_L = 2\text{ k}\Omega \parallel 3\text{ pF}$

		min.	typ.	max.	
Insertion attenuation α					
Reference level for the following data	37,40 MHz	14,2	15,7	17,2	dB
Relative attenuation α_{rel}					
Picture carrier	38,90 MHz	5,0	6,0	7,0	dB
Color carrier	34,47 MHz	0,1	1,1	2,1	dB
Sound carrier	33,40 MHz	12,6	13,6	14,6	dB
NICAM sound carrier	33,05 MHz	—	13,6	—	dB
Adjacent picture carrier UHF	30,90 MHz	46,0	60,0	—	dB
VHF	31,90 MHz	48,0	62,0	—	dB
	32,40 MHz	30,0	35,0	—	dB
	40,15 MHz	42,0	54,0	—	dB
Adjacent sound carrier VHF	40,40 MHz	46,0	56,0	—	dB
UHF	41,40 MHz	43,0	56,0	—	dB
Lower sidelobe	25,00 ... 31,90 MHz	40,0	46,0	—	dB
Upper sidelobe	40,40 ... 45,00 MHz	40,0	46,0	—	dB
Reflected wave signal suppression					
1,2 μ s ... 6,0 μ s after main pulse (test pulse 250 ns, carrier frequency 37,40 MHz)		44,0	54,0	—	dB
Feedthrough signal suppression					
1,2 μ s ... 1,1 μ s before main pulse (test pulse 250 ns, carrier frequency 37,40 MHz)		50,0	56,0	—	dB
Group delay predistortion $\Delta\tau$ (reference frequency 38,90 MHz)					
	36,90 MHz	—	−90	—	ns
	34,47 MHz	—	10	—	ns
Impedance at 37,40 MHz					
Input: $Z_{IN} = R_{IN} \parallel C_{IN}$		—	1,8 $\parallel$ 12,7	—	k Ω $\parallel$ pF
Output: $Z_{OUT} = R_{OUT} \parallel C_{OUT}$		—	1,9 $\parallel$ 3,7	—	k Ω $\parallel$ pF
Temperature coefficient of frequency TC_f					
		—	−72	—	ppm/K



SAW Components



G 1984 M

IF Filter for Intercarrier Applications

38,90 MHz

Data Sheet

Frequency response

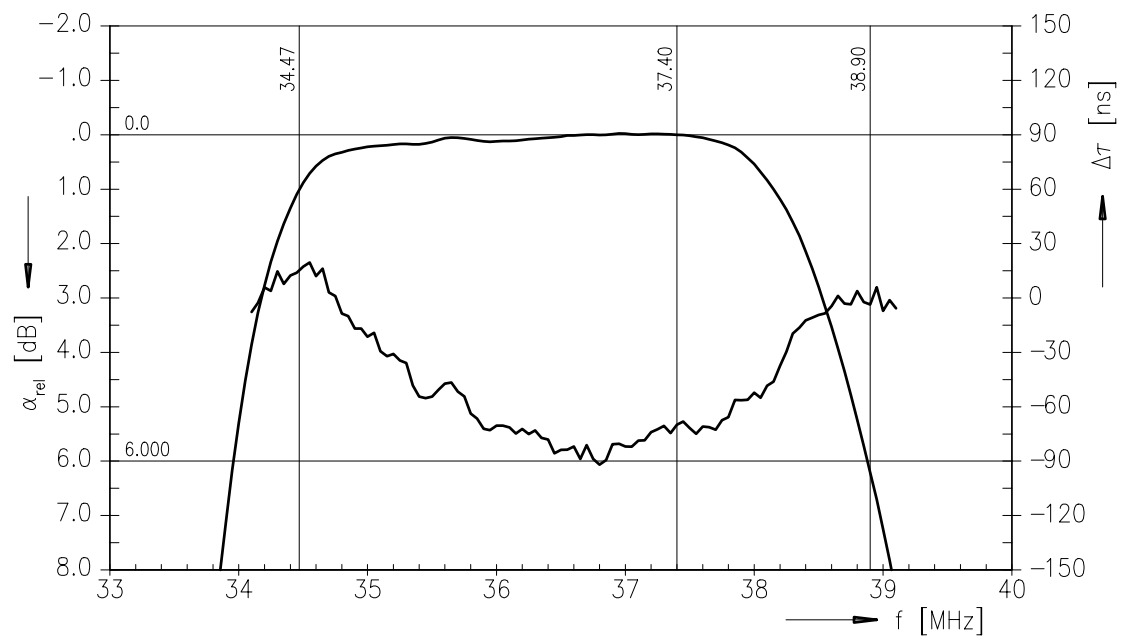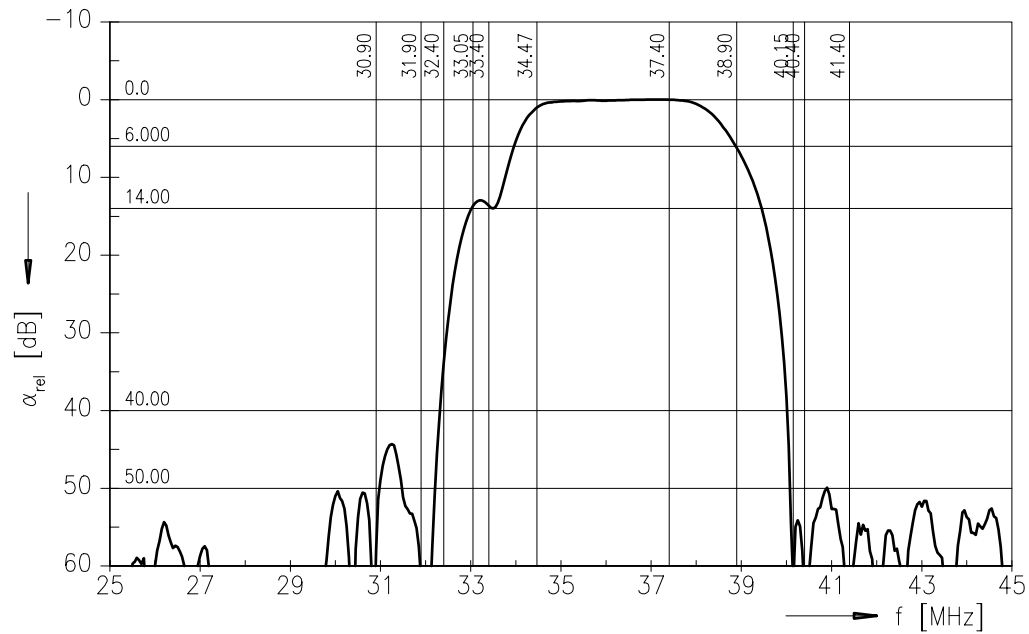



SAW Components


G 1984 M

IF Filter for Intercarrier Applications


38,90 MHz

Data Sheet

Frequency response

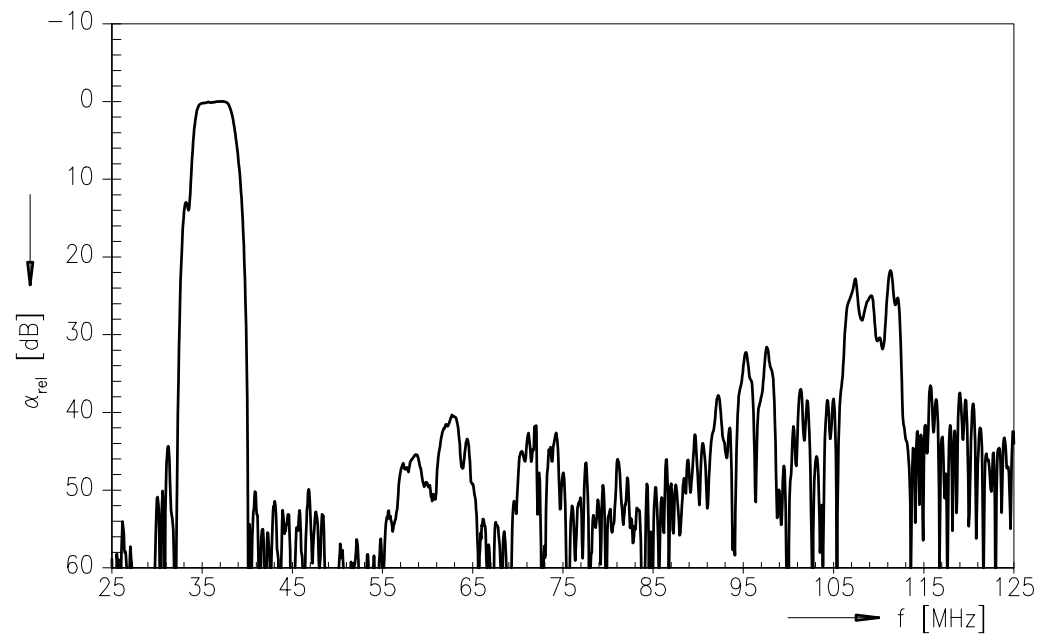

Time domain response

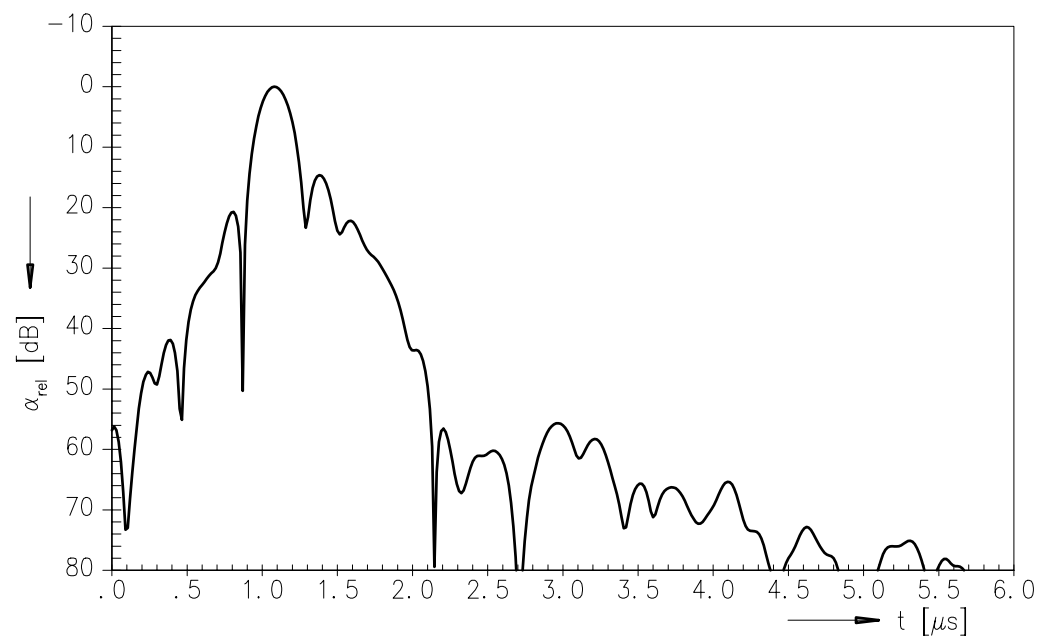



SAW Components	G 1984 M
IF Filter for Intercarrier Applications	38,90 MHz

Data Sheet

Published by EPCOS AG
Surface Acoustic Wave Components Division, OFW E UE
P.O. Box 80 17 09, D-81617 München

© EPCOS AG 1999. All Rights Reserved.

As far as patents or other rights of third parties are concerned, liability is only assumed for components per se, not for applications, processes and circuits implemented within components or assemblies.

The information describes the type of component and shall not be considered as assured characteristics.

Terms of delivery and rights to change design reserved.

For questions on technology, prices and delivery please contact the sales offices of EPCOS AG or the international representatives.

Due to technical requirements components may contain dangerous substances. For information on the type in question please also contact one of our sales offices.