



HTC1440 @ 44.160 MHz

Through Hole / 5 pins

TCXO

HTC1440
22-05-2000



Frequency: 44.160 MHz


Features:

Operating Temperature	0°C~+70°C
Frequency Stability	±3 ppm
Ageing @ 45°C	±1 ppm max./year
Overall Stability (1)	±5 ppm

Supply voltage	+3.3 V ±10%
Current consumption	20 mA max.

Rise & fall time	20 ns max.
Load HCMOS compatible	15 pF max
Duty cycle	45/55

(1) Including 25°C calibration, temperature, ageing 1 year, Vcc, load. changes

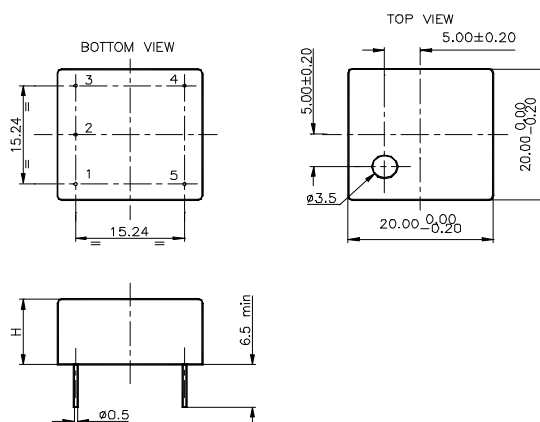

SHORT FORM Data Sheet - For more details, please contact us

SALES OFFICES:

Benelux: +33 (0) 1 49 88 49 00 / **Germany:** +49 (0) 89 820 79620 / **Nordic:** +46 (0) 8 59030300
France: +33 (0) 1 49 88 49 00 / **Italy:** +39 (0) 738 8869 / **Spain:** +33 (0) 1 49 88 49 00 / **UK:** +44 (0) 1256 883340
USA: +1 (623) 780-1995 / **Asia-Pacific:** +33 (0) 5 56 46 66 84

WEB SITE: <http://www.temex-components.com>

E-mail: adsl@temex.fr

Specifications are subject to change without notice