
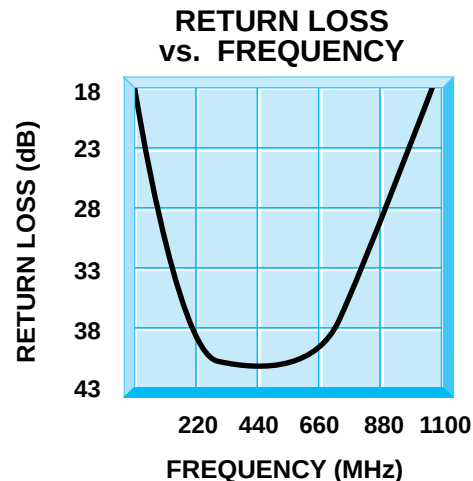
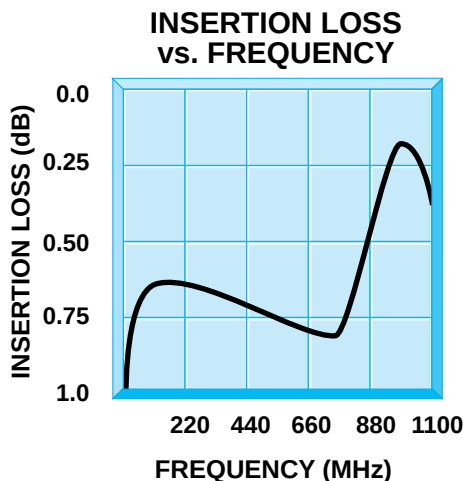


HJ-52001 / 52002 / 52003

20 to 1000 MHz Two-Way 0° Power Dividers

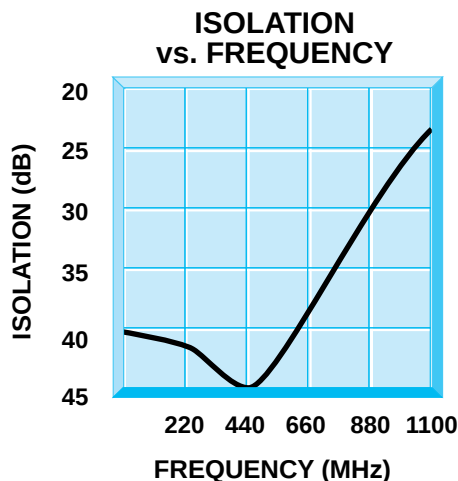


Guaranteed Specifications (-54° to +85°C)

Frequency Range	20 to 1000 MHz
Isolation	20 dB Min.
Insertion Loss	1.0 dB Max.
VSWR	1.4:1 Max.
Phase Balance	±4° Max.
Amplitude Balance	± 0.2 dB Max.
Impedance	50 Ohms
Power Handling	3 Watts Max.


Functional Schematic

HJ-52001



Mechanical Outline

HJ-52001

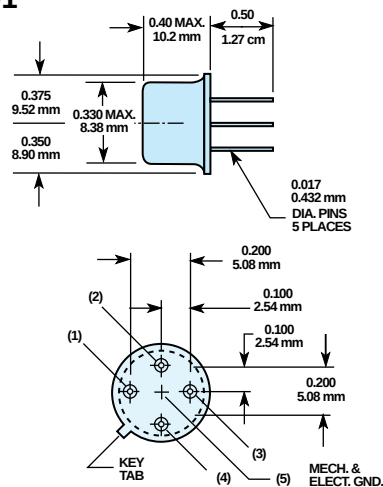

Additional Mechanical Outlines on next page

SIGNAL
TECHNOLOGY CORPORATION
OLEKTRON OPERATION


28 Tozer Road • Beverly, MA 01915-5579
Tel. 978.922.0019 • Fax 978.927.9328

HJ-52001 / 52002 / 52003


20 to 1000 MHz Two-Way 0° Power Dividers

Mechanical Outline

HJ-52002

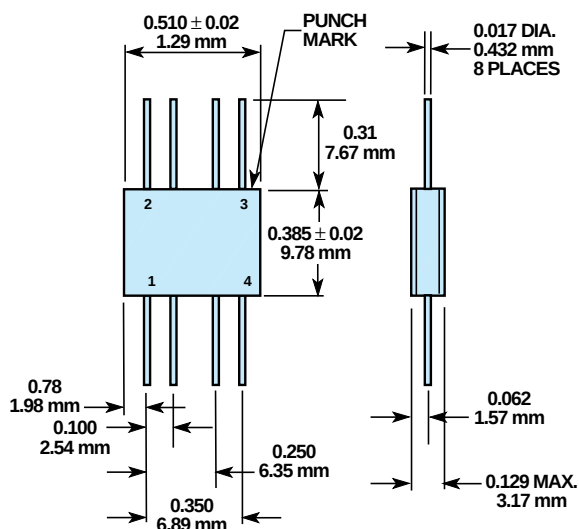


HJ-52003

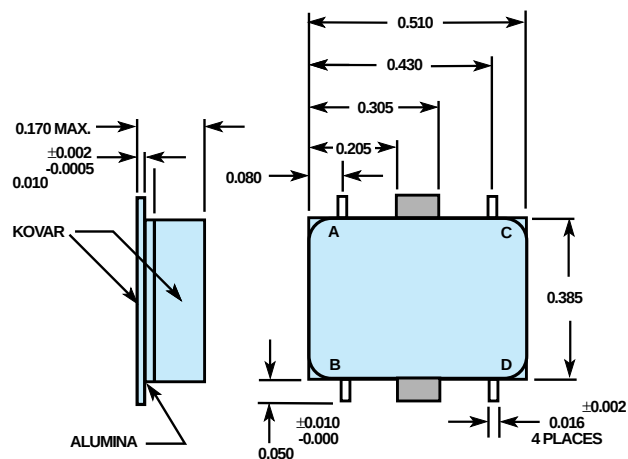

Functional Schematic

HJ-52002



Functional Schematic

HJ-52003

