



## CMOS Compatible HS-A1370/A1380 Series

### Description

The **HS-A1370/A1380 Series** of quartz crystal oscillators provide enable/disable 3-state CMOS compatible signals for bus connected systems. Supplying enable/disable pin of the HS-A1370 units with a logic "0" enables the output. Alternately, supplying enable/disable pin of the HS-A1380 units with a logic "1" enables its output. In the disable mode, output pin presents a high impedance to the load. All units are resistance welded in an all metal package, offering RFI shielding, and are designed to survive standard wave soldering operations without damage. Insulated standoffs to enhance board cleaning are standard.

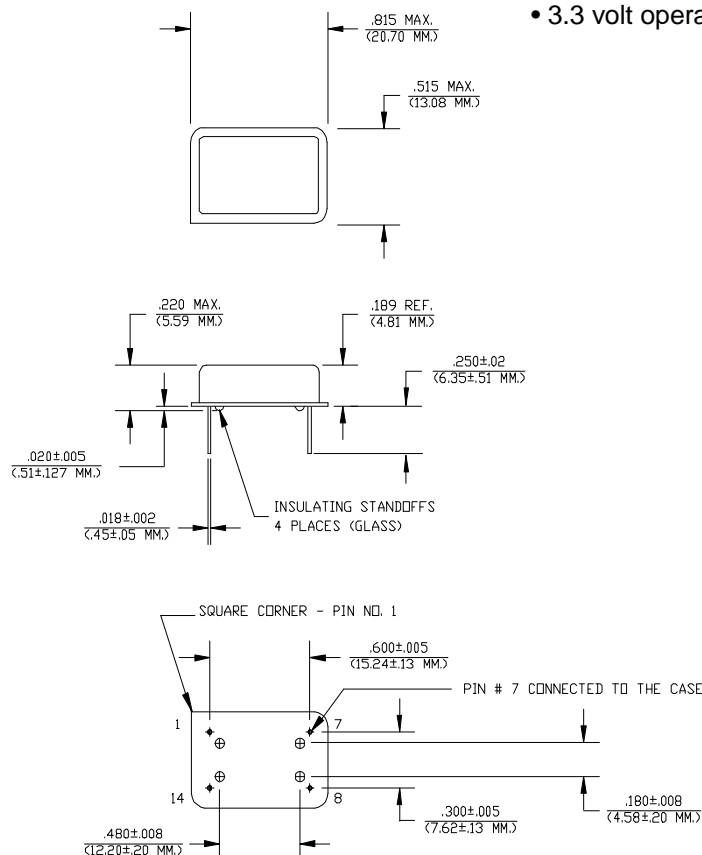
Pin	Connection
1	Enable Input
7	Grd & Case
8	Output
14	V <sub>DD</sub>

### Suggested Applications

The **HS-A1370/A1380 Series** oscillators are ideally suited for applications involving more than one clock or source on the same bus. This high impedance state allows ATE (Automatic Test Equipment) board testing without having to remove the oscillator. In multiplexing applications, multiplex clock signals can be made available to a system using the enable/disable 3-state feature.

### Features

- Wide frequency range—0.5MHz to 36.0MHz
- User specified tolerance from  $\pm 20$ ppm
- Case at electrical ground
- Will withstand vapor phase temperatures of 253°C for 4 minutes maximum
- Low power consumption
- All metal, resistance weld, hermetically sealed package
- High shock resistance, to 3000g
- 3.3 volt operation

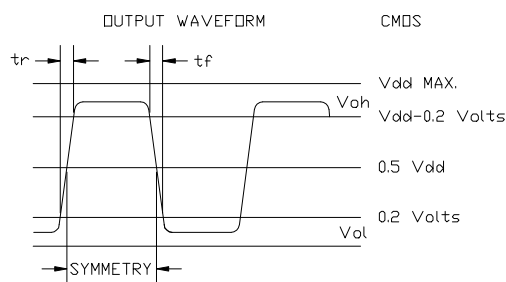
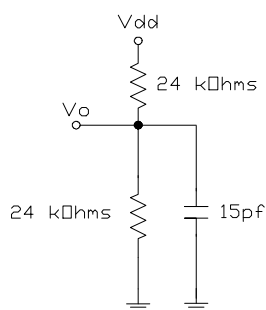


## Continued

## CMOS Compatible HS-A1370/A1380 Series

Operating Conditions and Output Characteristics				
	PARAMETER	CONDITIONS	MINIMUM	MAXIMUM
General Characteristics	Supply voltage ( $V_{DD}$ )	-----	3.00V	3.60V
	Supply current ( $I_{DD}$ )	$V_{DD}$ or ground current	0.0 mA	40 mA
	Output current ( $I_O$ )	Low level output current	0.0 mA	$\pm 16.0$ mA
	Tolerance	User specified 25 MHz >25 MHz	$\pm 20$ ppm $\pm 100$ ppm	----- -----
	Operating temperature ( $T_A$ )	-----	0°C	70°C
	Storage temperature ( $T_S$ )	-----	-55°C	125°C
	Power dissipation ( $P_D$ )	-----	-----	144 mW
	Lead temperature ( $T_L$ )	Soldering, 10 sec.	-----	300°C
Output Characteristics	Frequency	-----	0.5MHz	36.0MHz
	Symmetry	@.5 $V_{DD}$	40/60%	60/40%
	Logic 0 ( $V_{OL}$ )	$I_O=600\mu A$	-----	0.2V
	Logic 1 ( $V_{OH}$ )	$I_O=600\mu A$	$V_{DD}-0.2V$	-----
	Logic 0 ( $I_{OL}$ sink)	$V_O=0.2V$	-----	600 $\mu A$
	Logic 1 ( $I_{OH}$ source)	$V_O=V_{DD}-0.2V$	-----	600 $\mu A$
	Rise & fall time ( $t_r, t_f$ )	10-90% $V_O$	-----	10 ns
	$T_{pz}$ (Enable/Disable to high or low)	-----	-----	25 ns
	Enable/Disable			
	Logic high voltage	-----	3.0V	2.5V typical
	Logic low voltage	-----	-----	0.4V

(CMOS)

**Specialty Oscillators for Unique Requirements**

If the characteristics listed above do not meet your specific requirements, specialty solutions are often available.

For example, if you need better stability, extended temperature range, or tighter symmetry, NEL can provide a HS-A1379/A1389 series oscillator to serve your needs.

To let us know your special requirements, complete our **Specialty Oscillator** sheet. We will respond with the desired specialty oscillator, or discuss with you a solution that most closely meets your needs.

This information has been carefully prepared and is believed to be entirely reliable. However, no responsibility is assumed for inaccuracies. NEL reserves the right to make changes at any time in order to improve design and supply the best product possible.