

HZK-L Series

Silicon Epitaxial Planar Zener Diodes for Stabilized Power Supply

HITACHI

ADE-208-127B (Z)
Rev. 2


Features

- Low leakage, low zener impedance and maximum power dissipation of 400mW.
- Wide spectrum from 5.2V through 38V of zener voltage provide flexible application.
- LLD package is suitable for high density surface mounting and high speed assembly.

Ordering Information

Type No.	Mark	Package Code
HZK-L Series	Color Code	LLD

Outline

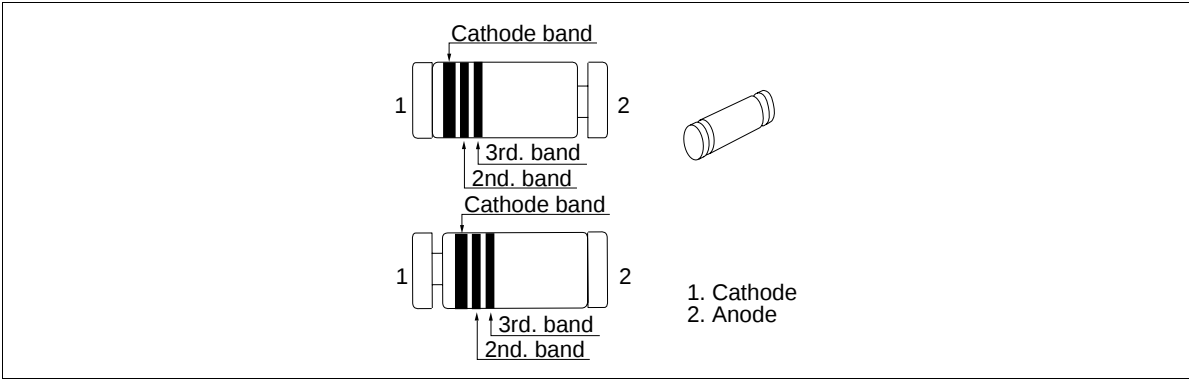

Absolute Maximum Ratings (Ta = 25°C)

Item	Symbol	Value	Unit
Power dissipation	Pd*	400	mW
Junction temperature	Tj	175	°C
Storage temperature	Tstg	-55 to +175	°C

Note: With P.C. Board.

HZK-L Series

Electrical Characteristics (Ta = 25°C)

		Zener Voltage			Reverse Current		Dynamic Resistance	
		V _z (V)*		Test Condition	I _R (μA)	Test Condition	r _d (Ω)	Test Condition
Type	Grade	Min	Max	I _z (mA)	Max	V _R (V)	Max	I _z (mA)
HZK6L	A	5.2	5.7	0.5	1	2.0	150	0.5
	B	5.5	6.0				80	
	C	5.8	6.4				60	
HZK7L	A	6.3	6.9	0.5	1	3.5	60	0.5
	B	6.7	7.3					
	C	7.2	7.9					
HZK9L	A	7.7	8.5	0.5	1	6.0	60	0.5
	B	8.3	9.1					
	C	8.9	9.7					
HZK11L	A	9.5	10.3	0.5	1	8.0	80	0.5
	B	10.2	11.1					
	C	10.9	11.9					
HZK12L	A	11.6	12.7	0.5	1	10.5	80	0.5
	B	12.4	13.4					
	C	13.2	14.3					
HZK15L		14.1	15.5	0.5	1	13.0	80	0.5
HZK16L		15.3	17.1	0.5	1	14.0	80	0.5
HZK18L		16.9	19.0	0.5	1	15.0	80	0.5
HZK20L		18.8	21.1	0.5	1	18.0	100	0.5
HZK22L		20.9	23.3	0.5	1	20.0	100	0.5
HZK24L		22.9	25.5	0.5	1	22.0	120	0.5
HZK27L		25.2	28.6	0.5	1	24.0	150	0.5
HZK30L		28.2	31.6	0.5	1	27.0	200	0.5
HZK33L		31.2	34.6	0.5	1	30.0	250	0.5
HZK36L		34.2	38.0	0.5	1	33.0	300	0.5

Note: Tested with DC.

Type No. is as follows: HZK6AL, HZK6BL, ... HZK36L.

MARK COLOR CODE

Type	Cathode Band	Second Band	Third Band
HZK6AL	Orange	Verdure	Pink
HZK6BL	Orange	Verdure	Verdure
HZK6CL	Orange	Verdure	Light Blue
HZK7AL	Orange	Yellow Green	Pink
HZK7BL	Orange	Yellow Green	Verdure
HZK7CL	Orange	Yellow Green	Light Blue
HZK9AL	Orange	Purple	Pink
HZK9BL	Orange	Purple	Verdure
HZK9CL	Orange	Purple	Light Blue
HZK11AL	Orange	Light Blue	Pink
HZK11BL	Orange	Light Blue	Verdure
HZK11CL	Orange	Light Blue	Light Blue
HZK12AL	Orange	White	Pink
HZK12BL	Orange	White	Verdure
HZK12CL	Orange	White	Light Blue
HZK15L	Yellow	Black	Pink
HZK16L	Yellow	Yellor Ocher	Pink
HZK18L	Yellow	Pink	Pink
HZK20L	Yellow	Orange	Pink
HZK22L	Yellow	Yellow	Pink
HZK24L	Yellow	Verdure	Pink
HZK27L	Yellow	Yellow Green	Pink
HZK30L	Yellow	Purple	Pink
HZK33L	Yellow	Light Blue	Pink
HZK36L	Yellow	White	Pink

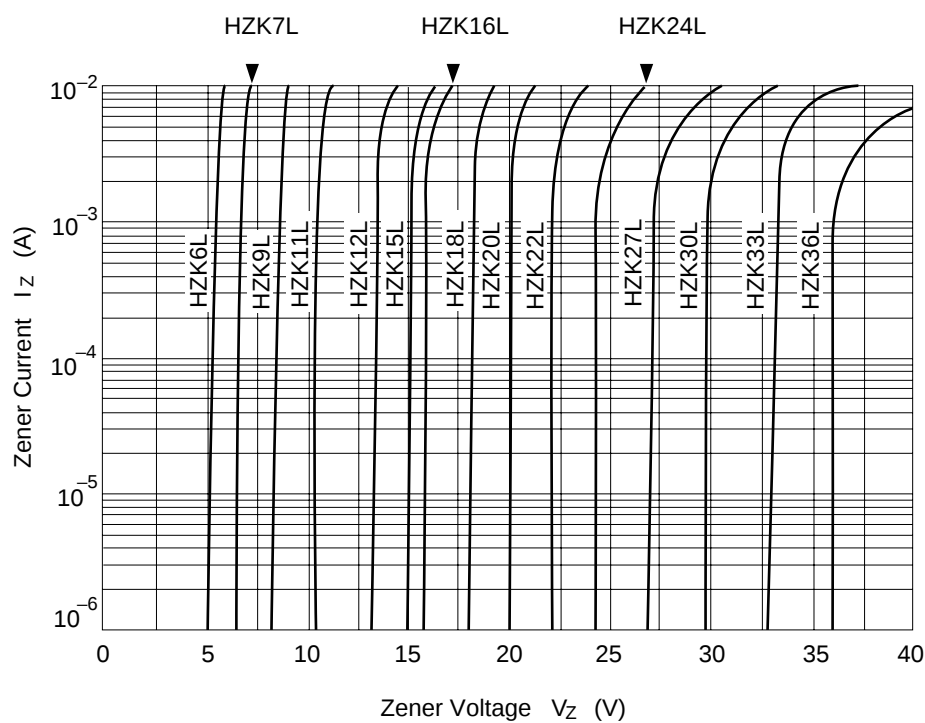


Fig.1 Zener current Vs. Zener voltage

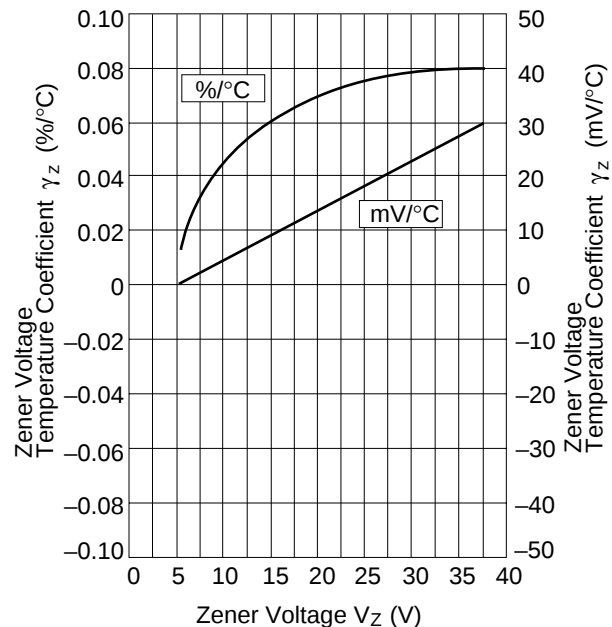


Fig.2 Temperature Coefficient Vs. Zener voltage


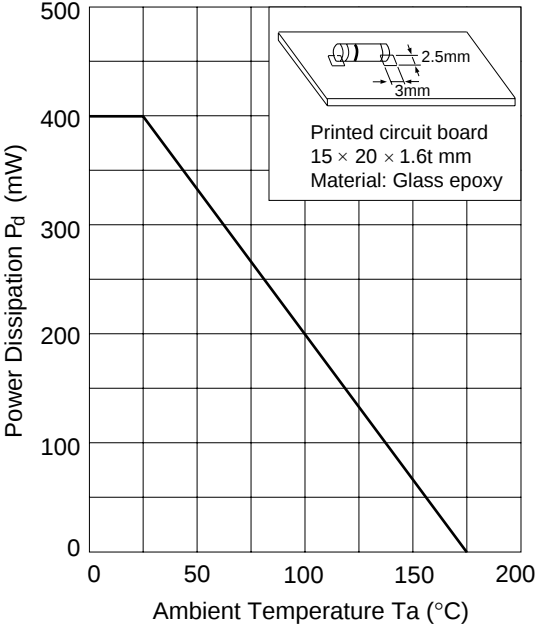


Fig.3 Power Dissipation Vs. Ambient Temperature

Package Dimensions

Unit: mm

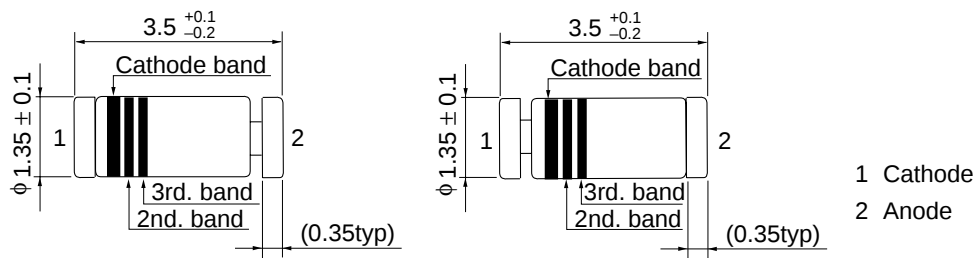

() : Reference only

HITACHI Code	LLD
JEDEC Code	—
EIAJ Code	—
Weight (g)	0.027

Cautions

1. Hitachi neither warrants nor grants licenses of any rights of Hitachi's or any third party's patent, copyright, trademark, or other intellectual property rights for information contained in this document. Hitachi bears no responsibility for problems that may arise with third party's rights, including intellectual property rights, in connection with use of the information contained in this document.
2. Products and product specifications may be subject to change without notice. Confirm that you have received the latest product standards or specifications before final design, purchase or use.
3. Hitachi makes every attempt to ensure that its products are of high quality and reliability. However, contact Hitachi's sales office before using the product in an application that demands especially high quality and reliability or where its failure or malfunction may directly threaten human life or cause risk of bodily injury, such as aerospace, aeronautics, nuclear power, combustion control, transportation, traffic, safety equipment or medical equipment for life support.
4. Design your application so that the product is used within the ranges guaranteed by Hitachi particularly for maximum rating, operating supply voltage range, heat radiation characteristics, installation conditions and other characteristics. Hitachi bears no responsibility for failure or damage when used beyond the guaranteed ranges. Even within the guaranteed ranges, consider normally foreseeable failure rates or failure modes in semiconductor devices and employ systemic measures such as fail-safes, so that the equipment incorporating Hitachi product does not cause bodily injury, fire or other consequential damage due to operation of the Hitachi product.
5. This product is not designed to be radiation resistant.
6. No one is permitted to reproduce or duplicate, in any form, the whole or part of this document without written approval from Hitachi.
7. Contact Hitachi's sales office for any questions regarding this document or Hitachi semiconductor products.

HITACHI

Hitachi, Ltd.

Semiconductor & Integrated Circuits.
Nippon Bldg., 2-6-2, Ohte-machi, Chiyoda-ku, Tokyo 100-0004, Japan
Tel: Tokyo (03) 3270-2111 Fax: (03) 3270-5109

URL	NorthAmerica	:	http://semiconductor.hitachi.com/
	Europe	:	http://www.hitachi-eu.com/hel/ecg
	Asia (Singapore)	:	http://www.has.hitachi.com.sg/grp3/sicd/index.htm
	Asia (Taiwan)	:	http://www.hitachi.com.tw/E/Product/SICD_Frame.htm
	Asia (HongKong)	:	http://www.hitachi.com.hk/eng/bo/grp3/index.htm
	Japan	:	http://www.hitachi.co.jp/Sicd/indx.htm

For further information write to:

Hitachi Semiconductor (America) Inc. 179 East Tasman Drive, San Jose, CA 95134 Tel: <1> (408) 433-1990 Fax: <1> (408) 433-0223	Hitachi Europe GmbH Electronic components Group Dornacher Straße 3 D-85622 Feldkirchen, Munich Germany Tel: <49> (89) 9 9180-0 Fax: <49> (89) 9 29 30 00 Hitachi Europe Ltd. Electronic Components Group. Whitebrook Park Lower Cookham Road Maidenhead Berkshire SL6 8YA, United Kingdom Tel: <44> (1628) 585000 Fax: <44> (1628) 778322
--	---

Hitachi Asia Pte. Ltd.
16 Collyer Quay #20-00
Hitachi Tower
Singapore 049318
Tel: 535-2100
Fax: 535-1533

Hitachi Asia Ltd.
Taipei Branch Office
3F, Hung Kuo Building, No.167,
Tun-Hwa North Road, Taipei (105)
Tel: <886> (2) 2718-3666
Fax: <886> (2) 2718-8180

Hitachi Asia (Hong Kong) Ltd.
Group III (Electronic Components)
7/F., North Tower, World Finance Centre,
Harbour City, Canton Road, Tsim Sha Tsui,
Kowloon, Hong Kong
Tel: <852> (2) 735 9218
Fax: <852> (2) 730 0281
Telex: 40815 HITEC HX

Copyright ' Hitachi, Ltd., 1999. All rights reserved. Printed in Japan.