

HD74LV393A

Dual 4-bit Binary Counters

HITACHI

ADE-205-276A (Z)

2nd Edition

March 2001

Description

The HD74LV393A contain two 4-bit ripple carry binary counters, which can be cascaded to create a single divide-by-256 counter.

The HD74LV393A is incremented on the high to low transition (negative edge) of the clock input, and each has an independent clear input. When clear is set high all four bits of each counter are set to a low level. This enables count truncation and allows the implementation of divide-by-N counter configurations. Low-voltage and high-speed operation is suitable for the battery-powered products (e.g., notebook computers), and the low-power consumption extends the battery life.

Features

- $V_{CC} = 2.0\text{ V}$ to 5.5 V operation
- All inputs V_{IH} (Max.) = 5.5 V (@ $V_{CC} = 0\text{ V}$ to 5.5 V)
- All outputs V_O (Max.) = 5.5 V (@ $V_{CC} = 0\text{ V}$)
- Typical V_{OL} ground bounce $< 0.8\text{ V}$ (@ $V_{CC} = 3.3\text{ V}$, $T_a = 25^\circ\text{C}$)
- Typical V_{OH} undershoot $> 2.3\text{ V}$ (@ $V_{CC} = 3.3\text{ V}$, $T_a = 25^\circ\text{C}$)
- Output current $\pm 6\text{ mA}$ (@ $V_{CC} = 3.0\text{ V}$ to 3.6 V), $\pm 12\text{ mA}$ (@ $V_{CC} = 4.5\text{ V}$ to 5.5 V)

Function Table

Inputs		Output
CLK	CLR	
X	H	L
H	L	No change
L	L	No change
↑	L	No change
↓	L	Count up

Note: H: High level

L: Low level


X: Immaterial

↑: Low to high transition

↓: High to low transition

HD74LV393A

Pin Arrangement

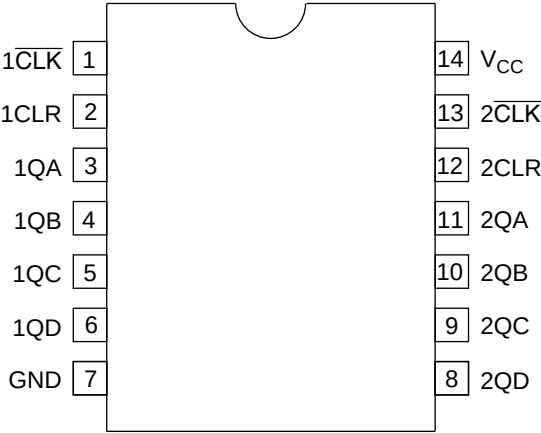

(Top view)

Absolute Maximum Ratings

Item	Symbol	Ratings	Unit	Conditions
Supply voltage range	V_{CC}	−0.5 to 7.0	V	
Input voltage range* ¹	V_I	−0.5 to 7.0	V	
Output voltage range* ^{1, 2}	V_O	−0.5 to $V_{CC} + 0.5$ −0.5 to 7.0	V	Output: H or L V_{CC} : OFF
Input clamp current	I_{IK}	−20	mA	$V_I < 0$
Output clamp current	I_{OK}	±50	mA	$V_O < 0$ or $V_O > V_{CC}$
Continuous output current	I_O	±25	mA	$V_O = 0$ to V_{CC}
Continuous current through V_{CC} or GND	I_{CC} or I_{GND}	±50	mA	
Maximum power dissipation at $T_a = 25^{\circ}\text{C}$ (in still air)* ³	P_T	785 500	mW	SOP TSSOP
Storage temperature	T_{stg}	−65 to 150	°C	

Notes: The absolute maximum ratings are values which must not individually be exceeded, and furthermore, no two of which may be realized at the same time.


- 1. The input and output voltage ratings may be exceeded if the input and output clamp-current ratings are observed.
- 2. This value is limited to 5.5 V maximum.
- 3. The maximum package power dissipation was calculated using a junction temperature of 150°C.

Recommended Operating Conditions


Item	Symbol	Min	Max	Unit	Conditions
Supply voltage range	V_{CC}	2.0	5.5	V	
Input voltage range	V_I	0	5.5	V	
Output voltage range	V_O	0	V_{CC}	V	H or L
Output current	I_{OH}	—	−50	μA	$V_{CC} = 2.0\text{ V}$
		—	−2	mA	$V_{CC} = 2.3\text{ to }2.7\text{ V}$
		—	−6		$V_{CC} = 3.0\text{ to }3.6\text{ V}$
		—	−12		$V_{CC} = 4.5\text{ to }5.5\text{ V}$
	I_{OL}	—	50	μA	$V_{CC} = 2.0\text{ V}$
		—	2	mA	$V_{CC} = 2.3\text{ to }2.7\text{ V}$
		—	6		$V_{CC} = 3.0\text{ to }3.6\text{ V}$
		—	12		$V_{CC} = 4.5\text{ to }5.5\text{ V}$
Input transition rise or fall rate	$\Delta t / \Delta v$	0	200	ns/V	$V_{CC} = 2.3\text{ to }2.7\text{ V}$
		0	100		$V_{CC} = 3.0\text{ to }3.6\text{ V}$
		0	20		$V_{CC} = 4.5\text{ to }5.5\text{ V}$
Operating free-air temperature	T_a	−40	85	°C	

Note: Unused or floating inputs must be held high or low.

Logic Diagram

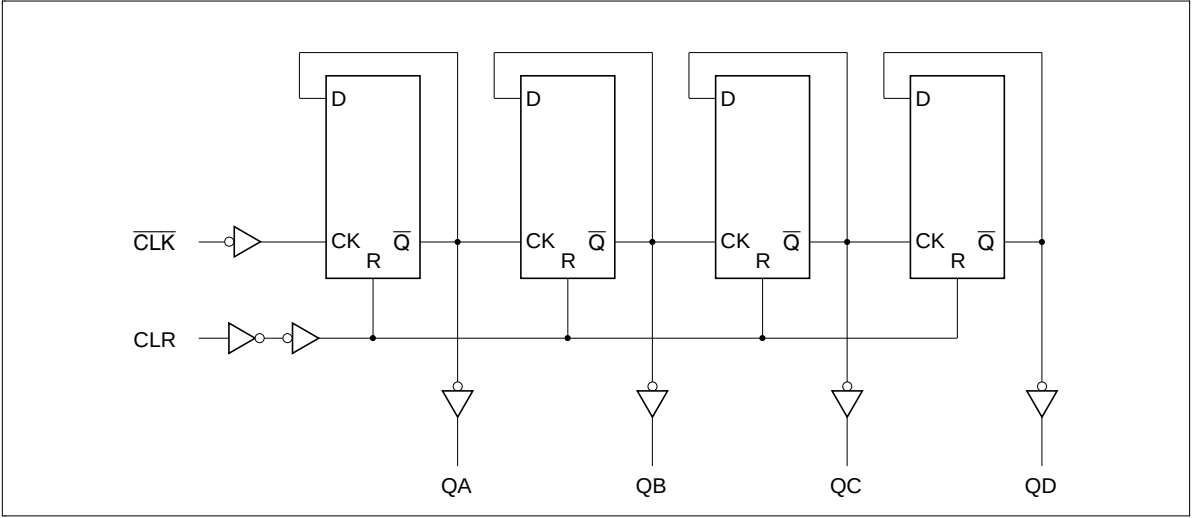

Timing Diagram

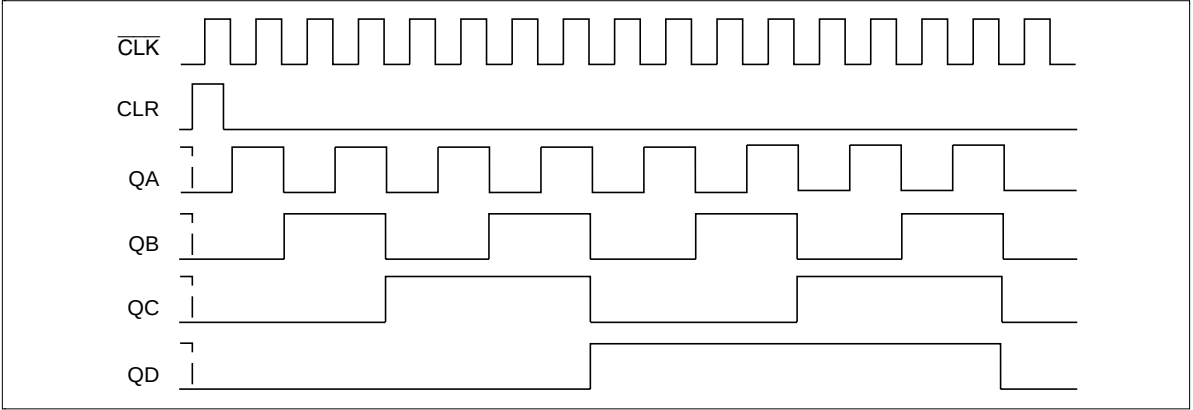

DC Electrical Characteristics

• Ta = -40 to 85°C

Item	Symbol	V _{CC} (V)*	Min	Typ	Max	Unit	Test Conditions
Input voltage	V _{IH}	2.0	1.5	—	—	V	
		2.3 to 2.7	V _{CC} × 0.7	—	—		
		3.0 to 3.6	V _{CC} × 0.7	—	—		
		4.5 to 5.5	V _{CC} × 0.7	—	—		
	V _{IL}	2.0	—	—	0.5		
		2.3 to 2.7	—	—	V _{CC} × 0.3		
		3.0 to 3.6	—	—	V _{CC} × 0.3		
		4.5 to 5.5	—	—	V _{CC} × 0.3		
Output voltage	V _{OH}	Min to Max	V _{CC} - 0.1	—	—	V	I _{OL} = -50 µA
		2.3	2.0	—	—		I _{OL} = -2 mA
		3.0	2.48	—	—		I _{OL} = -6 mA
		4.5	3.8	—	—		I _{OL} = -12 mA
	V _{OL}	Min to Max	—	—	0.1	V	I _{OL} = 50 µA
		2.3	—	—	0.4		I _{OL} = 2 mA
		3.0	—	—	0.44		I _{OL} = 6 mA
		4.5	—	—	0.55		I _{OL} = 12 mA
Input current	I _{IN}	0 to 5.5	—	—	±1	µA	V _{IN} = 5.5 V or GND
Quiescent supply current	I _{CC}	5.5	—	—	20	µA	V _{IN} = V _{CC} or GND, I _O = 0
Output leakage current	I _{OFF}	0	—	—	5	µA	V _I , or V _O = 0 V to 5.5 V
Input capacitance	C _{IN}	3.3	—	1.7	—	pF	V _I = V _{CC} or GND

Note: For conditions shown as Min or Max, use the appropriate values under recommended operating conditions.

Switching Characteristics

- $V_{CC} = 2.5 \pm 0.2 \text{ V}$

Item	Symbol	Ta = 25°C			Ta = −40 to 85°C		Unit	Test Conditions	FROM (Input)	TO (Output)
		Min	Typ	Max	Min	Max				
Maximum clock frequency	fmax	50	90	—	40	—	MHz	C _L = 15 pF		
		30	60	—	25	—		C _L = 50 pF		
Propa- gation delay time	t _{PLH} ./t _{PHL}	—	11.8	17.7	1.0	20.5	ns	C _L = 15 pF	CLK	Q _A
		—	15.1	21.3	1.0	24.5		C _L = 50 pF		
		—	13.4	20.3	1.0	23.5		C _L = 15 pF		Q _B
		—	16.7	23.9	1.0	27.5		C _L = 50 pF		
		—	14.9	22.5	1.0	26.0		C _L = 15 pF		Q _C
		—	18.2	26.1	1.0	30.0		C _L = 50 pF		
		—	16.2	24.2	1.0	28.0		C _L = 15 pF		Q _D
		—	19.5	27.8	1.0	32.0		C _L = 50 pF		
	t _{PHL}	—	10.8	14.8	1.0	17.0	C _L = 15 pF	CLR	Q _n	
		—	14.2	17.4	1.0	20.0	C _L = 50 pF			
Setup time	t _{su}	6.0	—	—	6.0	—	ns		CLR L before CLK ↓	
Pulse width	t _w	5.0	—	—	5.0	—	ns		CLR H	
		5.0	—	—	5.0	—			CLK H or L	

Switching Characteristics (cont)

- $V_{CC} = 3.3 \pm 0.3\text{ V}$

		Ta = 25°C			Ta = −40 to 85°C				FROM	TO
Item	Symbol	Min	Typ	Max	Min	Max	Unit	Test Conditions	(Input)	(Output)
Maximum clock frequency	fmax	75	120	—	65	—	MHz	C _L = 15 pF		
		45	65	—	35	—		C _L = 50 pF		
Propagation delay time	t _{PLH} /.t _{PHL}	—	8.6	13.2	1.0	15.5	ns	C _L = 15 pF	CLK	Q _A
		—	11.1	16.7	1.0	19.0		C _L = 50 pF		
		—	10.2	15.8	1.0	18.5		C _L = 15 pF		Q _B
		—	12.7	19.3	1.0	22.0		C _L = 50 pF		
		—	11.7	18.0	1.0	21.0		C _L = 15 pF		Q _C
		—	14.2	21.5	1.0	24.5		C _L = 50 pF		
		—	13.0	19.7	1.0	23.0		C _L = 15 pF		Q _D
		—	15.5	23.2	1.0	26.5		C _L = 50 pF		
	t _{PHL}	—	7.9	12.3	1.0	14.5	ns	C _L = 15 pF	CLR	Q _n
		—	10.4	15.8	1.0	18.0		C _L = 50 pF		
Setup time	t _{su}	5.0	—	—	5.0	—	ns		CLR L before CLK↓	
Pulse width	t _w	5.0	—	—	5.0	—	ns		CLR H	
		5.0	—	—	5.0	—			CLK H or L	

Switching Characteristics (cont)

- $V_{CC} = 5.0 \pm 0.5 \text{ V}$

Item	Symbol	Ta = 25°C			Ta = −40 to 85°C		Unit	Test Conditions	FROM (Input)	TO (Output)	
		Min	Typ	Max	Min	Max					
Maximum clock frequency	fmax	125	170	—	105	—	MHz	C _L = 15 pF			
		85	115	—	75	—			C _L = 50 pF		
Propa- gation delay time	t _{PLH} ./t _{PHL}	—	5.8	8.5	1.0	10.0	ns	C _L = 15 pF	$\overline{\text{CLK}}$	Q _A	
		—	7.3	10.5	1.0	12.0				C _L = 50 pF	
		—	6.8	9.8	1.0	11.5				C _L = 15 pF	Q _B
		—	8.3	11.8	1.0	13.5				C _L = 50 pF	
		—	7.7	11.2	1.0	13.0				C _L = 15 pF	Q _C
		—	9.2	13.2	1.0	15.0				C _L = 50 pF	
		—	8.5	12.5	1.0	14.5				C _L = 15 pF	Q _D
		—	10.0	14.5	1.0	16.5				C _L = 50 pF	
	t _{PHL}	—	5.4	8.1	1.0	9.5	ns	C _L = 15 pF	CLR	Q _n	
		—	6.9	10.1	1.0	11.5				C _L = 50 pF	
Setup time	t _{su}	4.0	—	—	4.0	—	ns		CLR L before $\overline{\text{CLK}}$ ↓		
Pulse width	t _w	5.0	—	—	5.0	—	ns		CLR H		
		5.0	—	—	5.0	—			$\overline{\text{CLK}}$ H or L		

Operating Characteristics

- $C_L = 50\text{ pF}$


Item	Symbol	$V_{CC}\text{ (V)}$	$T_a = 25^{\circ}\text{C}$			Unit	Test Conditions
			Min	Typ	Max		
Power dissipation capacitance	C_{PD}	3.3	—	12.0	—	pF	$f = 10\text{ MHz}$
		5.0	—	15.0	—		

Noise Characteristics


- $C_L = 50\text{ pF}$

Item	Symbol	$V_{CC}\text{ (V)}$	$T_a = 25^{\circ}\text{C}$			Unit	Test Conditions
			Min	Typ	Max		
Quiet output, maximum dynamic V_{OL}	$V_{OL(P)}$	3.3	—	0.3	0.8	V	
Quiet output, minimum dynamic V_{OL}	$V_{OL(V)}$	3.3	—	−0.3	−0.8		
Quiet output, minimum dynamic V_{OH}	$V_{OH(V)}$	3.3	—	3.0	—		
High-level dynamic input voltage	$V_{IH(D)}$	3.3	2.31	—	—		
Low-level dynamic input voltage	$V_{IL(D)}$	3.3	—	—	0.99		


Test Circuit

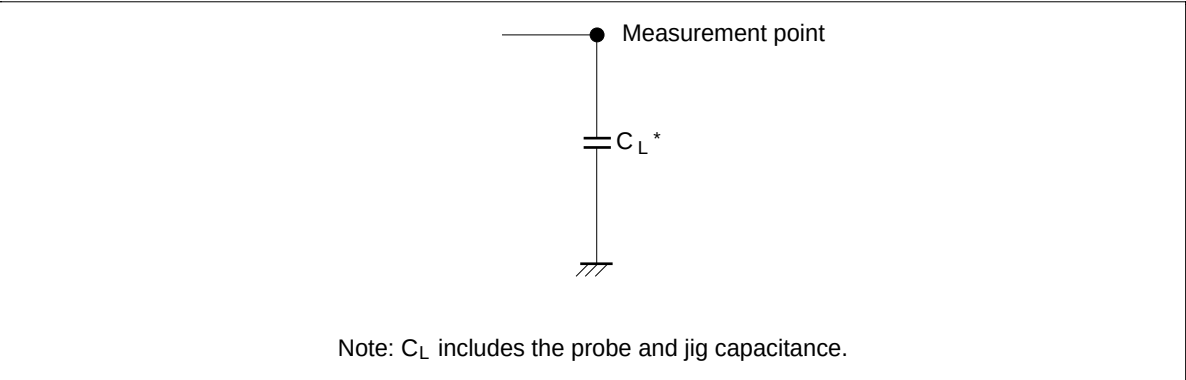

• Waveforms – 1

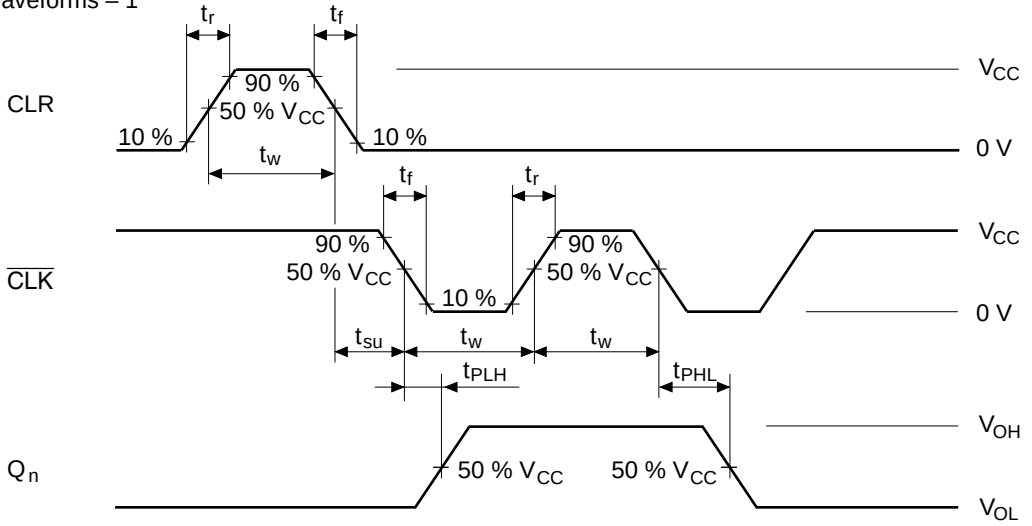

• Waveforms – 2

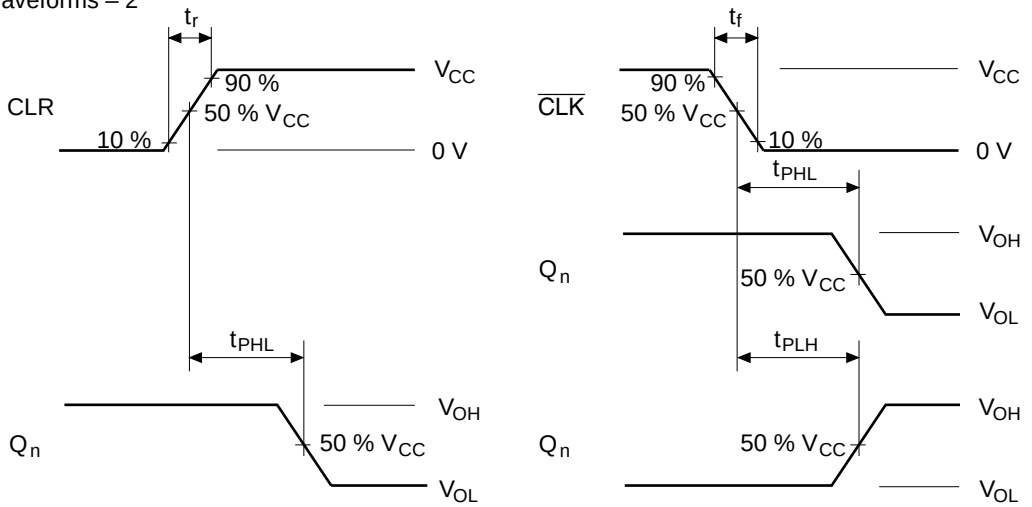


Notes: 1. Input waveform: $PRR \leq 10 \text{ MHz}$, $Z_o = 50 \Omega$, $t_r \leq 3 \text{ ns}$, $t_f \leq 3 \text{ ns}$

2. The output are measured one at a time with one transition per measurement.

Package Dimensions

Unit: mm


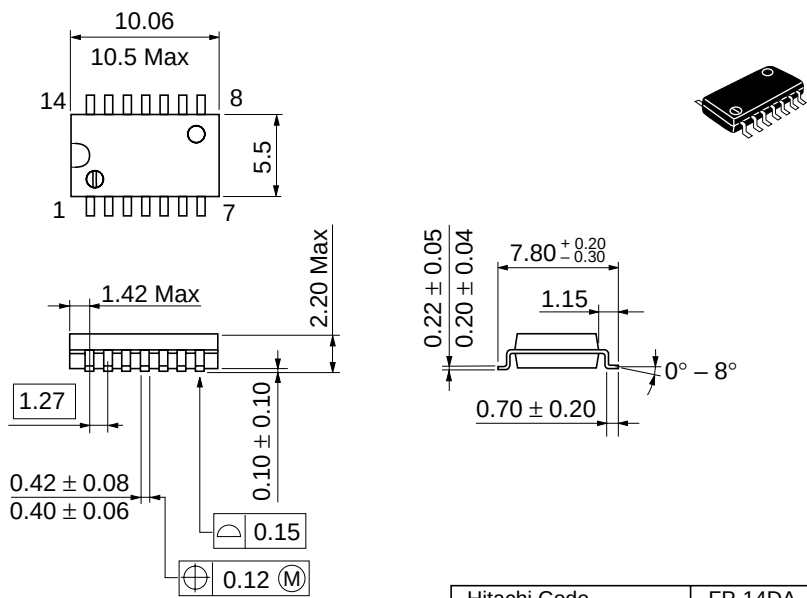


Dimension including the plating thickness
Base material dimension

Hitachi Code	FP-14DA
JEDEC	—
EIAJ	Conforms
Weight (reference value)	0.23 g




Unit: mm

Unit: mm

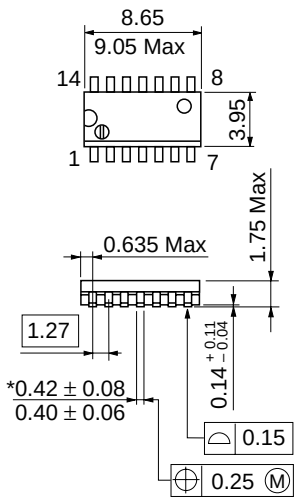

*Dimension including the plating thickness
Base material dimension

Hitachi Code	FP-14DN
JEDEC	Conforms
EIAJ	Conforms
Weight (reference value)	0.13 g

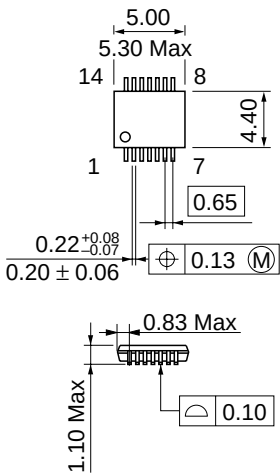

Dimension including the plating thickness
Base material dimension

Hitachi Code	TTP-14D
JEDEC	—
EIAJ	—
Weight (reference value)	0.05 g

Cautions

1. Hitachi neither warrants nor grants licenses of any rights of Hitachi's or any third party's patent, copyright, trademark, or other intellectual property rights for information contained in this document. Hitachi bears no responsibility for problems that may arise with third party's rights, including intellectual property rights, in connection with use of the information contained in this document.

2. Products and product specifications may be subject to change without notice. Confirm that you have received the latest product standards or specifications before final design, purchase or use.

3. Hitachi makes every attempt to ensure that its products are of high quality and reliability. However, contact Hitachi's sales office before using the product in an application that demands especially high quality and reliability or where its failure or malfunction may directly threaten human life or cause risk of bodily injury, such as in aerospace, aeronautics, nuclear power, combustion control, transportation, traffic, safety equipment or medical equipment for life support.

4. Design your application so that the product is used within the ranges guaranteed by Hitachi particularly for maximum rating, operating supply voltage range, heat radiation characteristics, installation conditions and other characteristics. Hitachi bears no responsibility for failure or damage when used beyond the guaranteed ranges. Even within the guaranteed ranges, consider normally foreseeable failure rates or failure modes in semiconductor devices and employ systemic measures such as fail-safe devices, so that the equipment incorporating the Hitachi product does not cause bodily injury, fire or other consequential damage due to operation of the Hitachi product.

5. This product is not designed to be radiation resistant.

6. No one is permitted to reproduce or duplicate, in any form, the whole or part of this document without written approval from Hitachi.

7. Contact Hitachi's sales office for any questions regarding this document or Hitachi semiconductor products.

HITACHI

Hitachi, Ltd.
Semiconductor & Integrated Circuits.
Nippon Bldg., 2-6-2, Ohte-machi, Chiyoda-ku, Tokyo 100-0004, Japan
Tel: Tokyo (03) 3270-2111 Fax: (03) 3270-5109

URL	NorthAmerica	: http://semiconductor.hitachi.com/
	Europe	: http://www.hitachi-eu.com/hel/ecg
	Asia	: http://sicapac.hitachi-asia.com
	Japan	: http://www.hitachi.co.jp/Sicd/indx.htm

For further information write to:

Hitachi Semiconductor (America) Inc. 179 East Tasman Drive, San Jose, CA 95134 Tel: <1> (408) 433-1990 Fax: <1> (408) 433-0223	Hitachi Europe Ltd. Electronic Components Group. Whitebrook Park Lower Cookham Road Maidenhead Berkshire SL6 8YA, United Kingdom Tel: <44> (1628) 585000 Fax: <44> (1628) 585200 Hitachi Europe GmbH Electronic Components Group Dornacher Straße 3 D-85622 Feldkirchen, Munich Germany Tel: <49> (89) 9 9180-0 Fax: <49> (89) 9 29 30 00	Hitachi Asia Ltd. Hitachi Tower 16 Collyer Quay #20-00, Singapore 049318 Tel : <65>-538-6533/538-8577 Fax : <65>-538-6933/538-3877 URL : http://www.hitachi.com.sg Hitachi Asia Ltd. (Taipei Branch Office) 4/F, No. 167, Tun Hwa North Road, Hung-Kuo Building, Taipei (105), Taiwan Tel : <886>-(2)-2718-3666 Fax : <886>-(2)-2718-8180 Telex : 23222 HAS-TP URL : http://www.hitachi.com.tw	Hitachi Asia (Hong Kong) Ltd. Group III (Electronic Components) 7/F., North Tower, World Finance Centre, Harbour City, Canton Road Tsim Sha Tsui, Kowloon, Hong Kong Tel : <852>-(2)-735-9218 Fax : <852>-(2)-730-0281 URL : http://semiconductor.hitachi.com.hk
--	---	---	---

Copyright © Hitachi, Ltd., 2001. All rights reserved. Printed in Japan.

Colophon 3.0