




PRODUCT SPECIFICATION

HDM3224C/CL

320x240 COLOR GRAPHICS
LCD DISPLAY MODULE

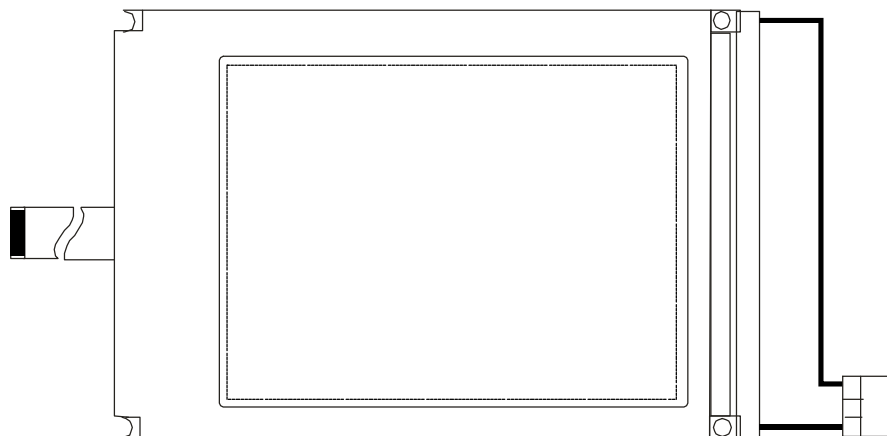

HANTRONIX, INC. 10080 BUBB RD. CUPERTINO, CA 95014	Q.A.: JK	REV.: 2.2	HDM3224C/CL	SHEET 1 OF 18
				DATE: 6/4/01

1.MECHANICAL DATA

(1) Product No.	HDM3224C/CL
(2) Module Size	168.0 (W)mm x 111.0 (H)mm x 7.4(D)mm
(3) Dot Size	0.09 (W)mm x 0.33 (H)mm
(4) Dot Pitch	0.12 (W)mm x 0.36 (H)mm
(5) Number of Dots	320 xRGB(W) x 240 (H)Dots
(6) Duty	1/240
(7) LCD Display Mode	FSTN: Color STN Module
	REAR POLARIZER: Color Transmissive Type
(8) Viewing Direction	6 O'clock
(9) Backlight	CCFL
(10) Controller	Excluded
(11) DC/DC Converter	Excluded
(12) Weight	280 g(approx.)

HANTRONIX, INC. 10080 BUBB RD. CUPERTINO, CA 95014	Q.A.: JK	REV.: 2.2	HDM3224C/CL	SHEET 2 OF 18
				DATE: 6/4/01

2. ABSOLUTE MAXIMUM RATINGS

(1) ELECTRICAL ABSOLUTE RATINGS

VSS=0V

ITEM	SYMBOL	MIN	MAX	UNIT	COMMENT
Power Supply for Logic	VDD-VSS	-0.3	7.0	V	
Power Supply for LCD Drive	VLCD-VSS	0	42.0	V	
Input Voltage	VI	-0.3	VDD+0.3	V	
Static Electricity	-	-	-	-	Note 1

(2) ENVIRONMENTAL ABSOLUTE MAXIMUM RATINGS

ITEM	NORMAL TEMP.			
	OPERATING		STORAGE	
	MIN.	MAX.	MIN.	MAX.
Ambient Temperature	0	50	-20	60
Humidity (Without Condensation)	Note 2,4		Note 3,4	

Note 1 LCM should be grounded during handling LCM.

Note 2 $T_a \leq 50^\circ\text{C}$: 85%RH max

$T_a > 50^\circ\text{C}$: Absolute humidity must be lower
than the humidity of 85%RH at 50°C

Note 3 T_a at -20°C will be < 48 hrs, at 60°C will be < 120 hrs

Note 4 Background will color change slightly depending on ambient temperature.

That phenomenon is reversible.

HANTRONIX, INC. 10080 BUBB RD. CUPERTINO, CA 95014	Q.A.: JK	REV.: 2.2	HDM3224C/CL	SHEET 3 OF 18
				DATE: 6/4/01

3. ELECTRICAL CHARACTERISTICS

3-1.CHARACTERISTICS OF LCM

ITEM		SYMBOL	CONDITION		MIN.	TYP.	MAX.	UNIT
Logic Circuit Power Supply		VDD-VSS	Ta= 25°C		4.5	5.0	5.5	V
Input Voltage		VIH	H level		0.8VDD	—	VDD	V
		VIL	L level		0	—	0.2VDD	V
Recommended LCD Driving Voltage (Normal Temp. LCM)		VLCD-VSS	Duty=1/240 Bias=1/13 VDD=5.0V	0°C	23.2	23.6	24.0	V
				25°C	22.2	22.6	23.0	
				50°C	21.0	21.4	21.8	
Supply Current for Logic		IDD	VDD-VSS = 5.0V VLCD-VSS = 22.6V Ta= 25°C		—	2.0	6.0	mA
Supply Current for LCD		ILCD	PATTERN: □ ■ □ ■ □ ■ □ ■ ■ □ ■ □ ■ □ ■ □		—	8.0	15.0	mA
LCM	Surface Luminance	L	PATTERN: (Dots All On of White Color) □ □ □ □ □ □ □ □		—	67.5	—	cd/m ²
			PATTERN: (Dots All Off) ■ ■ ■ ■ ■ ■ ■ ■		—	2.7	—	
Recommended Frame Frequency for Optimum Coctrast		FLM	—		115	120	125	Hz

3-2.ELECTRICAL CHARACTERISTICS OF BACKLIGHT

Used lamp : Rating

PARAMETER	SYMBOL	MIN.	TYP.	MAX.	UNIT	REMARK
Lamp Voltage	V_L	—	320	—	Vrms	$T_a = 25^\circ\text{C}$
Lamp current	I_L	4	5	6	mA rms	(*1) $T_a = 25^\circ\text{C}$
Lamp power consumption	P_L	—	1.6	—	W	(*2) $T_a = 25^\circ\text{C}$
Lamp frequency	F_L	20	35	50	KHz	$T_a = 25^\circ\text{C}$
Starting voltage	V_s	—	455	—	Vrms	$T_a = 0^\circ\text{C}$
		—	350	—	Vrms	$T_a = 25^\circ\text{C}$
Lamp life time	L_L	—	20000	—	hrs	$I_L = 5\text{mA rms}, T_a = 25^\circ\text{C}$

(*1) It is recommended that I_L be not more than 5.0 mA rms so that heat radiation of CCFT backlight may least affect the display quality .

(*2) Power consumption excluded inverter loss .

HANTRONIX, INC. 10080 BUBB RD. CUPERTINO, CA 95014	Q.A.: JK	REV.: 2.2	HDM3224C/CL	SHEET 5 OF 18
				DATE: 6/4/01

4.OPTICAL CHARACTERISTICS

4-1.Optical Char. of Normal Temp. Mode

AT Vop

ITEM MODE		Cr(Contrast Ratio)						θ (Viewing Angle)		ϕ (Viewing Angle)	
		0°C		25°C		50°C		25°C		25°C	
		MIN.	TYP.	MIN.	TYP.	MIN.	TYP.	MIN.	TYP.	MIN.	TYP.
T	M	—	40	—	35	—	5	—	90	—	±58
NOTE		NOTE 6						NOTE 5			

note:

T: TRANSMISSIVE

M: FOR 6 O'CLOCK STN MODULE

AT $\phi=0^\circ$ $\theta=0^\circ$

ITEM	SYMBOL	CONDITION	MIN.	TYP.	MAX.	UNIT	NOTE
Response Time (rise)	Tr	0°C	—	550	750	ms	NOTE 2
		25°C	—	230	330		
		50°C	—	100	140		
Response Time (fall)	Tf	0°C	—	270	370	ms	NOTE 2
		25°C	—	80	110		
		50°C	—	60	85		

HANTRONIX, INC.
10080 BUBB RD.
CUPERTINO, CA 95014

Q.A.:

JK

REV.:

2.2

HDM3224C/CL

SHEET 6 OF 18

DATE:

6/4/01

4-2. Color of CIE Coordinate


Ta = 25°C

ITEM		SYMBOL	CONDITION	VALUE	BRIGHTNESS (cd/m ²)	NOTE
Color of CIE Coordinate	Red	X	$\phi=0^{\circ}$, $\theta=0^{\circ}$	0.531	21.0	Note※
		y		0.318		
	Green	X		0.305	50.0	
		y		0.521		
	Blue	X		0.163	18.0	
		y		0.139		
	White	X		0.302	75.0	
		y		0.311		

Note* Measuring at position 3 on Fig.1
CIE chromaticity diagram

Tolerance : ± 0.05

Fig.1

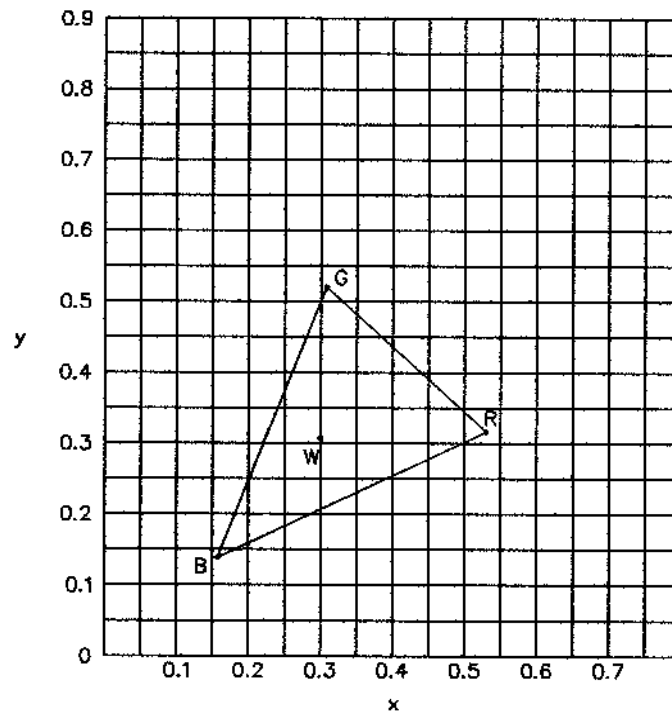

HANTRONIX, INC.
10080 BUBB RD.
CUPERTINO, CA 95014

Q.A.:
JK

REV.:
2.2


HDM3224C/CL

SHEET 7 OF 18


DATE:
6/4/01

(NOTE 1)

Definition of Operation Voltage(V_{op})

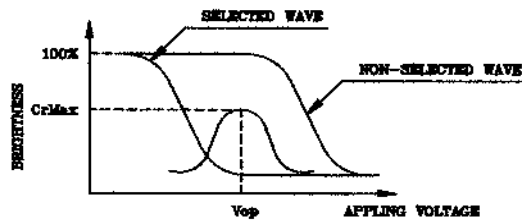

(positive type)

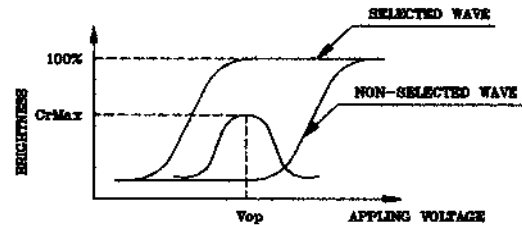


(negative type)

*Conditions


Viewing Angle : 0
Frame Frequency : 120Hz
Applying Waveform : 1/N duty 1/a bias

(NOTE 2)

Definition of Response Time(T_r, T_f)

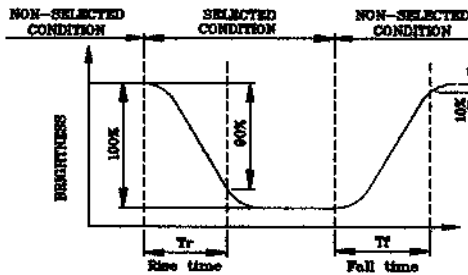

(positive type)

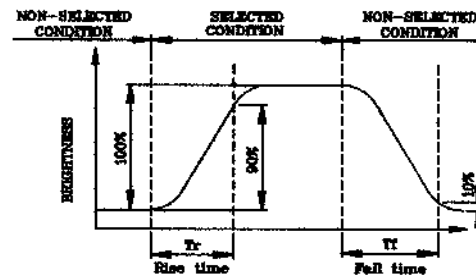


(negative type)

*Conditions


Operating Voltage : V_{op}
Viewing Angle (θ, ϕ) : (0,0)
Frame Frequency : 120Hz
Applying Waveform : 1/N duty 1/a bias

(NOTE 3)

Description of Measuring Equipment and Driving Waveforms

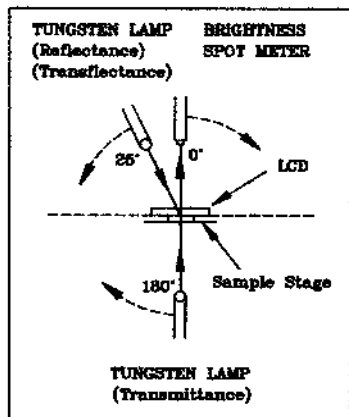


CONST.
TEMP.
CHAMBER

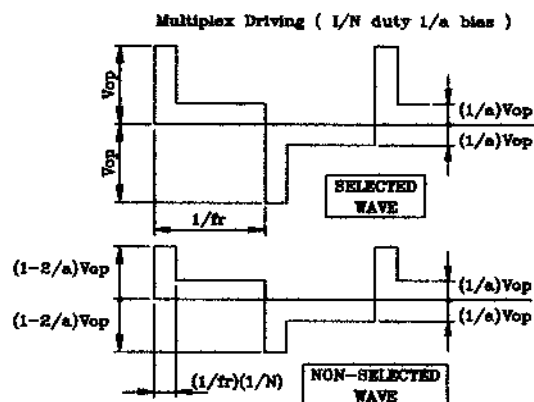



(NOTE 4)

Definition of Viewing Direction

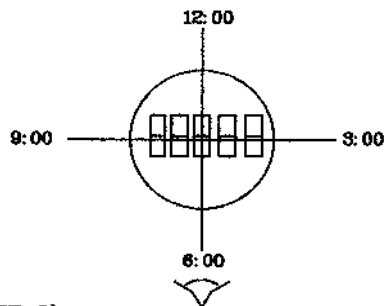

(NOTE 5)

Definition of Viewing Angle

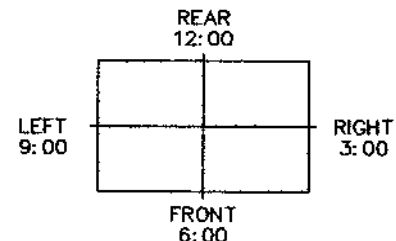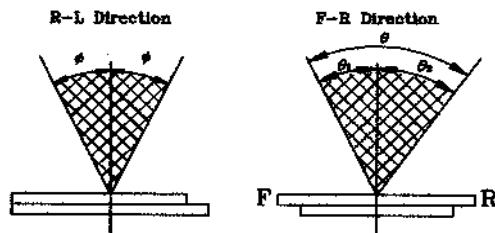

*For This Product

The Viewing Direction is 6 O'clock
So $\theta_1 > \theta_2$


$$\theta = \theta_1 + \theta_2$$

*Conditions


Operating Voltage : V_{op}
Frame Frequency : 120Hz
Applying Waveform : 1/N duty 1/a bias
Contrast Ratio : larger than 2

(NOTE 6)

Definition of Contrast Ratio (Cr)

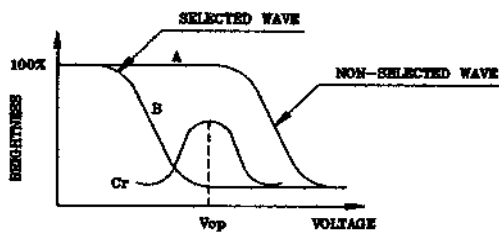

(positive type)

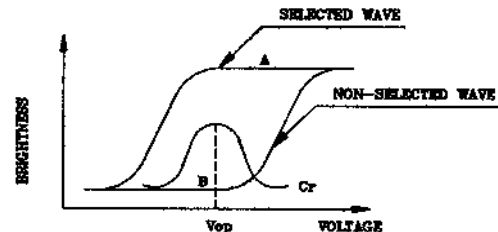

(negative type)

$$\text{Contrast Ratio : } Cr = A/B$$

*Conditions

Viewing Angle : 0
Frame Frequency : 120Hz
Applying Waveform : 1/N duty 1/a bias

HANTRONIX, INC.
10080 BUBB RD.
CUPERTINO, CA 95014

Q.A.:

JK

REV.:

2.2

HDM3224C/CL


SHEET 9 OF 18

DATE:


6/4/01

5. BLOCK DIAGRAM

LCD

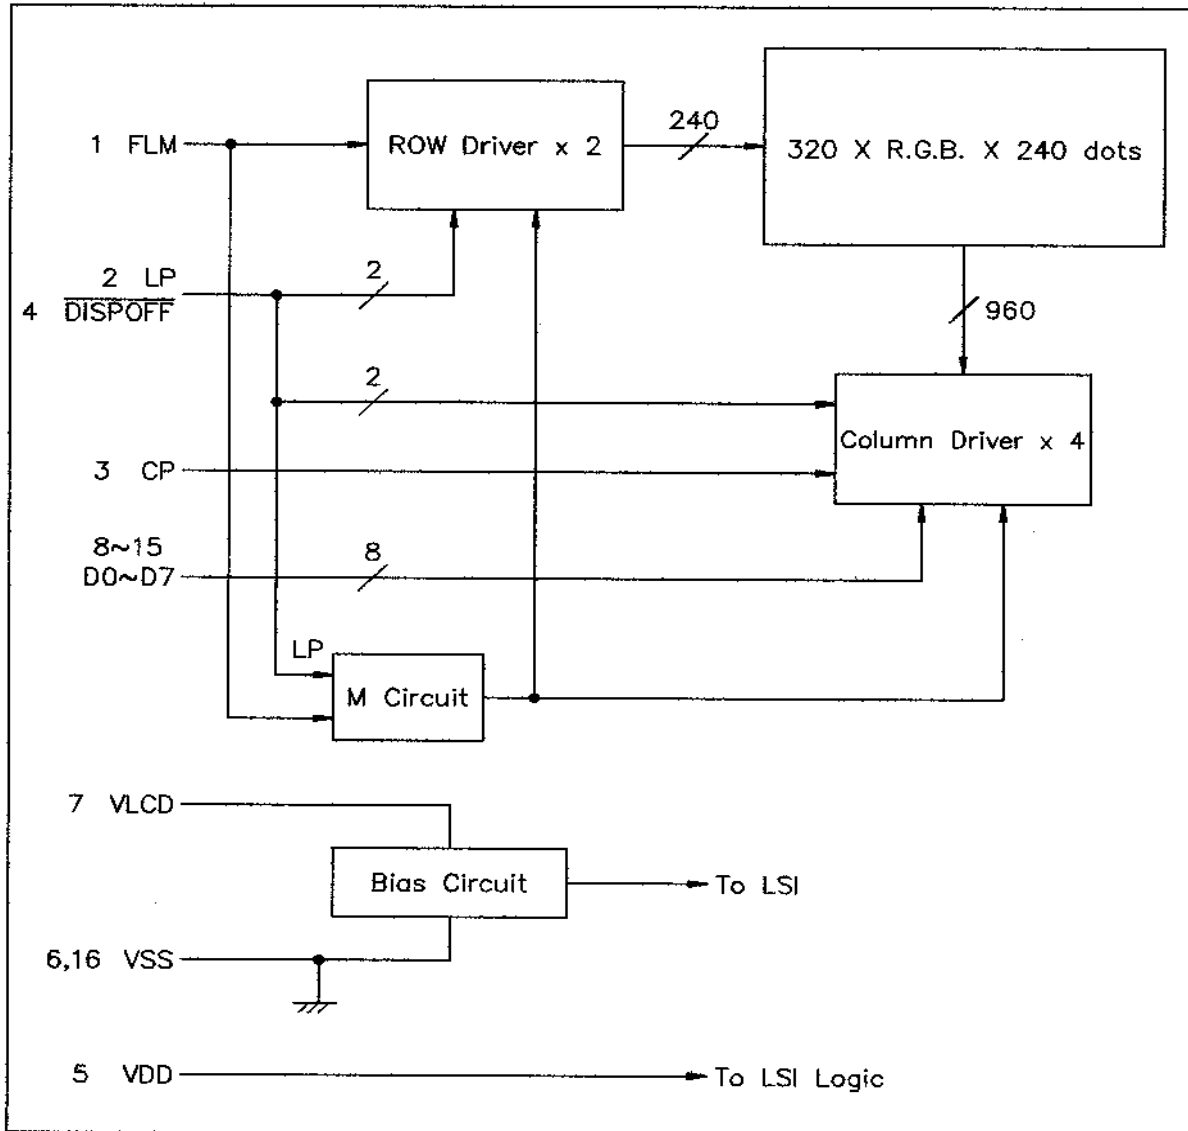

CCFL

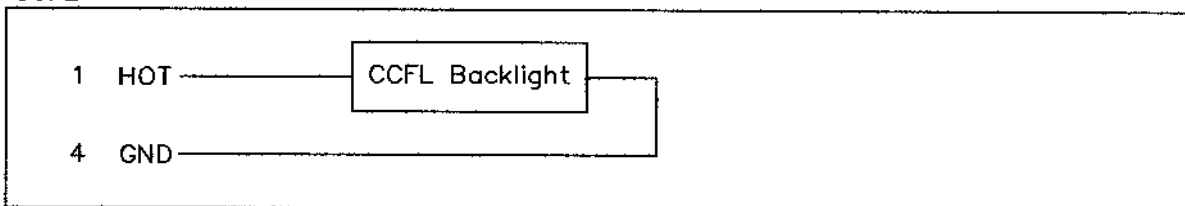

6.INTERNAL PIN CONNECTION

LCD

Pin No.	Symbol	Level	Function
1	FLM	H/L	First Line Marker
2	LP	H→L	Data Latch Signal
3	CP	H→L	Clock Signal for Shifting Data
4	DISPOFF	H/L	Display Control Signal, H : Display on L : Display off
5	VDD	—	Power Supply for Logic
6	VSS	—	Power Supply (0V,GND)
7	VLCD	—	Power Supply for LCD Drive
8	D0	H/L	Display Data
9	D1	H/L	Display Data
10	D2	H/L	Display Data
11	D3	H/L	Display Data
12	D4	H/L	Display Data
13	D5	H/L	Display Data
14	D6	H/L	Display Data
15	D7	H/L	Display Data
16	VSS	—	Power Supply (0V,GND)

CCFL

Pin No.	Symbol	Level	Function
1	HOT	—	Power Supply for CCFL(HOT)
2	NC	—	Non-connection
3	NC	—	Non-connection
4	GND	—	Power Supply for CCFL(GND)

LCD INTERFACE CABLE :

FFC,N16,Pitch 1.0 mm (Thickness = 0.3 mm)

CORRESPONDABLE LCD CONNECTOR :

MOLEX 52207-1690 or COMPATIBLE

CCFL CONNECTOR :



M63M83-04 (MITSUMI)

CORRESPONDABLE CCFL CONNECTOR :

M60-04-30-134P or M60-04-30-114P or M61M73-04 (MITSUMI)

HANTRONIX, INC. 10080 BUBB RD. CUPERTINO, CA 95014	Q.A.: JK	REV.: 2.2	HDM3224C/CL	SHEET 11 OF 18
				DATE: 6/4/01

7. POWER SUPPLY

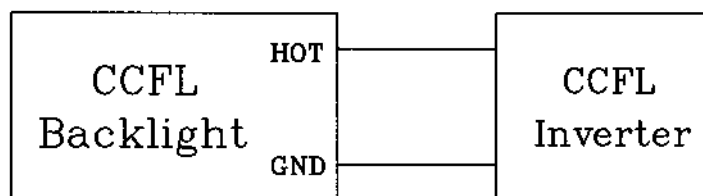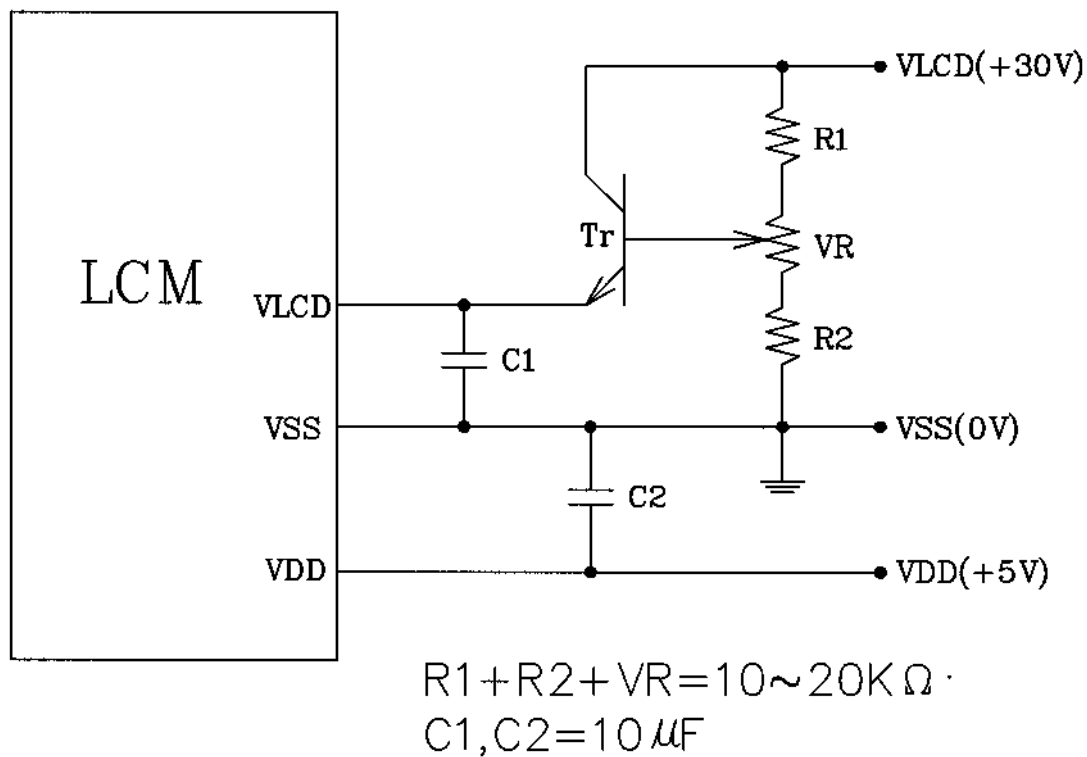

Recommended CCFL Inverter : TDK CXA-L10L
 TDK CXA-M10L-L


HANTRONIX, INC. 10080 BUBB RD. CUPERTINO, CA 95014	Q.A.: JK	REV.: 2.2	HDM3224C/CL	SHEET 12 OF 18
				DATE: 6/4/01

8. TIMING CHARACTERISTICS

8-1. INTERFACE TIMING

VDD=5.0V ± 10%

Parameter	SYMBOL	MIN.	MAX.	UNIT
CLOCK PULSE CYCLE TIME	t_{WCK}	40	—	ns
CLOCK PULSE HIGH LEVEL WIDTH	t_{WCKH}	12	—	ns
CLOCK PULSE LOW LEVEL WIDTH	t_{WCKL}	14	—	ns
LATCH PULSE HIGH LEVEL WIDTH	t_{WLPH}	15	—	ns
CP→LP RISE TIME	t_{LD}	5	—	ns
CP→LP FALL TIME	t_{SL}	25	—	ns
LP→CP RISE TIME	t_{LS}	25	—	ns
LP→CP FALL TIME	t_{LH}	25	—	ns
CLOCK PULSE RISE/FALL TIME	t_r, t_f	—	50	ns
DATA SETUP TIME	t_{DS}	5	—	ns
DATA HOLD TIME	t_{DH}	15	—	ns
$\overline{DISPOFF}$ LOW LEVEL WIDTH	t_{WDL}	1.2	—	μs
$\overline{DISPOFF}$ CANCELLATION TIME	t_{SD}	100	—	ns

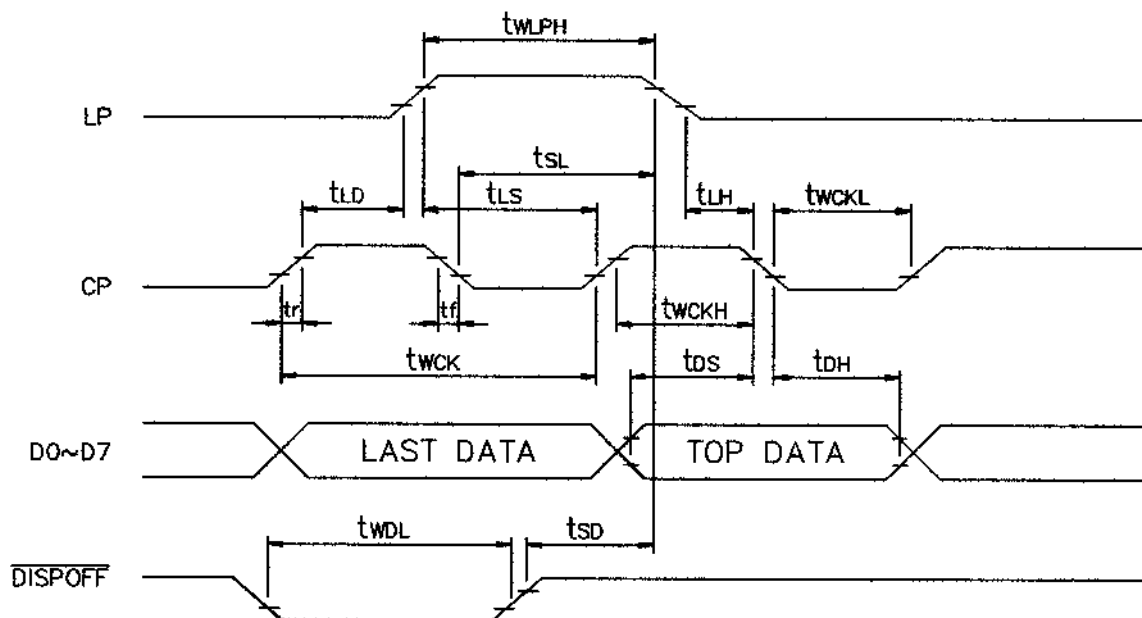

HANTRONIX, INC.
10080 BUBB RD.
CUPERTINO, CA 95014

Q.A.:

JK

REV.:

2.2


HDM3224C/CL

SHEET 13 OF 18

DATE:

6/4/01

8-2.TIMING CHART OF INPUT SIGNAL

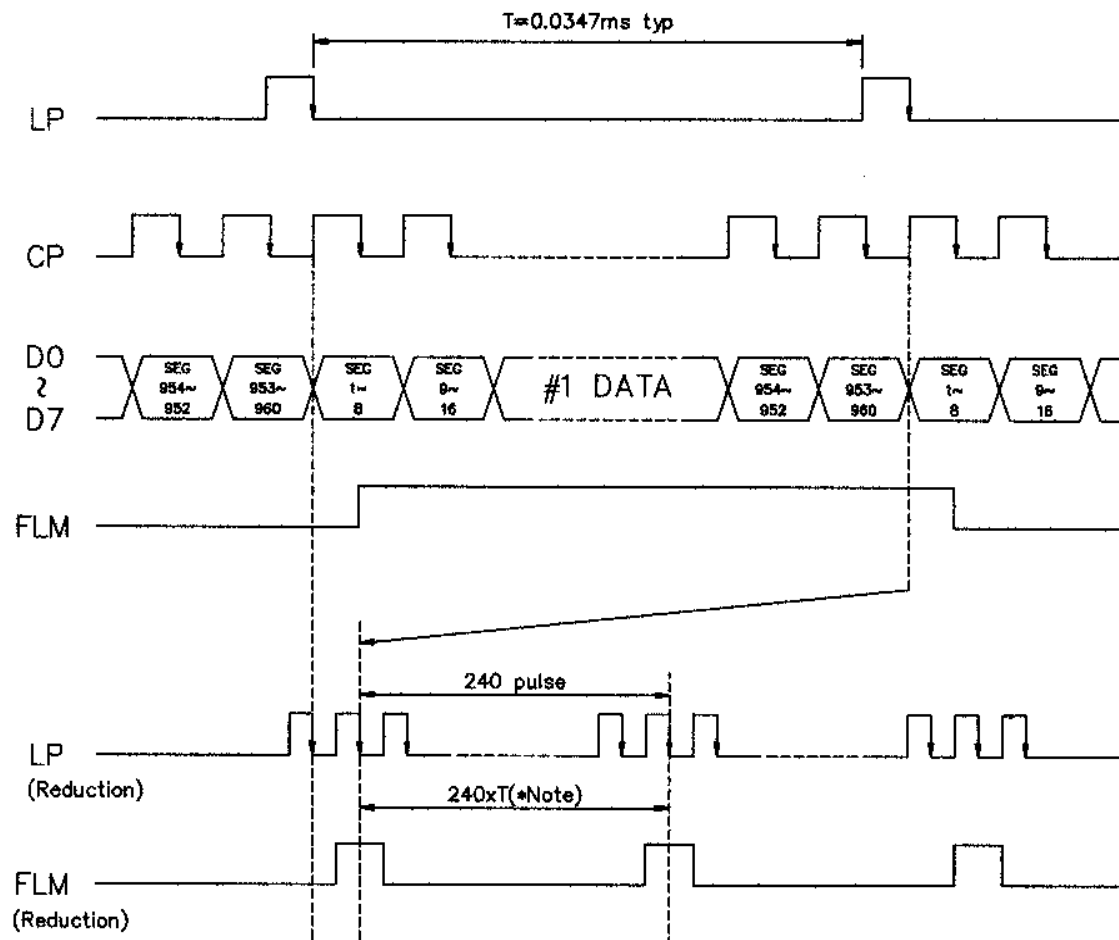

*Note :

If you have problem of display quality , you may modify the LP pulse to improve .

Method : 1.Increase one pulse of LP.

2.Check the display quality.


3.If display quality N.G. , redo item 1.

4.If you try many value (ex: 240~260) , you can't get the best quality . The display error may cause by others.


HANTRONIX, INC. 10080 BUBB RD. CUPERTINO, CA 95014	Q.A.: JK	REV.: 2.2	HDM3224C/CL	SHEET 14 OF 18
				DATE: 6/4/01

8-3. POWER ON/OFF TIMING

ON SEQUENCE

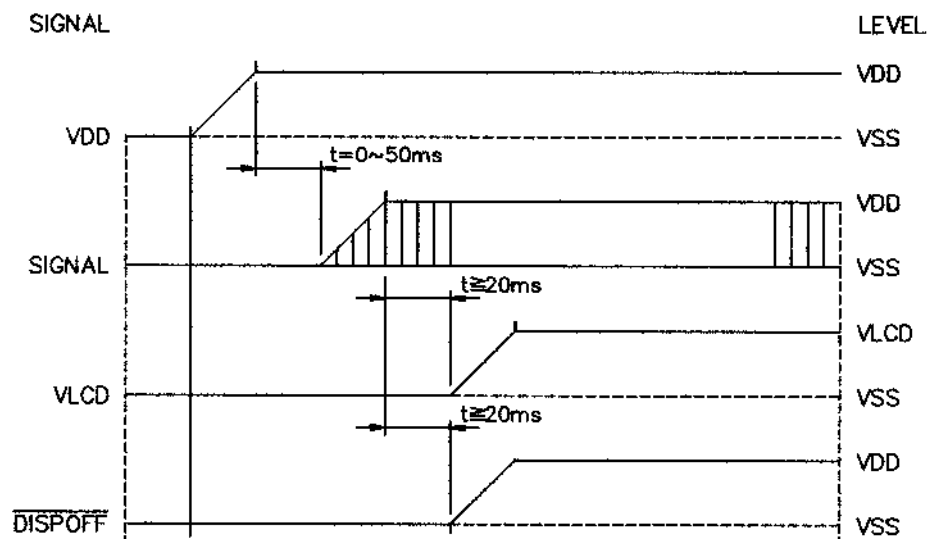


OFF SEQUENCE

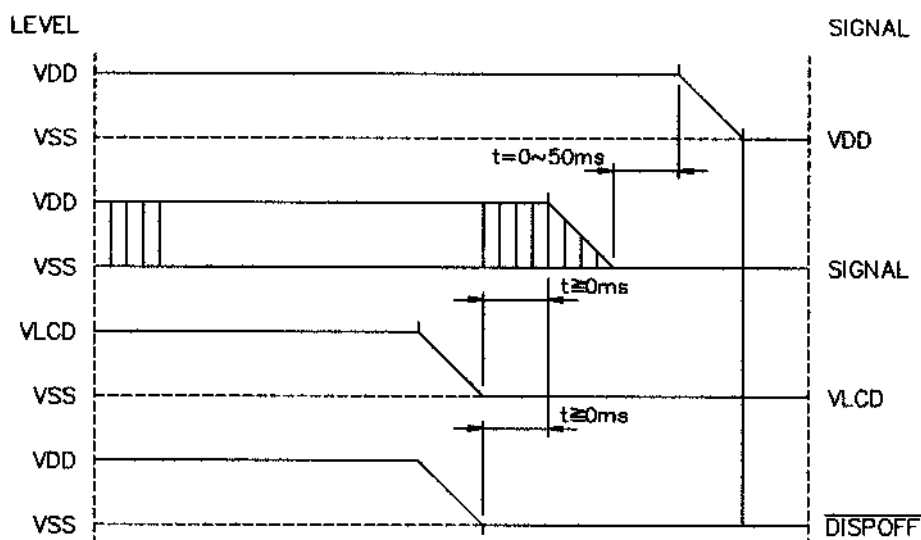

Please maintain the above sequence when turning on and off the power supply of the module. If $\overline{\text{DISPOFF}}$ is supplied to the module while internal alternate signal for LCD driving(M) is unstable, DC component will be supplied to the LCD panel. This may cause damage the LCD module.

HANTRONIX, INC. 10080 BUBB RD. CUPERTINO, CA 95014	Q.A.: JK	REV.: 2.2	HDM3224C/CL	SHEET 15 OF 18
				DATE: 6/4/01


8-4.DISPLAY PATTERN

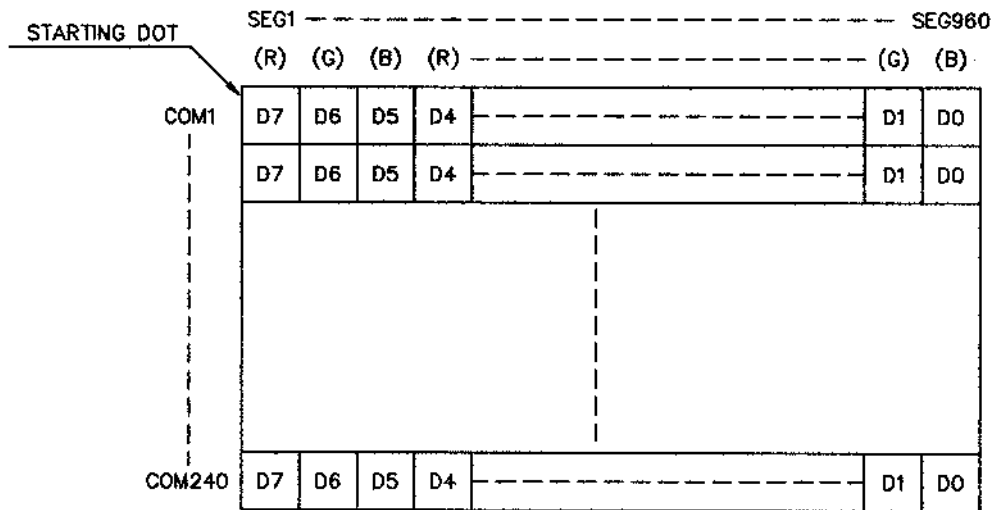

D0~D7 are 8 bits transmitted data, where D0 is LSB and D7 is MSB.

9.RELIABILITY TEST

NO	ITEM	CONDITION			STANDARD	NOTE
1	High Temp. Storage	70°C	120HR		Appearance without defect	
2	Low Temp. Storage	-20°C	120HR		Appearance without defect	
3	High Temp. & High Humi. Storage	40°C 90%RH	120HR		Appearance without defect	
4	Thermal Shock	-20°C, 30min → 25°C.5min → 70°C, 30min → 25°C.5min (1cycle)			Appearance without defect	5 cycles

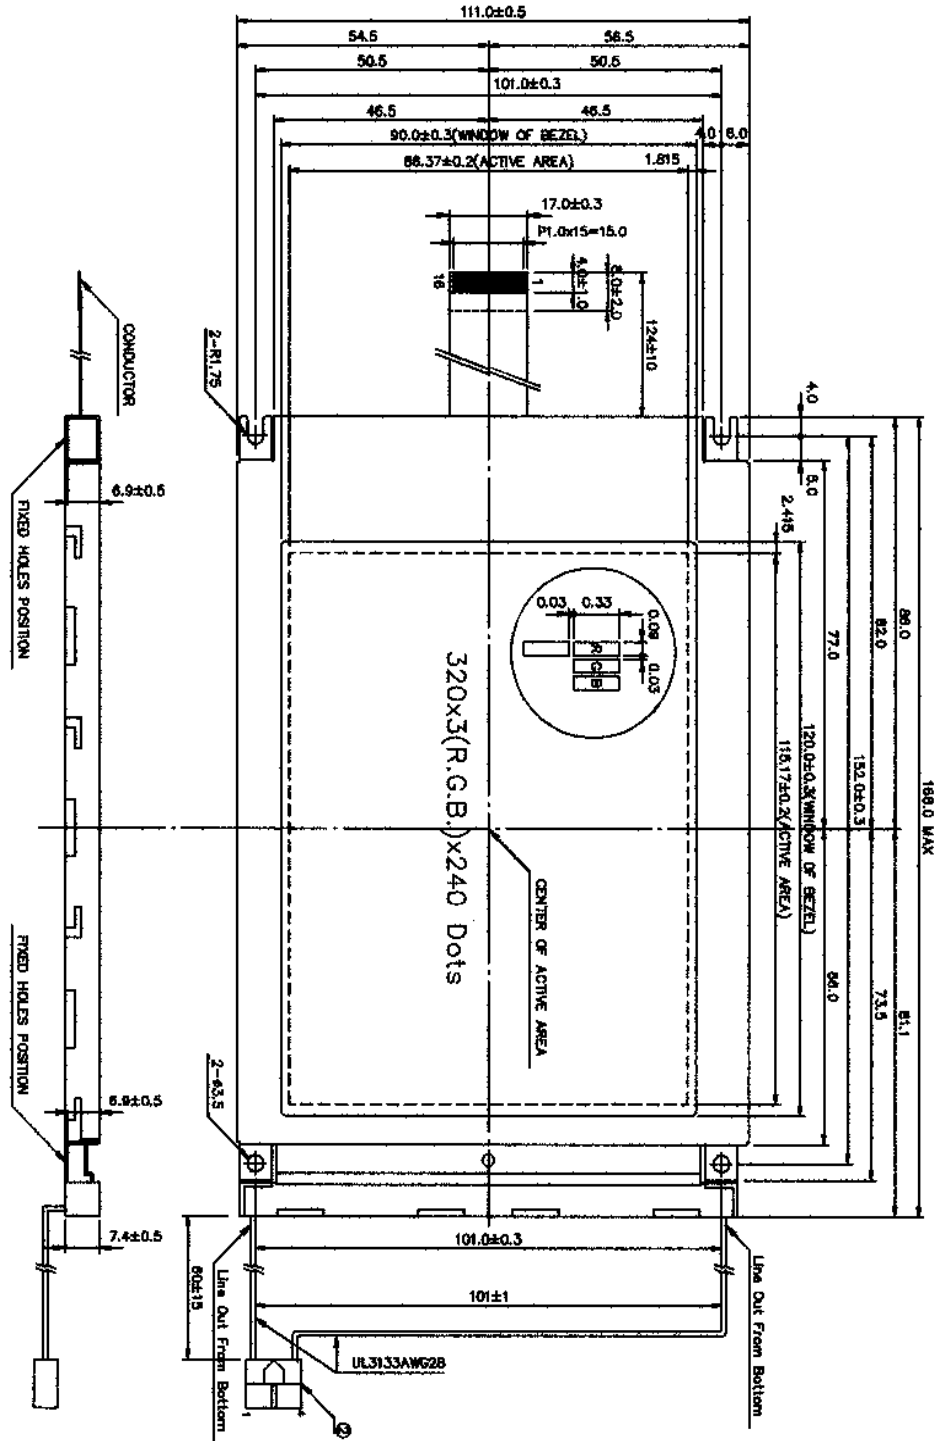

NOTE :

1. RESOLUTION : 320 X 3(R.G.B.) X 240 DOTS
2. CONTROLLER : EXCLUDED
3. DC/DC CONVERTER : EXCLUDED
4. $\varnothing$ INTERFACE CONNECTOR
FFC, M16 P1.0mm
5. TOLERANCE NO SPECIFIED : $\pm 0.5\text{mm}$

HANTRONIX, INC.
10080 BUBB RD.
CUPERTINO, CA 95014

JK

2.2

HDM3224C/CL

SHEET 18 OF 18

6/4/01