
HD74BC574A

Octal D Type Flip Flops With 3 State Outputs

HITACHI

ADE-205-042A (Z)
2nd. Edition
Sep. 2000

Description

The HD74BC574A provides high drivability and operation equal to or better than high speed bipolar standard logic IC by using Bi-CMOS process. The device features low power dissipation that is about 1/5 of high speed bipolar logic IC, when the frequency is 10 MHz. The device has eight edge trigger D type flip flops with three state outputs in a 20 pin package. Data at the D inputs meeting set up requirements, are transferred to the Q outputs on positive going transitions of the clock input. When the latch enable goes low, data at the D inputs will be retained at the outputs until latch enable returns high again. When a high logic level is applied to the output control input, all outputs go to a high impedance state, regardless of what signals are present at the other inputs and the state of the strage elements.

Features

- Input/Output are at high impedance state when power supply is off.
- Built in input pull up circuit can make input pins be open, when not used.
- TTL level input
- Wide operating temperature range

Ta = -40 to + 85°C


HD74BC574A

Function Table

Inputs			
Output Control	CK	D	Output Q
L		H	H
L		L	L
L	L	X	Q ₀
H	X	X	Z

- H : High level
L : Low level
X : Immaterial
Z : High impedance
 : Low to high transition
Q₀ : Level of Q before the indicated steady state input conditions were established.

Pin Arrangement

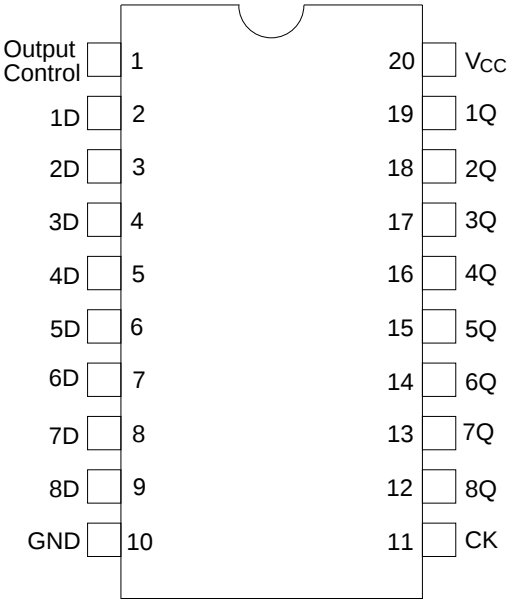

(Top view)

Absolute Maximum Ratings

Item	Symbol	Rating	Unit
Supply voltage	V_{CC}	−0.5 to +7.0	V
Input diode current	I_{IK}	±30	mA
Input voltage	V_{IN}	−0.5 to +7.5	V
Output voltage	V_{OUT}	−0.5 to +7.5	V
Off state output voltage	$V_{OUT(off)}$	−0.5 to +5.5	V
Storage temperature	Tstg	−65 to +150	°C


Note: 1. The absolute maximum ratings are values which must not individually be exceeded, and furthermore, no two of which may be realized at the same time.

Recommended Operating Conditions

Item	Symbol	Min	Typ	Max	Unit
Supply voltage	V_{CC}	4.5	5.0	5.5	V
Input voltage	V_{IN}	0	—	V_{CC}	V
Output voltage	V_{OUT}	0	—	V_{CC}	V
Operating temperature	Topr	−40	—	85	°C
Input rise/fall time*1	t_r, t_f	0	—	8	ns/V

Note: 1. This item guarantees maximum limit when one input switches.
Waveform: Refer to test circuit of switching characteristics.

Logic Diagram

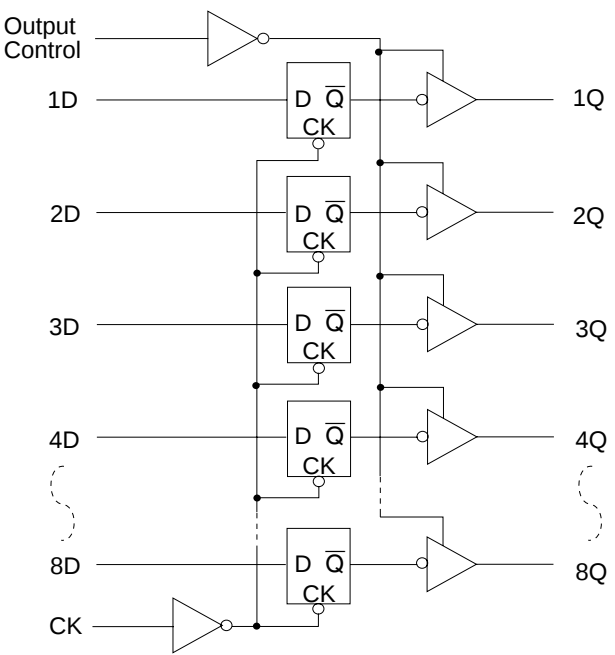

Electrical Characteristics ($T_a = -40^{\circ}\text{C}$ to $+85^{\circ}\text{C}$)

Item	Symbol	V_{CC} (V)	Min	Max	Unit	Test Conditions
Input voltage	V_{IH}		2.0	—	V	
	V_{IL}		—	0.8	V	
Output voltage	V_{OH}	4.5	2.4	—	V	$I_{OH} = -3\text{ mA}$
		4.5	2.0	—	V	$I_{OH} = -15\text{ mA}$
	V_{OL}	4.5	—	0.4	V	$I_{OL} = 24\text{ mA}$
		4.5	—	0.5	V	$I_{OL} = 48\text{ mA}$
Input diode voltage	V_{IK}	4.5	—	-1.2	V	$I_{IN} = -18\text{ mA}$
Input current	I_I	5.5	—	-250	μA	$V_{IN} = 0\text{ V}$
		5.5	—	1.0	μA	$V_{IN} = 5.5\text{ V}$
		5.5	—	100	μA	$V_{IN} = 7.0\text{ V}$
Short circuit output current* ¹	I_{OS}	5.5	-100	-225	mA	$V_{IN} = 0$ or 5.5 V All outputs is "L"
Off state output current	I_{OZH}	5.5	—	50	μA	$V_O = 2.7\text{ V}$
	I_{OZL}	5.5	—	-50	μA	$V_O = 0.5\text{ V}$
Supply current	I_{CCL}	5.5	—	29.5	mA	$V_{IN} = 0$ or 5.5 V All outputs is "L"
	I_{CCH}	5.5	—	2.5	mA	$V_{IN} = 0$ or 5.5 V All outputs is "H"
	I_{CCZ}	5.5	—	2.5	mA	$V_{IN} = 0$ or 5.5 V All outputs is "Z"
	I_{CCT} * ²	5.5	—	1.5	mA	$V_{IN} = 3.4$ or 0.5 V


Notes: 1. Not more than one output should be shorted at a time and duration of the short circuit should not exceed one second.

2. When input by the TTL level, it shows I_{CC} increase at per one input pin.


Switching Test Method (C_L = 50 pF)

Item	Symbol	Ta = 25°C		Ta = -40 to 85°C		Unit	Test conditions
		Min	Max	Min	Max		
Propagation delay time	CK → Q	t _{PLH}	3.0	8.0	3.0	10.0	ns
		t _{PHL}	3.0	8.0	3.0	10.0	
Output enable time		t _{ZH}	3.0	9.0	3.0	11.0	ns
		t _{ZL}	3.0	9.0	3.0	11.0	
Output disable time		t _{HZ}	3.0	8.0	3.0	10.0	ns
		t _{LZ}	3.0	8.0	3.0	10.0	
Setup time		t _s (H)	2.0	—	2.0	—	ns
		t _s (L)	2.0	—	2.0	—	
Hold time		t _h (H)	2.0	—	2.0	—	ns
		t _h (L)	2.0	—	2.0	—	
Pulse width		t _w (H)	6.0	—	6.0	—	ns
		t _w (L)	6.0	—	6.0	—	
Input capacitance	C _{IN}	3.0 (Typ)	—	—	—	pF	V _{IN} = V _{CC} or GND
Output capacitance	C _O	15.0 (Typ)	—	—	—	pF	V _O = V _{CC} or GND


Test Circuit

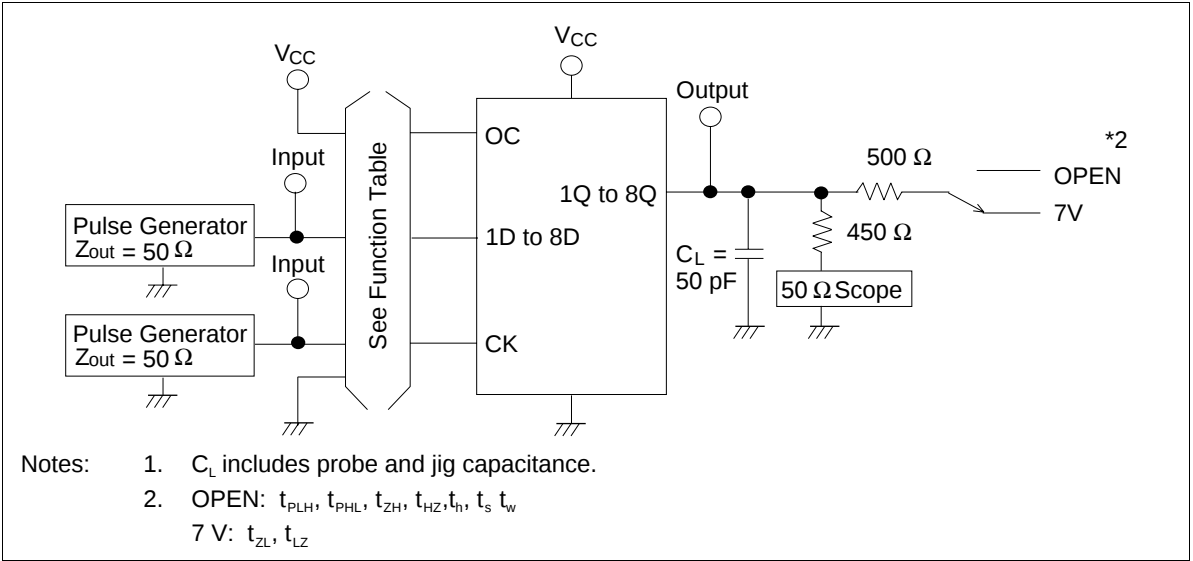


Waveforms-1

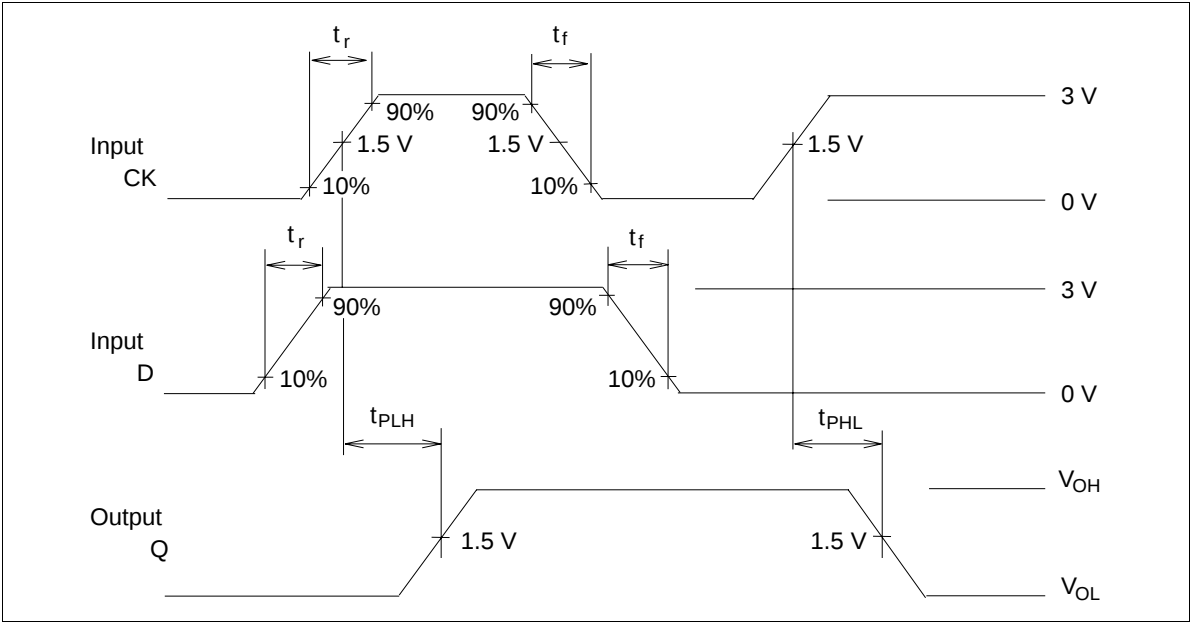

Waveforms-2

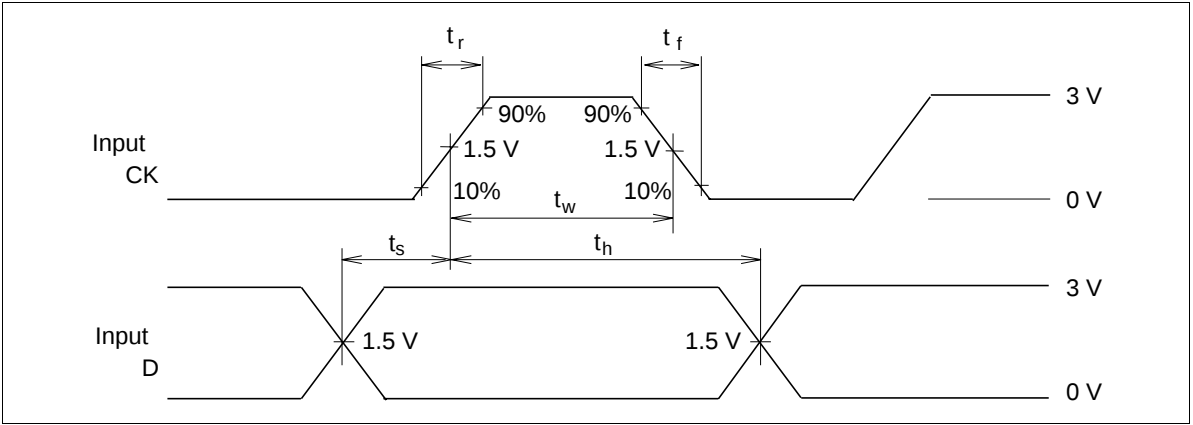


Waveforms-3

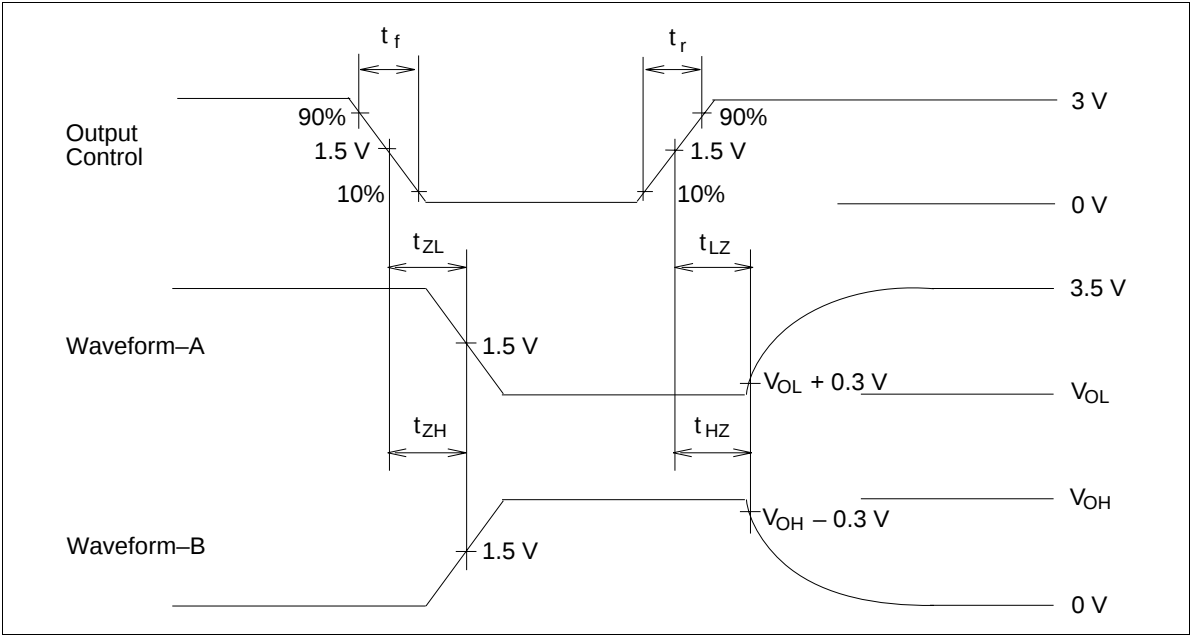

- Notes:
1. $t_r = 2.5 \text{ ns}$, $t_f = 2.5 \text{ ns}$
 2. Input waveform: PRR = 1 MHz, duty cycle 50%
 3. Waveform-A shows input conditions such that the output is "L" level when enable by the output control.
 4. Waveform-B shows input conditions such that the output is "H" level when enable by the output control.


Package Dimensions

Unit: mm

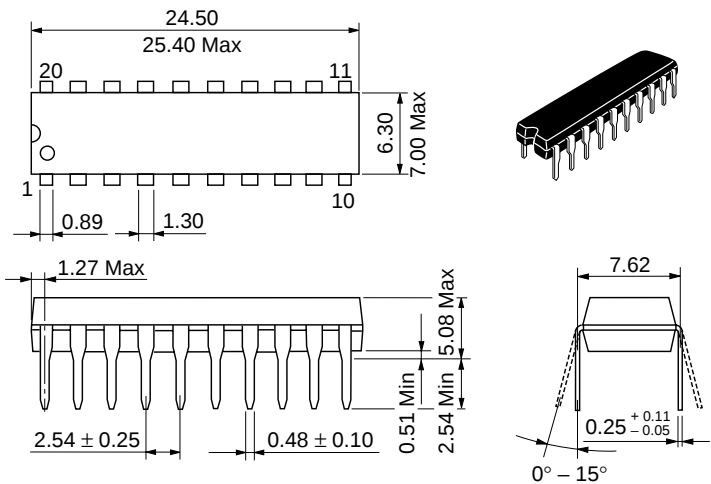

Hitachi Code	DP-20N
JEDEC	—
EIAJ	Conforms
Mass (reference value)	1.26 g




Unit: mm

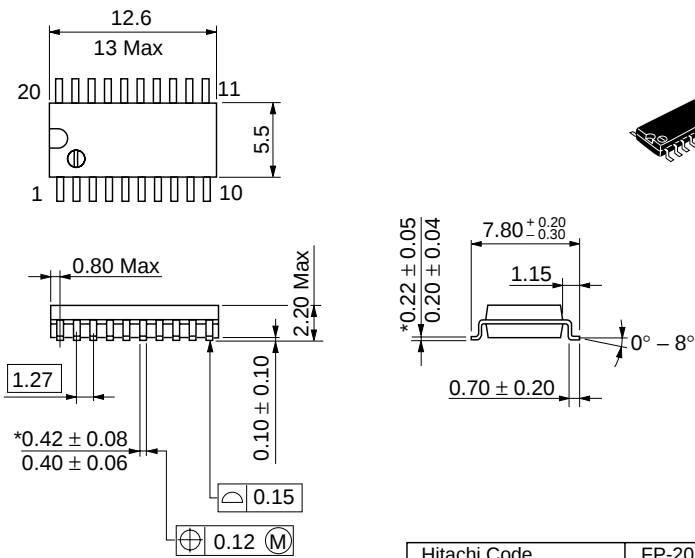

*Dimension including the plating thickness
Base material dimension

Hitachi Code	FP-20DA
JEDEC	—
EIAJ	Conforms
Mass (reference value)	0.31 g



Unit: mm

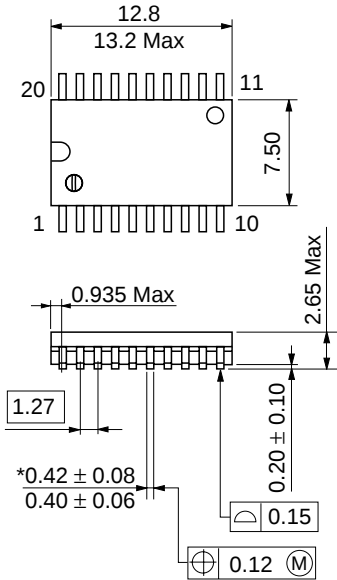

Hitachi Code	FP-20DB
JEDEC	Conforms
EIAJ	—
Mass (reference value)	0.52 g

*Dimension including the plating thickness
Base material dimension

Unit: mm

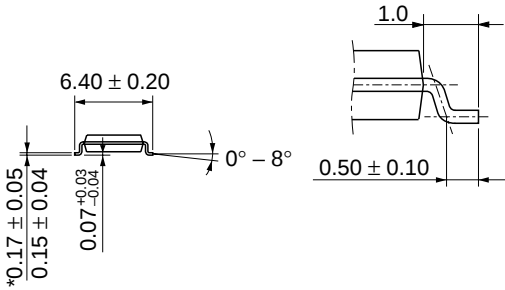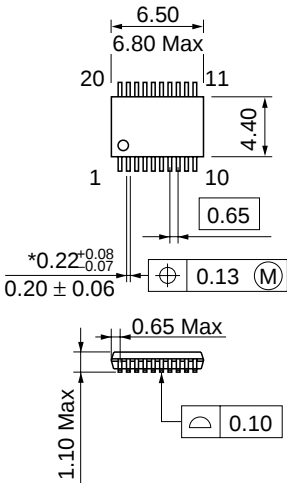

Hitachi Code	TTP-20DA
JEDEC	—
EIAJ	—
Mass (reference value)	0.07 g

*Dimension including the plating thickness
Base material dimension

Cautions

1. Hitachi neither warrants nor grants licenses of any rights of Hitachi's or any third party's patent, copyright, trademark, or other intellectual property rights for information contained in this document. Hitachi bears no responsibility for problems that may arise with third party's rights, including intellectual property rights, in connection with use of the information contained in this document.
2. Products and product specifications may be subject to change without notice. Confirm that you have received the latest product standards or specifications before final design, purchase or use.
3. Hitachi makes every attempt to ensure that its products are of high quality and reliability. However, contact Hitachi's sales office before using the product in an application that demands especially high quality and reliability or where its failure or malfunction may directly threaten human life or cause risk of bodily injury, such as aerospace, aeronautics, nuclear power, combustion control, transportation, traffic, safety equipment or medical equipment for life support.
4. Design your application so that the product is used within the ranges guaranteed by Hitachi particularly for maximum rating, operating supply voltage range, heat radiation characteristics, installation conditions and other characteristics. Hitachi bears no responsibility for failure or damage when used beyond the guaranteed ranges. Even within the guaranteed ranges, consider normally foreseeable failure rates or failure modes in semiconductor devices and employ systemic measures such as fail-safes, so that the equipment incorporating Hitachi product does not cause bodily injury, fire or other consequential damage due to operation of the Hitachi product.
5. This product is not designed to be radiation resistant.
6. No one is permitted to reproduce or duplicate, in any form, the whole or part of this document without written approval from Hitachi.
7. Contact Hitachi's sales office for any questions regarding this document or Hitachi semiconductor products.

HITACHI

Hitachi, Ltd.

Semiconductor & Integrated Circuits.
Nippon Bldg., 2-6-2, Ohte-machi, Chiyoda-ku, Tokyo 100-0004, Japan
Tel: Tokyo (03) 3270-2111 Fax: (03) 3270-5109

URL	North America	: http://semiconductor.hitachi.com/
	Europe	: http://www.hitachi-eu.com/hel/ecg
	Asia	: http://sicapac.hitachi-asia.com
	Japan	: http://www.hitachi.co.jp/Sicd/indx.htm

For further information write to:

Hitachi Semiconductor (America) Inc. 179 East Tasman Drive, San Jose, CA 95134 Tel: <1> (408) 433-1990 Fax: <1> (408) 433-0223	Hitachi Europe GmbH Electronic Components Group Dornacher Straße 3 D-85622 Feldkirchen, Munich Germany Tel: <49> (89) 9 9180-0 Fax: <49> (89) 9 29 30 00
	Hitachi Europe Ltd. Electronic Components Group. Whitebrook Park Lower Cookham Road Maidenhead Berkshire SL6 8YA, United Kingdom Tel: <44> (1628) 585000 Fax: <44> (1628) 585160

Hitachi Asia Ltd. Hitachi Tower 16 Collyer Quay #20-00, Singapore 049318 Tel: <65>-538-6533/538-8577 Fax: <65>-538-6933/538-3877 URL: http://www.hitachi.com.sg	Hitachi Asia Ltd. (Taipei Branch Office) 4/F, No. 167, Tun Hwa North Road, Hung-Kuo Building, Taipei (105), Taiwan Tel: <886>-(2)-2718-3666 Fax: <886>-(2)-2718-8180 Telex: 23222 HAS-TP URL: http://www.hitachi.com.tw
---	---

Hitachi Asia (Hong Kong) Ltd.
Group III (Electronic Components)
7/F., North Tower,
World Finance Centre,
Harbour City, Canton Road
Tsim Sha Tsui, Kowloon,
Hong Kong
Tel: <852>-(2)-735-9218
Fax: <852>-(2)-730-0281
URL: <http://www.hitachi.com.hk>

Copyright © Hitachi, Ltd., 2000. All rights reserved. Printed in Japan.
Colophon 2.0

HITACHI