



## HXZT Series

### FEATURES:

- Excellent environmental resistance
- Low cost
- Standard frequency range from 1.26 MHz to 16 MHz
- Packaging Tape and Reel Option (-T)


### STANDARD SPECIFICATIONS

Package Configuration	Part Number (X.XX denotes freq. in MHz)	Frequency tolerance @ 25° C	Frequency stability @ -20° C to + 80° C	Aging in 10 years
Fig. 1	<b>HXZTX.XX</b> Freq. 1.26 MHz ~ 16.0 MHz	±0.5%	±0.3%	±0.3%

Please see environmental and mechanical specifications on p. 66, Group 5. Marking, see p. 72.

### ORDERING INFORMATION


#### HXZT - Frequency - CL - Temperature - Packaging

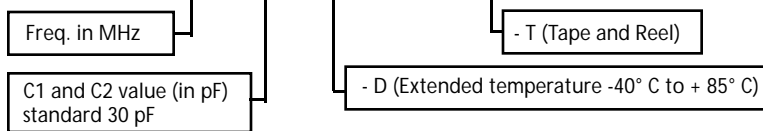


Please specify C1 and C2 values (C1/C2) if they are different

Dimensions: in (mm)

L	0.4 (10)
W	0.2 (5)
H	0.4 (10)
LL	0.2 (5)
WW	0.2 (5)

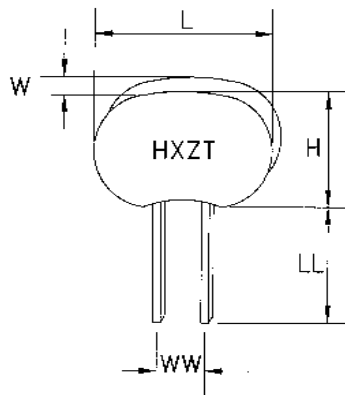

#### TEST CIRCUIT

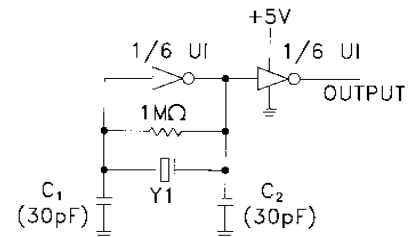

U1: CD4069 CMOS IC  
Y1: CERAMIC RESONATOR  
C<sub>1</sub> C<sub>2</sub>: LOAD CAPACITANCE  
(SEE TABLE)

Note: Left blank if standard.

All specifications and markings subject to change without notice.