



A Philips Lighting and Agilent Technologies Joint Venture

**HPWS-TH00**  
**HPWS-FH00**  
**HPWS-TL00**  
**HPWS-FL00**

## Technical Data

### SnapLED 150 LEDs

#### Benefits


- Fewer LEDs Required
- Lower System Cost
- 3-Dimensional Array Design

#### Features

- High Flux Output
- Designed for High Current Operation
- Low Thermal Resistance
- Low Profile
- Solderless Mounting Technique
- Mounted on Formable Substrate
- Meets SAE/ECE/JIS Automotive Color Requirements

#### Applications

- Automotive Lighting
  - Rear Combination Lamps
  - Front Turn Signal Lamps
  - High Mount Stop Lamps
  - Indirect Lighting
- Solid State Lighting and Signaling

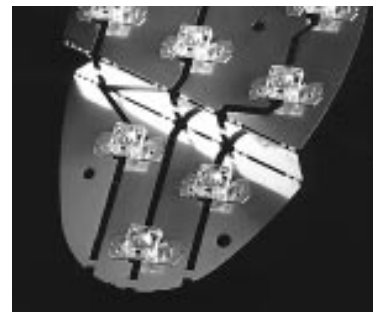

#### Description

Using Hewlett-Packard's patented solderless clinch technology, SnapLED 150 emitters are assembled onto a formable metal substrate which offers both styling flexibility and thermal conductivity unmatched by any other LED assembly.

The package's efficient optical design, high brightness material, and high current capability drastically reduce the number of LEDs required for lighting functions – thereby lowering the total cost.


#### Selection Guide

Part Number	LED Color	Total Flux $\Phi_v$ (mlm) @ 150 mA <sup>[1]</sup> Min.	Total Included Angle $\theta_{0.90\text{ v}}$ (Degrees) <sup>[2]</sup> Typ.
HPWS-TH00-00000	TS AlInGaP Red-Orange	6000	120
HPWS-FH00-00000			70
HPWS-TL00-00000	TS AlInGaP Amber	3000	120
HPWS-FL00-00000			70

#### Notes:

1.  $\Phi_v$  is the total luminous flux output as measured with an integrating sphere after the device has stabilized ( $R\theta_{j-a} = 100^\circ\text{C/W}$ ,  $T_A = 25^\circ\text{C}$ ).
2.  $\theta_{0.90\text{ v}}$  is the included angle at which 90% of the total luminous flux is captured. See Figure 5.

## Outline Drawing

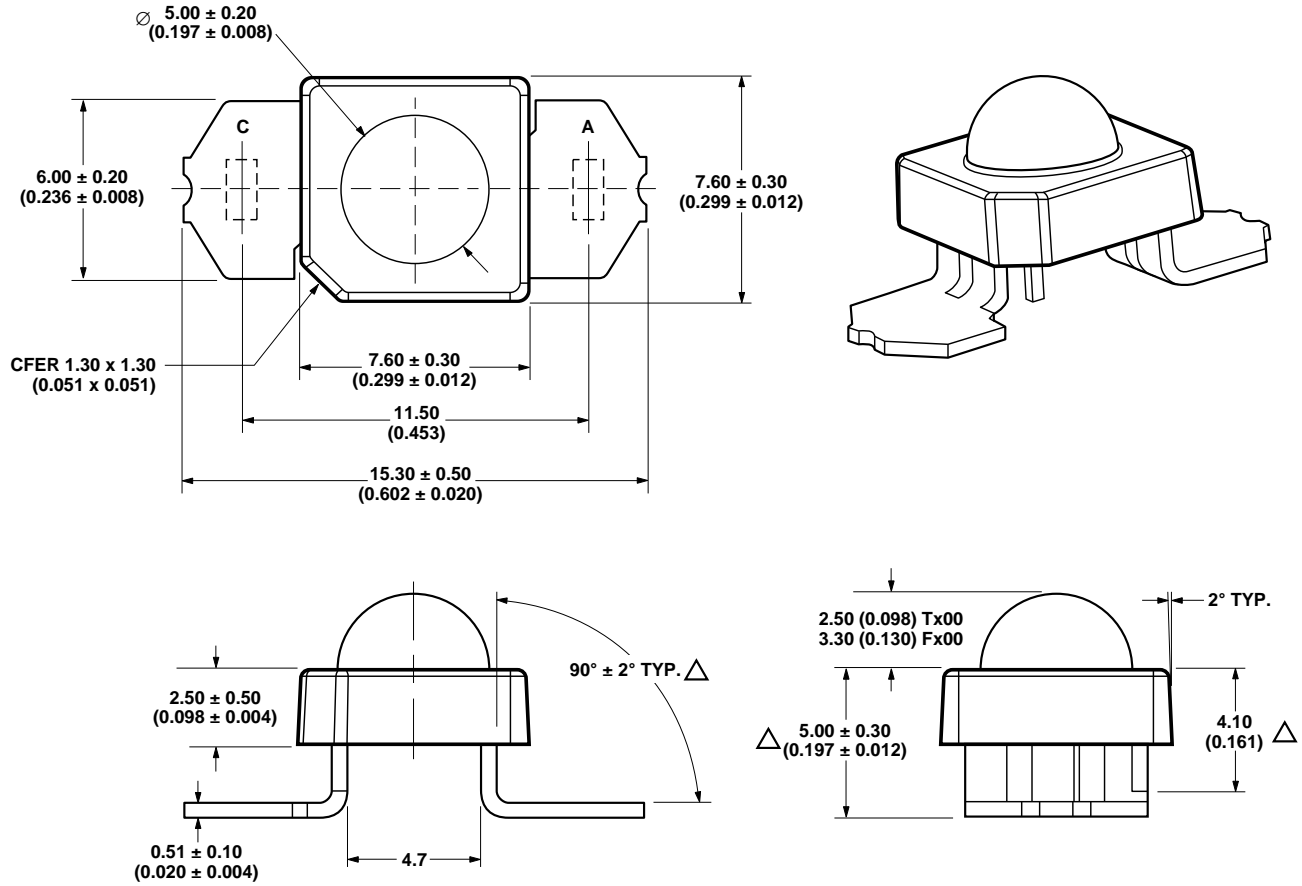

### Notes:

1. Dimensions are in millimeters (inches).
2. Dimensions without tolerances are nominal.
3. Cathode lead is indicated with a "C" and anode lead is indicated with an "A."
4. Special characteristics are designated with a triangle.
5. Clinch joint locations shown in dashed lines on top view of part (11.50 mm spacing).

## Absolute Maximum Ratings at $T_A = 25^\circ\text{C}$

Parameter	HPWS-Tx00/Fx00	Units
DC Forward Current <sup>[1,2]</sup>	150	mA
Pulsed Forward Current <sup>[3,4]</sup>	200	mA
Power Dissipation	475	mW
Reverse Voltage ( $I_R = 100 \mu\text{A}$ )	10	V
Operating Temperature Range	-40 to +100	$^\circ\text{C}$
Storage Temperature Range	-55 to +100	$^\circ\text{C}$
High Temperature Chamber	125 $^\circ\text{C}$ , 2 hrs.	
LED Junction Temperature	125 $^\circ\text{C}$	

### Notes:

1. Operation at currents below 20 mA is not recommended.
2. Derate linearly as shown in Figure 3a.
3. Amber only at simulated turn signal conditions of  $f = 0.5 - 2$  Hz and 50% duty factor.
4. Derate linearly as shown in Figure 3b.

### Optical Characteristics at $T_A = 25^\circ\text{C}$ , $I_F = 150\text{ mA}$ , $R_{\theta\text{J-A}} = 100^\circ\text{C/W}$

Device Type	Total Flux $\Phi_V$ (mlm) <sup>[1]</sup> Min.	Peak Wavelength $\lambda_{\text{peak}}$ (nm) Typ.	Color, Dominant Wavelength $\lambda_d$ (nm) <sup>[2]</sup> Typ.	Total Included Angle $\theta_{0.90\text{ V}}$ (Degrees) <sup>[3]</sup> Typ.	Ratio of Luminous Intensity to Total Flux $I_V$ (mcd)/ $\Phi_V$ (mlm) Typ.	Viewing Angle $2\theta_{1/2}$ (Degrees) Typ.
HPWS-TH00	6000	630	621	120	0.6	85
HPWS-FH00				70	2.0	30
HPWS-TL00	3000	596	594	120	0.6	85
HPWS-FL00				70	2.0	30

**Notes:**

- $\Phi_V$  is the total luminous flux output as measured with an integrating sphere after the device has stabilized.
- The dominant wavelength is derived from the CIE Chromaticity Diagram and represents the perceived color of the device.
- $\theta_{0.90\text{ V}}$  is the included angle at which 90% of the total luminous flux is captured. See Figure 5.

### Electrical Characteristics at $T_A = 25^\circ\text{C}$

Device Type	Forward Voltage $V_F$ (Volts) @ $I_F = 150\text{ mA}$			Reverse Breakdown $V_R$ (Volts) @ $I_R = 100\text{ }\mu\text{A}$		Capacitance $C$ (pF) $V_F = 0$ , $f = 1\text{ MHz}$	Thermal Resistance $R_{\theta\text{J-PIN}}$ ( $^\circ\text{C/W}$ )	Speed of Response $\tau_s$ (ns) <sup>[1]</sup>
	Min.	Typ.	Max.	Min.	Typ.	Typ.	Typ.	Typ.
HPWS-xH00	2.15	2.55	3.03	10	20	80	60	20
HPWS-xL00	2.15	2.65	3.15	10	20	80	75	20

**Note:**

- $\tau_s$  is the time constant,  $e^{-t/\tau_s}$ .

### Projected Luminous Flux Category Availability <sup>[1]</sup>

Part Number	LED Color	Total Flux $\Phi_V$ (mlm) @ $150\text{ mA}$ <sup>[2]</sup> Min.	1999	2000	2001	2002	2003	2004	2005
HPWS-xH00-L4000	Red-Orange	6000	✓	✓	✓	✓	✓	✓	
HPWS-xH00-M4000		8000			✓	✓	✓	✓	✓
HPWS-xH00-N4000		10000				✓	✓	✓	✓
HPWS-xL00-F4000	Amber	3000	✓	✓	✓	✓	✓	✓	✓
HPWS-xL00-G4000		3500	✓	✓	✓	✓	✓	✓	✓
HPWS-xL00-H4000		4000				✓	✓	✓	✓

**Notes:**

- LEDs will be available at the beginning of indicated years.
- $\Phi_V$  is the total luminous flux output as measured with an integrating sphere after the device has stabilized ( $R_{\theta\text{J-a}} = 100^\circ\text{C/W}$ ,  $T_A = 25^\circ\text{C}$ ).

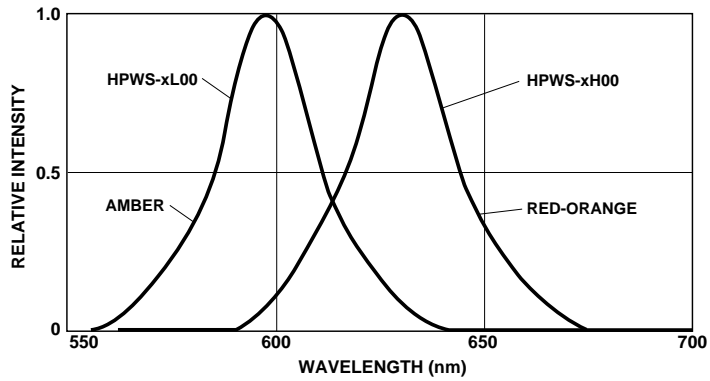


Figure 1. Relative Intensity vs. Wavelength.

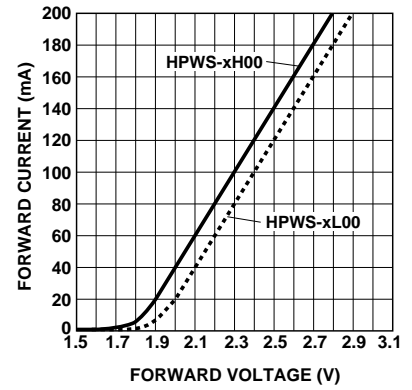


Figure 2. Forward Current vs. Forward Voltage.

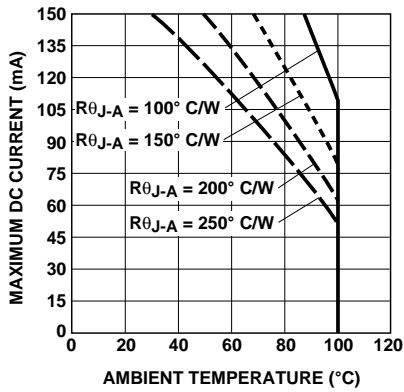


Figure 3a. HPWS-xx00 Maximum DC Forward Current vs. Ambient Temperature.

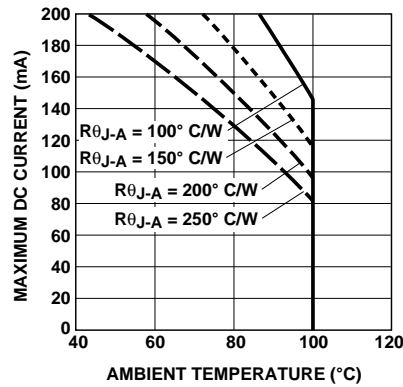


Figure 3b. HPWS-xx00 Maximum Pulsed Forward Current vs. Ambient Temperature.

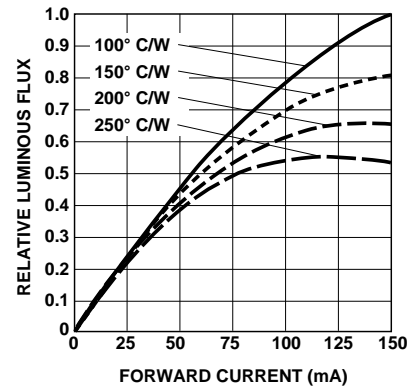


Figure 4. HPWS-xx00 Relative Luminous Flux vs. Forward Current.

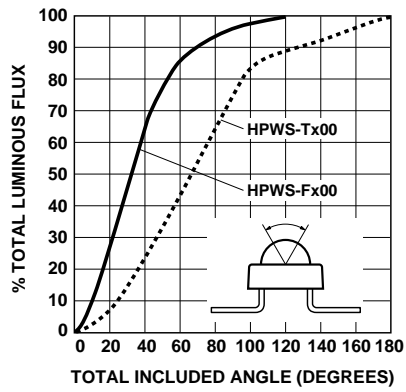


Figure 5. HPWS-xx00 Percent Total Luminous Flux vs. Total Included Angle.

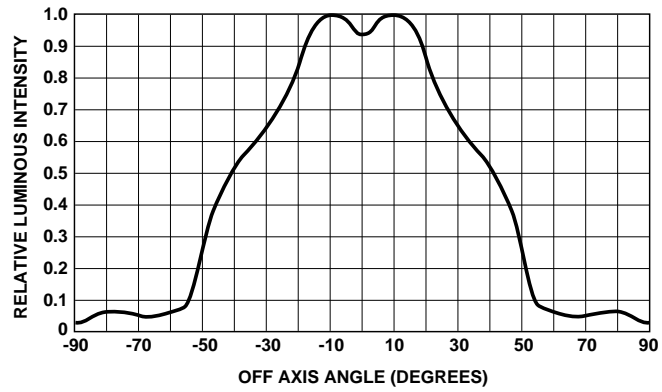


Figure 6a. HPWS-Tx00 Relative Intensity vs. Off Axis Angle.

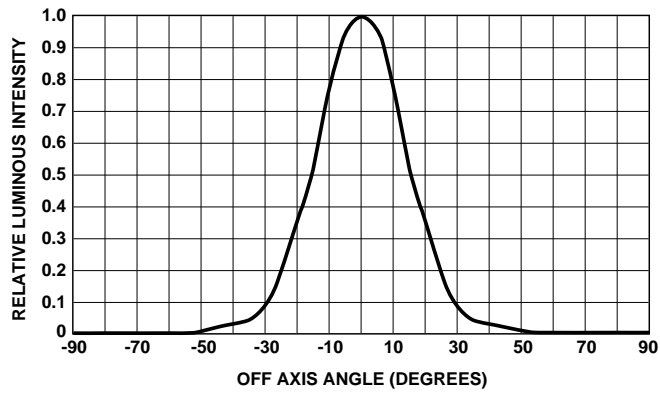


Figure 6b. HPWS-Fx00 Relative Intensity vs. Off Axis Angle.

For additional information, please refer to the LumiLeds AN 1149 Series.



A Philips Lighting and Agilent Technologies Joint Venture

---

**LumiLeds Lighting:  
The Revolution of Lighting.**

LumiLeds Lighting is a joint venture between Philips Lighting and Agilent Technologies.

Agilent Technologies, an \$8 billion startup, is the result of the strategic realignment of Hewlett-Packard, producer of the world's brightest red and amber LEDs, as well as state-of-the-art, high-brightness LEDs in blue, green, white and other colors.

Philips is a global leader in developing, manufacturing and marketing innovative lighting products worldwide.

LumiLeds Lighting is changing the future of lighting. In the next century, LED-based lighting will quickly replace conventional lighting for a wealth of commercial, industrial, institutional and consumer applications. By combining the lighting expertise of Philips and the LED technology strength of Agilent, our products will bring irresistible value to lighting solutions of all kinds. LumiLeds Lighting will reduce waste and power consumption worldwide by developing long-lasting, energy-efficient products.

**LumiLeds Lighting**

An Agilent Technologies & Philips Lighting Joint Venture

[www.lumileds.com](http://www.lumileds.com)

For technical assistance or the location of your nearest LumiLeds sales office, call:

**Americas/Canada:**

Toll free: (877) 298-9455

Fax: 408-435-4980

**Europe:**

Automotive Lighting 49 7031 464 2122

Signage and Contour Lighting 39 02 9212 2048

Signaling 39 02 9212 2048

Illumination 39 02 9212 2048

Data subject to change.

Copyright © 2000 LumiLeds Lighting

Obsoletes Publication No. 5968-7807E

Publication No. DS08 (3/00)