

To all our customers

---

## **Regarding the change of names mentioned in the document, such as Hitachi Electric and Hitachi XX, to Renesas Technology Corp.**

---

The semiconductor operations of Mitsubishi Electric and Hitachi were transferred to Renesas Technology Corporation on April 1st 2003. These operations include microcomputer, logic, analog and discrete devices, and memory chips other than DRAMs (flash memory, SRAMs etc.)

Accordingly, although Hitachi, Hitachi, Ltd., Hitachi Semiconductors, and other Hitachi brand names are mentioned in the document, these names have in fact all been changed to Renesas Technology Corp. Thank you for your understanding. Except for our corporate trademark, logo and corporate statement, no changes whatsoever have been made to the contents of the document, and these changes do not constitute any alteration to the contents of the document itself.

Renesas Technology Home Page: <http://www.renesas.com>

Renesas Technology Corp.  
Customer Support Dept.  
April 1, 2003

## Cautions

Keep safety first in your circuit designs!

1. Renesas Technology Corporation puts the maximum effort into making semiconductor products better and more reliable, but there is always the possibility that trouble may occur with them. Trouble with semiconductors may lead to personal injury, fire or property damage.  
Remember to give due consideration to safety when making your circuit designs, with appropriate measures such as (i) placement of substitutive, auxiliary circuits, (ii) use of nonflammable material or (iii) prevention against any malfunction or mishap.

Notes regarding these materials

1. These materials are intended as a reference to assist our customers in the selection of the Renesas Technology Corporation product best suited to the customer's application; they do not convey any license under any intellectual property rights, or any other rights, belonging to Renesas Technology Corporation or a third party.
2. Renesas Technology Corporation assumes no responsibility for any damage, or infringement of any third-party's rights, originating in the use of any product data, diagrams, charts, programs, algorithms, or circuit application examples contained in these materials.
3. All information contained in these materials, including product data, diagrams, charts, programs and algorithms represents information on products at the time of publication of these materials, and are subject to change by Renesas Technology Corporation without notice due to product improvements or other reasons. It is therefore recommended that customers contact Renesas Technology Corporation or an authorized Renesas Technology Corporation product distributor for the latest product information before purchasing a product listed herein.  
The information described here may contain technical inaccuracies or typographical errors.  
Renesas Technology Corporation assumes no responsibility for any damage, liability, or other loss rising from these inaccuracies or errors.  
Please also pay attention to information published by Renesas Technology Corporation by various means, including the Renesas Technology Corporation Semiconductor home page (<http://www.renesas.com>).
4. When using any or all of the information contained in these materials, including product data, diagrams, charts, programs, and algorithms, please be sure to evaluate all information as a total system before making a final decision on the applicability of the information and products. Renesas Technology Corporation assumes no responsibility for any damage, liability or other loss resulting from the information contained herein.
5. Renesas Technology Corporation semiconductors are not designed or manufactured for use in a device or system that is used under circumstances in which human life is potentially at stake. Please contact Renesas Technology Corporation or an authorized Renesas Technology Corporation product distributor when considering the use of a product contained herein for any specific purposes, such as apparatus or systems for transportation, vehicular, medical, aerospace, nuclear, or undersea repeater use.
6. The prior written approval of Renesas Technology Corporation is necessary to reprint or reproduce in whole or in part these materials.
7. If these products or technologies are subject to the Japanese export control restrictions, they must be exported under a license from the Japanese government and cannot be imported into a country other than the approved destination.  
Any diversion or reexport contrary to the export control laws and regulations of Japan and/or the country of destination is prohibited.
8. Please contact Renesas Technology Corporation for further details on these materials or the products contained therein.

## H8S/2199R Series

H8S/2199R

HD6432199R

H8S/2198R

HD6432198R

H8S/2197R

HD6432197R

H8S/2197S

HD6432197S

H8S/2196R

HD6432196R

H8S/2196S

HD6432196S

H8S/2199R F-ZTAT<sup>TM</sup>

HD64F2199R







## Cautions

1. Hitachi neither warrants nor grants licenses of any rights of Hitachi's or any third party's patent, copyright, trademark, or other intellectual property rights for information contained in this document. Hitachi bears no responsibility for problems that may arise with third party's rights, including intellectual property rights, in connection with use of the information contained in this document.
2. Products and product specifications may be subject to change without notice. Confirm that you have received the latest product standards or specifications before final design, purchase or use.
3. Hitachi makes every attempt to ensure that its products are of high quality and reliability. However, contact Hitachi's sales office before using the product in an application that demands especially high quality and reliability or where its failure or malfunction may directly threaten human life or cause risk of bodily injury, such as aerospace, aeronautics, nuclear power, combustion control, transportation, traffic, safety equipment or medical equipment for life support.
4. Design your application so that the product is used within the ranges guaranteed by Hitachi particularly for maximum rating, operating supply voltage range, heat radiation characteristics, installation conditions and other characteristics. Hitachi bears no responsibility for failure or damage when used beyond the guaranteed ranges. Even within the guaranteed ranges, consider normally foreseeable failure rates or failure modes in semiconductor devices and employ systemic measures such as fail-safes, so that the equipment incorporating Hitachi product does not cause bodily injury, fire or other consequential damage due to operation of the Hitachi product.
5. This product is not designed to be radiation resistant.
6. No one is permitted to reproduce or duplicate, in any form, the whole or part of this document without written approval from Hitachi.
7. Contact Hitachi's sales office for any questions regarding this document or Hitachi semiconductor products.



# Comparison between H8S/2199 Series and H8S/2199R Series

| Item                                                                     | H8S/2199 Series                                                                                                                         | H8S/2199R Series                                                                                                                      | Remarks                                                                                      |
|--------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------|
| OSD                                                                      |                                                                                                                                         |                                                                                                                                       |                                                                                              |
| Initialization mode of bits 12 and 11 in the OSD format register (DFORM) | Initialized by a reset, or in module stop mode, sleep mode, standby mode, watch mode, subactive mode, or subsleep mode.                 | Initialized by a reset. When rewriting bits 12 and 11, make sure the module stop bit in the sync separator is not cleared to 0.       | Bit 12: FSCIN (4/2fsc input select bit)<br>Bit 11: FSCEXT (4/2fsc external input select bit) |
| Character display size at vertical 2 times x horizontal 2 times          | Number of characters in a row is 16                                                                                                     | Number of characters in a row is 32                                                                                                   |                                                                                              |
| 4/2fsc clock in superimposed mode                                        | Necessary                                                                                                                               | Unnecessary                                                                                                                           |                                                                                              |
| Horizontal display output mask area in superimposed mode                 |                                                        |                                                      |                                                                                              |
| Vertical display output mask area in superimposed mode                   | NTSC, 4.43 NTSC, and MPAL: 16 lines after external Vsync is detected<br>PAL, SECAM, and NPAL: 21 lines after external Vsync is detected | NTSC, 4.43 NTSC, and MPAL: 6 lines after external Vsync is detected<br>PAL, SECAM, and NPAL: 6 lines after external Vsync is detected |                                                                                              |
| Horizontal starting display position when HCKSEL = 1                     | Compared to when HCKSEL = 0, shifted left by approx. 1.7 µs if AFC = 9 MHz, and by approx. 1.1 µs if AFC = 7 MHz                        | Same position as when HCKSEL = 0                                                                                                      |                                                                                              |

| Item                                  | H8S/2199 Series                                                                              | H8S/2199R Series                                                                                                                                                                                  | Remarks                                                                                                            |             |        |  |   |                                  |   |          |  |
|---------------------------------------|----------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------|-------------|--------|--|---|----------------------------------|---|----------|--|
| OSD                                   |                                                                                              |                                                                                                                                                                                                   |                                                                                                                    |             |        |  |   |                                  |   |          |  |
| Dot clock source in text display mode | AFC reference clock                                                                          | AFC reference clock or 4/2fsc clock                                                                                                                                                               | The data slicer can operate when 4/2fsc clocks is selected in text display mode.<br><br>Bit 1 in SEPA CR: DOTCKSL  |             |        |  |   |                                  |   |          |  |
| Data slicer                           |                                                                                              |                                                                                                                                                                                                   |                                                                                                                    |             |        |  |   |                                  |   |          |  |
| Operating frequency                   | AFC reference clock = 9 MHz                                                                  | AFC reference clock = 7 or 9 MHz                                                                                                                                                                  |                                                                                                                    |             |        |  |   |                                  |   |          |  |
| Data bit size                         | 16 bits                                                                                      | 16 or 32 bits                                                                                                                                                                                     | Bit 0 in SEPA CR: DSL32B                                                                                           |             |        |  |   |                                  |   |          |  |
| Sync separator                        |                                                                                              |                                                                                                                                                                                                   |                                                                                                                    |             |        |  |   |                                  |   |          |  |
| Register initialization mode          | Initialized by a reset.                                                                      | Initialized by a reset, or in module stop mode, sleep mode, standby mode, watch mode, subactive mode, or subsleep mode.<br><br>Note that bit 5 (CCMPSL) in SEPIMR is only initialized by a reset. | Bit 5: CCMPSL (selection of Csync separation comparator input and control of input/output of Csync/Hsync terminal) |             |        |  |   |                                  |   |          |  |
| HHKON2                                | No corresponding bit                                                                         | Bit is available                                                                                                                                                                                  | Bit 1 in SEPCR: HHKON2                                                                                             |             |        |  |   |                                  |   |          |  |
| New bits                              | Bit 1 in SEPCR: Reserved                                                                     | Bit 1 in SEPCR: HHKON2                                                                                                                                                                            |                                                                                                                    |             |        |  |   |                                  |   |          |  |
|                                       |                                                                                              | Controls HHK operation during V-blanking.                                                                                                                                                         |                                                                                                                    |             |        |  |   |                                  |   |          |  |
|                                       |                                                                                              | <table><tr><th>Bit1</th><th>Description</th></tr><tr><td>HHKON2</td><td></td></tr><tr><td>0</td><td>Does not operate (initial value)</td></tr><tr><td>1</td><td>Operates</td></tr></table>        | Bit1                                                                                                               | Description | HHKON2 |  | 0 | Does not operate (initial value) | 1 | Operates |  |
|                                       |                                                                                              | Bit1                                                                                                                                                                                              | Description                                                                                                        |             |        |  |   |                                  |   |          |  |
|                                       |                                                                                              | HHKON2                                                                                                                                                                                            |                                                                                                                    |             |        |  |   |                                  |   |          |  |
| 0                                     | Does not operate (initial value)                                                             |                                                                                                                                                                                                   |                                                                                                                    |             |        |  |   |                                  |   |          |  |
| 1                                     | Operates                                                                                     |                                                                                                                                                                                                   |                                                                                                                    |             |        |  |   |                                  |   |          |  |
| Bit 1 in SEPA CR: Reserved            | Bit 1 in SEPA CR: DOTCKSL                                                                    |                                                                                                                                                                                                   | The data slicer can operate when 4/2fsc clocks is selected in text display mode.                                   |             |        |  |   |                                  |   |          |  |
|                                       | Selects the dot clock source. When this bit is set to 1, clear bit 3 (HCKSEL) in SEPCR to 0. |                                                                                                                                                                                                   |                                                                                                                    |             |        |  |   |                                  |   |          |  |

| Item           | H8S/2199 Series                        | H8S/2199R Series                                                                                                                                                                                       | Remarks |             |         |  |   |                                        |   |              |  |
|----------------|----------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------|-------------|---------|--|---|----------------------------------------|---|--------------|--|
|                |                                        | <table><tr><th>Bit1</th><th>Description</th></tr><tr><td>DOTCKSL</td><td></td></tr><tr><td>0</td><td>AFC reference clock<br/>(initial value)</td></tr><tr><td>1</td><td>4/2fsc clock</td></tr></table> | Bit1    | Description | DOTCKSL |  | 0 | AFC reference clock<br>(initial value) | 1 | 4/2fsc clock |  |
| Bit1           | Description                            |                                                                                                                                                                                                        |         |             |         |  |   |                                        |   |              |  |
| DOTCKSL        |                                        |                                                                                                                                                                                                        |         |             |         |  |   |                                        |   |              |  |
| 0              | AFC reference clock<br>(initial value) |                                                                                                                                                                                                        |         |             |         |  |   |                                        |   |              |  |
| 1              | 4/2fsc clock                           |                                                                                                                                                                                                        |         |             |         |  |   |                                        |   |              |  |
| Sync separator |                                        |                                                                                                                                                                                                        |         |             |         |  |   |                                        |   |              |  |
| New bits       | Bit 0 in SEPA CR:<br>Reserved          | Bit 0 in SEPA CR:<br>DSL32B<br><br>Selects the slice mode<br>for the data slicer.                                                                                                                      |         |             |         |  |   |                                        |   |              |  |
|                |                                        | <table><tr><th>Bit0</th><th>Description</th></tr><tr><td>DSL32B</td><td></td></tr><tr><td>0</td><td>16-bit mode<br/>(initial value)</td></tr><tr><td>1</td><td>32-bit mode</td></tr></table>           | Bit0    | Description | DSL32B  |  | 0 | 16-bit mode<br>(initial value)         | 1 | 32-bit mode  |  |
| Bit0           | Description                            |                                                                                                                                                                                                        |         |             |         |  |   |                                        |   |              |  |
| DSL32B         |                                        |                                                                                                                                                                                                        |         |             |         |  |   |                                        |   |              |  |
| 0              | 16-bit mode<br>(initial value)         |                                                                                                                                                                                                        |         |             |         |  |   |                                        |   |              |  |
| 1              | 32-bit mode                            |                                                                                                                                                                                                        |         |             |         |  |   |                                        |   |              |  |
|                |                                        | The data slicer can<br>operate when AFC is set<br>to either 7 or 9 MHz.<br>However, the slice line<br>must be set to one line.                                                                         |         |             |         |  |   |                                        |   |              |  |



# Preface

This LSI is a single-chip microcomputer made up of the H8S/2000 CPU with an internal 32-bit architecture as its core, and the peripheral functions required to configure a system.

This LSI is equipped with ROM, RAM, digital servo circuits, a sync separator, an OSD, a data slicer, seven types of timers, three types of PWMs, two types of serial communication interfaces (SCIs), an I<sup>2</sup>C bus interface (IIC), a D/A converter, an A/D converter, and I/O ports as on-chip supporting modules. This LSI is suitable for use as an embedded processor for high-level control systems. Its on-chip ROM is flash memory (F-ZTAT<sup>TM</sup>\*) that provides flexibility as it can be reprogrammed in no time to cope with all situations from the early stages of mass production to full-scale mass production. This is particularly applicable to application devices with specifications that will most probably change.

Note: \* F-ZTAT<sup>TM</sup> is a trademark of Hitachi, Ltd.

**Target Users:** This manual was written for users who will be using the H8S/2199R Series and H8S/2199R F-ZTAT<sup>TM</sup> in the design of application systems. Members of this audience are expected to understand the fundamentals of electrical circuits, logical circuits, and microcomputers.

**Objective:** This manual was written to explain the hardware functions and electrical characteristics of the H8S/2199R Series and H8S/2199R F-ZTAT<sup>TM</sup> to the above audience. Refer to the H8S/2600 Series, H8S/2000 Series Programming Manual for a detailed description of the instruction set.

**Notes on reading this manual:**

- In order to understand the overall functions of the chip  
Read the manual according to the contents. This manual can be roughly categorized into parts on the CPU, system control functions, peripheral functions and electrical characteristics.
- In order to understand the details of the CPU's functions  
Read the H8S/2600 Series, H8S/2000 Series Programming Manual.
- In order to understand the details of a register when its name is known  
The addresses, bits, and initial values of the registers are summarized in Appendix B, Internal I/O Registers.  
Example:     Bit order:             The MSB is on the left and the LSB is on the right.

**Related Manuals:** The latest versions of all related manuals are available from our web site. Please ensure you have the latest versions of all documents you require.  
<http://www.hitachi.co.jp/Sicd/English/Products/micome.htm>

H8S/2199R Series and H8S/2199R F-ZTAT™ manuals:

| Manual Title                                        | ADE No.     |
|-----------------------------------------------------|-------------|
| H8S/2199R Series, H8S/2199R F-ZTAT™ Hardware Manual | This manual |
| H8S/2600 Series, H8S/2000 Series Programming Manual | ADE-602-083 |

Users manuals for development tools:

| Manual Title                                  | ADE No.     |
|-----------------------------------------------|-------------|
| C/C++ Compiler Users Manual                   | ADE-702-059 |
| Simulator Debugger (for Windows) Users Manual | ADE-702-037 |
| Hitachi Embedded Workshop Users Manual        | ADE-702-201 |

Application Notes:

| Manual Title               | ADE No.     |
|----------------------------|-------------|
| C/C++ Compiler Edition     | ADE-502-044 |
| H8S Series Technical Q & A | ADE-502-059 |
| F-ZTAT Technical Q & A     | ADE-502-046 |



# Contents

|           |                                                          |    |
|-----------|----------------------------------------------------------|----|
| Section 1 | Overview.....                                            | 1  |
| 1.1       | Overview.....                                            | 1  |
| 1.2       | Internal Block Diagram.....                              | 7  |
| 1.3       | Pin Arrangement and Functions.....                       | 9  |
| 1.3.1     | Pin Arrangement .....                                    | 9  |
| 1.3.2     | Pin Functions.....                                       | 11 |
| Section 2 | CPU .....                                                | 19 |
| 2.1       | Overview.....                                            | 19 |
| 2.1.1     | Features.....                                            | 19 |
| 2.1.2     | Differences between H8S/2600 CPU and H8S/2000 CPU.....   | 20 |
| 2.1.3     | Differences from H8/300 CPU .....                        | 20 |
| 2.1.4     | Differences from H8/300H CPU .....                       | 21 |
| 2.2       | CPU Operating Modes .....                                | 22 |
| 2.2.1     | Normal Mode (Not available for this LSI).....            | 22 |
| 2.2.2     | Advanced Mode .....                                      | 24 |
| 2.3       | Address Space.....                                       | 27 |
| 2.4       | Register Configuration .....                             | 28 |
| 2.4.1     | Overview.....                                            | 28 |
| 2.4.2     | General Registers .....                                  | 29 |
| 2.4.3     | Control Registers.....                                   | 30 |
| 2.4.4     | Initial Register Values .....                            | 31 |
| 2.5       | Data Formats .....                                       | 32 |
| 2.5.1     | General Register Data Formats .....                      | 32 |
| 2.5.2     | Memory Data Formats.....                                 | 34 |
| 2.6       | Instruction Set.....                                     | 35 |
| 2.6.1     | Overview.....                                            | 35 |
| 2.6.2     | Instructions and Addressing Modes.....                   | 36 |
| 2.6.3     | Table of Instructions Classified by Function.....        | 37 |
| 2.6.4     | Basic Instruction Formats .....                          | 47 |
| 2.6.5     | Notes on Use of Bit-Manipulation Instructions.....       | 48 |
| 2.7       | Addressing Modes and Effective Address Calculation ..... | 49 |
| 2.7.1     | Addressing Mode .....                                    | 49 |
| 2.7.2     | Effective Address Calculation.....                       | 52 |
| 2.8       | Processing States.....                                   | 56 |
| 2.8.1     | Overview.....                                            | 56 |
| 2.8.2     | Reset State.....                                         | 57 |
| 2.8.3     | Exception-Handling State .....                           | 58 |
| 2.8.4     | Program Execution State.....                             | 59 |

|                                     |                                                                     |    |
|-------------------------------------|---------------------------------------------------------------------|----|
| 2.8.5                               | Power-Down State.....                                               | 60 |
| 2.9                                 | Basic Timing .....                                                  | 61 |
| 2.9.1                               | Overview .....                                                      | 61 |
| 2.9.2                               | On-Chip Memory (ROM, RAM).....                                      | 61 |
| 2.9.3                               | On-Chip Supporting Module Access Timing.....                        | 62 |
| 2.10                                | Usage Note .....                                                    | 63 |
| 2.10.1                              | TAS Instruction.....                                                | 63 |
| 2.10.2                              | STM/LDM Instruction.....                                            | 63 |
| Section 3 MCU Operating Modes ..... |                                                                     | 65 |
| 3.1                                 | Overview.....                                                       | 65 |
| 3.1.1                               | Operating Mode Selection .....                                      | 65 |
| 3.1.2                               | Register Configuration.....                                         | 65 |
| 3.2                                 | Register Descriptions .....                                         | 66 |
| 3.2.1                               | Mode Control Register (MDCR).....                                   | 66 |
| 3.2.2                               | System Control Register (SYSCR).....                                | 66 |
| 3.3                                 | Operating Mode (Mode 1).....                                        | 67 |
| 3.4                                 | Address Map in Each Operating Mode .....                            | 68 |
| Section 4 Power-Down State .....    |                                                                     | 71 |
| 4.1                                 | Overview.....                                                       | 71 |
| 4.1.1                               | Register Configuration.....                                         | 75 |
| 4.2                                 | Register Descriptions .....                                         | 76 |
| 4.2.1                               | Standby Control Register (SBYCR).....                               | 76 |
| 4.2.2                               | Low-Power Control Register (LPWRCR) .....                           | 78 |
| 4.2.3                               | Timer Register A (TMA).....                                         | 80 |
| 4.2.4                               | Module Stop Control Register (MSTPCR) .....                         | 81 |
| 4.3                                 | Medium-Speed Mode.....                                              | 82 |
| 4.4                                 | Sleep Mode.....                                                     | 83 |
| 4.4.1                               | Sleep Mode .....                                                    | 83 |
| 4.4.2                               | Clearing Sleep Mode .....                                           | 83 |
| 4.5                                 | Module Stop Mode .....                                              | 84 |
| 4.5.1                               | Module Stop Mode.....                                               | 84 |
| 4.6                                 | Standby Mode.....                                                   | 85 |
| 4.6.1                               | Standby Mode .....                                                  | 85 |
| 4.6.2                               | Clearing Standby Mode .....                                         | 85 |
| 4.6.3                               | Setting Oscillation Settling Time after Clearing Standby Mode ..... | 85 |
| 4.7                                 | Watch Mode .....                                                    | 87 |
| 4.7.1                               | Watch Mode.....                                                     | 87 |
| 4.7.2                               | Clearing Watch Mode.....                                            | 87 |
| 4.8                                 | Subsleep Mode .....                                                 | 88 |
| 4.8.1                               | Subsleep Mode.....                                                  | 88 |
| 4.8.2                               | Clearing Subsleep Mode .....                                        | 88 |

|                                     |                                                         |     |
|-------------------------------------|---------------------------------------------------------|-----|
| 4.9                                 | Subactive Mode .....                                    | 89  |
| 4.9.1                               | Subactive Mode.....                                     | 89  |
| 4.9.2                               | Clearing Subactive Mode.....                            | 89  |
| 4.10                                | Direct Transition.....                                  | 90  |
| 4.10.1                              | Overview of Direct Transition .....                     | 90  |
| Section 5 Exception Handling .....  |                                                         | 91  |
| 5.1                                 | Overview .....                                          | 91  |
| 5.1.1                               | Exception Handling Types and Priority .....             | 91  |
| 5.1.2                               | Exception Handling Operation .....                      | 92  |
| 5.1.3                               | Exception Sources and Vector Table .....                | 92  |
| 5.2                                 | Reset .....                                             | 94  |
| 5.2.1                               | Overview.....                                           | 94  |
| 5.2.2                               | Reset Sequence.....                                     | 94  |
| 5.2.3                               | Interrupts after Reset .....                            | 95  |
| 5.3                                 | Interrupts .....                                        | 96  |
| 5.4                                 | Trap Instruction .....                                  | 97  |
| 5.5                                 | Stack Status after Exception Handling .....             | 98  |
| 5.6                                 | Notes on Use of the Stack .....                         | 99  |
| Section 6 Interrupt Controller..... |                                                         | 101 |
| 6.1                                 | Overview .....                                          | 101 |
| 6.1.1                               | Features.....                                           | 101 |
| 6.1.2                               | Block Diagram .....                                     | 102 |
| 6.1.3                               | Pin Configuration .....                                 | 103 |
| 6.1.4                               | Register Configuration.....                             | 103 |
| 6.2                                 | Register Descriptions .....                             | 104 |
| 6.2.1                               | System Control Register (SYSCR).....                    | 104 |
| 6.2.2                               | Interrupt Control Registers A to D (ICRA to ICRD) ..... | 105 |
| 6.2.3                               | IRQ Enable Register (IENR).....                         | 106 |
| 6.2.4                               | IRQ Edge Select Registers (IEGR).....                   | 107 |
| 6.2.5                               | IRQ Status Register (IRQR).....                         | 108 |
| 6.2.6                               | Port Mode Register 1 (PMR1).....                        | 109 |
| 6.3                                 | Interrupt Sources.....                                  | 110 |
| 6.3.1                               | External Interrupts .....                               | 110 |
| 6.3.2                               | Internal Interrupts.....                                | 111 |
| 6.3.3                               | Interrupt Exception Vector Table .....                  | 112 |
| 6.4                                 | Interrupt Operation.....                                | 115 |
| 6.4.1                               | Interrupt Control Modes and Interrupt Operation.....    | 115 |
| 6.4.2                               | Interrupt Control Mode 0 .....                          | 117 |
| 6.4.3                               | Interrupt Control Mode 1 .....                          | 119 |
| 6.4.4                               | Interrupt Exception Handling Sequence .....             | 122 |
| 6.4.5                               | Interrupt Response Times .....                          | 123 |

|                    |                                                                                                                                                       |     |
|--------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------|-----|
| 6.5                | Usage Notes.....                                                                                                                                      | 124 |
| 6.5.1              | Contention between Interrupt Generation and Disabling.....                                                                                            | 124 |
| 6.5.2              | Instructions that Disable Interrupts.....                                                                                                             | 125 |
| 6.5.3              | Interrupts during Execution of EEPMOV Instruction.....                                                                                                | 125 |
| Section 7 ROM..... |                                                                                                                                                       | 127 |
| 7.1                | Overview.....                                                                                                                                         | 127 |
| 7.1.1              | Block Diagram .....                                                                                                                                   | 127 |
| 7.2                | Overview of Flash Memory.....                                                                                                                         | 128 |
| 7.2.1              | Features.....                                                                                                                                         | 128 |
| 7.2.2              | Block Diagram .....                                                                                                                                   | 129 |
| 7.2.3              | Flash Memory Operating Modes.....                                                                                                                     | 130 |
| 7.2.4              | Pin Configuration .....                                                                                                                               | 134 |
| 7.2.5              | Register Configuration.....                                                                                                                           | 134 |
| 7.3                | Flash Memory Register Descriptions .....                                                                                                              | 135 |
| 7.3.1              | Flash Memory Control Register 1 (FLMCR1).....                                                                                                         | 135 |
| 7.3.2              | Flash Memory Control Register 2 (FLMCR2).....                                                                                                         | 138 |
| 7.3.3              | Erase Block Register 1 (EBR1).....                                                                                                                    | 141 |
| 7.3.4              | Erase Block Register 2 (EBR2).....                                                                                                                    | 141 |
| 7.3.5              | Serial/Timer Control Register (STCR) .....                                                                                                            | 142 |
| 7.4                | On-Board Programming Modes.....                                                                                                                       | 144 |
| 7.4.1              | Boot Mode .....                                                                                                                                       | 145 |
| 7.4.2              | User Program Mode .....                                                                                                                               | 150 |
| 7.5                | Programming/Erasing Flash Memory .....                                                                                                                | 151 |
| 7.5.1              | Program Mode (n=1 when the target address range is H'00000 to H'3FFFF<br>and n=2 when the target address range is H'40000 to H'47FFF).....            | 151 |
| 7.5.2              | Program-Verify Mode (n = 1 when the target address range is H'00000 to<br>H'3FFFF and n = 2 when the target address range is H'40000 to H'47FFF)..... | 152 |
| 7.5.3              | Erase Mode (n = 1 when the target address range is H'00000 to H'3FFFF<br>and n = 2 when the target address range is H'40000 to H'47FFF) .....         | 154 |
| 7.5.4              | Erase-Verify Mode (n = 1 when the target address range is H'00000 to<br>H'3FFFF and n = 2 when the target address range is H'40000 to H'47FFF).....   | 156 |
| 7.6                | Flash Memory Protection .....                                                                                                                         | 157 |
| 7.6.1              | Hardware Protection.....                                                                                                                              | 157 |
| 7.6.2              | Software Protection .....                                                                                                                             | 158 |
| 7.6.3              | Error Protection.....                                                                                                                                 | 159 |
| 7.7                | Interrupt Handling when Programming/Erasing Flash Memory .....                                                                                        | 160 |
| 7.8                | Flash Memory Programmer Mode .....                                                                                                                    | 161 |
| 7.8.1              | Programmer Mode Setting.....                                                                                                                          | 161 |
| 7.8.2              | Socket Adapters and Memory Map .....                                                                                                                  | 161 |
| 7.8.3              | Programmer Mode Operation.....                                                                                                                        | 162 |
| 7.8.4              | Memory Read Mode.....                                                                                                                                 | 163 |
| 7.8.5              | Auto-Program Mode.....                                                                                                                                | 166 |

|                                       |                                                                 |     |
|---------------------------------------|-----------------------------------------------------------------|-----|
| 7.8.6                                 | Auto-Erase Mode .....                                           | 168 |
| 7.8.7                                 | Status Read Mode.....                                           | 169 |
| 7.8.8                                 | Status Polling .....                                            | 171 |
| 7.8.9                                 | Programmer Mode Transition Time .....                           | 172 |
| 7.8.10                                | Notes on Memory Programming .....                               | 172 |
| 7.9                                   | Note on Switching from F-ZTAT Version to Mask-ROM Version ..... | 173 |
| Section 8 RAM .....                   |                                                                 | 175 |
| 8.1                                   | Overview .....                                                  | 175 |
| 8.1.1                                 | Block Diagram .....                                             | 175 |
| Section 9 Clock Pulse Generator ..... |                                                                 | 177 |
| 9.1                                   | Overview .....                                                  | 177 |
| 9.1.1                                 | Block Diagram .....                                             | 177 |
| 9.1.2                                 | Register Configuration.....                                     | 177 |
| 9.2                                   | Register Descriptions .....                                     | 178 |
| 9.2.1                                 | Standby Control Register (SBYCR) .....                          | 178 |
| 9.2.2                                 | Low-Power Control Register (LPWRCR) .....                       | 179 |
| 9.3                                   | Oscillator .....                                                | 180 |
| 9.3.1                                 | Connecting a Crystal Resonator .....                            | 180 |
| 9.3.2                                 | External Clock Input.....                                       | 182 |
| 9.4                                   | Duty Adjustment Circuit .....                                   | 185 |
| 9.5                                   | Medium-Speed Clock Divider .....                                | 185 |
| 9.6                                   | Bus Master Clock Selection Circuit .....                        | 185 |
| 9.7                                   | Subclock Oscillator Circuit .....                               | 186 |
| 9.7.1                                 | Connecting 32.768 kHz Crystal Resonator .....                   | 186 |
| 9.7.2                                 | When Subclock is not Needed.....                                | 187 |
| 9.8                                   | Subclock Waveform Shaping Circuit.....                          | 187 |
| 9.9                                   | Notes on the Resonator .....                                    | 187 |
| Section 10 I/O Port.....              |                                                                 | 189 |
| 10.1                                  | Overview .....                                                  | 189 |
| 10.1.1                                | Port Functions .....                                            | 189 |
| 10.1.2                                | Port Input .....                                                | 189 |
| 10.1.3                                | MOS Pull-Up Transistors.....                                    | 192 |
| 10.2                                  | Port 0.....                                                     | 193 |
| 10.2.1                                | Overview.....                                                   | 193 |
| 10.2.2                                | Register Configuration.....                                     | 194 |
| 10.2.3                                | Pin Functions.....                                              | 195 |
| 10.2.4                                | Pin States .....                                                | 195 |
| 10.3                                  | Port 1.....                                                     | 196 |
| 10.3.1                                | Overview.....                                                   | 196 |
| 10.3.2                                | Register Configuration.....                                     | 196 |

|            |                                   |     |
|------------|-----------------------------------|-----|
| 10.3.3     | Pin Functions .....               | 200 |
| 10.3.4     | Pin States .....                  | 201 |
| 10.4       | Port 2.....                       | 202 |
| 10.4.1     | Overview .....                    | 202 |
| 10.4.2     | Register Configuration.....       | 202 |
| 10.4.3     | Pin Functions .....               | 205 |
| 10.4.4     | Pin States .....                  | 207 |
| 10.5       | Port 3.....                       | 208 |
| 10.5.1     | Overview .....                    | 208 |
| 10.5.2     | Register Configuration.....       | 208 |
| 10.5.3     | Pin Functions .....               | 212 |
| 10.5.4     | Pin States .....                  | 215 |
| 10.6       | Port 4.....                       | 216 |
| 10.6.1     | Overview .....                    | 216 |
| 10.6.2     | Register Configuration.....       | 216 |
| 10.6.3     | Pin Functions .....               | 219 |
| 10.6.4     | Pin States .....                  | 221 |
| 10.7       | Port 6.....                       | 222 |
| 10.7.1     | Overview .....                    | 222 |
| 10.7.2     | Register Configuration.....       | 223 |
| 10.7.3     | Pin Functions .....               | 228 |
| 10.7.4     | Operation .....                   | 230 |
| 10.7.5     | Pin States .....                  | 231 |
| 10.8       | Port 7.....                       | 232 |
| 10.8.1     | Overview .....                    | 232 |
| 10.8.2     | Register Configuration.....       | 233 |
| 10.8.3     | Pin Functions .....               | 238 |
| 10.8.4     | Operation .....                   | 239 |
| 10.8.5     | Pin States .....                  | 240 |
| 10.9       | Port 8.....                       | 241 |
| 10.9.1     | Overview .....                    | 241 |
| 10.9.2     | Register Configuration.....       | 242 |
| 10.9.3     | Pin Functions .....               | 248 |
| 10.9.4     | Pin States .....                  | 250 |
| Section 11 | Timer A .....                     | 251 |
| 11.1       | Overview.....                     | 251 |
| 11.1.1     | Features.....                     | 251 |
| 11.1.2     | Block Diagram .....               | 252 |
| 11.1.3     | Register Configuration.....       | 252 |
| 11.2       | Register Descriptions .....       | 253 |
| 11.2.1     | Timer Mode Register A (TMA) ..... | 253 |
| 11.2.2     | Timer Counter A (TCA) .....       | 255 |

|            |                                             |     |
|------------|---------------------------------------------|-----|
| 11.2.3     | Module Stop Control Register (MSTPCR) ..... | 255 |
| 11.3       | Operation.....                              | 256 |
| 11.3.1     | Operation as the Interval Timer.....        | 256 |
| 11.3.2     | Operation as Clock Timer .....              | 256 |
| 11.3.3     | Initializing the Counts.....                | 256 |
| Section 12 | Timer B .....                               | 257 |
| 12.1       | Overview.....                               | 257 |
| 12.1.1     | Features.....                               | 257 |
| 12.1.2     | Block Diagram .....                         | 257 |
| 12.1.3     | Pin Configuration .....                     | 258 |
| 12.1.4     | Register Configuration.....                 | 258 |
| 12.2       | Register Descriptions .....                 | 259 |
| 12.2.1     | Timer Mode Register B (TMB).....            | 259 |
| 12.2.2     | Timer Counter B (TCB).....                  | 261 |
| 12.2.3     | Timer Load Register B (TLB).....            | 261 |
| 12.2.4     | Port Mode Register A (PMRA).....            | 262 |
| 12.2.5     | Module Stop Control Register (MSTPCR) ..... | 263 |
| 12.3       | Operation.....                              | 264 |
| 12.3.1     | Operation as the Interval Timer.....        | 264 |
| 12.3.2     | Operation as the Auto Reload Timer .....    | 264 |
| 12.3.3     | Event Counter .....                         | 264 |
| Section 13 | Timer J .....                               | 265 |
| 13.1       | Overview.....                               | 265 |
| 13.1.1     | Features.....                               | 265 |
| 13.1.2     | Block Diagram .....                         | 265 |
| 13.1.3     | Pin Configuration .....                     | 267 |
| 13.1.4     | Register Configuration.....                 | 267 |
| 13.2       | Register Descriptions .....                 | 268 |
| 13.2.1     | Timer Mode Register J (TMJ).....            | 268 |
| 13.2.2     | Timer J Control Register (TMJC).....        | 271 |
| 13.2.3     | Timer J Status Register (TMJS) .....        | 274 |
| 13.2.4     | Timer Counter J (TCJ).....                  | 275 |
| 13.2.5     | Timer Counter K (TCK) .....                 | 275 |
| 13.2.6     | Timer Load Register J (TLJ).....            | 276 |
| 13.2.7     | Timer Load Register K (TLK) .....           | 276 |
| 13.2.8     | Module Stop Control Register (MSTPCR) ..... | 277 |
| 13.3       | Operation.....                              | 278 |
| 13.3.1     | 8-bit Reload Timer (TMJ-1).....             | 278 |
| 13.3.2     | 8-bit Reload Timer (TMJ-2).....             | 278 |
| 13.3.3     | Remote Controlled Data Transmission .....   | 279 |
| 13.3.4     | TMJ-2 Expansion Function.....               | 282 |

|            |                                                                   |     |
|------------|-------------------------------------------------------------------|-----|
| Section 14 | Timer L .....                                                     | 283 |
| 14.1       | Overview .....                                                    | 283 |
| 14.1.1     | Features.....                                                     | 283 |
| 14.1.2     | Block Diagram .....                                               | 284 |
| 14.1.3     | Register Configuration.....                                       | 285 |
| 14.2       | Register Descriptions .....                                       | 286 |
| 14.2.1     | Timer L Mode Register (LMR).....                                  | 286 |
| 14.2.2     | Linear Time Counter (LTC).....                                    | 288 |
| 14.2.3     | Reload/Compare Match Register (RCR) .....                         | 288 |
| 14.2.4     | Module Stop Control Register (MSTPCR) .....                       | 289 |
| 14.3       | Operation.....                                                    | 290 |
| 14.3.1     | Compare Match Clear Operation.....                                | 290 |
| 14.3.2     | Auto-Reload Operation.....                                        | 291 |
| 14.3.3     | Interval Timer Operation .....                                    | 292 |
| 14.3.4     | Interrupt Request .....                                           | 292 |
| 14.4       | Typical Usage.....                                                | 293 |
| 14.5       | Reload Timer Interrupt Request Signal .....                       | 293 |
| Section 15 | Timer R.....                                                      | 295 |
| 15.1       | Overview .....                                                    | 295 |
| 15.1.1     | Features.....                                                     | 295 |
| 15.1.2     | Block Diagram .....                                               | 295 |
| 15.1.3     | Pin Configuration .....                                           | 297 |
| 15.1.4     | Register Configuration.....                                       | 297 |
| 15.2       | Register Descriptions .....                                       | 298 |
| 15.2.1     | Timer R Mode Register 1 (TMRM1).....                              | 298 |
| 15.2.2     | Timer R Mode Register 2 (TMRM2).....                              | 300 |
| 15.2.3     | Timer R Control/Status Register (TM RCS).....                     | 303 |
| 15.2.4     | Timer R Capture Register 1 (TM RCP1) .....                        | 305 |
| 15.2.5     | Timer R Capture Register 2 (TM RCP2) .....                        | 306 |
| 15.2.6     | Timer R Load Register 1 (TM RL1).....                             | 306 |
| 15.2.7     | Timer R Load Register 2 (TM RL2).....                             | 307 |
| 15.2.8     | Timer R Load Register 3 (TM RL3).....                             | 307 |
| 15.2.9     | Module Stop Control Register (MSTPCR) .....                       | 308 |
| 15.3       | Operation.....                                                    | 309 |
| 15.3.1     | Reload Timer Counter Equipped with Capturing Function TMRU-1..... | 309 |
| 15.3.2     | Reload Timer Counter Equipped with Capturing Function TMRU-2..... | 310 |
| 15.3.3     | Reload Counter Timer TMRU-3 .....                                 | 310 |
| 15.3.4     | Mode Identification .....                                         | 311 |
| 15.3.5     | Reeling Controls.....                                             | 311 |
| 15.3.6     | Acceleration and Braking Processes of the Capstan Motor.....      | 311 |
| 15.3.7     | Slow Tracking Mono-Multi Function.....                            | 312 |
| 15.4       | Interrupt Cause .....                                             | 314 |



|                   |                                                                    |            |
|-------------------|--------------------------------------------------------------------|------------|
| 15.5              | Settings for Respective Functions.....                             | 315        |
| 15.5.1            | Mode Identification .....                                          | 315        |
| 15.5.2            | Reeling Controls.....                                              | 316        |
| 15.5.3            | Slow Tracking Mono-Multi Function.....                             | 316        |
| 15.5.4            | Acceleration and Braking Processes of the Capstan Motor.....       | 317        |
| <b>Section 16</b> | <b>Timer X1 .....</b>                                              | <b>319</b> |
| 16.1              | Overview.....                                                      | 319        |
| 16.1.1            | Features.....                                                      | 319        |
| 16.1.2            | Block Diagram .....                                                | 320        |
| 16.1.3            | Pin Configuration .....                                            | 321        |
| 16.1.4            | Register Configuration.....                                        | 322        |
| 16.2              | Register Descriptions .....                                        | 323        |
| 16.2.1            | Free Running Counter (FRC) .....                                   | 323        |
| 16.2.2            | Output Comparing Registers A and B (OCRA and OCRB).....            | 324        |
| 16.2.3            | Input Capture Registers A through D (ICRA through ICRD) .....      | 325        |
| 16.2.4            | Timer Interrupt Enabling Register (TIER).....                      | 327        |
| 16.2.5            | Timer Control/Status Register X (TCSRX) .....                      | 330        |
| 16.2.6            | Timer Control Register X (TCRX).....                               | 334        |
| 16.2.7            | Timer Output Comparing Control Register (TOCR) .....               | 336        |
| 16.2.8            | Module Stop Control Register (MSTPCR) .....                        | 338        |
| 16.3              | Operation.....                                                     | 339        |
| 16.3.1            | Operation of Timer X1 .....                                        | 339        |
| 16.3.2            | Counting Timing of the FRC .....                                   | 340        |
| 16.3.3            | Output Comparing Signal Outputting Timing.....                     | 341        |
| 16.3.4            | FRC Clearing Timing .....                                          | 341        |
| 16.3.5            | Input Capture Signal Inputting Timing .....                        | 342        |
| 16.3.6            | Input Capture Flag (ICFA through ICFD) Setting Up Timing .....     | 343        |
| 16.3.7            | Output Comparing Flag (OCFA and OCFB) Setting Up Timing .....      | 344        |
| 16.3.8            | Overflow Flag (CVF) Setting Up Timing .....                        | 344        |
| 16.4              | Operation Mode of Timer X1 .....                                   | 345        |
| 16.5              | Interrupt Causes .....                                             | 346        |
| 16.6              | Exemplary Uses of Timer X1 .....                                   | 347        |
| 16.7              | Precautions when Using Timer X1 .....                              | 348        |
| 16.7.1            | Competition between Writing and Clearing with the FRC .....        | 348        |
| 16.7.2            | Competition between Writing and Counting Up with the FRC.....      | 349        |
| 16.7.3            | Competition between Writing and Comparing Match with the OCR ..... | 350        |
| 16.7.4            | Changing Over the Internal Clocks and Counter Operations .....     | 351        |
| <b>Section 17</b> | <b>Watchdog Timer (WDT).....</b>                                   | <b>353</b> |
| 17.1              | Overview.....                                                      | 353        |
| 17.1.1            | Features.....                                                      | 353        |
| 17.1.2            | Block Diagram .....                                                | 354        |

|                   |                                                                             |            |
|-------------------|-----------------------------------------------------------------------------|------------|
| 17.1.3            | Register Configuration.....                                                 | 355        |
| 17.2              | Register Descriptions .....                                                 | 356        |
| 17.2.1            | Watchdog Timer Counter (WTCNT).....                                         | 356        |
| 17.2.2            | Watchdog Timer Control/Status Register (WTCSR).....                         | 356        |
| 17.2.3            | System Control Register (SYSCR).....                                        | 359        |
| 17.2.4            | Notes on Register Access.....                                               | 360        |
| 17.3              | Operation.....                                                              | 361        |
| 17.3.1            | Watchdog Timer Operation.....                                               | 361        |
| 17.3.2            | Interval Timer Operation .....                                              | 362        |
| 17.3.3            | Timing of Setting of Overflow Flag (OVF) .....                              | 363        |
| 17.4              | Interrupts.....                                                             | 364        |
| 17.5              | Usage Notes.....                                                            | 364        |
| 17.5.1            | Contention between Watchdog Timer Counter (WTCNT) Write and Increment ..... | 364        |
| 17.5.2            | Changing Value of CKS2 to CKS0 .....                                        | 365        |
| 17.5.3            | Switching between Watchdog Timer Mode and Interval Timer Mode.....          | 365        |
| <b>Section 18</b> | <b>8-Bit PWM.....</b>                                                       | <b>367</b> |
| 18.1              | Overview.....                                                               | 367        |
| 18.1.1            | Features.....                                                               | 367        |
| 18.1.2            | Block Diagram .....                                                         | 367        |
| 18.1.3            | Pin Configuration .....                                                     | 368        |
| 18.1.4            | Register Configuration.....                                                 | 368        |
| 18.2              | Register Descriptions .....                                                 | 369        |
| 18.2.1            | 8-bit PWM Data Registers 0, 1, 2 and 3 (PWR0, PWR1, PWR2, PWR3).....        | 369        |
| 18.2.2            | 8-bit PWM Control Register (PW8CR) .....                                    | 370        |
| 18.2.3            | Port Mode Register 3 (PMR3) .....                                           | 371        |
| 18.2.4            | Module Stop Control Register (MSTPCR) .....                                 | 372        |
| 18.3              | 8-Bit PWM Operation.....                                                    | 373        |
| <b>Section 19</b> | <b>12-Bit PWM.....</b>                                                      | <b>375</b> |
| 19.1              | Overview.....                                                               | 375        |
| 19.1.1            | Features.....                                                               | 375        |
| 19.1.2            | Block Diagram .....                                                         | 376        |
| 19.1.3            | Pin Configuration .....                                                     | 377        |
| 19.1.4            | Register Configuration.....                                                 | 377        |
| 19.2              | Register Descriptions .....                                                 | 378        |
| 19.2.1            | 12-Bit PWM Control Registers (CPWCR, DPWCR).....                            | 378        |
| 19.2.2            | 12-Bit PWM Data Registers (DPWDR, CPWDR) .....                              | 381        |
| 19.2.3            | Module Stop Control Register (MSTPCR) .....                                 | 382        |
| 19.3              | Operation.....                                                              | 383        |
| 19.3.1            | Output Waveform.....                                                        | 383        |

|            |                                                    |     |
|------------|----------------------------------------------------|-----|
| Section 20 | 14-Bit PWM .....                                   | 385 |
| 20.1       | Overview .....                                     | 385 |
| 20.1.1     | Features.....                                      | 385 |
| 20.1.2     | Block Diagram .....                                | 386 |
| 20.1.3     | Pin Configuration .....                            | 386 |
| 20.1.4     | Register Configuration.....                        | 387 |
| 20.2       | Register Descriptions .....                        | 388 |
| 20.2.1     | PWM Control Register (PWCR) .....                  | 388 |
| 20.2.2     | PWM Data Registers U and L (PWDRU, PWDRL).....     | 389 |
| 20.2.3     | Module Stop Control Register (MSTPCR) .....        | 390 |
| 20.3       | 14-Bit PWM Operation .....                         | 391 |
| Section 21 | Prescalar Unit .....                               | 393 |
| 21.1       | Overview .....                                     | 393 |
| 21.1.1     | Features.....                                      | 393 |
| 21.1.2     | Block Diagram .....                                | 394 |
| 21.1.3     | Pin Configuration .....                            | 395 |
| 21.1.4     | Register Configuration.....                        | 395 |
| 21.2       | Registers.....                                     | 396 |
| 21.2.1     | Input Capture Register 1 (ICR1) .....              | 396 |
| 21.2.2     | Prescalar Unit Control/Status Register (PCSR)..... | 396 |
| 21.2.3     | Port Mode Register 1 (PMR1).....                   | 399 |
| 21.3       | Noise Cancel Circuit .....                         | 400 |
| 21.4       | Operation.....                                     | 400 |
| 21.4.1     | Prescalar S (PSS).....                             | 400 |
| 21.4.2     | Prescalar W (PSW).....                             | 401 |
| 21.4.3     | Stable Oscillation Wait Time Count.....            | 401 |
| 21.4.4     | 8-bit PWM .....                                    | 402 |
| 21.4.5     | 8-bit Input Capture Using IC Pin.....              | 402 |
| 21.4.6     | Frequency Division Clock Output .....              | 402 |
| Section 22 | Serial Communication Interface 1 (SCI1) .....      | 403 |
| 22.1       | Overview .....                                     | 403 |
| 22.1.1     | Features.....                                      | 403 |
| 22.1.2     | Block Diagram .....                                | 405 |
| 22.1.3     | Pin Configuration .....                            | 406 |
| 22.1.4     | Register Configuration.....                        | 406 |
| 22.2       | Register Descriptions .....                        | 407 |
| 22.2.1     | Receive Shift Register 1 (RSR1).....               | 407 |
| 22.2.2     | Receive Data Register 1 (RDR1).....                | 407 |
| 22.2.3     | Transmit Shift Register 1 (TSR1).....              | 408 |
| 22.2.4     | Transmit Data Register 1 (TDR1) .....              | 408 |

|                                                       |                                                                                            |     |
|-------------------------------------------------------|--------------------------------------------------------------------------------------------|-----|
| 22.2.5                                                | Serial Mode Register 1 (SMR1) .....                                                        | 409 |
| 22.2.6                                                | Serial Control Register 1 (SCR1) .....                                                     | 412 |
| 22.2.7                                                | Serial Status Register 1 (SSR1) .....                                                      | 416 |
| 22.2.8                                                | Bit Rate Register 1 (BRR1) .....                                                           | 419 |
| 22.2.9                                                | Serial Interface Mode Register 1 (SCMR1) .....                                             | 426 |
| 22.2.10                                               | Module Stop Control Register (MSTPCR) .....                                                | 427 |
| 22.3                                                  | Operation .....                                                                            | 428 |
| 22.3.1                                                | Overview .....                                                                             | 428 |
| 22.3.2                                                | Operation in Asynchronous Mode .....                                                       | 430 |
| 22.3.3                                                | Multiprocessor Communication Function .....                                                | 440 |
| 22.3.4                                                | Operation in Synchronous Mode .....                                                        | 448 |
| 22.4                                                  | SCI Interrupts .....                                                                       | 456 |
| 22.5                                                  | Usage Notes .....                                                                          | 457 |
| Section 23 I <sup>2</sup> C Bus Interface (IIC) ..... |                                                                                            | 465 |
| 23.1                                                  | Overview .....                                                                             | 465 |
| 23.1.1                                                | Features .....                                                                             | 465 |
| 23.1.2                                                | Block Diagram .....                                                                        | 466 |
| 23.1.3                                                | Pin Configuration .....                                                                    | 467 |
| 23.1.4                                                | Register Configuration .....                                                               | 468 |
| 23.2                                                  | Register Descriptions .....                                                                | 469 |
| 23.2.1                                                | I <sup>2</sup> C Bus Data Register (ICDR) .....                                            | 469 |
| 23.2.2                                                | Slave Address Register (SAR) .....                                                         | 472 |
| 23.2.3                                                | Second Slave Address Register (SARX) .....                                                 | 474 |
| 23.2.4                                                | I <sup>2</sup> C Bus Mode Register (ICMR) .....                                            | 475 |
| 23.2.5                                                | I <sup>2</sup> C Bus Control Register (ICCR) .....                                         | 479 |
| 23.2.6                                                | I <sup>2</sup> C Bus Status Register (ICSR) .....                                          | 486 |
| 23.2.7                                                | Serial/Timer Control Register (STCR) .....                                                 | 490 |
| 23.2.8                                                | DDC Switch Register (DDCSWR) .....                                                         | 491 |
| 23.2.9                                                | Module Stop Control Register (MSTPCR) .....                                                | 494 |
| 23.3                                                  | Operation .....                                                                            | 495 |
| 23.3.1                                                | I <sup>2</sup> C Bus Data Format .....                                                     | 495 |
| 23.3.2                                                | Master Transmit Operation .....                                                            | 496 |
| 23.3.3                                                | Master Receive Operation .....                                                             | 499 |
| 23.3.4                                                | Slave Receive Operation .....                                                              | 502 |
| 23.3.5                                                | Slave Transmit Operation .....                                                             | 505 |
| 23.3.6                                                | IRIC Setting Timing and SCL Control .....                                                  | 506 |
| 23.3.7                                                | Automatic Switching from Formatless Transfer to I <sup>2</sup> C Bus Format Transfer ..... | 508 |
| 23.3.8                                                | Noise Canceler .....                                                                       | 509 |
| 23.3.9                                                | Sample Flowcharts .....                                                                    | 509 |
| 23.3.10                                               | Initializing Internal Status .....                                                         | 513 |
| 23.4                                                  | Usage Notes .....                                                                          | 515 |

|            |                                                      |     |
|------------|------------------------------------------------------|-----|
| Section 24 | A/D Converter .....                                  | 521 |
| 24.1       | Overview .....                                       | 521 |
| 24.1.1     | Features.....                                        | 521 |
| 24.1.2     | Block Diagram .....                                  | 522 |
| 24.1.3     | Pin Configuration .....                              | 523 |
| 24.1.4     | Register Configuration.....                          | 524 |
| 24.2       | Register Descriptions .....                          | 525 |
| 24.2.1     | Software-Triggered A/D Result Register (ADR) .....   | 525 |
| 24.2.2     | Hardware-Triggered A/D Result Register (AHR) .....   | 525 |
| 24.2.3     | A/D Control Register (ADCR).....                     | 526 |
| 24.2.4     | A/D Control/Status Register (ADCSR) .....            | 529 |
| 24.2.5     | Trigger Select Register (ADTSR) .....                | 532 |
| 24.2.6     | Port Mode Register 0 (PMR0).....                     | 532 |
| 24.2.7     | Module Stop Control Register (MSTPCR) .....          | 533 |
| 24.3       | Interface to Bus Master .....                        | 534 |
| 24.4       | Operation.....                                       | 535 |
| 24.4.1     | Software-Triggered A/D Conversion.....               | 535 |
| 24.4.2     | Hardware- or External-Triggered A/D Conversion ..... | 536 |
| 24.5       | Interrupt Sources.....                               | 537 |
| Section 25 | Address Trap Controller (ATC) .....                  | 539 |
| 25.1       | Overview .....                                       | 539 |
| 25.1.1     | Features.....                                        | 539 |
| 25.1.2     | Block Diagram .....                                  | 539 |
| 25.1.3     | Register Configuration.....                          | 540 |
| 25.2       | Register Descriptions .....                          | 540 |
| 25.2.1     | Address Trap Control Register (ATCR) .....           | 540 |
| 25.2.2     | Trap Address Register 2 to 0 (TAR2 to TAR0).....     | 542 |
| 25.3       | Precautions in Usage .....                           | 543 |
| 25.3.1     | Basic Operations .....                               | 543 |
| 25.3.2     | Enabling.....                                        | 545 |
| 25.3.3     | Bcc Instruction .....                                | 545 |
| 25.3.4     | BSR Instruction .....                                | 549 |
| 25.3.5     | JSR Instruction .....                                | 550 |
| 25.3.6     | JMP Instruction .....                                | 552 |
| 25.3.7     | RTS Instruction .....                                | 553 |
| 25.3.8     | SLEEP Instruction .....                              | 554 |
| 25.3.9     | Competing Interrupt .....                            | 558 |
| Section 26 | Servo Circuits .....                                 | 563 |
| 26.1       | Overview .....                                       | 563 |
| 26.1.1     | Functions.....                                       | 563 |
| 26.1.2     | Block Diagram .....                                  | 564 |

|        |                                                                   |     |
|--------|-------------------------------------------------------------------|-----|
| 26.2   | Servo Port.....                                                   | 565 |
| 26.2.1 | Overview .....                                                    | 565 |
| 26.2.2 | Block Diagram .....                                               | 565 |
| 26.2.3 | Pin Configuration .....                                           | 568 |
| 26.2.4 | Register Configuration.....                                       | 569 |
| 26.2.5 | Register Description .....                                        | 569 |
| 26.2.6 | DFG/DPG Input Signals .....                                       | 573 |
| 26.3   | Reference Signal Generators .....                                 | 574 |
| 26.3.1 | Overview .....                                                    | 574 |
| 26.3.2 | Block Diagram .....                                               | 574 |
| 26.3.3 | Register Configuration.....                                       | 576 |
| 26.3.4 | Register Description .....                                        | 577 |
| 26.3.5 | Operation .....                                                   | 582 |
| 26.4   | HSW (Head-switch) Timing Generator.....                           | 597 |
| 26.4.1 | Overview .....                                                    | 597 |
| 26.4.2 | Block Diagram .....                                               | 597 |
| 26.4.3 | HSW Timing Generator Configuration.....                           | 599 |
| 26.4.4 | Register Configuration.....                                       | 600 |
| 26.4.5 | Register Description .....                                        | 600 |
| 26.4.6 | Operation .....                                                   | 614 |
| 26.4.7 | Interrupts.....                                                   | 620 |
| 26.4.8 | Cautions.....                                                     | 621 |
| 26.5   | High-Speed Switching Circuit for Four-Head Special Playback ..... | 622 |
| 26.5.1 | Overview .....                                                    | 622 |
| 26.5.2 | Block Diagram .....                                               | 622 |
| 26.5.3 | Pin Configuration .....                                           | 623 |
| 26.5.4 | Register Description .....                                        | 623 |
| 26.6   | Drum Speed Error Detector.....                                    | 626 |
| 26.6.1 | Overview .....                                                    | 626 |
| 26.6.2 | Block Diagram .....                                               | 626 |
| 26.6.3 | Register Configuration.....                                       | 628 |
| 26.6.4 | Register Description .....                                        | 629 |
| 26.6.5 | Operation .....                                                   | 634 |
| 26.6.6 | fH Correction in Trick Play Mode.....                             | 636 |
| 26.7   | Drum Phase Error Detector .....                                   | 637 |
| 26.7.1 | Overview .....                                                    | 637 |
| 26.7.2 | Block Diagram .....                                               | 638 |
| 26.7.3 | Register Configuration.....                                       | 639 |
| 26.7.4 | Register Description .....                                        | 640 |
| 26.7.5 | Operation .....                                                   | 643 |
| 26.7.6 | Phase Comparison .....                                            | 645 |
| 26.8   | Capstan Speed Error Detector .....                                | 646 |
| 26.8.1 | Overview .....                                                    | 646 |

|          |                                               |     |
|----------|-----------------------------------------------|-----|
| 26.8.2   | Block Diagram .....                           | 647 |
| 26.8.3   | Register Configuration.....                   | 648 |
| 26.8.4   | Register Description .....                    | 649 |
| 26.8.5   | Operation .....                               | 654 |
| 26.9     | Capstan Phase Error Detector .....            | 656 |
| 26.9.1   | Overview.....                                 | 656 |
| 26.9.2   | Block Diagram .....                           | 656 |
| 26.9.3   | Register Configuration.....                   | 658 |
| 26.9.4   | Register Description .....                    | 659 |
| 26.9.5   | Operation .....                               | 662 |
| 26.10    | X-Value and Tracking Adjustment Circuit.....  | 664 |
| 26.10.1  | Overview.....                                 | 664 |
| 26.10.2  | Block Diagram .....                           | 664 |
| 26.10.3  | Register Description .....                    | 666 |
| 26.11    | Digital Filters.....                          | 669 |
| 26.11.1  | Overview.....                                 | 669 |
| 26.11.2  | Block Diagram .....                           | 670 |
| 26.11.3  | Arithmetic Buffer .....                       | 672 |
| 26.11.4  | Register Configuration.....                   | 673 |
| 26.11.5  | Register Description .....                    | 674 |
| 26.11.6  | Filter Characteristics.....                   | 682 |
| 26.11.7  | Operations in Case of Transient Response..... | 684 |
| 26.11.8  | Initialization of Z-1.....                    | 684 |
| 26.12    | Additional V Signal Generator .....           | 686 |
| 26.12.1  | Overview.....                                 | 686 |
| 26.12.2  | Pin Configuration .....                       | 687 |
| 26.12.3  | Register Configuration.....                   | 687 |
| 26.12.4  | Register Description .....                    | 687 |
| 26.12.5  | Additional V Pulse Signal.....                | 689 |
| 26.13    | CTL Circuit .....                             | 692 |
| 26.13.1  | Overview.....                                 | 692 |
| 26.13.2  | Block Diagram .....                           | 693 |
| 26.13.3  | Pin Configuration .....                       | 694 |
| 26.13.4  | Register Configuration.....                   | 694 |
| 26.13.5  | Register Description .....                    | 695 |
| 26.13.6  | Operation .....                               | 709 |
| 26.13.7  | CTL Input Section .....                       | 712 |
| 26.13.8  | Duty Discriminator.....                       | 715 |
| 26.13.9  | CTL Output Section.....                       | 721 |
| 26.13.10 | Trapezoid Waveform Circuit.....               | 724 |
| 26.13.11 | Note on CTL Interrupt .....                   | 725 |
| 26.14    | Frequency Dividers.....                       | 726 |
| 26.14.1  | Overview.....                                 | 726 |

|                                                         |                                                        |     |
|---------------------------------------------------------|--------------------------------------------------------|-----|
| 26.14.2                                                 | CTL Frequency Divider.....                             | 726 |
| 26.14.3                                                 | CFG Frequency Divider.....                             | 730 |
| 26.14.4                                                 | DFG Noise Removal Circuit.....                         | 739 |
| 26.15                                                   | Sync Signal Detector.....                              | 741 |
| 26.15.1                                                 | Overview .....                                         | 741 |
| 26.15.2                                                 | Block Diagram .....                                    | 742 |
| 26.15.3                                                 | Pin Configuration.....                                 | 743 |
| 26.15.4                                                 | Register Configuration.....                            | 743 |
| 26.15.5                                                 | Register Description .....                             | 744 |
| 26.15.6                                                 | Noise Detection.....                                   | 752 |
| 26.15.7                                                 | Activation of the Sync Signal Detector.....            | 755 |
| 26.16                                                   | Servo Interrupt.....                                   | 756 |
| 26.16.1                                                 | Overview .....                                         | 756 |
| 26.16.2                                                 | Register Configuration.....                            | 756 |
| 26.16.3                                                 | Register Description .....                             | 756 |
| Section 27 Sync Separator for OSD and Data Slicer ..... |                                                        | 765 |
| 27.1                                                    | Overview.....                                          | 765 |
| 27.1.1                                                  | Features.....                                          | 766 |
| 27.1.2                                                  | Block Diagram .....                                    | 766 |
| 27.1.3                                                  | Pin Configuration .....                                | 768 |
| 27.1.4                                                  | Register Configuration.....                            | 768 |
| 27.2                                                    | Register Description.....                              | 769 |
| 27.2.1                                                  | Sync Separation Input Mode Register (SEPIMR) .....     | 769 |
| 27.2.2                                                  | Sync Separation Control Register (SEPCR).....          | 774 |
| 27.2.3                                                  | Sync Separation AFC Control Register (SEPACR) .....    | 777 |
| 27.2.4                                                  | Horizontal Sync Signal Threshold Register (HVTHR)..... | 779 |
| 27.2.5                                                  | Vertical Sync Signal Threshold Register (VVTHR).....   | 783 |
| 27.2.6                                                  | Field Detection Window Register (FWIDR).....           | 786 |
| 27.2.7                                                  | H Complement and Mask Timing Register (HCMMR).....     | 788 |
| 27.2.8                                                  | Noise Detection Counter (NDETC).....                   | 790 |
| 27.2.9                                                  | Noise Detection Level Register (NDETR).....            | 791 |
| 27.2.10                                                 | Data Slicer Detection Window Register (DDETRW).....    | 792 |
| 27.2.11                                                 | Internal Sync Frequency Register (INFRQR) .....        | 794 |
| 27.3                                                    | Operation.....                                         | 795 |
| 27.3.1                                                  | Selecting Source Signals for Sync Separation.....      | 795 |
| 27.3.2                                                  | Vsync Separation.....                                  | 801 |
| 27.3.3                                                  | Hsync Separation.....                                  | 802 |
| 27.3.4                                                  | Field Detection .....                                  | 803 |
| 27.3.5                                                  | Noise Detection.....                                   | 803 |
| 27.3.6                                                  | Automatic Frequency Controller (AFC) .....             | 804 |
| 27.3.7                                                  | Module Stop Control Register (MSTPCR) .....            | 809 |



|            |                                                              |     |
|------------|--------------------------------------------------------------|-----|
| Section 28 | Data Slicer.....                                             | 811 |
| 28.1       | Overview.....                                                | 811 |
| 28.1.1     | Features.....                                                | 811 |
| 28.1.2     | Block Diagram .....                                          | 812 |
| 28.1.3     | Pin Configuration .....                                      | 813 |
| 28.1.4     | Register Configuration.....                                  | 814 |
| 28.1.5     | Data Slicer Use Conditions .....                             | 814 |
| 28.2       | Register Description.....                                    | 815 |
| 28.2.1     | Slice Even- (Odd-) Field Mode Register (SEVFD, SODFD).....   | 815 |
| 28.2.2     | Slice Line Setting Registers 1 to 4 (SLINE1 to SLINE4) ..... | 819 |
| 28.2.3     | Slice Detection Registers 1 to 4 (SDTCT1 to SDTCT4).....     | 821 |
| 28.2.4     | Slice Data Registers 1 to 4 (SDATA1 to SDATA4).....          | 824 |
| 28.2.5     | Module Stop Control Register (MSTPCR) .....                  | 825 |
| 28.2.6     | Monitor Output Setting Register (DOUT) .....                 | 826 |
| 28.3       | Operation.....                                               | 827 |
| 28.3.1     | Slice Line Specification .....                               | 827 |
| 28.3.2     | Slice Sequence .....                                         | 830 |
| 28.4       | 32-Bit Slice Operation.....                                  | 831 |
| Section 29 | On-Screen Display (OSD) .....                                | 835 |
| 29.1       | Overview.....                                                | 835 |
| 29.1.1     | Features.....                                                | 835 |
| 29.1.2     | Block Diagram .....                                          | 837 |
| 29.1.3     | Pin Configuration .....                                      | 838 |
| 29.1.4     | Register Configuration.....                                  | 839 |
| 29.1.5     | TV Formats and Display Modes.....                            | 840 |
| 29.2       | Description of Display Functions.....                        | 840 |
| 29.2.1     | Superimposed Mode and Text Display Mode .....                | 840 |
| 29.2.2     | Character Configuration.....                                 | 841 |
| 29.2.3     | On-Screen Display Configuration .....                        | 842 |
| 29.3       | Settings in Character Units .....                            | 843 |
| 29.3.1     | Character Configuration.....                                 | 843 |
| 29.3.2     | Character Colors.....                                        | 843 |
| 29.3.3     | Halftones/Cursors.....                                       | 844 |
| 29.3.4     | Blinking .....                                               | 845 |
| 29.3.5     | Button Display .....                                         | 846 |
| 29.3.6     | Character Data ROM (OSDROM) .....                            | 847 |
| 29.3.7     | Display Data RAM (OSDRAM) .....                              | 849 |
| 29.4       | Settings in Row Units.....                                   | 854 |
| 29.4.1     | Button Patterns .....                                        | 854 |
| 29.4.2     | Display Enlargement .....                                    | 854 |
| 29.4.3     | Character Brightness.....                                    | 854 |

|                                       |                                                                                |     |
|---------------------------------------|--------------------------------------------------------------------------------|-----|
| 29.4.4                                | Cursor Color, Brightness, Halftone Levels .....                                | 854 |
| 29.4.5                                | Row Registers (CLINEn, n = rows 1 to 12).....                                  | 856 |
| 29.5                                  | Settings in Screen Units .....                                                 | 861 |
| 29.5.1                                | Display Positions.....                                                         | 861 |
| 29.5.2                                | Turning the OSD Display On and Off .....                                       | 862 |
| 29.5.3                                | Display Method.....                                                            | 862 |
| 29.5.4                                | Blinking Period .....                                                          | 862 |
| 29.5.5                                | Borders .....                                                                  | 863 |
| 29.5.6                                | Background Color and Brightness.....                                           | 863 |
| 29.5.7                                | Character, Cursor, and Background Chroma Saturation.....                       | 863 |
| 29.5.8                                | Display Position Registers (HPOS and VPOS).....                                | 864 |
| 29.5.9                                | Screen Control Register (DCNTL).....                                           | 866 |
| 29.6                                  | Other Settings .....                                                           | 871 |
| 29.6.1                                | TV Format .....                                                                | 871 |
| 29.6.2                                | Display Data RAM Control .....                                                 | 871 |
| 29.6.3                                | Timing of OSD Display Updates Using Register Rewriting.....                    | 871 |
| 29.6.4                                | 4fsc/2fsc.....                                                                 | 871 |
| 29.6.5                                | OSDV Interrupts .....                                                          | 871 |
| 29.6.6                                | OSD Format Register (DFORM) .....                                              | 872 |
| 29.7                                  | Digital Output.....                                                            | 876 |
| 29.7.1                                | R, G, and B Outputs .....                                                      | 876 |
| 29.7.2                                | YCO and YBO Outputs .....                                                      | 879 |
| 29.7.3                                | Digital Output Specification Register (DOUT).....                              | 880 |
| 29.7.4                                | Module Stop Control Register (MTSTPCR).....                                    | 882 |
| 29.8                                  | Notes on OSD Font Creation.....                                                | 884 |
| 29.8.1                                | Note 1 on Font Creation (Font Width).....                                      | 884 |
| 29.8.2                                | Note 2 on Font Creation (Borders) .....                                        | 884 |
| 29.8.3                                | Note 3 on Font Creation (Blinking).....                                        | 886 |
| 29.8.4                                | Note 4 on Font Creation (Buttons) .....                                        | 887 |
| 29.9                                  | OSD Oscillator, AFC, and Dot Clock .....                                       | 888 |
| 29.9.1                                | Sync Signals.....                                                              | 888 |
| 29.9.2                                | AFC Circuit.....                                                               | 888 |
| 29.9.3                                | Dot Clock.....                                                                 | 888 |
| 29.9.4                                | 4/2fsc .....                                                                   | 889 |
| 29.10                                 | OSD Operation in CPU Operation Modes.....                                      | 891 |
| 29.11                                 | Character Data ROM (OSDROM) Access by CPU .....                                | 892 |
| 29.11.1                               | Serial Timer Control Register (STCR) .....                                     | 892 |
| Section 30 Power Supply Circuit ..... |                                                                                | 893 |
| 30.1                                  | Overview .....                                                                 | 893 |
| 30.2                                  | Power Supply Connection (Internal Power Supply Step-Down Circuit On-Chip)..... | 893 |

|            |                                                                                                        |      |
|------------|--------------------------------------------------------------------------------------------------------|------|
| Section 31 | Electrical Characteristics.....                                                                        | 895  |
| 31.1       | Absolute Maximum Ratings.....                                                                          | 895  |
| 31.2       | Electrical Characteristics of HD6432199R, HD6432198R, HD6432197R, and<br>HD6432196R.....               | 896  |
| 31.2.1     | DC Characteristics of HD6432199R, HD6432198R, HD6432197R, and<br>HD6432196R .....                      | 896  |
| 31.2.2     | Allowable Output Currents of HD6432199R, HD6432198R, HD6432197R, and<br>HD6432196R .....               | 903  |
| 31.2.3     | AC Characteristics of HD6432199R, HD6432198R, HD6432197R, and<br>HD6432196R .....                      | 904  |
| 31.2.4     | Serial Interface Timing of HD6432199R, HD6432198R, HD6432197R, and<br>HD6432196R .....                 | 907  |
| 31.2.5     | A/D Converter Characteristics of HD6432199R, HD6432198R, HD6432197R, and<br>HD6432196R .....           | 911  |
| 31.2.6     | Servo Section Electrical Characteristics of HD6432199R, HD6432198R,<br>HD6432197R, and HD6432196R..... | 912  |
| 31.2.7     | OSD Electrical Characteristics of HD6432199R, HD6432198R, HD6432197R, and<br>HD6432196R .....          | 914  |
| 31.3       | Electrical Characteristics of HD6432197S and HD6432196S.....                                           | 918  |
| 31.3.1     | DC Characteristics of HD6432197S and HD6432196S - Preliminary - .....                                  | 918  |
| 31.3.2     | Allowable Output Currents of HD6432197S and HD6432196S .....                                           | 925  |
| 31.3.3     | AC Characteristics of HD6432197S and HD6432196S.....                                                   | 926  |
| 31.3.4     | Serial Interface Timing of HD6432197S and HD6432196S .....                                             | 929  |
| 31.3.5     | A/D Converter Characteristics of HD6432197S and HD6432196S .....                                       | 933  |
| 31.3.6     | Servo Section Electrical Characteristics of HD6432197S and HD6432196S .....                            | 934  |
| 31.3.7     | OSD Electrical Characteristics of HD6432197S and HD6432196S.....                                       | 936  |
| 31.4       | Electrical Characteristics of HD64F2199R .....                                                         | 940  |
| 31.4.1     | DC Characteristics of HD64F2199R .....                                                                 | 940  |
| 31.4.2     | Allowable Output Currents of HD64F2199R.....                                                           | 947  |
| 31.4.3     | AC Characteristics of HD64F2199R .....                                                                 | 948  |
| 31.4.4     | Serial Interface Timing of HD64F2199R.....                                                             | 951  |
| 31.4.5     | A/D Converter Characteristics of HD64F2199R.....                                                       | 955  |
| 31.4.6     | Servo Section Electrical Characteristics of HD64F2199R.....                                            | 956  |
| 31.4.7     | OSD Electrical Characteristics of HD64F2199R .....                                                     | 958  |
| 31.4.8     | Flash Memory Characteristics.....                                                                      | 962  |
| Appendix A | Instruction Set.....                                                                                   | 965  |
| A.1        | Instructions.....                                                                                      | 965  |
| A.2        | Instruction Codes .....                                                                                | 976  |
| A.3        | Operation Code Map.....                                                                                | 986  |
| A.4        | Number of Execution States .....                                                                       | 990  |
| A.5        | Bus Status during Instruction Execution .....                                                          | 1000 |

|                                                           |                                            |      |
|-----------------------------------------------------------|--------------------------------------------|------|
| A.6                                                       | Change of Condition Codes.....             | 1014 |
| Appendix B Internal I/O Registers..... 1019               |                                            |      |
| B.1                                                       | Addresses .....                            | 1019 |
| B.2                                                       | Function List.....                         | 1028 |
| Appendix C Pin Circuit Diagrams..... 1159                 |                                            |      |
| C.1                                                       | Pin Circuit Diagrams.....                  | 1159 |
| Appendix D Port States in Each Processing State..... 1173 |                                            |      |
| D.1                                                       | Pin Circuit Diagrams.....                  | 1173 |
| Appendix E Usage Notes..... 1174                          |                                            |      |
| E.1                                                       | Power Supply Rise and Fall Order.....      | 1174 |
| E.2                                                       | Sample External Circuits.....              | 1176 |
| E.3                                                       | Handling of Pins When OSD Is Not Used..... | 1181 |
| Appendix F Product Lineup..... 1182                       |                                            |      |
| Appendix G Package Dimensions..... 1183                   |                                            |      |

# Section 1 Overview

## 1.1 Overview

The H8S/2199R Series comprises microcomputers (MCUs) built around the H8S/2000 CPU, adopting Hitachi's proprietary architecture, and equipped with on-chip supporting modules. The H8S/2000 has an internal 32-bit architecture, is provided with sixteen 16-bit general registers and a concise, optimized instruction set designed for high-speed operation, and can address a 16-Mbyte linear address space.

The H8S/2199R Series is equipped with a digital servo circuit, sync separator, OSD, data slicer, ROM, RAM, seven types of timers, three types of PWM, two types of serial communication interface, an I<sup>2</sup>C bus interface, A/D converter, and I/O port as on-chip supporting modules. The on-chip ROM is either flash memory (F-ZTAT™\*) or mask ROM, with a capacity of 256, 128, 112, 96, or 80 kbytes. ROM is connected to the CPU via a 16-bit data bus, enabling both byte and word data to be accessed in one state. Instruction fetching has been speeded up, and processing speed increased.

Using the H8S/2199R Series can implement a system suitable for VTR control. This manual describes the H8S/2199R Series hardware. For details on instructions, see the H8S/2600 and H8S/2000 Series Programming Manual.

Note: \* F-ZTAT™ is a trademark of Hitachi, Ltd.

**Table 1.1 Features of the H8S/2199R Series**

| Item  | Specifications                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
|-------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| CPU   | <ul style="list-style-type: none"><li>• General-register architecture<ul style="list-style-type: none"><li>— Sixteen 16-bit general registers (also usable as sixteen 8-bit registers or eight 32-bit registers)</li></ul></li><li>• High-speed operation suitable for real-time control<ul style="list-style-type: none"><li>— Maximum operating frequency: 10 MHz/4 to 5.5 V</li><li>— High-speed arithmetic operations<ul style="list-style-type: none"><li>8/16/32-bit register-register add/subtract: 100 ns (10-MHz operation)</li><li>16 × 16-bit register-register multiply: 2000 ns (10-MHz operation)</li><li>32 ÷ 16-bit register-register divide: 2000 ns (10-MHz operation)</li></ul></li></ul></li><li>• Instruction set suitable for high-speed operation<ul style="list-style-type: none"><li>— Sixty-five basic instructions</li><li>— 8/16/32-bit transfer/arithmetic and logic instructions</li><li>— Unsigned/signed multiply and divide instructions</li><li>— Powerful bit-manipulation instructions</li></ul></li><li>• CPU operating modes<ul style="list-style-type: none"><li>— Advanced mode: 16-Mbyte address space</li></ul></li></ul> |
| Timer | <ul style="list-style-type: none"><li>• Seven types of timer are incorporated<ul style="list-style-type: none"><li>— Timer A<ul style="list-style-type: none"><li>• 8-bit interval timer</li><li>• Clock source can be selected among 8 types of internal clock of which frequencies are divided from the system clock (<math>\phi</math>) and subclock (<math>\phi</math>SUB)</li><li>• Functions as clock time base by subclock input</li></ul></li><li>— Timer B<ul style="list-style-type: none"><li>• Functions as 8-bit interval timer or reload timer</li><li>• Clock source can be selected among 7 types of internal clock or external event input</li></ul></li><li>— Timer J<ul style="list-style-type: none"><li>• Functions as two 8-bit down counters or one 16-bit down counter (reload timer/event counter timer/timer output, etc., 5 types of operation modes)</li><li>• Remote controlled transmit function</li><li>• Take up/Supply Reel Pulse Frequency division</li></ul></li></ul></li></ul>                                                                                                                                                 |

| Item           | Specifications                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
|----------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Timer          | <ul style="list-style-type: none"> <li>— Timer L <ul style="list-style-type: none"> <li>• 8-bit up/down counter</li> <li>• Clock source can be selected among 2 types of internal clock, CFG frequency division signal, and PB and REC-CTL (control pulse)</li> <li>• Compare-match clearing function/auto reload function</li> </ul> </li> <li>— Timer R <ul style="list-style-type: none"> <li>• Three reload timers</li> <li>• Mode discrimination</li> <li>• Reel control</li> <li>• Capstan motor acceleration/deceleration detection function</li> <li>• Slow tracking mono-multi</li> </ul> </li> <li>— Timer X1 (except for the H8S/2197S and H8S/2196S) <ul style="list-style-type: none"> <li>• 16-bit free-running counter</li> <li>• Clock source can be selected among 3 types of internal clock and DVCFG</li> <li>• Two output compare outputs</li> <li>• Four input capture inputs</li> </ul> </li> <li>— Watchdog timer <ul style="list-style-type: none"> <li>• Functions as watchdog timer or 8-bit interval timer</li> <li>• Generates reset signal or NMI at overflow</li> </ul> </li> </ul> |
| Prescaler unit | <ul style="list-style-type: none"> <li>— Divides system clock frequency and generates frequency division clock for supporting module functions</li> <li>— Divides subclock frequency and generates input clock for Timer A (clock time base)</li> <li>— Generates 8-bit PWM frequency and duty period</li> <li>— 8-bit input capture at external signal edge</li> <li>— Frequency division clock output enabled</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| PWM            | <ul style="list-style-type: none"> <li>• Three types of PWM are incorporated <ul style="list-style-type: none"> <li>— 14-bit PWM: Pulse resolution type x 1 channel (except for the H8S/2197S and H8S/2196S)</li> <li>— 8-bit PWM: Duty control type x 4 channels (H8S/2197S and H8S/2196S : 2 channel)</li> <li>— 12-bit PWM: Pulse pitch control type x 2 channels</li> </ul> </li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |

| Item                                                                              | Specifications                                                                                                                                                                                                                                                                                                                                                                                 |
|-----------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Serial communication interface (SCI)                                              | <ul style="list-style-type: none"> <li>— Asynchronous mode or synchronous mode selectable</li> <li>— Desired bit rate selectable with built-in baud rate generator</li> <li>— Multiprocessor communication function</li> </ul>                                                                                                                                                                 |
| I <sup>2</sup> C bus interface (2 channels) (H8S/2197S and H8S/2196S : 1 channel) | <ul style="list-style-type: none"> <li>— Conforms to Phillips I<sup>2</sup>C bus interface standard</li> <li>— Start and stop conditions generated automatically</li> <li>— Selection of acknowledge output levels when receiving, and automatic loading of acknowledge bit when transmitting</li> <li>— Selection of acknowledgement mode or serial mode (without acknowledge bit)</li> </ul> |
| A/D converter                                                                     | <ul style="list-style-type: none"> <li>— Resolution: 10 bits</li> <li>— Input: 12 channels</li> <li>— High-speed conversion: 13.4 μs minimum conversion time (10 MHz operation)</li> <li>— Sample-and-hold function</li> <li>— A/D conversion can be activated by software or external trigger</li> </ul>                                                                                      |
| Address trap controller                                                           | <ul style="list-style-type: none"> <li>— Interrupt occurs when the preset address is found during bus cycle</li> <li>— To-be-trapped addresses can be individually set at three different locations</li> </ul>                                                                                                                                                                                 |
| I/O port                                                                          | <ul style="list-style-type: none"> <li>— 56 input/output pins</li> <li>— 8 input-only pins</li> <li>— Can be switched for each supporting module</li> </ul>                                                                                                                                                                                                                                    |
| Servo circuit                                                                     | <ul style="list-style-type: none"> <li>• Digital servo circuits on-chip <ul style="list-style-type: none"> <li>— Input and output circuits</li> <li>— Error detection circuit</li> <li>— Phase and gain compensation</li> </ul> </li> </ul>                                                                                                                                                    |
| Sync signal (servo)                                                               | <ul style="list-style-type: none"> <li>• On-chip sync signal detection circuit <ul style="list-style-type: none"> <li>— Can separately detect horizontal and vertical sync signals</li> <li>— Noise detection function</li> </ul> </li> </ul>                                                                                                                                                  |
| Sync separator for OSD and data slicer                                            | <ul style="list-style-type: none"> <li>• Sync separator including AFC <ul style="list-style-type: none"> <li>— Horizontal and vertical sync signals separated from the composite video signal</li> <li>— Noise detection</li> <li>— Selection of sync separation methods</li> </ul> </li> </ul>                                                                                                |



| Item                    | Specifications                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |                  |     |     |           |                      |                  |           |             |           |           |            |           |           |            |  |           |            |           |           |            |  |
|-------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------|-----|-----|-----------|----------------------|------------------|-----------|-------------|-----------|-----------|------------|-----------|-----------|------------|--|-----------|------------|-----------|-----------|------------|--|
| OSD (On Screen Display) | <ul style="list-style-type: none"><li>— Screen of 32 characters × 12 lines</li><li>— 384 types of characters (H8S/2199R F-ZTAT : 512 types of characters<br/>H8S/2197S and H8S/2196S : 256 types of characters)</li><li>— Character configuration: 12 dots × 18 lines</li><li>— Character colors: Eight hues</li><li>— Background colors: Eight hues</li><li>— Cursor colors: Eight hues</li><li>— Halftone display</li><li>— Button display</li></ul>                                                                                                                                                          |                  |     |     |           |                      |                  |           |             |           |           |            |           |           |            |  |           |            |           |           |            |  |
| Data slicer             | <ul style="list-style-type: none"><li>— Slice lines: Four lines (H8S/2197S and H8S/2196S : two lines)</li><li>— Slice levels: Seven levels</li><li>— Sampling clock generated by AFC</li><li>— Slice interrupt</li><li>— Error detection</li></ul>                                                                                                                                                                                                                                                                                                                                                              |                  |     |     |           |                      |                  |           |             |           |           |            |           |           |            |  |           |            |           |           |            |  |
| Memory                  | <ul style="list-style-type: none"><li>— Flash memory or mask ROM (Refer to the product line-up)</li><li>— High-speed static RAM</li></ul> <table><tr><th>Product Name</th><th>ROM</th><th>RAM</th></tr><tr><td>H8S/2199R</td><td>128 k (256 k*) bytes</td><td>4 k (8 k*) bytes</td></tr><tr><td>H8S/2198R</td><td>112 k bytes</td><td>4 k bytes</td></tr><tr><td>H8S/2197R</td><td>96 k bytes</td><td>4 k bytes</td></tr><tr><td>H8S/2196R</td><td>80 k bytes</td><td></td></tr><tr><td>H8S/2197S</td><td>96 k bytes</td><td>3 k bytes</td></tr><tr><td>H8S/2196S</td><td>80 k bytes</td><td></td></tr></table> | Product Name     | ROM | RAM | H8S/2199R | 128 k (256 k*) bytes | 4 k (8 k*) bytes | H8S/2198R | 112 k bytes | 4 k bytes | H8S/2197R | 96 k bytes | 4 k bytes | H8S/2196R | 80 k bytes |  | H8S/2197S | 96 k bytes | 3 k bytes | H8S/2196S | 80 k bytes |  |
| Product Name            | ROM                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | RAM              |     |     |           |                      |                  |           |             |           |           |            |           |           |            |  |           |            |           |           |            |  |
| H8S/2199R               | 128 k (256 k*) bytes                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | 4 k (8 k*) bytes |     |     |           |                      |                  |           |             |           |           |            |           |           |            |  |           |            |           |           |            |  |
| H8S/2198R               | 112 k bytes                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | 4 k bytes        |     |     |           |                      |                  |           |             |           |           |            |           |           |            |  |           |            |           |           |            |  |
| H8S/2197R               | 96 k bytes                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | 4 k bytes        |     |     |           |                      |                  |           |             |           |           |            |           |           |            |  |           |            |           |           |            |  |
| H8S/2196R               | 80 k bytes                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |                  |     |     |           |                      |                  |           |             |           |           |            |           |           |            |  |           |            |           |           |            |  |
| H8S/2197S               | 96 k bytes                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | 3 k bytes        |     |     |           |                      |                  |           |             |           |           |            |           |           |            |  |           |            |           |           |            |  |
| H8S/2196S               | 80 k bytes                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |                  |     |     |           |                      |                  |           |             |           |           |            |           |           |            |  |           |            |           |           |            |  |
| Power-down state        | <ul style="list-style-type: none"><li>— Medium-speed mode</li><li>— Sleep mode</li><li>— Module stop mode</li><li>— Standby mode</li><li>— Subclock operation</li><li>Subactive mode, watch mode, subsleep mode</li></ul>                                                                                                                                                                                                                                                                                                                                                                                       |                  |     |     |           |                      |                  |           |             |           |           |            |           |           |            |  |           |            |           |           |            |  |
| Interrupt controller    | <ul style="list-style-type: none"><li>— Six external interrupt pins (IRQ5 to IRQ0)</li><li>— 44 internal interrupt sources (H8S/2197S and H8S/2196S : 35 internal interrupt sources)</li><li>— Three priority levels settable</li></ul>                                                                                                                                                                                                                                                                                                                                                                         |                  |     |     |           |                      |                  |           |             |           |           |            |           |           |            |  |           |            |           |           |            |  |

| Item                  | Specifications                                                                                                                                                                                                                          |
|-----------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Clock pulse generator | <ul style="list-style-type: none"> <li>Two types of clock pulse generator on-chip <ul style="list-style-type: none"> <li>System clock pulse generator: 8 to 10 MHz</li> <li>Subclock pulse generator: 32.768 kHz</li> </ul> </li> </ul> |
| Packages              | — 112-pin plastic QFP (FP-112)                                                                                                                                                                                                          |
| Product lineup        |                                                                                                                                                                                                                                         |

| Series    | Product Code      |                 |                                |          |
|-----------|-------------------|-----------------|--------------------------------|----------|
|           | Mask ROM Versions | F-ZTAT Versions | ROM/RAM (bytes)                | Packages |
| H8S/2199R | HD6432199R        | HD64F2199R      | 128 k/4 k<br>(256 k*/<br>8 k*) | FP-112   |
|           | HD6432198R        | —               | 112 k/4 k                      | FP-112   |
|           | HD6432197R        | —               | 96 k/4 k                       | FP-112   |
|           | HD6432196R        | —               | 80 k/4 k                       | FP-112   |
|           | HD6432197S        | —               | 96 k/3 k                       | FP-112   |
|           | HD6432196S        | —               | 80 k/3 k                       | FP-112   |

Note: \*F-ZTAT version

## 1.2 Internal Block Diagram

Figure 1.1 shows an internal block diagram of the H8S/2199R Series.

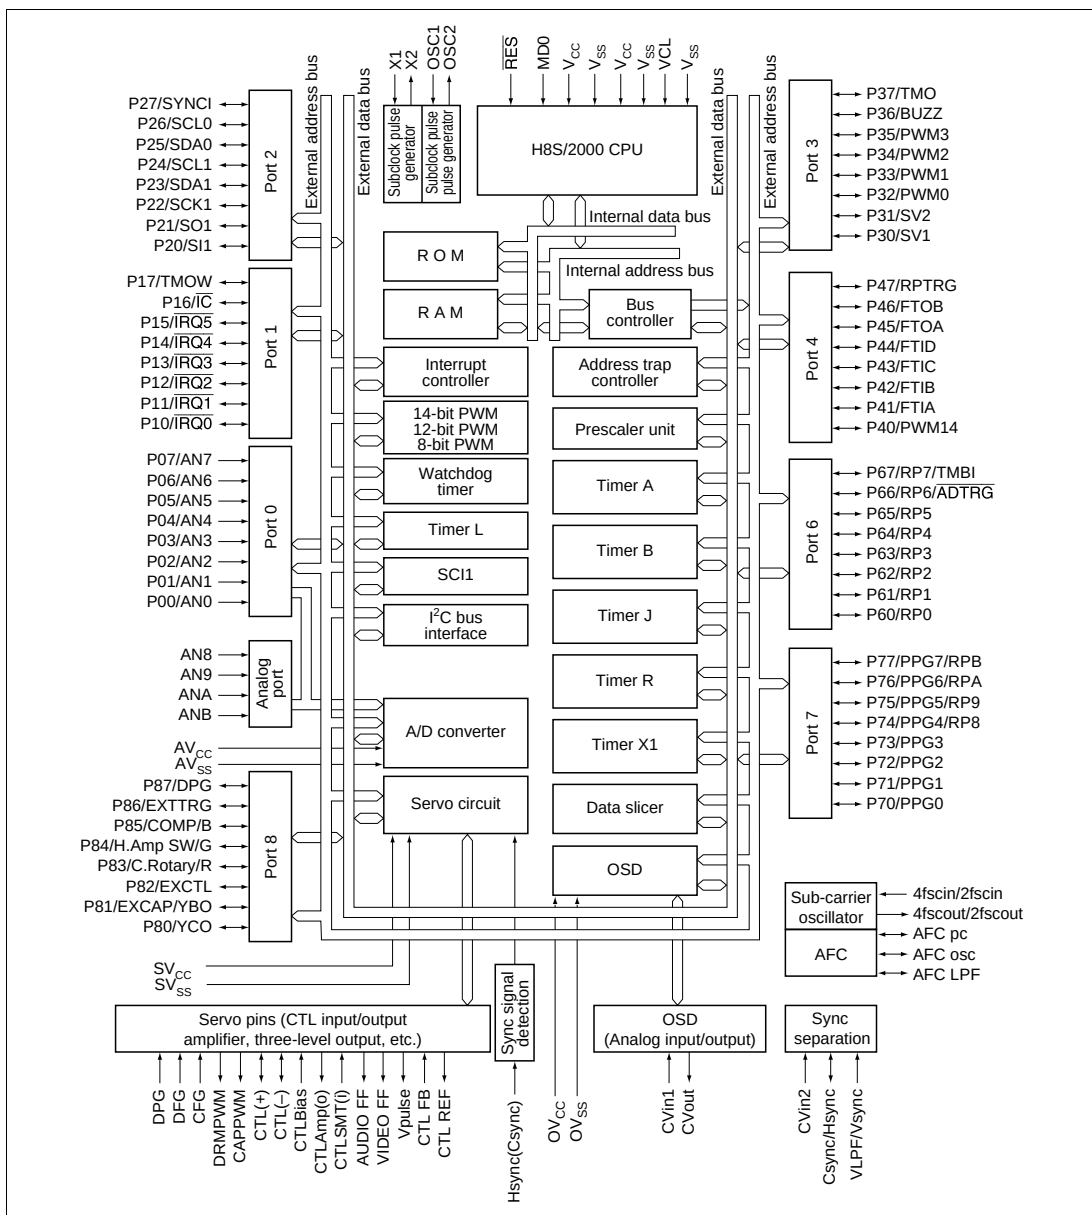


**Figure 1.1 Internal Block Diagram of H8S/2199R Series (except for the H8S/2197S and H8S/2196S)**

Figure 1.2 shows an internal block diagram of the H8S/2197S and H8S/2196S.

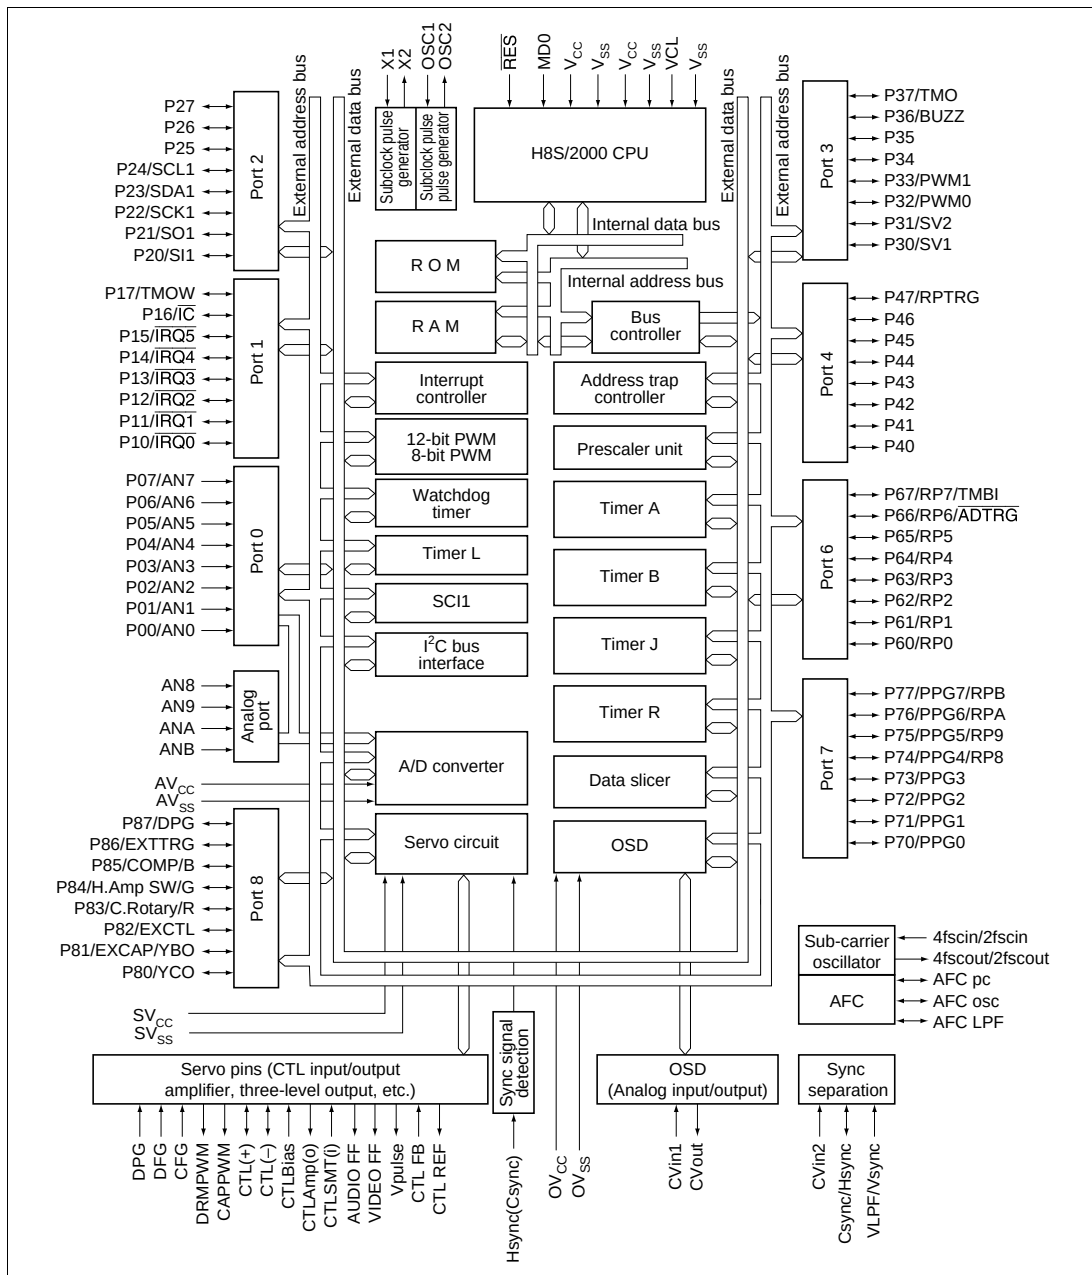


Figure 1.2 Internal Block Diagram of the H8S/2197S and H8S/2196S

## 1.3 Pin Arrangement and Functions

### 1.3.1 Pin Arrangement

Figure 1.3 shows the pin arrangement of the H8S/2199R Series.

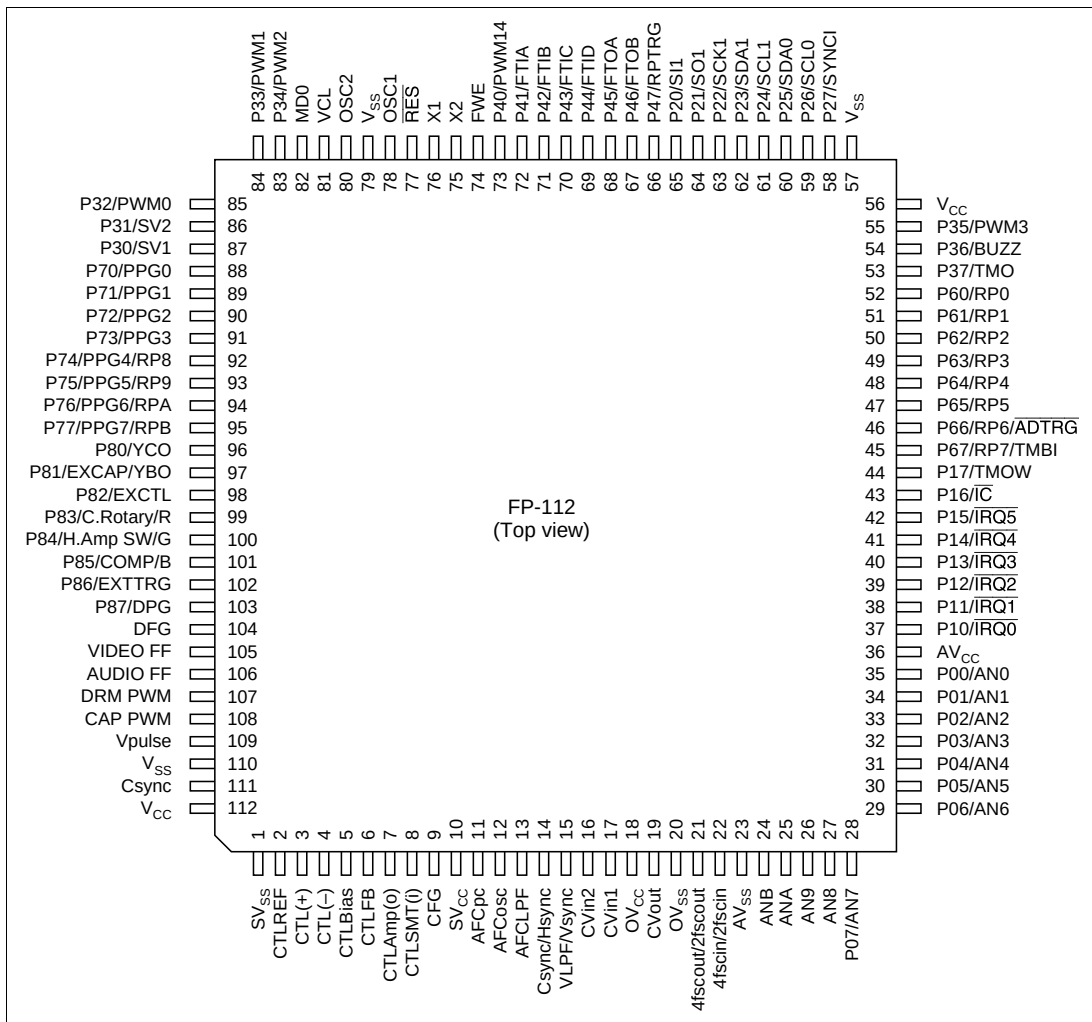


**Figure 1.3 Pin Arrangement of H8S/2199R Series (except for the H8S/2197S and H8S/2196S)**

Figure 1.4 shows the pin arrangement of the H8S/2197S and H8S/2196S.

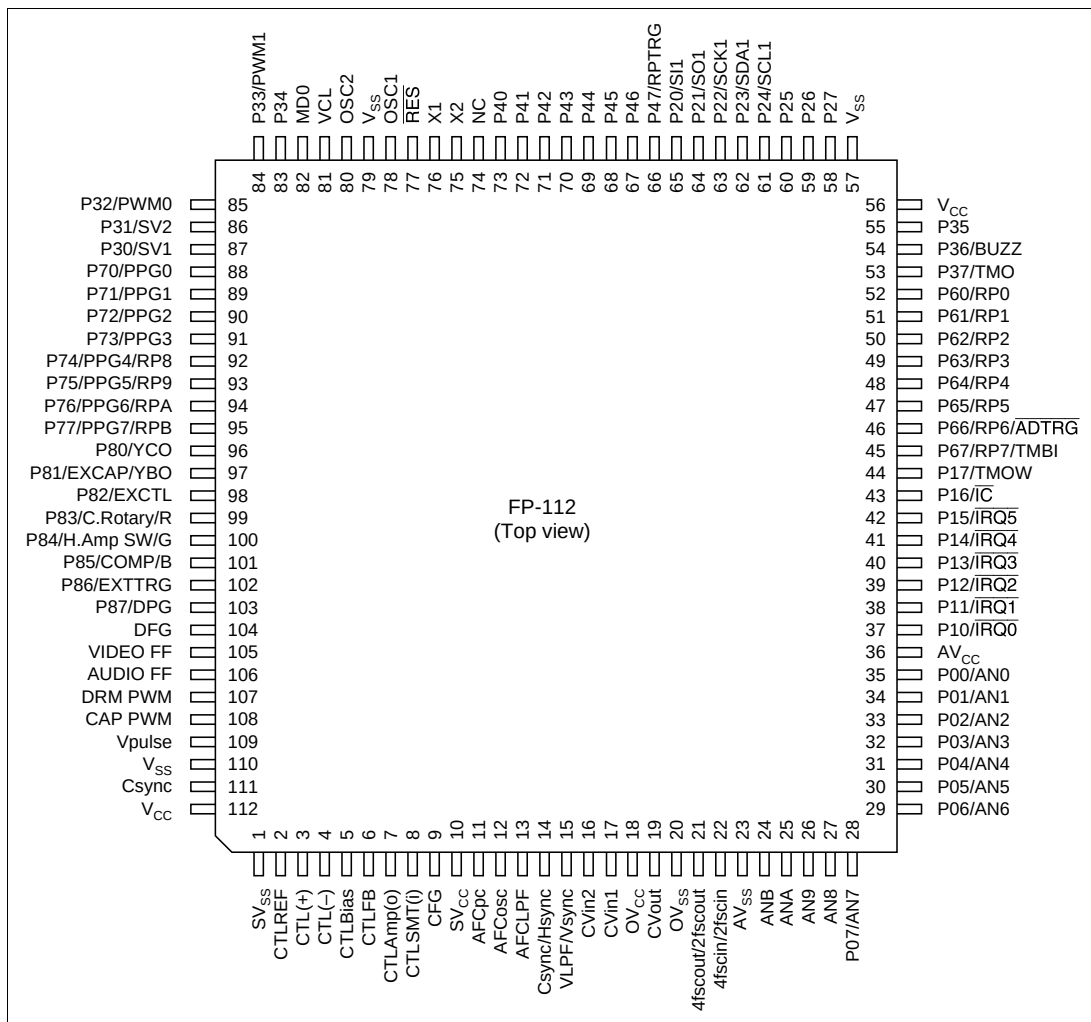


**Figure 1.4 Pin Arrangement of H8S/2197S and H8S/2196S**

### 1.3.2 Pin Functions

Table 1.2 summarizes the functions of the H8S/2199R Series pins.

**Table 1.2 Pin Functions**

| Type         | Symbol           | Pin No.     | I/O    | Name and Function                                                                                                                                                                               |
|--------------|------------------|-------------|--------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Power supply | V <sub>CC</sub>  | 56, 112     | Input  | Power supply:<br>All Vcc pins should be connected to the system power supply (+5V)                                                                                                              |
|              | V <sub>SS</sub>  | 57, 79, 110 | Input  | Ground:<br>All Vss pins should be connected to the system power supply (0V)                                                                                                                     |
|              | SV <sub>CC</sub> | 10          | Input  | Servo power supply:<br>SVcc pin should be connected to the servo analog power supply (+5V)                                                                                                      |
|              | SV <sub>SS</sub> | 1           | Input  | Servo ground:<br>SVss pin should be connected to the servo analog power supply (0V)                                                                                                             |
|              | AV <sub>CC</sub> | 36          | Input  | Analog power supply:<br>Power supply pin for A/D converter. It should be connected to the system power supply (+5V) when the A/D converter is not used                                          |
|              | AV <sub>SS</sub> | 23          | Input  | Analog ground:<br>Ground pin for A/D converter. It should be connected to the system power supply (0V)                                                                                          |
|              | OV <sub>CC</sub> | 18          | Input  | OSD power supply:<br>OV <sub>CC</sub> should be connected to the OSD analog power supply (+5 V)                                                                                                 |
|              | OV <sub>SS</sub> | 20          | Input  | OSD ground:<br>OV <sub>SS</sub> should be connected to the OSD analog power supply (0 V)                                                                                                        |
| Clock        | V <sub>CL</sub>  | 81          | Input  | Smoothing capacitor connection:<br>Connect 0.1-μF power-smoothing capacitance between V <sub>CL</sub> and V <sub>SS</sub>                                                                       |
|              | OSC1             | 78          | Input  | Connected to a crystal oscillator. It can also input an external clock. See section 9, Clock Pulse Generator, for typical connection diagrams for a crystal oscillator and external clock input |
|              | OSC2             | 80          | Output |                                                                                                                                                                                                 |
|              | X1               | 76          | Input  | Connected to a 32.768 kHz crystal oscillator. See section 9, Clock Pulse Generator, for typical connection diagrams                                                                             |
|              | X2               | 75          | Output |                                                                                                                                                                                                 |

| Type                   | Symbol                   | Pin No. | I/O    | Name and Function                                                                                                                                                          |
|------------------------|--------------------------|---------|--------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Operating mode control | MD0                      | 82      | Input  | Mode pin:<br>This pin sets the operating mode. This pin should not be changed while the MCU is in operation                                                                |
| System control         | $\overline{\text{RES}}$  | 77      | Input  | Reset input:<br>When this pin is driven low, the chip is reset                                                                                                             |
|                        | FWE                      | 74      | Input  | Flash memory enable:<br>Enables/disables flash memory programming. This pin is available only with MCU with flash memory on-chip.                                          |
| Interrupts             | $\overline{\text{IRQ0}}$ | 37      | Input  | External interrupt request 0:<br>External interrupt input pin for which rising edge sense, falling edge sense or both edges sense are selectable                           |
|                        | $\overline{\text{IRQ1}}$ | 38      | Input  | External interrupt requests 1 to 5:<br>External interrupt input pins for which rising or falling edge sense are selectable                                                 |
|                        | $\overline{\text{IRQ2}}$ | 39      |        |                                                                                                                                                                            |
|                        | $\overline{\text{IRQ3}}$ | 40      |        |                                                                                                                                                                            |
|                        | $\overline{\text{IRQ4}}$ | 41      |        |                                                                                                                                                                            |
|                        | $\overline{\text{IRQ5}}$ | 42      |        |                                                                                                                                                                            |
| Prescaler unit         | $\overline{\text{IC}}$   | 43      | Input  | Input capture input:<br>Input capture input pin for prescaler unit                                                                                                         |
|                        | TMOW                     | 44      | Output | Frequency division clock output:<br>Output pin for clock of which frequency is divided by prescaler                                                                        |
| Timers                 | TMBI                     | 45      | Input  | Timer B event input:<br>Input pin for events to be input to Timer B counter                                                                                                |
|                        | $\overline{\text{IRQ1}}$ | 38      | Input  | Timer J event input:<br>Input pin for events to be input to Timer J RDT-1 or RDT-2 counter                                                                                 |
|                        | $\overline{\text{IRQ2}}$ | 39      |        |                                                                                                                                                                            |
|                        | TMO                      | 53      | Output | Timer J timer output:<br>Output pin for toggle at underflow of RDT-1 of Timer J, or remote controlled transmit data                                                        |
|                        | BUZZ                     | 54      | Output | Timer J buzzer output:<br>Output pin for toggle which is selectable among fixed frequency, 1Hz frequency divided from subclock (32 kHz), and frequency division CTL signal |



| Type                                 | Symbol                   | Pin No. | I/O           | Name and Function                                                                                               |
|--------------------------------------|--------------------------|---------|---------------|-----------------------------------------------------------------------------------------------------------------|
| Timers                               | $\overline{\text{IRQ3}}$ | 40      | Input         | Timer R input capture:<br>Input pin for input capture of Timer R TMRU-1 or TMRU-2                               |
|                                      | FTOA*                    | 68      | Output        | Timer X1 output compare A and B output:<br>Output pin for output compare A and B of Timer X1                    |
|                                      | FTOB*                    | 67      |               |                                                                                                                 |
|                                      | FTIA*                    | 72      | Input         | Timer X1 input capture A, B, C and D input:<br>Input pin for input capture A, B, C and D of Timer X1            |
|                                      | FTIB*                    | 71      |               |                                                                                                                 |
|                                      | FTIC*                    | 70      |               |                                                                                                                 |
|                                      | FTID*                    | 69      |               |                                                                                                                 |
| PWM                                  | PWM0                     | 85      | Output        | 8-bit PWM square waveform output:<br>Output pin for waveform generated by 8-bit PWM 0, 1, 2 and 3               |
|                                      | PWM1                     | 84      |               |                                                                                                                 |
|                                      | PWM2*                    | 83      |               |                                                                                                                 |
|                                      | PWM3*                    | 55      |               |                                                                                                                 |
|                                      | PWM14*                   | 73      | Output        | 14-bit PWM square waveform output:<br>Output pin for waveform generated by 14-bit PWM                           |
| Serial communication interface (SCI) | SCK1                     | 63      | Input /output | SCI clock input/output:<br>Clock input pins for SCI 1                                                           |
|                                      | SI1                      | 65      | Input         | SCI receive data input:<br>Receive data input pins for SCI 1                                                    |
|                                      | SO1                      | 64      | Output        | SCI transmit data output:<br>Transmit data output pins for SCI 1                                                |
| I <sup>2</sup> C bus interface       | SCL0*                    | 59      | Input         | I <sup>2</sup> C bus interface clock input/output:<br>Clock input/output pin for I <sup>2</sup> C bus interface |
|                                      | SCL1                     | 61      | /output       |                                                                                                                 |
|                                      | SDA0*                    | 60      | Input         | I <sup>2</sup> C bus interface data input/output:<br>Data input/output pin for I <sup>2</sup> C bus interface   |
|                                      | SDA1                     | 62      | /output       |                                                                                                                 |
|                                      | SYNCl*                   | 58      | Input         | I <sup>2</sup> C bus interface clock input:<br>I <sup>2</sup> C formatless serial clock input                   |

| Type           | Symbol                   | Pin No.              | I/O              | Name and Function                                                                                                                                 |
|----------------|--------------------------|----------------------|------------------|---------------------------------------------------------------------------------------------------------------------------------------------------|
| A/D converter  | AN7 to AN0               | 28 to 35             | Input            | Analog input channels 7 to 0:<br>Analog data input pins. A/D conversion is started by a software triggering                                       |
|                | AN8<br>AN9<br>ANA<br>ANB | 27<br>26<br>25<br>24 | Input            | Analog input channels 8, 9, A and B:<br>Analog data input pins. A/D conversion is started by an external trigger, a hardware trigger, or software |
|                | ADTRG                    | 46                   | Input            | A/D conversion external trigger input:<br>A/D conversion for analog data input pins 8, 9, A, and B is started by an external trigger              |
|                |                          |                      |                  |                                                                                                                                                   |
| Servo circuits | AUDIO FF                 | 106                  | Output           | Audio FF:<br>Output pin for audio head switching signal                                                                                           |
|                | VIDEO FF                 | 105                  | Output           | Video FF:<br>Output pin for video head switching signal                                                                                           |
|                | CAPPWM                   | 108                  | Output           | Capstan mix:<br>12-bit PWM output pin giving result of capstan speed error and phase error after filtering                                        |
|                | DRMPWM                   | 107                  | Output           | Drum mix:<br>12-bit PWM output pin giving result of drum speed error and phase error after filtering                                              |
|                | Vpulse                   | 109                  | Output           | Additional V pulse:<br>Three-level output pin for additional V signal synchronized to the VIDEO FF signal                                         |
|                | C.Rotary                 | 99                   | Output           | Color rotary signal:<br>Output pin for color signal processing control signal in four-head special-effects playback                               |
|                | H.AmpSW                  | 100                  | Output           | Head-amp switch:<br>Output pin for preamplifier output select signal in four-head special-effects playback.                                       |
|                | COMP                     | 101                  | Input            | Compare input:<br>Input pin for signal giving the result of preamplifier output comparison in four-head special-effects playback.                 |
|                |                          |                      |                  |                                                                                                                                                   |
|                | CTL (+)<br>CTL (-)       | 3<br>4               | Input<br>/output | CTL head (+) and (-) pins:<br>I/O pins for CTL signals                                                                                            |
|                | CTL Bias                 | 5                    | Input            | CTL primary amp bias supply:<br>Bias supply pin for CTL primary amp                                                                               |

| Type           | Symbol       | Pin No.  | I/O    | Name and Function                                                                                                        |
|----------------|--------------|----------|--------|--------------------------------------------------------------------------------------------------------------------------|
| Servo circuits | CTL Amp (o)  | 7        | Output | CTL amp output:<br>Output pin for CTL amp                                                                                |
|                | CTL SMT (I)  | 8        | Input  | CTL Schmitt amp input:<br>Input pin for CTL Schmitt amp                                                                  |
|                | CTLFB        | 6        | Input  | CLT feedback input:<br>Input pin for CTL amp high-range characteristics control                                          |
|                | CTLREF       | 2        | Output | CTL amp reference voltage output:<br>Output pin for 1/2Vcc (SV)                                                          |
|                | CFG          | 9        | Input  | Capstan FG input:<br>Schmitt comparator input pin for CFG signal                                                         |
|                | DFG          | 104      | Input  | Drum FG input:<br>Schmitt input pin for DFG signal                                                                       |
|                | DPG          | 103      | Input  | Drum PG input:<br>Schmitt input pin for DPG signal                                                                       |
|                | EXCTL        | 98       | Input  | External CTL input:<br>Input pin for external CTL signal                                                                 |
|                | Csync        | 111      | Input  | Mixed sync signal input:<br>Input pin for mixed sync signal                                                              |
|                | EXCAP        | 97       | Input  | Capstan external sync signal input:<br>Signal input pin for external synchronization of capstan phase control            |
|                | EXTTRG       | 102      | Input  | External trigger signal input:<br>Signal input pin for synchronization with reference signal generator                   |
|                | SV1          | 87       | Output | Servo monitor output pin 1:<br>Output pin for servo module internal signal                                               |
|                | SV2          | 86       | Output | Servo monitor output pin 2:<br>Output pin for servo module internal signal                                               |
|                | PPG7 to PPG0 | 95 to 88 | Output | PPG:<br>Output pin for HSW timing generator. To be used when head switching is required as well as AUDIO FF and VIDEO FF |

| Type           | Symbol                  | Pin No. | I/O              | Name and Function                                                                                                                                             |
|----------------|-------------------------|---------|------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Sync separator | Csync/<br>Hsync         | 14      | Input/<br>output | Sync signal input/output:<br>Composite sync signal input/output or horizontal sync signal input                                                               |
|                | VLPF/<br>Vsync          | 15      | Input            | Sync signal input:<br>Pin for connecting external LPF for vertical sync signal or input pin for vertical sync signal                                          |
|                | AFC pc                  | 11      | Input/<br>output | AFC oscillation:<br>Pin for connecting external circuit for AFC oscillation                                                                                   |
|                | AFC osc                 | 12      | Input/<br>output | AFC oscillation:<br>Pin for connecting external circuit for AFC oscillation                                                                                   |
|                | AFC LPF                 | 13      | Input/<br>output | Pin for connecting external LPF for AFC                                                                                                                       |
|                | 4 fsc in/<br>2 fsc in   | 22      | Input            | fsc oscillation:<br>Input pin for subcarrier oscillator. 4fsc or 2fsc can be selected<br>fsc: Subcarrier frequency                                            |
|                | 4 fsc out/<br>2 fsc out | 21      | Output           | fsc oscillation:<br>Output pin for subcarrier oscillator. 4fsc or 2fsc can be selected<br>fsc: Subcarrier frequency                                           |
| OSD            | CVin2                   | 16      | Input            | Composite video input:<br>Composite video signal input. Input 2-Vp-p composite video signal, and the sync tip of the signal is clamped to about 2.0 V         |
|                | CVin1                   | 17      | Input            | Composite video input:<br>Composite video signal input for OSD. Input 2-Vp-p composite video signal, and the sync tip of the signal is clamped to about 1.4 V |
|                | CVout                   | 19      | Output           | Composite video output:<br>Composite video signal output for OSD. 2-Vp-p composite video signal is output                                                     |
|                | R                       | 99      | Output           | OSD digital output:<br>Color signal R output                                                                                                                  |
|                | G                       | 100     | Output           | OSD digital output:<br>Color signal G output                                                                                                                  |
|                | B                       | 101     | Output           | OSD digital output:<br>Color signal B output                                                                                                                  |

| Type        | Symbol     | Pin No.              | I/O              | Name and Function                                                                                                                                      |
|-------------|------------|----------------------|------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------|
| OSD         | YCO        | 96                   | Output           | OSD digital output:<br>Character data output                                                                                                           |
|             | YBO        | 97                   | Output           | OSD digital output:<br>Character display position output                                                                                               |
| Data slicer | CVin2      | 16                   | Input            | Composite video input:<br>Composite video signal input. Input 2-Vp-p composite video signal, and the sync tip of the signal is clamped to about 2.0 V. |
| I/O port    | P07 to P00 | 28 to 35             | Input            | Port 0:<br>8-bit input pins                                                                                                                            |
|             | P17 to P10 | 44 to 37             | Input<br>/output | Port 1:<br>8-bit I/O pins                                                                                                                              |
|             | P27 to P20 | 58 to 65             | Input<br>/output | Port 2:<br>8-bit I/O pins                                                                                                                              |
|             | P37 to P30 | 53 to 55<br>83 to 87 | Input<br>/output | Port 3:<br>8-bit I/O pins                                                                                                                              |
|             | P47 to P40 | 66 to 73             | Input<br>/output | Port 4:<br>8-bit I/O pins                                                                                                                              |
|             | P67 to P60 | 45 to 52             | Input<br>/output | Port 6:<br>8-bit I/O pins                                                                                                                              |
|             | P77 to P70 | 95 to 88             | Input<br>/output | Port 7:<br>8-bit I/O pins                                                                                                                              |
|             | P87 to P80 | 103 to<br>96         | Input<br>/output | Port 8:<br>8-bit I/O pins                                                                                                                              |
|             | RP7 to RP0 | 45 to 52             | Output           | Realtime output port:<br>8-bit realtime output pins                                                                                                    |
|             | RPB to RP8 | 95 to 92             | Output           | Realtime output port:<br>4-bit realtime output pins                                                                                                    |
|             | RPTRG      | 66                   | Input            | Realtime output port trigger input:<br>Input pin for realtime output port trigger                                                                      |

Note: \* Not available in the H8S/2197S or H8S/2196S.



# Section 2 CPU

## 2.1 Overview

The H8S/2000 CPU is a high-speed central processing unit with an internal 32-bit architecture that is upward-compatible with the H8/300 and H8/300H CPUs. The H8S/2000 CPU has sixteen 16-bit general registers, can address a 16-Mbyte (architecturally 4-Gbyte) linear address space, and is ideal for realtime control.

### 2.1.1 Features

The H8S/2000 CPU has the following features.

- Upward-compatible with H8/300 and H8/300H CPUs  
Can execute H8/300 and H8/300H object programs
- General-register architecture  
Sixteen 16-bit general registers (also usable as sixteen 8-bit registers or eight 32-bit registers)
- Sixty-five basic instructions  
8/16/32-bit arithmetic and logic instructions  
Multiply and divide instructions  
Powerful bit-manipulation instructions
- Eight addressing modes  
Register direct [Rn]  
Register indirect [@ERn]  
Register indirect with displacement [@(d:16,ERn) or @(d:32,ERn)]  
Register indirect with post-increment or pre-decrement [@ERn+ or @-ERn]  
Absolute address [@aa:8, @aa:16, @aa:24, or @aa:32]  
Immediate [#xx:8, #xx:16, or #xx:32]  
Program-counter relative [@(d:8,PC) or @(d:16,PC)]  
Memory indirect [@@aa:8]
- 16-Mbyte address space  
Program: 16 Mbytes  
Data: 16 Mbytes (4 Gbytes architecturally)
- High-speed operation  
All frequently-used instructions execute in one or two states  
Maximum clock rate: 10 MHz  
8/16/32-bit register-register add/subtract: 100 ns  
8 × 8-bit register-register multiply: 1200 ns

16 ÷ 8-bit register-register divide: 1200 ns  
 16 × 16-bit register-register multiply: 2000 ns  
 32 ÷ 16-bit register-register divide: 2000 ns

- Two CPU operating modes  
Normal mode\*/Advanced mode
- Power-down state  
Transition to power-down state by SLEEP instruction  
CPU clock speed selection

Note: \* Normal mode is not available for this LSI.

### 2.1.2 Differences between H8S/2600 CPU and H8S/2000 CPU

The differences between the H8S/2600 CPU and the H8S/2000 CPU are shown below.

- Register configuration  
The MAC register is supported only by the H8S/2600 CPU.
- Basic instructions  
The four instructions MAC, CLRMAC, LDMAC, and STMAC are supported only by the H8S/2600 CPU.
- Number of execution states  
The number of execution states of the MULXU and MULXS instructions differ as follows.

| Instruction | Mnemonic        | Number of Execution States |          |
|-------------|-----------------|----------------------------|----------|
|             |                 | H8S/2600                   | H8S/2000 |
| MULXU       | MULXU.B Rs, Rd  | 3                          | 12       |
|             | MULXU.W Rs, Erd | 4                          | 20       |
| MULXS       | MULXS.B Rs, Rd  | 4                          | 13       |
|             | MULXS.W Rs, Erd | 5                          | 21       |

There are also differences in the address space, EXR register functions, power-down state, etc., depending on the product.

### 2.1.3 Differences from H8/300 CPU

In comparison to the H8/300 CPU, the H8S/2000 CPU has the following enhancements.

- More general registers and control registers  
Eight 16-bit extended registers, and one 8-bit control register, have been added.



- Expanded address space  
Normal mode supports the same 64-kbyte address space as the H8/300 CPU.  
Advanced mode supports a maximum 16-Mbyte address space.
- Enhanced addressing mode  
The addressing modes have been enhanced to make effective use of the 16-Mbyte address space.
- Enhanced instructions  
Addressing modes of bit-manipulation instructions have been enhanced.  
Signed multiply and divide instructions have been added.  
Two-bit shift instructions have been added.  
Instructions for saving and restoring multiple registers have been added.  
A test and set instruction has been added.
- Higher speed  
Basic instructions execute twice as fast.

#### **2.1.4 Differences from H8/300H CPU**

In comparison to the H8/300H CPU, the H8S/2000 CPU has the following enhancements.

- Additional control register  
One 8-bit control register has been added.
- Enhanced instructions  
Addressing modes of bit-manipulation instructions have been enhanced.  
Two-bit shift instructions have been added.  
Instructions for saving and restoring multiple registers have been added.  
A test and set instruction has been added.
- Higher speed  
Basic instructions execute twice as fast.

## 2.2 CPU Operating Modes

The H8S/2000 CPU has two operating modes: normal and advanced. Normal mode supports a maximum 64-kbyte address space. Advanced mode supports a maximum 16-Mbyte total address space (architecturally the maximum total address space is 4 Gbytes, with a maximum of 16 Mbytes for the program area and a maximum of 4 Gbytes for the data area).

The mode is selected by the mode pins of the microcontroller.

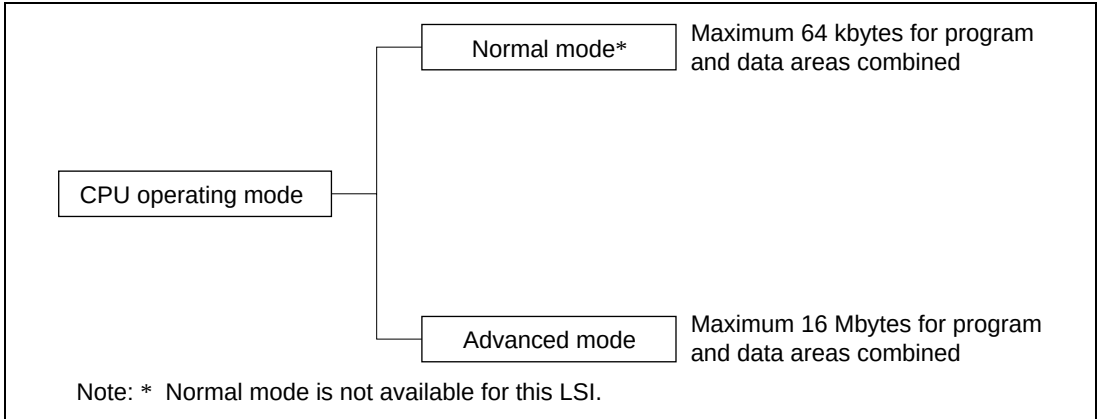


**Figure 2.1 CPU Operating Modes**

### 2.2.1 Normal Mode (Not available for this LSI)

The exception vector table and stack have the same structure as in the H8/300 CPU.

#### (1) Address Space

A maximum address space of 64 kbytes can be accessed.

#### (2) Extended Registers (En)

The extended registers (E0 to E7) can be used as 16-bit registers, or as the upper 16-bit segments of 32-bit registers. When En is used as a 16-bit register it can contain any value, even when the corresponding general register (Rn) is used as an address register. If the general register is referenced in the register indirect addressing mode with pre-decrement (@-Rn) or post-increment (@Rn+) and a carry or borrow occurs, however, the value in the corresponding extended register (En) will be affected.

#### (3) Instruction Set

All instructions and addressing modes can be used. Only the lower 16 bits of effective addresses (EA) are valid.

#### (4) Exception Vector Table and Memory Indirect Branch Addresses

In normal mode the top area starting at H'0000 is allocated to the exception vector table. One branch address is stored per 16 bits. The configuration of the exception vector table in normal mode is shown in figure 2.2. For details of the exception vector table, see section 5, Exception Handling.

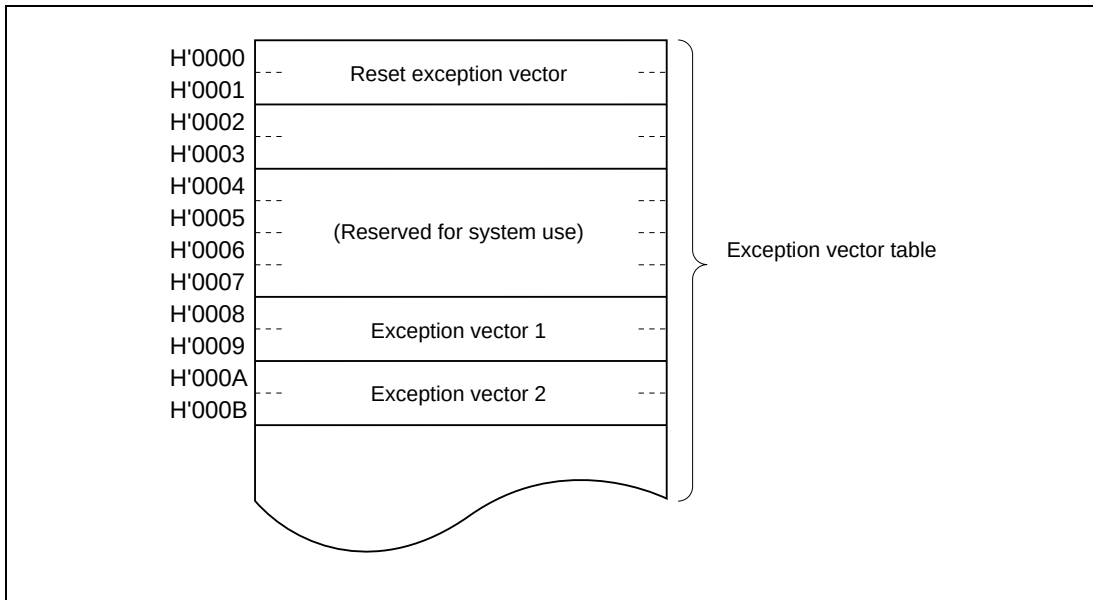


**Figure 2.2 Exception Vector Table (Normal Mode)**

The memory indirect addressing mode (@@aa:8) employed in the JMP and JSR instructions uses an 8-bit absolute address included in the instruction code to specify a memory operand that contains a branch address. In normal mode the operand is a 16-bit word operand, providing a 16-bit branch address. Branch addresses can be stored in the top area from H'0000 to H'00FF. Note that this area is also used for the exception vector table.

## (5) Stack Structure

When the program counter (PC) is pushed onto the stack in a subroutine call, and the PC and condition-code register (CCR) are pushed onto the stack in exception handling, they are stored as shown in figure 2.3. The extended control register (EXR) is not pushed onto the stack. For details, see section 5, Exception Handling.

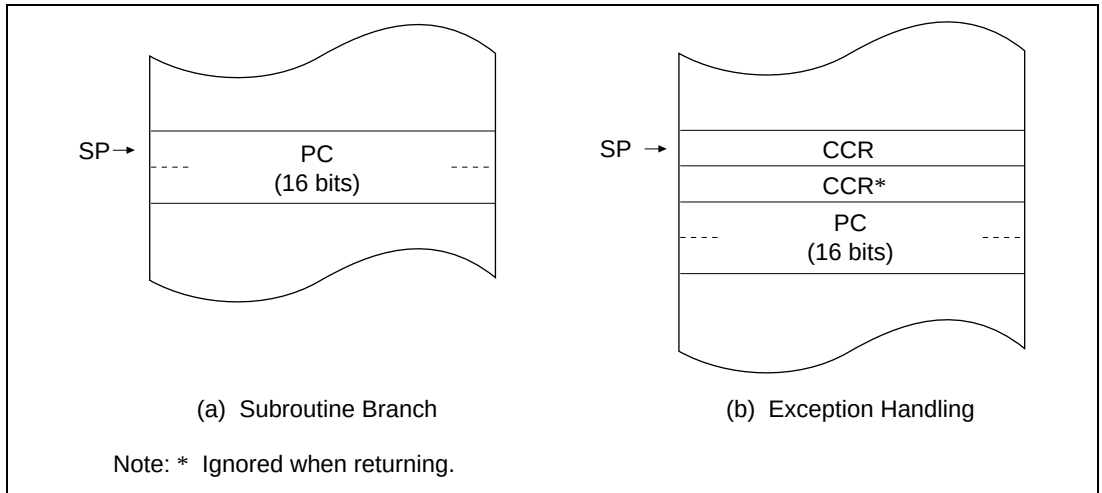


**Figure 2.3 Stack Structure in Normal Mode**

### 2.2.2 Advanced Mode

#### (1) Address Space

Linear access is provided to a 16-Mbyte maximum address space (architecturally a maximum 16-Mbyte program area and a maximum 4-Gbyte data area, with a maximum of 4 Gbytes for program and data areas combined).

#### (2) Extended Registers (En)

The extended registers (E0 to E7) can be used as 16-bit registers, or as the upper 16-bit segments of 32-bit registers or address registers.

#### (3) Instruction Set

All instructions and addressing modes can be used.

#### (4) Exception Vector Table and Memory Indirect Branch Addresses

In advanced mode the top area starting at H'00000000 is allocated to the exception vector table in units of 32 bits. In each 32 bits, the upper 8 bits are ignored and a branch address is stored in the lower 24 bits (figure 2.4). For details of the exception vector table, see section 5, Exception Handling.

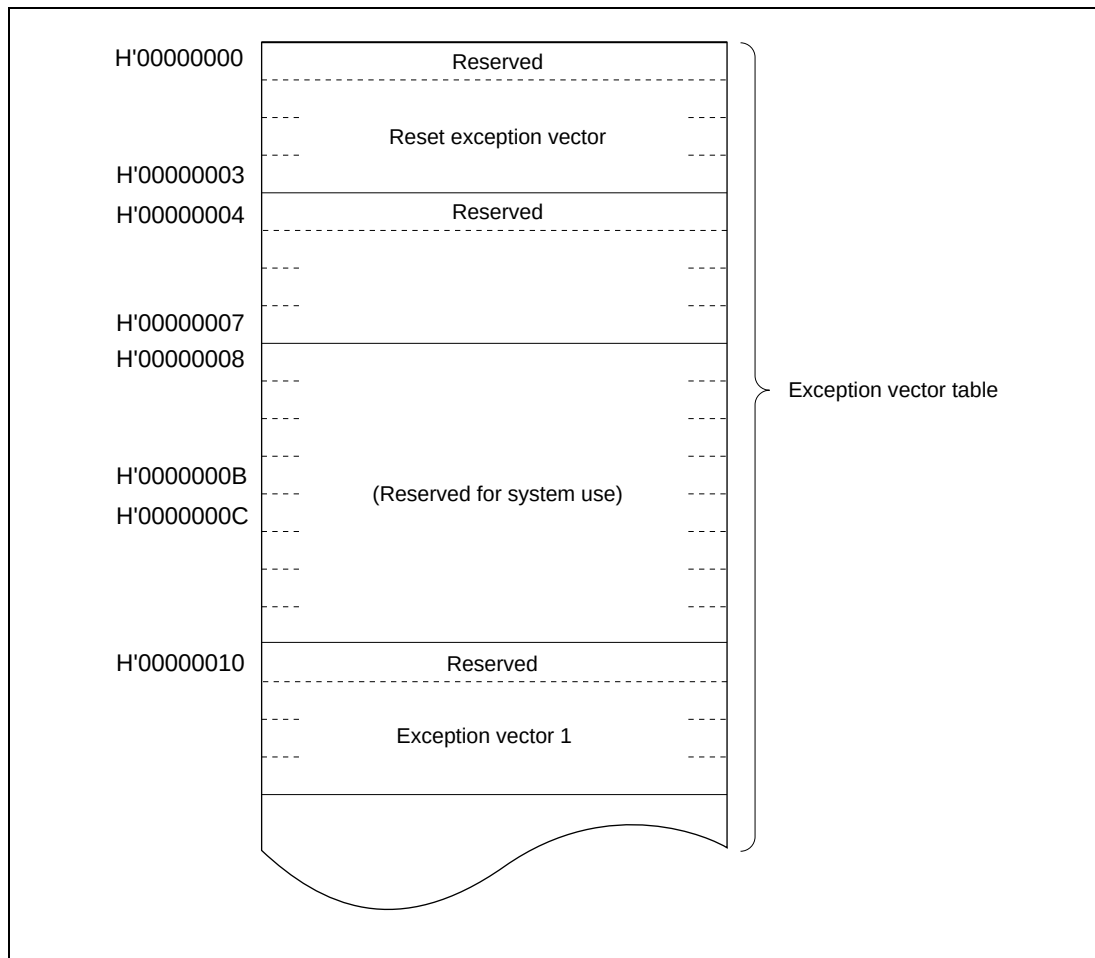


**Figure 2.4 Exception Vector Table (Advanced Mode)**

The memory indirect addressing mode (@@aa:8) employed in the JMP and JSR instructions uses an 8-bit absolute address included in the instruction code to specify a memory operand that contains a branch address. In advanced mode the operand is a 32-bit longword operand, providing a 32-bit branch address. The upper 8 bits of these 32 bits are a reserved area that is regarded as H'00. Branch addresses can be stored in the area from H'00000000 to H'000000FF. Note that the first part of this range is also the exception vector table.

## (5) Stack Structure

In advanced mode, when the program counter (PC) is pushed onto the stack in a subroutine call, and the PC and condition-code register (CCR) are pushed onto the stack in exception handling, they are stored as shown in figure 2.5. The extended control register (EXR) is not pushed onto the stack. For details, see section 5, Exception Handling.

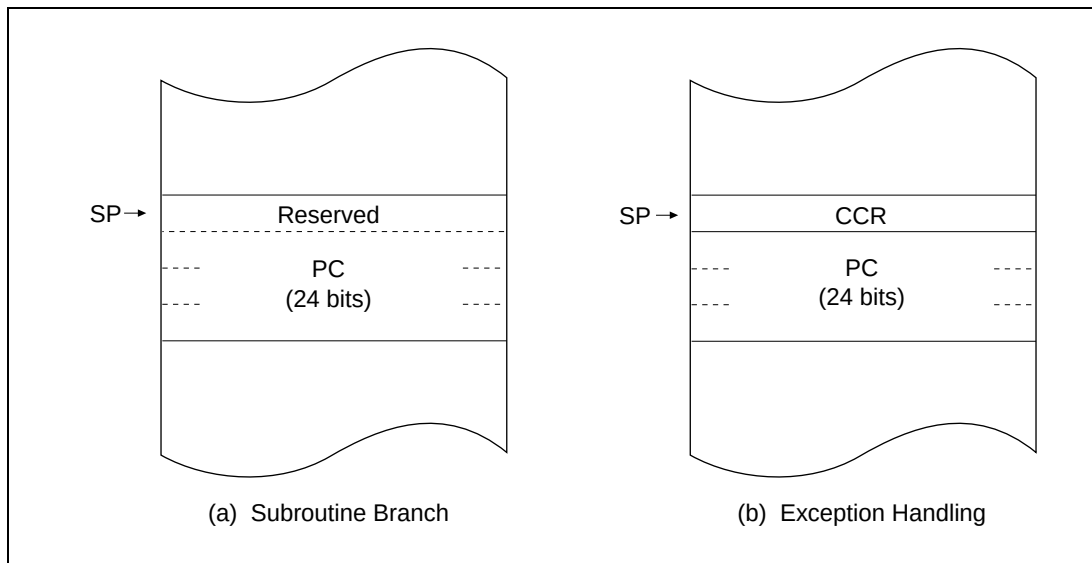


**Figure 2.5 Stack Structure in Advanced Mode**

### 2.3 Address Space

Figure 2.6 shows a memory map of the H8S/2000 CPU. The H8S/2000 CPU provides linear access to a maximum 64-kbyte address space in normal mode, and a maximum 16-Mbyte (architecturally 4-Gbyte) address space in advanced mode.

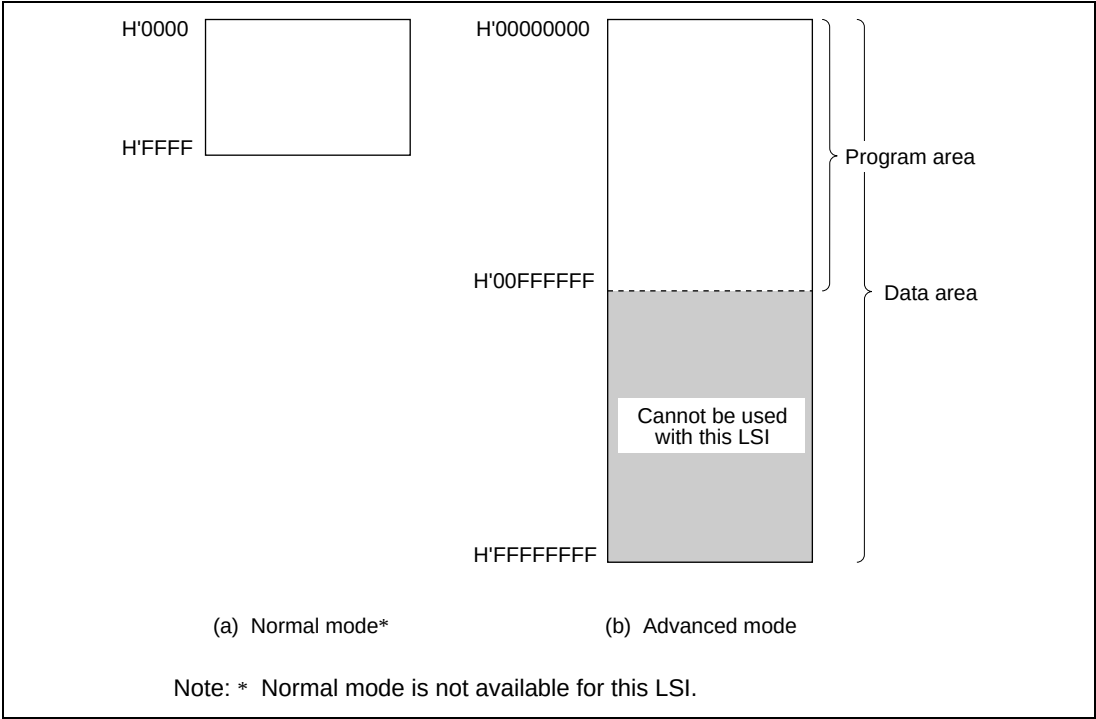


Figure 2.6 Memory Map

## 2.4 Register Configuration

### 2.4.1 Overview

The CPU has the internal registers shown in figure 2.7. There are two types of registers: general registers and control registers.

#### General Registers (Rn) and Extended Registers (En)

|          | 15 | 0 7 | 0 7 | 0 |
|----------|----|-----|-----|---|
| ER0      | E0 | R0H | R0L |   |
| ER1      | E1 | R1H | R1L |   |
| ER2      | E2 | R2H | R2L |   |
| ER3      | E3 | R3H | R3L |   |
| ER4      | E4 | R4H | R4L |   |
| ER5      | E5 | R5H | R5L |   |
| ER6      | E6 | R6H | R6L |   |
| ER7 (SP) | E7 | R7H | R7L |   |

#### Control Registers (CR)

| 23 | 0 |
|----|---|
| PC |   |

| 7    | 6 | 5 | 4 | 3 | 2  | 1  | 0  |
|------|---|---|---|---|----|----|----|
| EXR* | T | - | - | - | I2 | I1 | I0 |

|     | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
|-----|---|---|---|---|---|---|---|---|
| CCR | I | U | H | U | N | Z | V | C |

#### Legend:

SP : Stack pointer  
PC : Program counter  
EXR : Extended control register  
T : Trace bit  
I2 to I0 : Interrupt mask bits  
CCR : Condition-code register  
I : Interrupt mask bit  
UI : User bit or interrupt mask bit

H : Half-carry flag  
U : User bit  
N : Negative flag  
Z : Zero flag  
V : Overflow flag  
C : Carry flag

Note: \* Does not affect operation in this LSI.

**Figure 2.7 CPU Registers**



## 2.4.2 General Registers

The CPU has eight 32-bit general registers. These general registers are all functionally alike and can be used as both address registers and data registers. When a general register is used as a data register, it can be accessed as a 32-bit, 16-bit, or 8-bit register. When the general registers are used as 32-bit registers or address registers, they are designated by the letters ER (ER0 to ER7).

The ER registers divide into 16-bit general registers designated by the letters E (E0 to E7) and R (R0 to R7). These registers are functionally equivalent, providing a maximum of sixteen 16-bit registers. The E registers (E0 to E7) are also referred to as extended registers.

The R registers divide into 8-bit general registers designated by the letters RH (R0H to R7H) and RL (R0L to R7L). These registers are functionally equivalent, providing a maximum of sixteen 8-bit registers.

Figure 2.8 illustrates the usage of the general registers. The usage of each register can be selected independently.

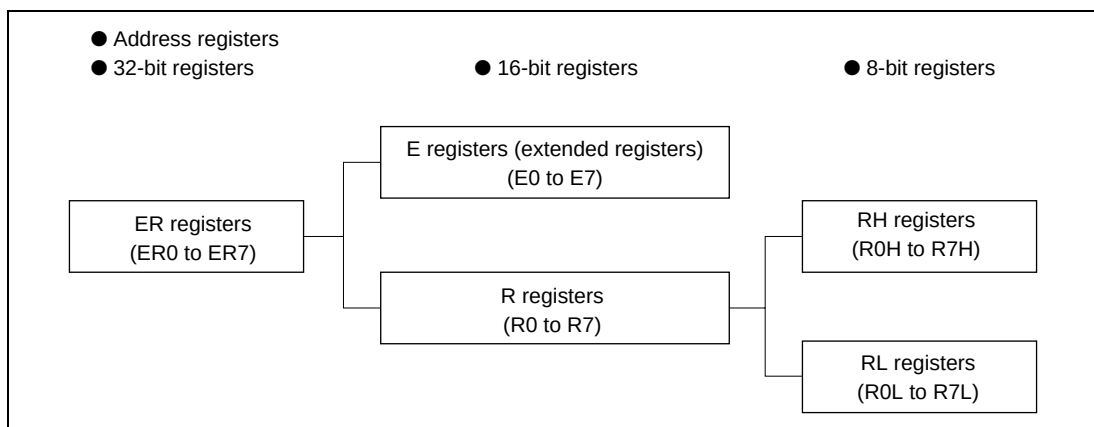


**Figure 2.8 Usage of General Registers**

General register ER7 has the function of stack pointer (SP) in addition to its general-register function, and is used implicitly in exception handling and subroutine calls. Figure 2.9 shows the stack.

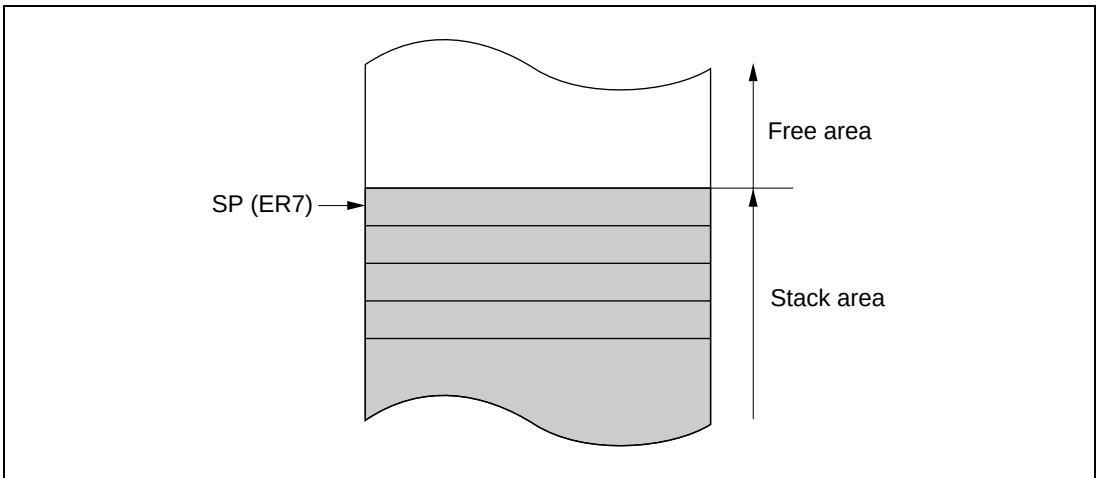


**Figure 2.9 Stack**

### 2.4.3 Control Registers

The control registers are the 24-bit program counter (PC), 8-bit extended control register (EXR), and 8-bit condition-code register (CCR).

#### (1) Program Counter (PC)

This 24-bit counter indicates the address of the next instruction the CPU will execute. The length of all CPU instructions is 2 bytes (one word), so the least significant PC bit is ignored. (When an instruction is fetched, the least significant PC bit is regarded as 0.)

#### (2) Extended Control Register (EXR)

An 8-bit register. In this LSI, this register does not affect operation.

##### **Bit 7: Trace Bit (T)**

This bit is reserved. In this LSI, this bit does not affect operation.

##### **Bits 6 to 3: Reserved**

These bits are reserved. They are always read as 1.

##### **Bits 2 to 0: Interrupt Mask Bits (I2 to I0)**

These bits are reserved. In this LSI, these bits do not affect operation.

#### (3) Condition: Code Register (CCR)

This 8-bit register contains internal CPU status information, including an interrupt mask bit (I) and half-carry (H), negative (N), zero (Z), overflow (V), and carry (C) flags.

##### **Bit 7: Interrupt Mask Bit (I)**

Masks interrupts other than NMI when set to 1. (NMI is accepted regardless of the I bit setting.) The I bit is set to 1 by hardware at the start of an exception-handling sequence. For details, see section 6, Interrupt Controller.

**Bit 6: User Bit or Interrupt Mask Bit (UI)**

Can be written and read by software using the LDC, STC, ANDC, ORC, and XORC instructions. This bit can also be used as an interrupt mask bit. For details, see section 6, Interrupt Controller.

**Bit 5: Half-Carry Flag (H)**

When the ADD.B, ADDX.B, SUB.B, SUBX.B, CMP.B, or NEG.B instruction is executed, this flag is set to 1 if there is a carry or borrow at bit 3, and cleared to 0 otherwise. When the ADD.W, SUB.W, CMP.W, or NEG.W instruction is executed, the H flag is set to 1 if there is a carry or borrow at bit 11, and cleared to 0 otherwise. When the ADD.L, SUB.L, CMP.L, or NEG.L instruction is executed, the H flag is set to 1 if there is a carry or borrow at bit 27, and cleared to 0 otherwise.

**Bit 4: User Bit (U)**

Can be written and read by software using the LDC, STC, ANDC, ORC, and XORC instructions.

**Bit 3: Negative Flag (N)**

Stores the value of the most significant bit (sign bit) of data.

**Bit 2: Zero Flag (Z)**

Set to 1 to indicate zero data, and cleared to 0 to indicate non-zero data.

**Bit 1: Overflow Flag (V)**

Set to 1 when an arithmetic overflow occurs, and cleared to 0 otherwise.

**Bit 0: Carry Flag (C)**

Set to 1 when a carry occurs, and cleared to 0 otherwise. Used by:

- (a) Add instructions, to indicate a carry
- (b) Subtract instructions, to indicate a borrow
- (c) Shift and rotate instructions, to store the carry

The carry flag is also used as a bit accumulator by bit-manipulation instructions.

Some instructions leave some or all of the flag bits unchanged. For the action of each instruction on the flag bits, see section 29, Appendix A.1, List of Instructions.

Operations can be performed on the CCR bits by the LDC, STC, ANDC, ORC, and XORC instructions. The N, Z, V, and C flags are used as branching conditions for conditional branch (Bcc) instructions.

## 2.4.4 Initial Register Values

Reset exception handling loads the CPU's program counter (PC) from the vector table, clears the trace bit in EXR to 0, and sets the interrupt mask bits in CCR and EXR to 1. The other CCR bits and the general registers are not initialized. In particular, the stack pointer (ER7) is not initialized. The stack pointer should therefore be initialized by an MOV.L instruction executed immediately after a reset.

2.5 Data Formats

The CPU can process 1-bit, 4-bit (BCD), 8-bit (byte), 16-bit (word), and 32-bit (longword) data. Bit-manipulation instructions operate on 1-bit data by accessing bit n (n = 0, 1, 2, ..., 7) of byte operand data. The DAA and DAS decimal-adjust instructions treat byte data as two digits of 4-bit BCD data.

2.5.1 General Register Data Formats

Figure 2.10 shows the data formats in general registers.

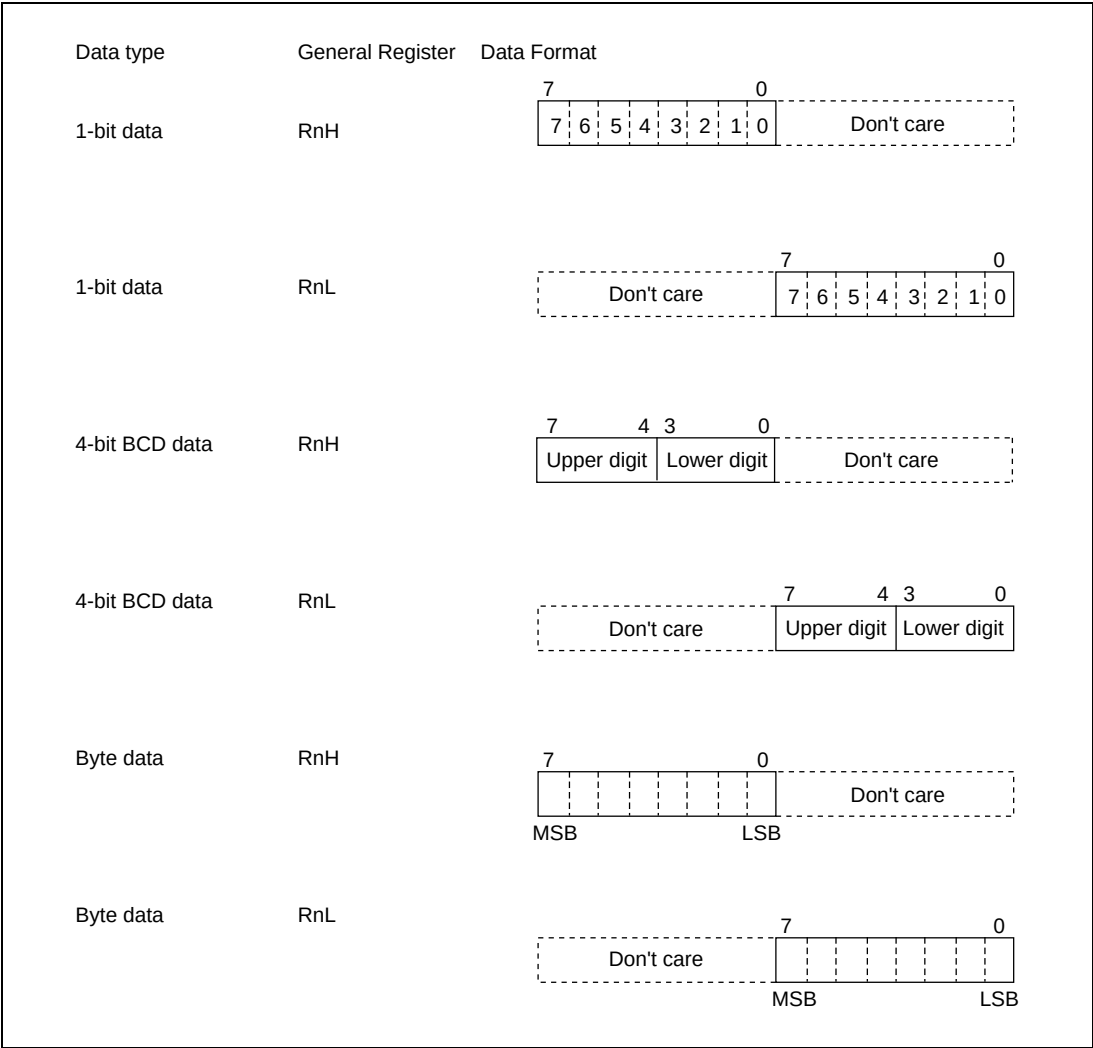


Figure 2.10 General Register Data Formats (1)

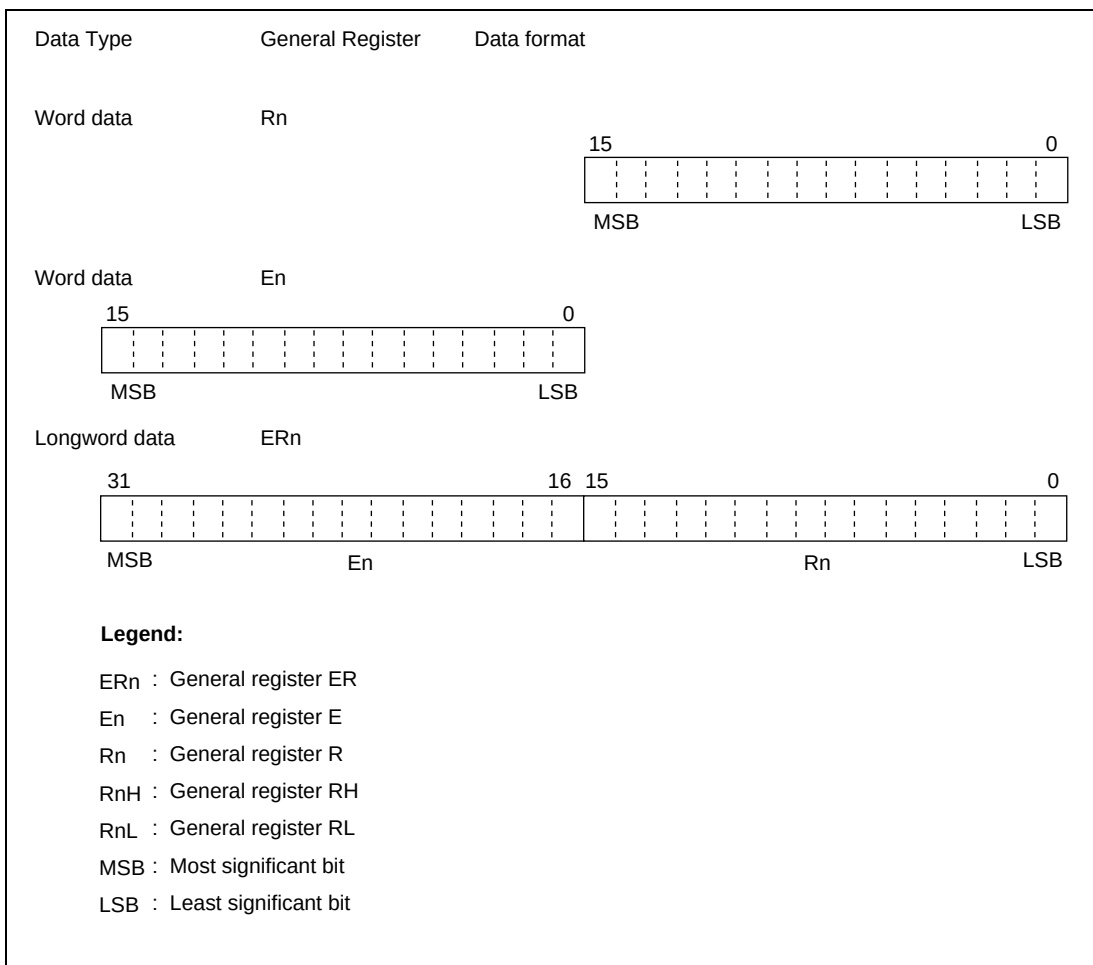


**Figure 2.11 General Register Data Formats (2)**

2.5.2 Memory Data Formats

Figure 2.12 shows the data formats in memory.

The CPU can access word data and longword data in memory, but word or longword data must begin at an even address. If an attempt is made to access word or longword data at an odd address, no address error occurs but the least significant bit of the address is regarded as 0, so the access starts at the preceding address. This also applies to instruction fetches.

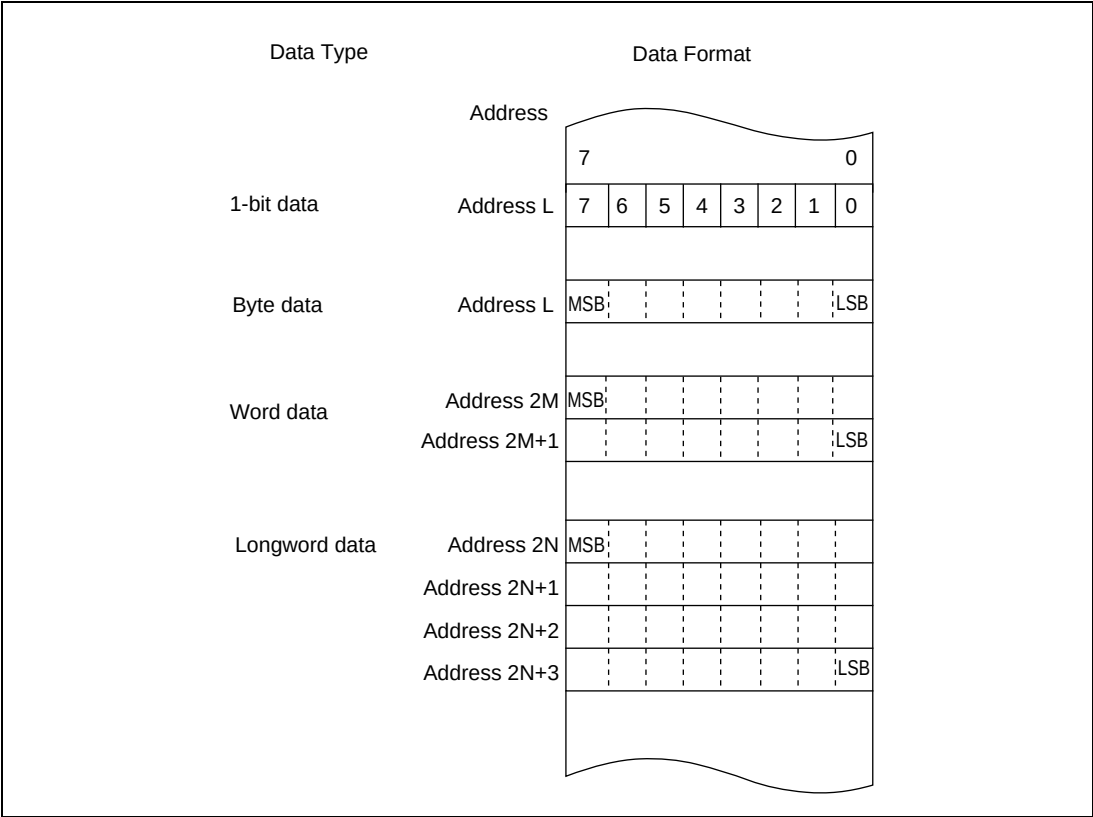


Figure 2.12 Memory Data Formats

When ER7 (SP) is used as an address register to access the stack, the operand size should be word size or longword size.

## 2.6 Instruction Set

### 2.6.1 Overview

The H8S/2000 CPU has 65 types of instructions. The instructions are classified by function in table 2.1.

**Table 2.1 Instruction Classification**

| Function            | Instructions                                                                      | Size | Types |
|---------------------|-----------------------------------------------------------------------------------|------|-------|
| Data transfer       | MOV                                                                               | BWL  | 5     |
|                     | POP* <sup>1</sup> , PUSH* <sup>1</sup>                                            | WL   |       |
|                     | LDM* <sup>5</sup> , STM* <sup>5</sup>                                             | L    |       |
|                     | MOVFP* <sup>3</sup> , MOVTPE* <sup>3</sup>                                        | B    |       |
| Arithmetic          | ADD, SUB, CMP, NEG                                                                | BWL  | 19    |
|                     | ADDX, SUBX, DAA, DAS                                                              | B    |       |
|                     | INC, DEC                                                                          | BWL  |       |
|                     | ADDS, SUBS                                                                        | L    |       |
|                     | MULXU, DIVXU, MULXS, DIVXS                                                        | BW   |       |
|                     | EXTU, EXTS                                                                        | WL   |       |
|                     | TAS* <sup>4</sup>                                                                 | B    |       |
| Logic operations    | AND, OR, XOR, NOT                                                                 | BWL  | 4     |
| Shift               | SHAL, SHAR, SHLL, SHLR, ROTL, ROTR, ROTXL, ROTXR                                  | BWL  | 8     |
| Bit manipulation    | RSET, BCLR, BNOT, BTST, BLD, BILD, BST, BIST, BAND, BIAND, BOR, BIOR, BXOR, BIXOR | B    | 14    |
| Branch              | Bcc* <sup>2</sup> , JMP, BSR, JSR, RTS                                            | —    | 5     |
| System control      | TRAPA, RTE, SLEEP, LDC, STC, ANDC, ORC, XORC, NOP                                 | —    | 9     |
| Block data transfer | EEPMOV                                                                            | —    | 1     |

**Total: 65 types**

Notes: B: byte size; W: word size; L: longword size.

1. POP.W Rn and PUSH.W Rn are identical to MOV.W @SP+, Rn and MOV.W Rn, @-SP.  
POP.L ERn and PUSH.L ERn are identical to MOV.L @SP+, ERn and MOV.L ERn, @-SP.
2. Bcc is the general name for conditional branch instructions.
3. Cannot be used in the H8S/2199 Series.
4. Only register ER0, ER1, ER4, or ER5 should be used when using the TAS instruction.
5. Only registers ER0 to ER6 should be used when using the STM/LDM instruction.

## 2.6.2 Instructions and Addressing Modes

Table 2.2 indicates the combinations of instructions and addressing modes that the H8S/2000 CPU can use.

**Table 2.2 Combinations of Instructions and Addressing Modes**

| Function              | Instruction                           | Addressing Modes |     |      |              |              |             |       |        |        |        |           |             |        |    |
|-----------------------|---------------------------------------|------------------|-----|------|--------------|--------------|-------------|-------|--------|--------|--------|-----------|-------------|--------|----|
|                       |                                       | #xx              | Rn  | @ERn | @(d:16, ERn) | @(d:32, ERn) | @-ERn/@ERn+ | @aa:8 | @aa:16 | @aa:24 | @aa:32 | @(d8, PC) | @(d:16, PC) | @@aa:8 |    |
| Data transfer         | MOV                                   | BWL              | BWL | BWL  | BWL          | BWL          | BWL         | B     | BWL    | —      | BWL    | —         | —           | —      | —  |
|                       | POP, PUSH                             | —                | —   | —    | —            | —            | —           | —     | —      | —      | —      | —         | —           | —      | WL |
|                       | LDM* <sup>3</sup> , STM* <sup>3</sup> | —                | —   | —    | —            | —            | —           | —     | —      | —      | —      | —         | —           | —      | L  |
|                       | MOVFP, MOVTPE* <sup>1</sup>           | —                | —   | —    | —            | —            | —           | —     | B      | —      | —      | —         | —           | —      | —  |
| Arithmetic operations | ADD, CMP                              | BWL              | BWL | —    | —            | —            | —           | —     | —      | —      | —      | —         | —           | —      | —  |
|                       | SUB                                   | WL               | BWL | —    | —            | —            | —           | —     | —      | —      | —      | —         | —           | —      | —  |
|                       | ADDX, SUBX                            | B                | B   | —    | —            | —            | —           | —     | —      | —      | —      | —         | —           | —      | —  |
|                       | ADDS, SUBS                            | —                | L   | —    | —            | —            | —           | —     | —      | —      | —      | —         | —           | —      | —  |
|                       | INC, DEC                              | —                | BWL | —    | —            | —            | —           | —     | —      | —      | —      | —         | —           | —      | —  |
|                       | DAA, DAS                              | —                | B   | —    | —            | —            | —           | —     | —      | —      | —      | —         | —           | —      | —  |
|                       | MULXU, DIVXU                          | —                | BW  | —    | —            | —            | —           | —     | —      | —      | —      | —         | —           | —      | —  |
|                       | MULXS, DIVXS                          | —                | BW  | —    | —            | —            | —           | —     | —      | —      | —      | —         | —           | —      | —  |
|                       | NEG                                   | —                | BWL | —    | —            | —            | —           | —     | —      | —      | —      | —         | —           | —      | —  |
|                       | EXTU, EXTS                            | —                | WL  | —    | —            | —            | —           | —     | —      | —      | —      | —         | —           | —      | —  |
| TAS* <sup>2</sup>     | —                                     | —                | B   | —    | —            | —            | —           | —     | —      | —      | —      | —         | —           | —      |    |
| Logic operation       | AND, OR, XOR                          | BWL              | BWL | —    | —            | —            | —           | —     | —      | —      | —      | —         | —           | —      | —  |
|                       | NOT                                   | —                | BWL | —    | —            | —            | —           | —     | —      | —      | —      | —         | —           | —      | —  |
| Shift                 |                                       | —                | BWL | —    | —            | —            | —           | —     | —      | —      | —      | —         | —           | —      | —  |
| Bit manipulation      |                                       | —                | B   | B    | —            | —            | —           | B     | B      | —      | B      | —         | —           | —      | —  |
| Branch                | Bcc, BSR                              | —                | —   | —    | —            | —            | —           | —     | —      | —      | —      | ○         | ○           | —      | —  |
|                       | JMP, JSR                              | —                | —   | —    | —            | —            | —           | —     | —      | ○      | —      | —         | —           | ○      | —  |
|                       | RTS                                   | —                | —   | —    | —            | —            | —           | —     | —      | —      | —      | —         | —           | —      | ○  |
| System control        | TRAPA                                 | —                | —   | —    | —            | —            | —           | —     | —      | —      | —      | —         | —           | —      | ○  |
|                       | RTE                                   | —                | —   | —    | —            | —            | —           | —     | —      | —      | —      | —         | —           | —      | ○  |
|                       | SLEEP                                 | —                | —   | —    | —            | —            | —           | —     | —      | —      | —      | —         | —           | —      | ○  |
|                       | LDC                                   | B                | B   | W    | W            | W            | W           | —     | W      | —      | W      | —         | —           | —      | —  |
|                       | STC                                   | —                | B   | W    | W            | W            | W           | —     | W      | —      | W      | —         | —           | —      | —  |
|                       | ANDC, ORC, XORC                       | B                | —   | —    | —            | —            | —           | —     | —      | —      | —      | —         | —           | —      | —  |
|                       | NOP                                   | —                | —   | —    | —            | —            | —           | —     | —      | —      | —      | —         | —           | —      | ○  |
| Block data transfer   |                                       | —                | —   | —    | —            | —            | —           | —     | —      | —      | —      | —         | —           | —      | BW |

### Legend:

B: Byte

W: Word

L: Longword

Notes: 1. Cannot be used in this LSI.

2. Only register ER0, ER1, ER4, or ER5 should be used when using the TAS instruction.

3. Only registers ER0 to ER6 should be used when using the STM/LDM instruction.



### 2.6.3 Table of Instructions Classified by Function

Tables 2.3 to 2.10 summarize the functions of the instructions. The notation used in table 2.3 is defined below.

#### Operation Notation

|                |                                    |
|----------------|------------------------------------|
| Rd             | General register (destination)*    |
| Rs             | General register (source)*         |
| Rn             | General register*                  |
| ERn            | General register (32-bit register) |
| (EAd)          | Destination operand                |
| (EAs)          | Source operand                     |
| EXR            | Extended control register          |
| CCR            | Condition-code register            |
| N              | N (negative) flag in CCR           |
| Z              | Z (zero) flag in CCR               |
| V              | V (overflow) flag in CCR           |
| C              | C (carry) flag in CCR              |
| PC             | Program counter                    |
| SP             | Stack pointer                      |
| #IMM           | Immediate data                     |
| Disp           | Displacement                       |
| +              | Addition                           |
| –              | Subtraction                        |
| ×              | Multiplication                     |
| ÷              | Division                           |
| ^              | Logical AND                        |
| ∨              | Logical OR                         |
| ⊕              | Logical exclusive OR               |
| →              | Move                               |
| ~              | NOT (logical complement)           |
| :8/:16/:24/:32 | 8-, 16-, 24-, or 32-bit length     |

Note: \*General registers include 8-bit registers (R0H to R7H, R0L to R7L), 16-bit registers (R0 to R7, E0 to E7), and 32-bit registers (ER0 to ER7).

**Table 2.3 Data Transfer Instructions**

| Instruction       | Size* <sup>1</sup> | Function                                                                                                                                                   |
|-------------------|--------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------|
| MOV               | B/W/L              | (EAs) → Rd, Rs → (EAd)<br>Moves data between two general registers or between a general register and memory, or moves immediate data to a general register |
| MOVFPPE           | B                  | Cannot be used in this LSI                                                                                                                                 |
| MOVTPE            | B                  | Cannot be used in this LSI                                                                                                                                 |
| POP               | W/L                | @SP+ → Rn<br>Pops a general register from the stack<br>POP.W Rn is identical to MOV.W @SP+, Rn<br>POP.L ERn is identical to MOV.L @SP+, ERn                |
| PUSH              | W/L                | Rn → @-SP<br>Pushes a general register onto the stack<br>PUSH.W Rn is identical to MOV.W Rn, @-SP<br>PUSH.L ERn is identical to MOV.L ERn, @-SP            |
| LDM* <sup>2</sup> | L                  | @SP+ → Rn (register list)<br>Pops two or more general registers from the stack                                                                             |
| STM* <sup>2</sup> | L                  | Rn (register list) → @-SP<br>Pushes two or more general registers onto the stack                                                                           |

Note: 1. Size refers to the operand size.

B: Byte

W: Word

L: Longword

2. Only registers ER0 to ER6 should be used when using the STM/LDM instruction.

**Table 2.4 Arithmetic Instructions**

| Instruction  | Size* <sup>1</sup> | Function                                                                                                                                                                                                                                                                                               |
|--------------|--------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| ADD<br>SUB   | B/W/L              | $Rd \pm Rs \rightarrow Rd$ , $Rd \pm \#IMM \rightarrow Rd$<br>Performs addition or subtraction on data in two general registers, or on immediate data and data in a general register. (Immediate byte data cannot be subtracted from byte data in a general register. Use the SUBX or ADD instruction) |
| ADDX<br>SUBX | B                  | $Rd \pm Rs \pm C \rightarrow Rd$ , $Rd \pm \#IMM \pm C \rightarrow Rd$<br>Performs addition or subtraction with carry on byte data in two general registers, or on immediate data and data in a general register                                                                                       |
| INC<br>DEC   | B/W/L              | $Rd \pm 1 \rightarrow Rd$ , $Rd \pm 2 \rightarrow Rd$<br>Increments or decrements a general register by 1 or 2. (Byte operands can be incremented or decremented by 1 only)                                                                                                                            |
| ADDS<br>SUBS | B                  | $Rd \pm 1 \rightarrow Rd$ , $Rd \pm 2 \rightarrow Rd$ , $Rd \pm 4 \rightarrow Rd$<br>Adds or subtracts the value 1, 2, or 4 to or from data in a 32-bit register                                                                                                                                       |
| DAA<br>DAS   | B/W                | $Rd \text{ decimal adjust} \rightarrow Rd$<br>Decimal-adjusts an addition or subtraction result in a general register by referring to the CCR to produce 4-bit BCD data                                                                                                                                |
| MULXU        | B/W                | $Rd \times Rs \rightarrow Rd$<br>Performs unsigned multiplication on data in two general registers: either 8 bits $\times$ 8 bits $\rightarrow$ 16 bits or 16 bits $\times$ 16 bits $\rightarrow$ 32 bits                                                                                              |
| MULXS        | B/W                | $Rd \times Rs \rightarrow Rd$<br>Performs signed multiplication on data in two general registers: either 8 bits $\times$ 8 bits $\rightarrow$ 16 bits or 16 bits $\times$ 16 bits $\rightarrow$ 32 bits                                                                                                |
| DIVXU        | B/W                | $Rd \div Rs \rightarrow Rd$<br>Performs unsigned division on data in two general registers: either 16 bits $\div$ 8 bits $\times$ 8-bit quotient and 8-bit remainder or 32 bits $\div$ 16 bits $\times$ 16-bit quotient and 16-bit remainder                                                           |

| Instruction | Size* <sup>1</sup> | Function                                                                                                                                                                                                                                             |
|-------------|--------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| DIVXS       | B/W                | $Rd \div Rs \rightarrow Rd$<br>Performs signed division on data in two general registers: either 16 bits $\div$ 8 bits $\rightarrow$ 8-bit quotient and 8-bit remainder or 32 bits $\div$ 16 bits $\rightarrow$ 16-bit quotient and 16-bit remainder |
| CMP         | B/W/L              | $Rd - Rs, Rd - \#IMM$<br>Compares data in a general register with data in another general register or with immediate data, and sets CCR bits according to the result                                                                                 |
| NEG         | B/W/L              | $0 - Rd \rightarrow Rd$<br>Takes the two's complement (arithmetic complement) of data in a general register                                                                                                                                          |
| EXTU        | W/L                | $Rd \text{ (zero extension)} \rightarrow Rd$<br>Extends the lower 8 bits of a 16-bit register to word size, or the lower 16 bits of a 32-bit register to longword size, by padding with zeros on the left                                            |
| EXTS        | W/L                | $Rd \text{ (sign extension)} \rightarrow Rd$<br>Extends the lower 8 bits of a 16-bit register to word size, or the lower 16 bits of a 32-bit register to longword size, by extending the sign bit                                                    |
| TAS         | B                  | $@ERd - 0, 1 \rightarrow (<\text{bit } 7> \text{ of } @ERd)^{*2}$<br>Tests memory contents, and sets the most significant bit (bit 7) to 1                                                                                                           |

Notes: 1. Size refers to the operand size.

B: Byte

W: Word

L: Longword

2. Only register ER0, ER1, ER4, or ER5 should be used when using the TAS instruction.

**Table 2.5 Logic Instructions**

| Instruction | Size* | Function                                                                                                                                                                           |
|-------------|-------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| AND         | B/W/L | $Rd \wedge Rs \rightarrow Rd$ , $Rd \wedge \#IMM \rightarrow Rd$<br>Performs a logical AND operation on a general register and another general register or immediate data          |
| OR          | B/W/L | $Rd \vee Rs \rightarrow Rd$ , $Rd \vee \#IMM \rightarrow Rd$<br>Performs a logical OR operation on a general register and another general register or immediate data               |
| XOR         | B/W/L | $Rd \oplus Rs \rightarrow Rd$ , $Rd \oplus \#IMM \rightarrow Rd$<br>Performs a logical exclusive OR operation on a general register and another general register or immediate data |
| NOT         | B/W/L | $\sim Rd \rightarrow Rd$<br>Takes the one's complement (logical complement) of general register contents                                                                           |

Note: \*Size refers to the operand size.

B: Byte

W: Word

L: Longword

**Table 2.6 Shift Instructions**

| Instruction    | Size* | Function                                                                                                                                |
|----------------|-------|-----------------------------------------------------------------------------------------------------------------------------------------|
| SHAL<br>SHAR   | B/W/L | $Rd \text{ (shift)} \rightarrow Rd$<br>Performs an arithmetic shift on general register contents<br>A 1-bit or 2-bit shift is possible  |
| SHLL<br>SHLR   | B/W/L | $Rd \text{ (shift)} \rightarrow Rd$<br>Performs a logical shift on general register contents<br>A 1-bit or 2-bit shift is possible      |
| ROTL<br>ROTR   | B/W/L | $Rd \text{ (rotate)} \rightarrow Rd$<br>Rotates general register contents<br>1-bit or 2-bit rotation is possible                        |
| ROTXL<br>ROTXR | B/W/L | $Rd \text{ (rotate)} \rightarrow Rd$<br>Rotates general register contents through the carry flag<br>1-bit or 2-bit rotation is possible |

Note: \*Size refers to the operand size.

B: Byte

W: Word

L: Longword

**Table 2.7 Bit Manipulation Instructions**

| Instruction | Size* | Function                                                                                                                                                                                                                                                       |
|-------------|-------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| BSET        | B     | $1 \rightarrow (\text{<bit-No.> of <EAd>})$<br>Sets a specified bit in a general register or memory operand to 1. The bit number is specified by 3-bit immediate data or the lower three bits of a general register                                            |
| BCLR        | B     | $0 \rightarrow (\text{<bit-No.> of <EAd>})$<br>Clears a specified bit in a general register or memory operand to 0. The bit number is specified by 3-bit immediate data or the lower three bits of a general register                                          |
| BNOT        | B     | $\sim (\text{<bit-No.> of <EAd>}) \rightarrow (\text{<bit-No.> of <EAd>})$<br>Inverts a specified bit in a general register or memory operand. The bit number is specified by 3-bit immediate data or the lower three bits of a general register               |
| BTST        | B     | $\sim (\text{<bit-No.> of <EAd>}) \rightarrow Z$<br>Tests a specified bit in a general register or memory operand and sets or clears the Z flag accordingly. The bit number is specified by 3-bit immediate data or the lower three bits of a general register |
| BAND        | B     | $C \wedge (\text{<bit-No.> of <EAd>}) \rightarrow C$<br>ANDs the carry flag with a specified bit in a general register or memory operand and stores the result in the carry flag                                                                               |
| BIAND       | B     | $C \wedge [\sim (\text{<bit-No.> of <EAd>})] \rightarrow C$<br>ANDs the carry flag with the inverse of a specified bit in a general register or memory operand and stores the result in the carry flag<br>The bit number is specified by 3-bit immediate data  |
| BOR         | B     | $C \vee (\text{<bit-No.> of <EAd>}) \rightarrow C$<br>ORs the carry flag with a specified bit in a general register or memory operand and stores the result in the carry flag                                                                                  |
| BIOR        | B     | $C \vee [\sim (\text{<bit-No.> of <EAd>})] \rightarrow C$<br>ORs the carry flag with the inverse of a specified bit in a general register or memory operand and stores the result in the carry flag<br>The bit number is specified by 3-bit immediate data     |

| Instruction | Size* | Function                                                                                                                                                                                                                                                               |
|-------------|-------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| BOXR        | B     | $C \oplus (\text{<bit-No.> of <EAd>}) \rightarrow C$<br>Exclusive-ORs the carry flag with a specified bit in a general register or memory operand and stores the result in the carry flag                                                                              |
| BIXOR       | B     | $C \oplus [\sim (\text{<bit-No.> of <EAd>})] \rightarrow C$<br>Exclusive-ORs the carry flag with the inverse of a specified bit in a general register or memory operand and stores the result in the carry flag<br>The bit number is specified by 3-bit immediate data |
| BLD         | B     | $(\text{<bit-No.> of <EAd>}) \rightarrow C$<br>Transfers a specified bit in a general register or memory operand to the carry flag                                                                                                                                     |
| BILD        | B     | $\sim (\text{<bit-No.> of <EAd>}) \rightarrow C$<br>Transfers the inverse of a specified bit in a general register or memory operand to the carry flag<br>The bit number is specified by 3-bit immediate data                                                          |
| BST         | B     | $C \rightarrow (\text{<bit-No.> of <EAd>})$<br>Transfers the carry flag value to a specified bit in a general register or memory operand                                                                                                                               |
| BIST        | B     | $\sim C \rightarrow (\text{<bit-No.> of <EAd>})$<br>Transfers the inverse of the carry flag value to a specified bit in a general register or memory operand<br>The bit number is specified by 3-bit immediate data                                                    |

Note: \*Size refers to the operand size.

B: Byte

**Table 2.8 Branch Instructions**

| Instruction | Size*                      | Function                                                                                                      |
|-------------|----------------------------|---------------------------------------------------------------------------------------------------------------|
| Bcc         | —                          | Branches to a specified address if a specified condition is true<br>The branching conditions are listed below |
| Mnemonic    | Description                | Condition                                                                                                     |
| BRA (BT)    | Always (True)              | Always                                                                                                        |
| BRN (BF)    | Never (False)              | Never                                                                                                         |
| BHI         | High                       | CVZ = 0                                                                                                       |
| BLS         | Low of Same                | CVZ = 1                                                                                                       |
| BCC (BHS)   | Carry Clear (High or Same) | C = 0                                                                                                         |
| BCS (BLO)   | Carry Set (LOW)            | C = 1                                                                                                         |
| BNE         | Not Equal                  | Z = 0                                                                                                         |
| BEQ         | Equal                      | Z = 1                                                                                                         |
| BVC         | oVerflow Clear             | V = 0                                                                                                         |
| BVS         | oVerflow Set               | V = 1                                                                                                         |
| BPL         | PLus                       | N = 0                                                                                                         |
| BMI         | MInus                      | N = 1                                                                                                         |
| BGE         | Greater or Equal           | NV = 0                                                                                                        |
| BLT         | Less Than                  | $N \oplus V = 1$                                                                                              |
| BGT         | Greater Than               | $Z \vee (N \oplus V) = 0$                                                                                     |
| BLE         | Less or Equal              | $Z \vee (N \oplus V) = 1$                                                                                     |
| JMP         | —                          | Branches unconditionally to a specified address                                                               |
| BSR         | —                          | Branches to a subroutine at a specified address                                                               |
| JSR         | —                          | Branches to a subroutine at a specified address                                                               |
| RTS         | —                          | Returns from a subroutine                                                                                     |



**Table 2.9 System Control Instructions**

| Instruction | Size* | Function                                                                                                                                                                                                                                    |
|-------------|-------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| TRAPA       | —     | Starts trap-instruction exception handling                                                                                                                                                                                                  |
| RTE         | —     | Returns from an exception-handling routine                                                                                                                                                                                                  |
| SLEEP       | —     | Causes a transition to a power-down state                                                                                                                                                                                                   |
| LDC         | B/W   | (EAs) → CCR, (EAs) → EXR<br>Moves contents of a general register or memory or immediate data to CCR or EXR. Although CCR and EXR are 8-bit registers, word-size transfers are performed between them and memory. The upper 8 bits are valid |
| STC         | B/W   | CCR → (EAd), EXR → (EAd)<br>Transfers CCR or EXR contents to a general register or memory. Although CCR and EXR are 8-bit registers, word-size transfers are performed between them and memory. The upper 8 bits are valid                  |
| ANDC        | B     | $CCR \wedge \#IMM \rightarrow CCR$ , $EXR \wedge \#IMM \rightarrow EXR$<br>Logically ANDs the CCR or EXR contents with immediate data                                                                                                       |
| ORC         | B     | $CCR \vee \#IMM \rightarrow CCR$ , $EXR \vee \#IMM \rightarrow EXR$<br>Logically ORs the CCR or EXR contents with immediate data                                                                                                            |
| XORC        | B     | $CCR \oplus \#IMM \rightarrow CCR$ , $EXR \oplus \#IMM \rightarrow EXR$<br>Logically exclusive-ORs the CCR or EXR contents with immediate data                                                                                              |
| NOP         | —     | $PC + 2 \rightarrow PC$<br>Only increments the program counter                                                                                                                                                                              |

Note: \*Size refers to the operand size.

B: Byte

W: Word

**Table 2.10 Block Data Transfer Instructions**

| Instruction | Size* | Function                                                                                                                                                                                                                                                                                                                                                                            |
|-------------|-------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| EEPMOV.B    | —     | if R4L $\neq$ 0 then<br>Repeat @ER5+→@er6+<br>R4L-1→R4L<br>Until R4L = 0<br>else next;                                                                                                                                                                                                                                                                                              |
| EEPMOV.W    | —     | if R4 $\neq$ 0 then<br>Repeat @ER5+→@er6+<br>R4-1→R4<br>Until R4 = 0<br>else next;<br><br>Transfers a data block according to parameters set in general registers R4L or R4, ER5, and ER6<br>R4L or R4: size of block (bytes)<br>ER5: starting source address<br>ER6: starting destination address<br>Execution of the next instruction begins as soon as the transfer is completed |

## 2.6.4 Basic Instruction Formats

The CPU instructions consist of 2-byte (1-word) units. An instruction consists of an operation field (op field), a register field (r field), an effective address extension (EA field), and a condition field (cc).

Figure 2.13 shows examples of instruction formats.

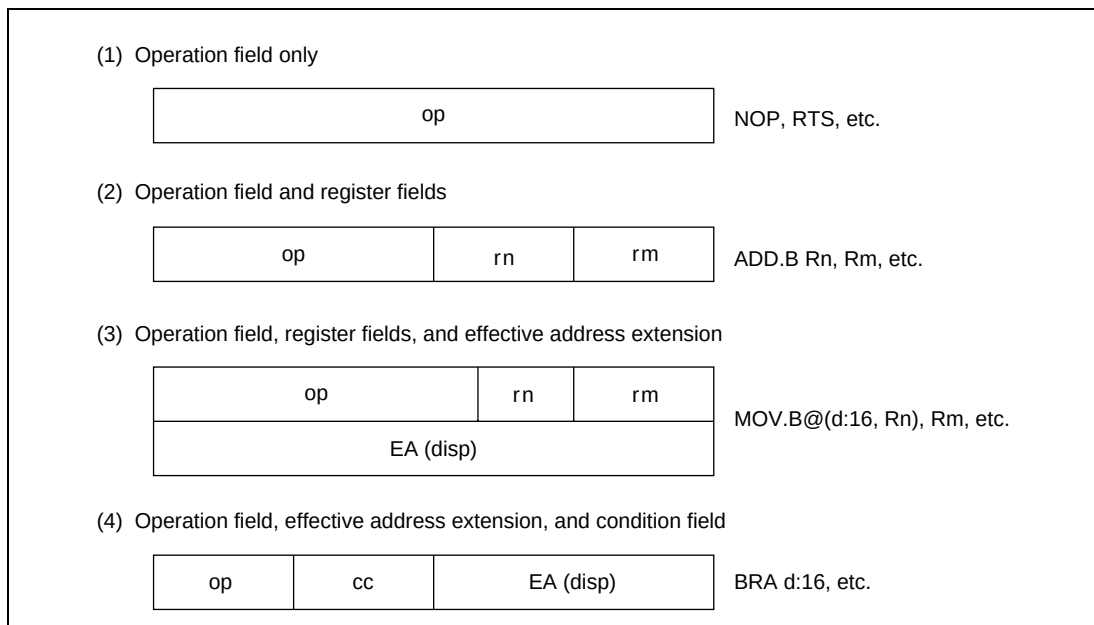


**Figure 2.13 Instruction Formats (Examples)**

### (1) Operation Field

Indicates the function of the instruction, the addressing mode, and the operation to be carried out on the operand. The operation field always includes the first four bits of the instruction.

Some instructions have two operation fields.

### (2) Register Field

Specifies a general register. Address registers are specified by 3 bits, data registers by 3 bits or 4 bits. Some instructions have two register fields. Some have no register field.

### (3) Effective Address Extension

Eight, 16, or 32 bits specifying immediate data, an absolute address, or a displacement.

### (4) Condition Field

Specifies the branching condition of Bcc instructions.

## 2.6.5 Notes on Use of Bit-Manipulation Instructions

The BSET, BCLR, BNOT, BST, and BIST instructions read a byte of data, carry out bit manipulation, then write back the byte of data. Caution is therefore required when using these instructions on a register containing write-only bits, or a port.

The BCLR instruction can be used to clear internal I/O register flags to 0. In this case, the relevant flag need not be read beforehand if it is clear that it has been set to 1 in an interrupt handling routine, etc.

## 2.7 Addressing Modes and Effective Address Calculation

### 2.7.1 Addressing Mode

The CPU supports the eight addressing modes listed in table 2.11. Each instruction uses a subset of these addressing modes. Arithmetic and logic instructions can use the register direct and immediate modes. Data transfer instructions can use all addressing modes except program-counter relative and memory indirect. Bit-manipulation instructions use register direct, register indirect, or absolute addressing mode to specify an operand, and register direct (BSET, BCLR, BNOT, and BTST instructions) or immediate (3-bit) addressing mode to specify a bit number in the operand.

**Table 2.11 Addressing Modes**

| No. | Addressing Mode                                                               | Symbol                      |
|-----|-------------------------------------------------------------------------------|-----------------------------|
| 1   | Register direct                                                               | Rn                          |
| 2   | Register indirect                                                             | @ERn                        |
| 3   | Register indirect with displacement                                           | @(d:16,ERn)/@(d:32,ERn)     |
| 4   | Register indirect with post-increment<br>Register indirect with pre-decrement | @ERn+<br>@-ERn              |
| 5   | Absolute address                                                              | @aa:8/#@aa:16/@aa:24/@aa:32 |
| 6   | Immediate                                                                     | #xx:8/#xx:16/#xx:32         |
| 7   | Program-counter relative                                                      | @(d:8,PC)/@(d:16,PC)        |
| 8   | Memory indirect                                                               | @@aa:8                      |

#### (1) Register Direct–Rn

The register field of the instruction code specifies an 8-, 16-, or 32-bit general register containing the operand. R0H to R7H and R0L to R7L can be specified as 8-bit registers. R0 to R7 and E0 to E7 can be specified as 16-bit registers. ER0 to ER7 can be specified as 32-bit registers.

#### (2) Register Indirect–@Ern

The register field of the instruction code specifies an address register (ERn) which contains the address of the operand in memory. If the address is a program instruction address, the lower 24 bits are valid and the upper 8 bits are all assumed to be 0 (H'00).

#### (3) Register Indirect with Displacement–@(d:16, ERn) or @(d:32, ERn)

A 16-bit or 32-bit displacement contained in the instruction is added to an address register (ERn) specified by the register field of the instruction, and the sum gives the address of a memory operand. A 16-bit displacement is sign-extended when added.

#### (4) Register Indirect with Post-Increment or Pre-Decrement—@ERn+ or @-ERn

##### (a) Register indirect with post-increment—@ERn+

The register field of the instruction code specifies an address register (ERn) which contains the address of a memory operand. After the operand is accessed, 1, 2, or 4 is added to the address register contents and the sum is stored in the address register. The value added is 1 for byte access, 2 for word access, or 4 for longword access. For word or longword access, the register value should be even.

##### (b) Register indirect with pre-decrement—@-ERn

The value 1, 2, or 4 is subtracted from an address register (ERn) specified by the register field in the instruction code, and the result becomes the address of a memory operand. The result is also stored in the address register. The value subtracted is 1 for byte access, 2 for word access, or 4 for longword access. For word or longword access, the register value should be even.

#### (5) Absolute Address—@aa:8, @aa:16, @aa:24, or @aa:32

The instruction code contains the absolute address of a memory operand. The absolute address may be 8 bits long (@aa:8), 16 bits long (@aa:16), 24 bits long (@aa:24), or 32 bits long (@aa:32).

To access data, the absolute address should be 8 bits (@aa:8), 16 bits (@aa:16), or 32 bits (@aa:32) long. For an 8-bit absolute address, the upper 24 bits are all assumed to be 1 (H'FFFF). For a 16-bit absolute address the upper 16 bits are a sign extension. A 32-bit absolute address can access the entire address space.

A 24-bit absolute address (@aa:24) indicates the address of a program instruction. The upper 8 bits are all assumed to be 0 (H'00).

Table 2.12 indicates the accessible absolute address ranges.

**Table 2.12 Absolute Address Access Ranges**

| Absolute Address            |                     | Normal Mode      | Advanced Mode                              |
|-----------------------------|---------------------|------------------|--------------------------------------------|
| Data address                | 8 bits<br>(@aa:8)   | H'FF00 to H'FFFF | H'FFFF00 to H'FFFFFF                       |
|                             | 16 bits<br>(@aa:16) | H'0000 to H'FFFF | H'000000 to H'007FFF, H'FF8000 to H'FFFFFF |
|                             | 32 bits<br>(@aa:32) |                  | H'000000 to H'FFFFFF                       |
| Program instruction address | 24 bits<br>(@aa:24) |                  |                                            |

## (6) Immediate—#xx:8, #xx:16, or #xx:32

The instruction contains 8-bit (#xx:8), 16-bit (#xx:16), or 32-bit (#xx:32) immediate data as an operand.

The ADDS, SUBS, INC, and DEC instructions contain immediate data implicitly. Some bit manipulation instructions contain 3-bit immediate data in the instruction code, specifying a bit number. The TRAPA instruction contains 2-bit immediate data in its instruction code, specifying a vector address.


## (7) Program-Counter Relative—@(d:8, PC) or @(d:16, PC)

This mode is used in the Bcc and BSR instructions. An 8-bit or 16-bit displacement contained in the instruction is sign-extended and added to the 24-bit PC contents to generate a branch address. Only the lower 24 bits of this branch address are valid; the upper 8 bits are all assumed to be 0 (H'00). The PC value to which the displacement is added is the address of the first byte of the next instruction, so the possible branching range is -126 to +128 bytes (-63 to +64 words) or -32766 to +32768 bytes (-16383 to +16384 words) from the branch instruction. The resulting value should be an even number.

## (8) Memory Indirect—@@aa:8

This mode can be used by the JMP and JSR instructions. The instruction code contains an 8-bit absolute address specifying a memory operand. This memory operand contains a branch address. The upper bits of the absolute address are all assumed to be 0, so the address range is 0 to 255 (H'0000 to H'00FF in normal mode, H'000000 to H'0000FF in advanced mode). In normal mode the memory operand is a word operand and the branch address is 16 bits long. In advanced mode the memory operand is a longword operand, the first byte of which is assumed to be all 0 (H'00).

Note that the first part of the address range is also the exception vector area. For further details, see section 5, Exception Handling.

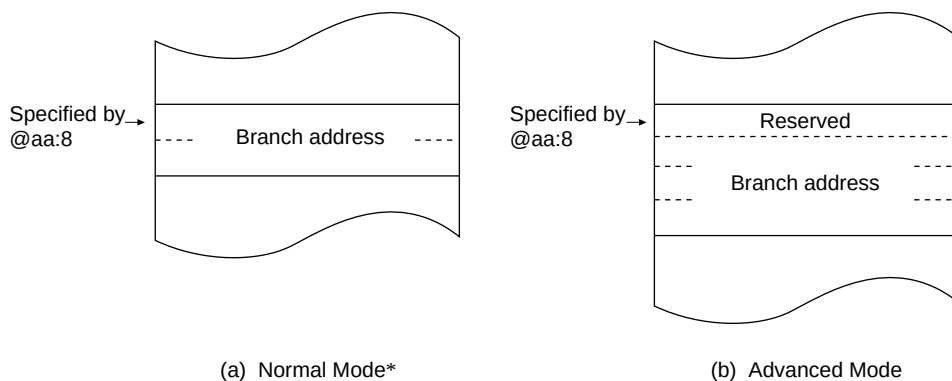

Note: \* Not available for this LSI

**Figure 2.14 Branch Address Specification in Memory Indirect Mode**

If an odd address is specified in word or longword memory access, or as a branch address, the least significant bit is regarded as 0, causing data to be accessed or an instruction code to be fetched at the address preceding the specified address. (For further information, see section 2.5.2, Memory Data Formats.)

## 2.7.2 Effective Address Calculation

Table 2.13 indicates how effective addresses are calculated in each addressing mode.

In normal mode\* the upper 8 bits of the effective address are ignored in order to generate a 16-bit address.


Note: \* Not available for this LSI.



Table 2.13 Effective Address Calculation

| No.          | Addressing Mode and Instruction Format                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | Effective Address Calculation | Effective Address (EA) |    |      |                                      |  |              |             |      |   |      |   |          |   |  |  |
|--------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------|------------------------|----|------|--------------------------------------|--|--------------|-------------|------|---|------|---|----------|---|--|--|
| 1            | Register direct (Rn)<br><table border="1"><tr><td>op</td><td>rm</td><td>rn</td></tr></table>                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | op                            | rm                     | rn |      | Operand is general register contents |  |              |             |      |   |      |   |          |   |  |  |
| op           | rm                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | rn                            |                        |    |      |                                      |  |              |             |      |   |      |   |          |   |  |  |
| 2            | Register indirect (@ERn)<br><table border="1"><tr><td>op</td><td>r</td><td></td></tr></table>                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | op                            | r                      |    |      |                                      |  |              |             |      |   |      |   |          |   |  |  |
| op           | r                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |                               |                        |    |      |                                      |  |              |             |      |   |      |   |          |   |  |  |
| 3            | Register indirect with displacement<br>@(d:16, ERn) or @(d:32, ERn)<br><table border="1"><tr><td>op</td><td>r</td><td></td><td>disp</td></tr></table>                                                                                                                                                                                                                                                                                                                                                                                                              | op                            | r                      |    | disp |                                      |  |              |             |      |   |      |   |          |   |  |  |
| op           | r                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |                               | disp                   |    |      |                                      |  |              |             |      |   |      |   |          |   |  |  |
| 4            | Register indirect with post-increment or pre-decrement<br><ul style="list-style-type: none"><li>Register indirect with post-increment @ERn+<br/><table border="1"><tr><td>op</td><td>r</td><td></td></tr></table></li><li>Register indirect with pre-decrement @-ERn<br/><table border="1"><tr><td>op</td><td>r</td><td></td></tr></table><table border="1"><thead><tr><th>Operand Size</th><th>Value Added</th></tr></thead><tbody><tr><td>Byte</td><td>1</td></tr><tr><td>Word</td><td>2</td></tr><tr><td>Longword</td><td>4</td></tr></tbody></table></li></ul> | op                            | r                      |    | op   | r                                    |  | Operand Size | Value Added | Byte | 1 | Word | 2 | Longword | 4 |  |  |
| op           | r                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |                               |                        |    |      |                                      |  |              |             |      |   |      |   |          |   |  |  |
| op           | r                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |                               |                        |    |      |                                      |  |              |             |      |   |      |   |          |   |  |  |
| Operand Size | Value Added                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |                               |                        |    |      |                                      |  |              |             |      |   |      |   |          |   |  |  |
| Byte         | 1                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |                               |                        |    |      |                                      |  |              |             |      |   |      |   |          |   |  |  |
| Word         | 2                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |                               |                        |    |      |                                      |  |              |             |      |   |      |   |          |   |  |  |
| Longword     | 4                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |                               |                        |    |      |                                      |  |              |             |      |   |      |   |          |   |  |  |

| No.            | Addressing Mode and Instruction Format                                 | Effective Address Calculation | Effective Address (EA)    |                                                                                                                                                                                                                                                |                                                                                                                                                                                                      |                                                                                                                                                         |    |             |    |    |    |            |            |                |      |  |                                                                                                                                                         |    |    |    |   |  |  |            |  |  |  |  |  |
|----------------|------------------------------------------------------------------------|-------------------------------|---------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------|----|-------------|----|----|----|------------|------------|----------------|------|--|---------------------------------------------------------------------------------------------------------------------------------------------------------|----|----|----|---|--|--|------------|--|--|--|--|--|
| 5              | Absolute address                                                       |                               |                           |                                                                                                                                                                                                                                                |                                                                                                                                                                                                      |                                                                                                                                                         |    |             |    |    |    |            |            |                |      |  |                                                                                                                                                         |    |    |    |   |  |  |            |  |  |  |  |  |
|                | @aa:8                                                                  |                               |                           |                                                                                                                                                                                                                                                |                                                                                                                                                                                                      |                                                                                                                                                         |    |             |    |    |    |            |            |                |      |  |                                                                                                                                                         |    |    |    |   |  |  |            |  |  |  |  |  |
|                | <table border="1"><tr><td>op</td><td>abs</td></tr></table>             | op                            | abs                       |                                                                                                                                                                                                                                                | <table border="1"><tr><td>31</td><td>24</td><td>23</td><td>8</td><td>7</td><td>0</td></tr><tr><td colspan="2">Don't care</td><td colspan="2">H'FFFF</td><td colspan="2"></td></tr></table>           | 31                                                                                                                                                      | 24 | 23          | 8  | 7  | 0  | Don't care |            | H'FFFF         |      |  |                                                                                                                                                         |    |    |    |   |  |  |            |  |  |  |  |  |
| op             | abs                                                                    |                               |                           |                                                                                                                                                                                                                                                |                                                                                                                                                                                                      |                                                                                                                                                         |    |             |    |    |    |            |            |                |      |  |                                                                                                                                                         |    |    |    |   |  |  |            |  |  |  |  |  |
| 31             | 24                                                                     | 23                            | 8                         | 7                                                                                                                                                                                                                                              | 0                                                                                                                                                                                                    |                                                                                                                                                         |    |             |    |    |    |            |            |                |      |  |                                                                                                                                                         |    |    |    |   |  |  |            |  |  |  |  |  |
| Don't care     |                                                                        | H'FFFF                        |                           |                                                                                                                                                                                                                                                |                                                                                                                                                                                                      |                                                                                                                                                         |    |             |    |    |    |            |            |                |      |  |                                                                                                                                                         |    |    |    |   |  |  |            |  |  |  |  |  |
|                | @aa:16                                                                 |                               |                           |                                                                                                                                                                                                                                                |                                                                                                                                                                                                      |                                                                                                                                                         |    |             |    |    |    |            |            |                |      |  |                                                                                                                                                         |    |    |    |   |  |  |            |  |  |  |  |  |
|                | <table border="1"><tr><td>op</td><td>abs</td></tr></table>             | op                            | abs                       |                                                                                                                                                                                                                                                | <table border="1"><tr><td>31</td><td>24</td><td>23</td><td>16</td><td>15</td><td>0</td></tr><tr><td colspan="2">Don't care</td><td colspan="2">Sign extension</td><td colspan="2"></td></tr></table> | 31                                                                                                                                                      | 24 | 23          | 16 | 15 | 0  | Don't care |            | Sign extension |      |  |                                                                                                                                                         |    |    |    |   |  |  |            |  |  |  |  |  |
| op             | abs                                                                    |                               |                           |                                                                                                                                                                                                                                                |                                                                                                                                                                                                      |                                                                                                                                                         |    |             |    |    |    |            |            |                |      |  |                                                                                                                                                         |    |    |    |   |  |  |            |  |  |  |  |  |
| 31             | 24                                                                     | 23                            | 16                        | 15                                                                                                                                                                                                                                             | 0                                                                                                                                                                                                    |                                                                                                                                                         |    |             |    |    |    |            |            |                |      |  |                                                                                                                                                         |    |    |    |   |  |  |            |  |  |  |  |  |
| Don't care     |                                                                        | Sign extension                |                           |                                                                                                                                                                                                                                                |                                                                                                                                                                                                      |                                                                                                                                                         |    |             |    |    |    |            |            |                |      |  |                                                                                                                                                         |    |    |    |   |  |  |            |  |  |  |  |  |
|                | @aa:24                                                                 |                               |                           |                                                                                                                                                                                                                                                |                                                                                                                                                                                                      |                                                                                                                                                         |    |             |    |    |    |            |            |                |      |  |                                                                                                                                                         |    |    |    |   |  |  |            |  |  |  |  |  |
|                | <table border="1"><tr><td>op</td><td>abs</td></tr></table>             | op                            | abs                       |                                                                                                                                                                                                                                                | <table border="1"><tr><td>31</td><td>24</td><td>23</td><td colspan="3">0</td></tr><tr><td colspan="2">Don't care</td><td colspan="4"></td></tr></table>                                              | 31                                                                                                                                                      | 24 | 23          | 0  |    |    | Don't care |            |                |      |  |                                                                                                                                                         |    |    |    |   |  |  |            |  |  |  |  |  |
| op             | abs                                                                    |                               |                           |                                                                                                                                                                                                                                                |                                                                                                                                                                                                      |                                                                                                                                                         |    |             |    |    |    |            |            |                |      |  |                                                                                                                                                         |    |    |    |   |  |  |            |  |  |  |  |  |
| 31             | 24                                                                     | 23                            | 0                         |                                                                                                                                                                                                                                                |                                                                                                                                                                                                      |                                                                                                                                                         |    |             |    |    |    |            |            |                |      |  |                                                                                                                                                         |    |    |    |   |  |  |            |  |  |  |  |  |
| Don't care     |                                                                        |                               |                           |                                                                                                                                                                                                                                                |                                                                                                                                                                                                      |                                                                                                                                                         |    |             |    |    |    |            |            |                |      |  |                                                                                                                                                         |    |    |    |   |  |  |            |  |  |  |  |  |
|                | @aa:32                                                                 |                               |                           |                                                                                                                                                                                                                                                |                                                                                                                                                                                                      |                                                                                                                                                         |    |             |    |    |    |            |            |                |      |  |                                                                                                                                                         |    |    |    |   |  |  |            |  |  |  |  |  |
|                | <table border="1"><tr><td>op</td><td colspan="2">abs</td></tr></table> | op                            | abs                       |                                                                                                                                                                                                                                                |                                                                                                                                                                                                      | <table border="1"><tr><td>31</td><td>24</td><td>23</td><td colspan="3">0</td></tr><tr><td colspan="2">Don't care</td><td colspan="4"></td></tr></table> | 31 | 24          | 23 | 0  |    |            | Don't care |                |      |  |                                                                                                                                                         |    |    |    |   |  |  |            |  |  |  |  |  |
| op             | abs                                                                    |                               |                           |                                                                                                                                                                                                                                                |                                                                                                                                                                                                      |                                                                                                                                                         |    |             |    |    |    |            |            |                |      |  |                                                                                                                                                         |    |    |    |   |  |  |            |  |  |  |  |  |
| 31             | 24                                                                     | 23                            | 0                         |                                                                                                                                                                                                                                                |                                                                                                                                                                                                      |                                                                                                                                                         |    |             |    |    |    |            |            |                |      |  |                                                                                                                                                         |    |    |    |   |  |  |            |  |  |  |  |  |
| Don't care     |                                                                        |                               |                           |                                                                                                                                                                                                                                                |                                                                                                                                                                                                      |                                                                                                                                                         |    |             |    |    |    |            |            |                |      |  |                                                                                                                                                         |    |    |    |   |  |  |            |  |  |  |  |  |
| 6              | Immediate #xx:8/#xx:16/#xx:32                                          |                               | Operand is immediate data |                                                                                                                                                                                                                                                |                                                                                                                                                                                                      |                                                                                                                                                         |    |             |    |    |    |            |            |                |      |  |                                                                                                                                                         |    |    |    |   |  |  |            |  |  |  |  |  |
|                | <table border="1"><tr><td>op</td><td>IMM</td></tr></table>             | op                            | IMM                       |                                                                                                                                                                                                                                                |                                                                                                                                                                                                      |                                                                                                                                                         |    |             |    |    |    |            |            |                |      |  |                                                                                                                                                         |    |    |    |   |  |  |            |  |  |  |  |  |
| op             | IMM                                                                    |                               |                           |                                                                                                                                                                                                                                                |                                                                                                                                                                                                      |                                                                                                                                                         |    |             |    |    |    |            |            |                |      |  |                                                                                                                                                         |    |    |    |   |  |  |            |  |  |  |  |  |
| 7              | Program-counter relative                                               |                               |                           |                                                                                                                                                                                                                                                |                                                                                                                                                                                                      |                                                                                                                                                         |    |             |    |    |    |            |            |                |      |  |                                                                                                                                                         |    |    |    |   |  |  |            |  |  |  |  |  |
|                | @(d:8, PC)/@(d:16, PC)                                                 |                               |                           |                                                                                                                                                                                                                                                |                                                                                                                                                                                                      |                                                                                                                                                         |    |             |    |    |    |            |            |                |      |  |                                                                                                                                                         |    |    |    |   |  |  |            |  |  |  |  |  |
|                | <table border="1"><tr><td>op</td><td>disp</td></tr></table>            | op                            | disp                      | <table border="1"><tr><td>23</td><td colspan="2">0</td></tr><tr><td colspan="3">PC contents</td></tr></table><br><table border="1"><tr><td>23</td><td colspan="2">0</td></tr><tr><td>Sign extension</td><td colspan="2">disp</td></tr></table> | 23                                                                                                                                                                                                   | 0                                                                                                                                                       |    | PC contents |    |    | 23 | 0          |            | Sign extension | disp |  | <table border="1"><tr><td>31</td><td>24</td><td>23</td><td colspan="3">0</td></tr><tr><td colspan="2">Don't care</td><td colspan="4"></td></tr></table> | 31 | 24 | 23 | 0 |  |  | Don't care |  |  |  |  |  |
| op             | disp                                                                   |                               |                           |                                                                                                                                                                                                                                                |                                                                                                                                                                                                      |                                                                                                                                                         |    |             |    |    |    |            |            |                |      |  |                                                                                                                                                         |    |    |    |   |  |  |            |  |  |  |  |  |
| 23             | 0                                                                      |                               |                           |                                                                                                                                                                                                                                                |                                                                                                                                                                                                      |                                                                                                                                                         |    |             |    |    |    |            |            |                |      |  |                                                                                                                                                         |    |    |    |   |  |  |            |  |  |  |  |  |
| PC contents    |                                                                        |                               |                           |                                                                                                                                                                                                                                                |                                                                                                                                                                                                      |                                                                                                                                                         |    |             |    |    |    |            |            |                |      |  |                                                                                                                                                         |    |    |    |   |  |  |            |  |  |  |  |  |
| 23             | 0                                                                      |                               |                           |                                                                                                                                                                                                                                                |                                                                                                                                                                                                      |                                                                                                                                                         |    |             |    |    |    |            |            |                |      |  |                                                                                                                                                         |    |    |    |   |  |  |            |  |  |  |  |  |
| Sign extension | disp                                                                   |                               |                           |                                                                                                                                                                                                                                                |                                                                                                                                                                                                      |                                                                                                                                                         |    |             |    |    |    |            |            |                |      |  |                                                                                                                                                         |    |    |    |   |  |  |            |  |  |  |  |  |
| 31             | 24                                                                     | 23                            | 0                         |                                                                                                                                                                                                                                                |                                                                                                                                                                                                      |                                                                                                                                                         |    |             |    |    |    |            |            |                |      |  |                                                                                                                                                         |    |    |    |   |  |  |            |  |  |  |  |  |
| Don't care     |                                                                        |                               |                           |                                                                                                                                                                                                                                                |                                                                                                                                                                                                      |                                                                                                                                                         |    |             |    |    |    |            |            |                |      |  |                                                                                                                                                         |    |    |    |   |  |  |            |  |  |  |  |  |

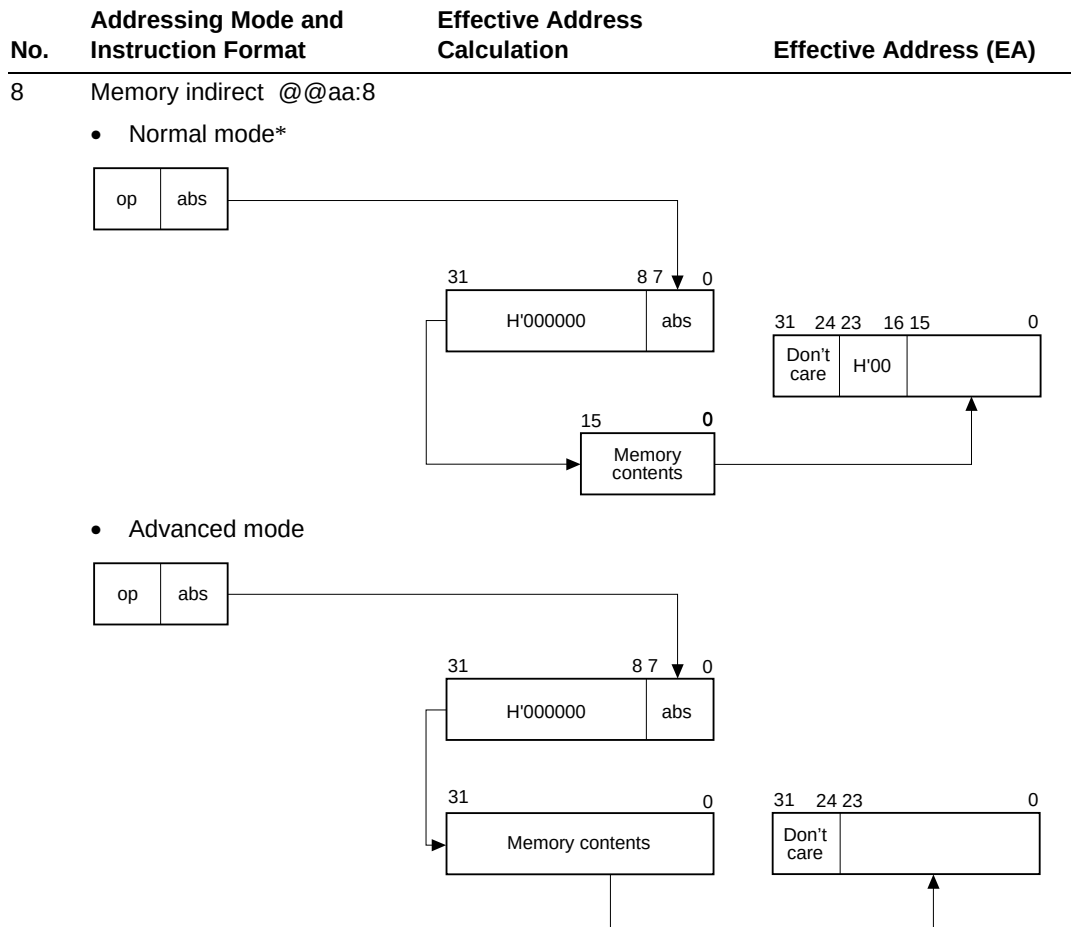

Note: \*Not available for this LSI.

## 2.8 Processing States

### 2.8.1 Overview

The CPU has four main processing states: the reset state, exception-handling state, program execution state, and power-down state. Figure 2.15 shows a diagram of the processing states. Figure 2.16 indicates the state transitions.

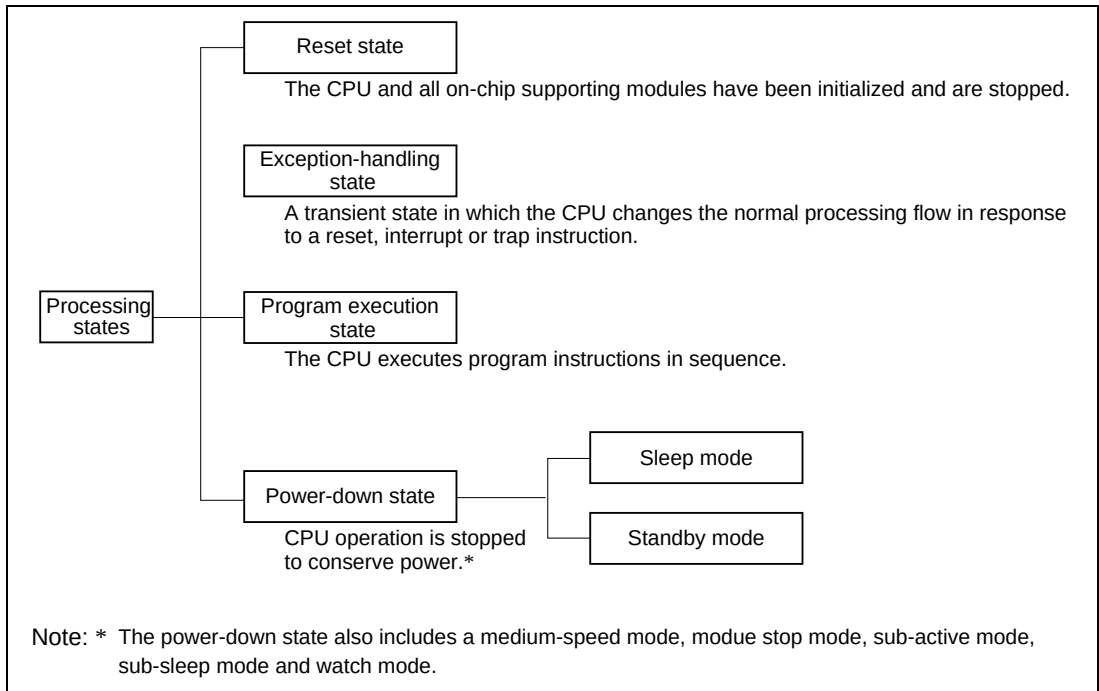


**Figure 2.15 Processing States**

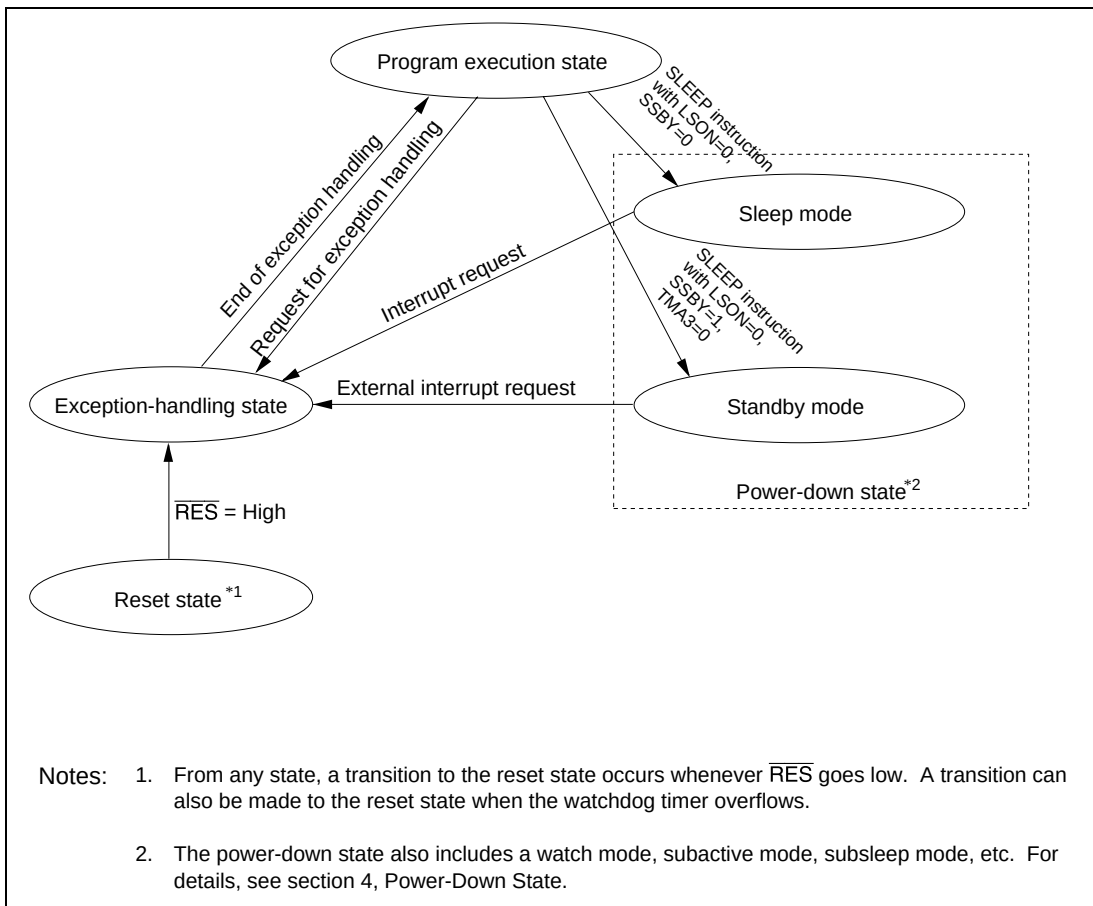


**Figure 2.16 State Transitions**

## 2.8.2 Reset State

When the  $\overline{\text{RES}}$  input goes low all current processing stops and the CPU enters the reset state. All interrupts are disabled in the reset state. Reset exception handling starts when the  $\overline{\text{RES}}$  signal changes from low to high.

The reset state can also be entered by a watchdog timer overflow. For details, see section 17, Watchdog Timer.

### 2.8.3 Exception-Handling State

The exception-handling state is a transient state that occurs when the CPU alters the normal processing flow due to a reset, interrupt, or trap instruction. The CPU fetches a start address (vector) from the exception vector table and branches to that address.

#### (1) Types of Exception Handling and Their Priority

Exception handling is performed for resets, interrupts, and trap instructions. Table 2.14 indicates the types of exception handling and their priority. Trap instruction exception handling is always accepted in the program execution state.

Exception handling and the stack structure depend on the interrupt control mode set in SYSCR.

**Table 2.14 Exception Handling Types and Priority**

| Priority                                                                                 | Type of Exception | Detection Timing                                                                 | Start of Exception Handling                                                                                                                   |
|------------------------------------------------------------------------------------------|-------------------|----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------|
| <br>High | Reset             | Synchronized with clock                                                          | Exception handling starts immediately after a low-to-high transition at the $\overline{\text{RES}}$ pin, or when the watchdog timer overflows |
|                                                                                          | Interrupt         | End of instruction execution or end of exception-handling sequence* <sup>1</sup> | When an interrupt is requested, exception handling starts at the end of the current instruction or current exception-handling sequence        |
|                                                                                          | Trap instruction  | When TRAPA instruction is executed                                               | Exception handling starts when a trap (TRAPA) instruction is executed* <sup>2</sup>                                                           |
| Low                                                                                      |                   |                                                                                  |                                                                                                                                               |

Notes: 1. Interrupts are not detected at the end of the ANDC, ORC, XORC, and LDC instructions, or immediately after reset exception handling.  
2. Trap instruction exception handling is always accepted in the program execution state.

#### (2) Reset Exception Handling

After the  $\overline{\text{RES}}$  pin has gone low and the reset state has been entered, when  $\overline{\text{RES}}$  goes high again, reset exception handling starts. When reset exception handling starts the CPU fetches a start address (vector) from the exception vector table and starts program execution from that address. All interrupts, including NMI, are disabled during reset exception handling and after it ends.

#### (3) Interrupt Exception Handling and Trap Instruction Exception Handling

When interrupt or trap-instruction exception handling begins, the CPU references the stack pointer (ER7) and pushes the program counter and other control registers onto the stack. Next, the CPU alters the settings of the interrupt mask bits in the control registers. Then the CPU fetches a start address (vector) from the exception vector table and program execution starts from that start address.

Figure 2.17 shows the stack after exception handling ends.

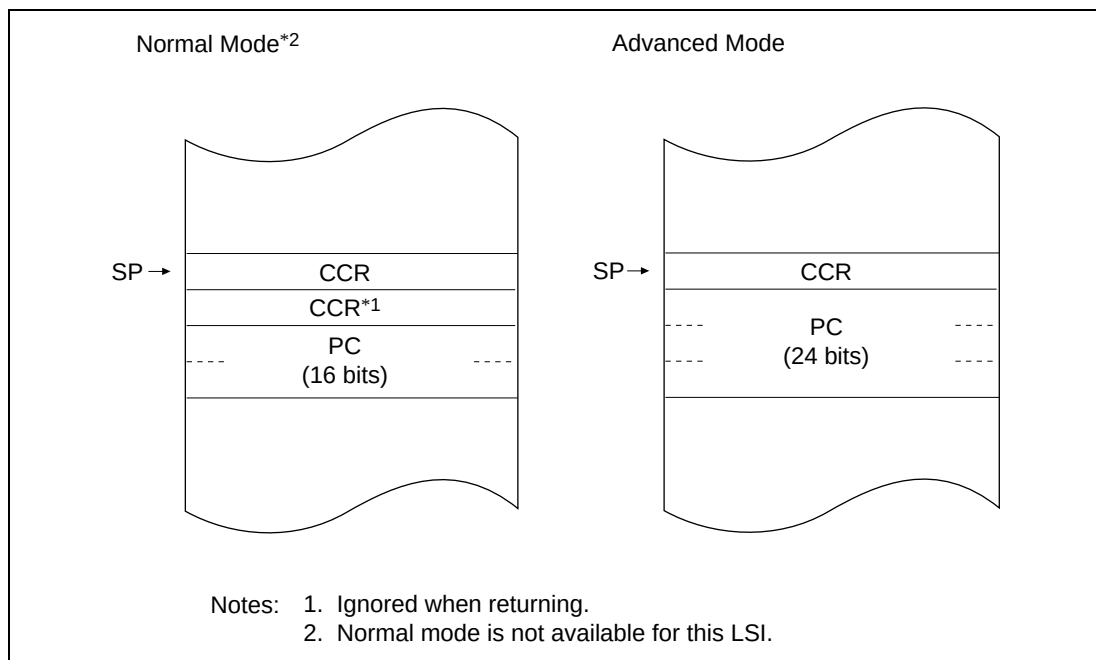


**Figure 2.17 Stack Structure after Exception Handling (Examples)**

#### 2.8.4 Program Execution State

In this state the CPU executes program instructions in sequence.

### 2.8.5 Power-Down State

The power-down state includes both modes in which the CPU stops operating and modes in which the CPU does not stop. There are five modes in which the CPU stops operating: sleep mode, standby mode, subsleep mode, and watch mode. There are also three other power-down modes: medium-speed mode, module stop mode, and subactive mode. In medium-speed mode, the CPU operates on a medium-speed clock. Module stop mode permits halting of the operation of individual modules, other than the CPU. Subactive mode, subsleep mode, and watch mode are power-down modes that use subclock input. For details, see section 4, Power-Down State.

#### (1) Sleep Mode

A transition to sleep mode is made if the SLEEP instruction is executed while the software standby bit (SSBY) in the standby control register (SBYCR) and the LSON bit in the low-power control register (LPWRCR) are both cleared to 0. In sleep mode, CPU operations stop immediately after execution of the SLEEP instruction. The contents of CPU registers are retained.

#### (2) Standby Mode

A transition to standby mode is made if the SLEEP instruction is executed while the SSBY bit in SBYCR is set to 1 and the LSON bit in LPWRCR and the TMA3 bit in the TMA (timer A) are both cleared to 0. In standby mode, the CPU and clock halt and all MCU operations stop. As long as a specified voltage is supplied, the contents of CPU registers and on-chip RAM are retained.



# 2.9 Basic Timing

## 2.9.1 Overview

The CPU is driven by a system clock, denoted by the symbol  $\phi$ . The period from one rising edge of  $\phi$  to the next is referred to as a “state.” The memory cycle or bus cycle consists of one or two states. Different methods are used to access on-chip memory and on-chip supporting modules.

## 2.9.2 On-Chip Memory (ROM, RAM)

On-chip memory is accessed in one state. The data bus is 16 bits wide, permitting both byte and word transfer instruction. Figure 2.18 shows the on-chip memory access cycle.

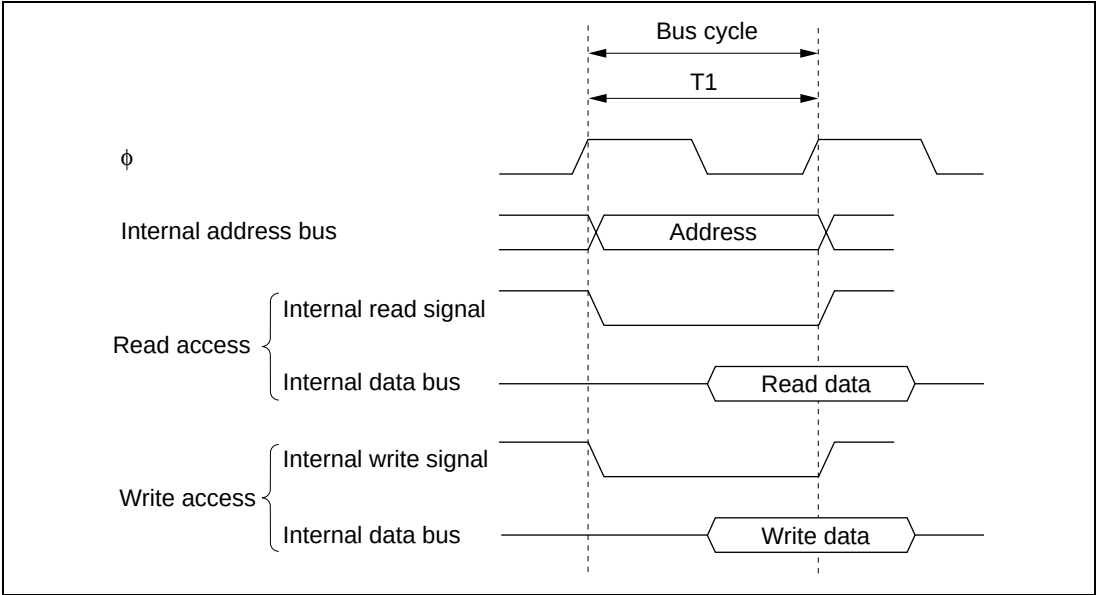


**Figure 2.18 On-Chip Memory Access Cycle**

### 2.9.3 On-Chip Supporting Module Access Timing

The on-chip supporting modules are accessed in two states. The data bus is either 8 bits or 16 bits wide, depending on the particular internal I/O register being accessed. Figure 2.19 shows the access timing for the on-chip supporting modules.

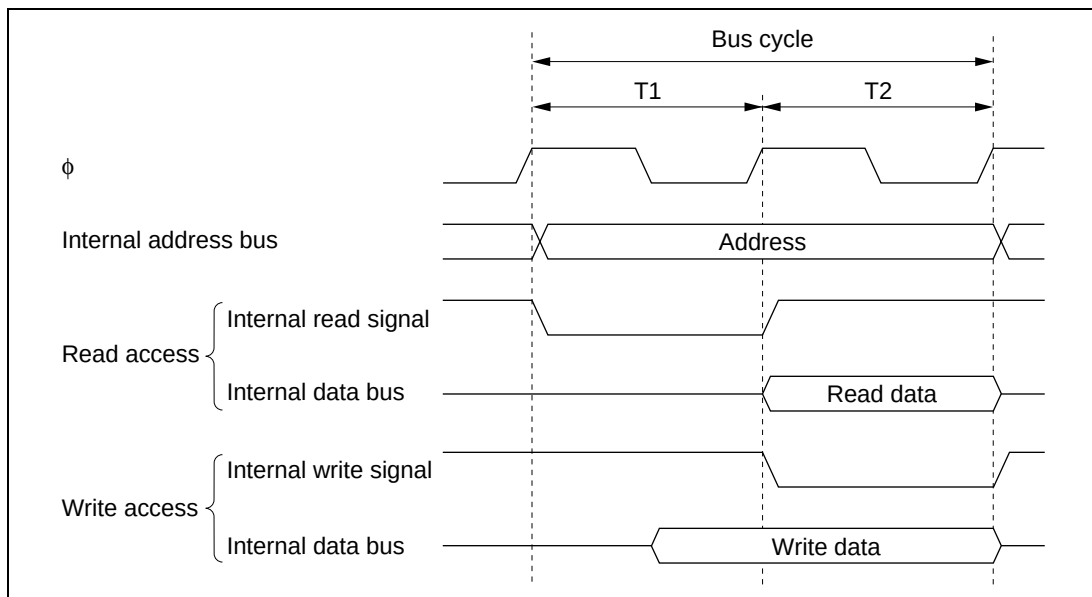


**Figure 2.19 On-Chip Supporting Module Access Cycle**

## **2.10 Usage Note**

### **2.10.1 TAS Instruction**

Only register ER0, ER1, ER4, or ER5 should be used when using the TAS instruction. The TAS instruction is not generated by the Hitachi H8S and H8/300 series C/C++ compilers. If the TAS instruction is used as a user-defined intrinsic function, ensure that only register ER0, ER1, ER4, or ER5 is used.

### **2.10.2 STM/LDM Instruction**

ER7 is not used as the register that can be saved (STM)/restored (LDM) when using STM/LDM instruction, because ER7 is the stack pointer. Two, three, or four registers can be saved/restored by one STM/LDM instruction. The following ranges can be specified in the register list.

Two registers : ER0—ER1, ER2—ER3, or ER4—ER5

Three registers : ER0—ER2 or ER4—ER6

Four registers : ER0—ER3

The STM/LDM instruction including ER7 is not generated by the Hitachi H8S and H8/300 series C/C++ compilers.



# Section 3 MCU Operating Modes

## 3.1 Overview

### 3.1.1 Operating Mode Selection

This LSI has one operating mode (mode 1). This mode is selected depending on settings of the mode pin (MD0).

Table 3.1 lists the MCU operating modes.

**Table 3.1 MCU Operating Mode Selection**

| MCU Operating Mode | MD0 | CPU Operating Mode | Description      |
|--------------------|-----|--------------------|------------------|
| 0                  | 0   | —                  | —                |
| 1                  | 1   | Advanced           | Single-chip mode |

The CPU's architecture allows for 4 Gbytes of address space, but this LSI actually accesses a maximum of 16 Mbytes.

Mode 1 operation starts in single-chip mode after reset release.

This LSI can only be used in mode 1. This means that the mode pins must be set at mode 1. Do not change the inputs at the mode pins during operation.

### 3.1.2 Register Configuration

This LSI has a mode control register (MDCR) that indicates the inputs at the mode pin (MD0) and a system control register (SYSCR) and that controls the operation of this LSI. Table 3.2 summarizes these registers.

**Table 3.2 MCU Registers**

| Name                    | Abbreviation | R/W | Initial Value | Address* |
|-------------------------|--------------|-----|---------------|----------|
| Mode control register   | MDCR         | R   | Undetermined  | H'FFE9   |
| System control register | SYSCR        | R/W | H'09          | H'FFE8   |

Note: \*Lower 16 bits of the address.

## 3.2 Register Descriptions

### 3.2.1 Mode Control Register (MDCR)

|                 |   |   |   |   |   |   |   |      |
|-----------------|---|---|---|---|---|---|---|------|
| Bit :           | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0    |
|                 | — | — | — | — | — | — | — | MDS0 |
| Initial value : | 0 | 0 | 0 | 0 | 0 | 0 | 0 | —*   |
| R/W :           | — | — | — | — | — | — | — | R    |

Note: \* Determined by MD0 pin

MDCR is an 8-bit read-only register monitors the current operating mode of this LSI.

#### Bits 7 to 1: Reserved.

These bits cannot be modified and are always read as 0.

#### Bit 0: Mode Select 0 (MDS0)

This bit indicates the value which reflects the input levels at mode pin (MD0) (the current operating mode). Bit MDS0 corresponds to MD0 pin. They are read-only bits-they cannot be written to. The mode pin (MD0) input levels are latched into these bits when MDCR is read.

### 3.2.2 System Control Register (SYSCR)

|                 |   |   |       |       |      |   |   |   |
|-----------------|---|---|-------|-------|------|---|---|---|
| Bit :           | 7 | 6 | 5     | 4     | 3    | 2 | 1 | 0 |
|                 | — | — | INTM1 | INTM0 | XRST | — | — | — |
| Initial value : | 0 | 0 | 0     | 0     | 1    | 0 | 0 | 1 |
| R/W :           | — | — | R     | R/W   | R    | — | — | — |

**Bits 7 and 6—Reserved:** These bits cannot be modified and are always read as 0.

### Bits 5 and 4—Interrupt control modes 1 and 0 (INTM1, INTM0)

These bits are for selecting the interrupt control mode of the interrupt controller. For details of the interrupt control modes, see section 6.4.1, Interrupt Control Modes and Interrupt Operation.

| Bit 5 | Bit 4 | Interrupt Control Mode | Description                                       |
|-------|-------|------------------------|---------------------------------------------------|
| INTM1 | INTM0 |                        |                                                   |
| 0     | 0     | 0                      | Interrupt is controlled by bit I (Initial value)  |
|       | 1     | 1                      | Interrupt is controlled by bits I and UI, and ICR |
| 1     | 0     | —                      | Cannot be used in this LSI                        |
|       | 1     | —                      | Cannot be used in this LSI                        |

**Bit 3—External Reset (XRST):** Indicates the reset source. When the watchdog timer is used, a reset can be generated by watchdog timer overflow as well as by external reset input. XRST is a read-only bit. It is set to 1 by an external reset and cleared to 0 by watchdog timer overflow.

#### Bit 3

| XRST | Description                                               |
|------|-----------------------------------------------------------|
| 0    | A reset is generated by watchdog timer overflow           |
| 1    | A reset is generated by an external reset (Initial value) |


**Bits 2 and 1—Reserved:** These bits cannot be modified and are always read as 0.

**Bit 0—Reserved:** This bit is always read as 1.

## 3.3 Operating Mode (Mode 1)

The CPU can access a 16 Mbyte address space in advanced mode.

### 3.4

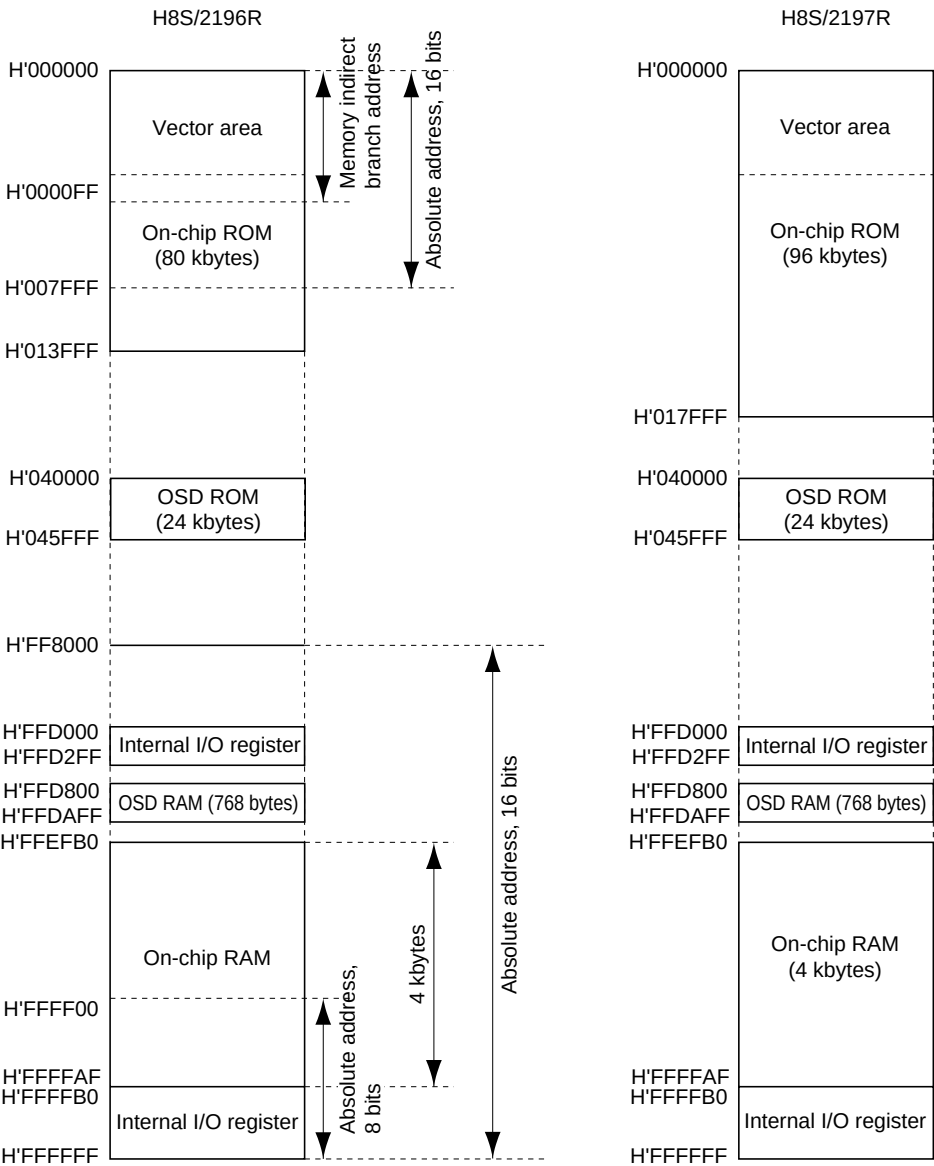

### Figure 3.1 Address Map (1)



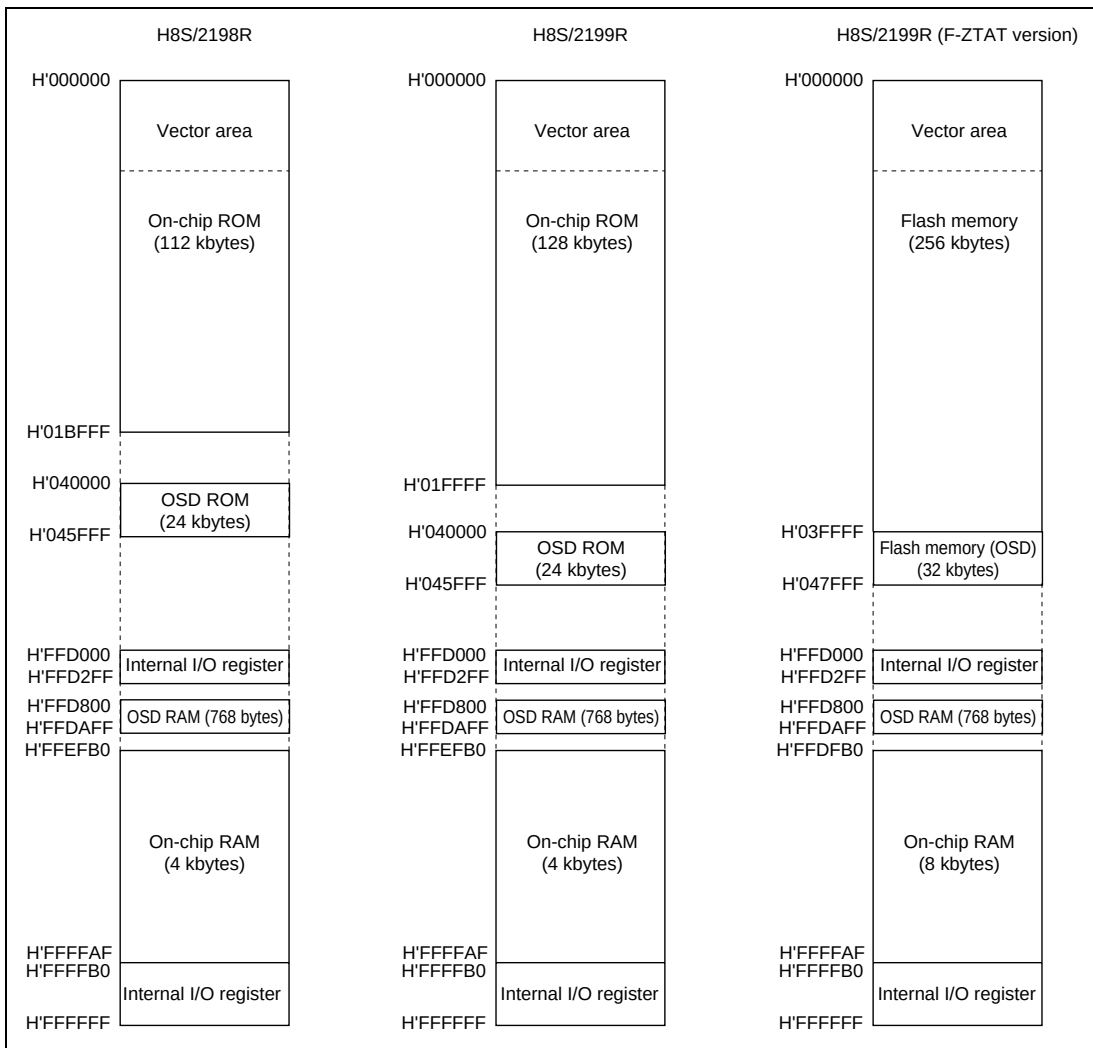


**Figure 3.2 Address Map (2)**

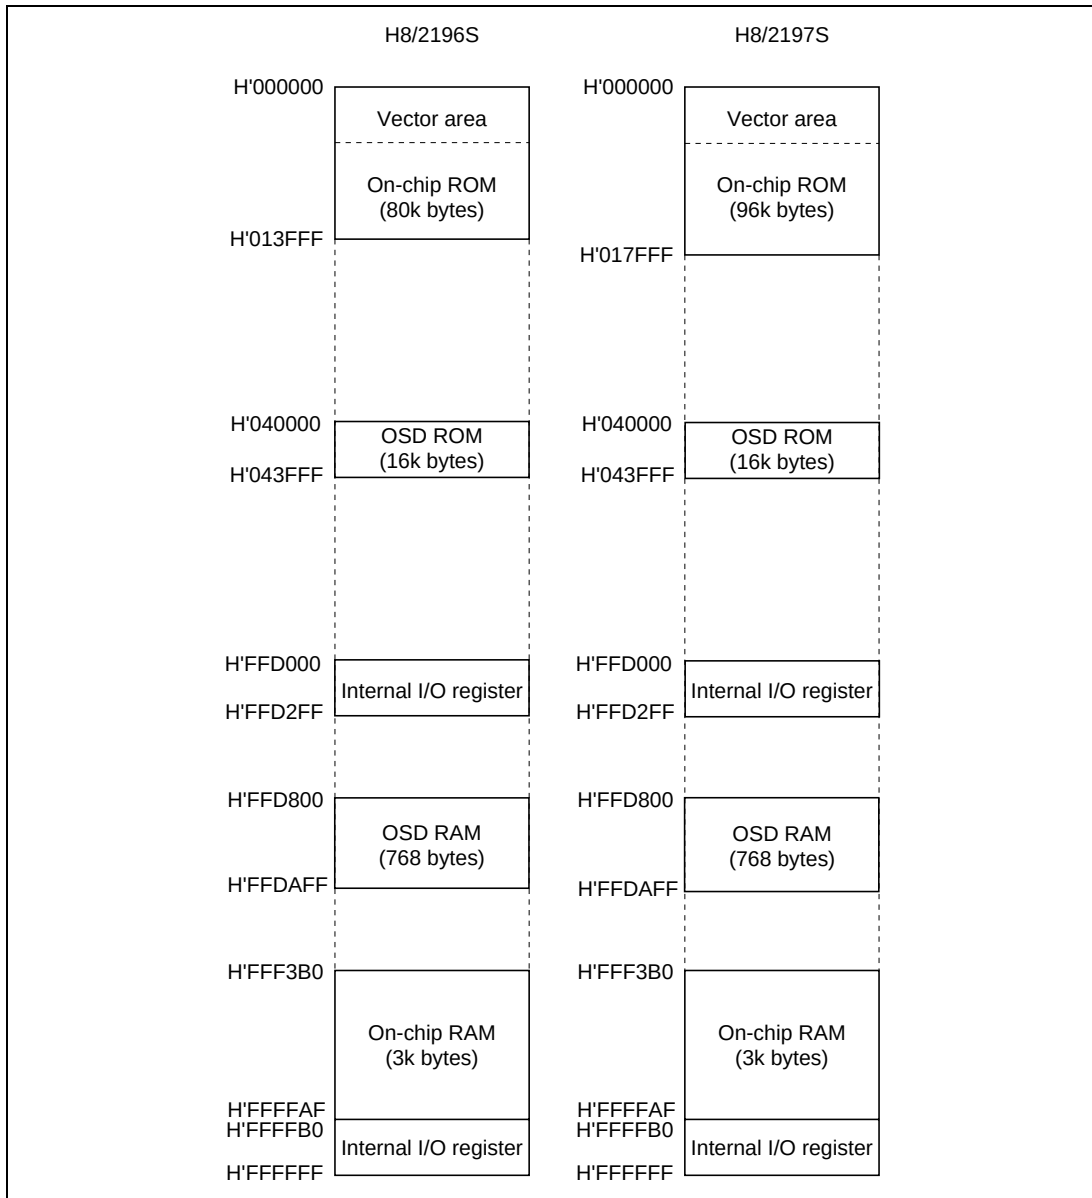


**Figure 3.3 Address Map (3)**

## Section 4 Power-Down State

### 4.1 Overview

In addition to the normal program execution state, this LSI has a power-down state in which operation of the CPU and oscillator is halted and power dissipation is reduced. Low-power operation can be achieved by individually controlling the CPU, on-chip supporting modules, and so on.

This LSI operating modes are as follows:

1. High-speed mode
2. Medium-speed mode
3. Sub-active mode
4. Sleep mode
5. Sub-sleep mode
6. Watch mode
7. Module stop mode
8. Standby mode

Of these, 2 to 8 are power-down modes. Certain combinations of these modes can be set.

After a reset, the MCU is in high-speed mode.


Table 4.1 shows the internal chip states in each mode, and table 4.2 shows the conditions for transition to the various modes. Figure 4.1 shows a mode transition diagram.

**Table 4.1 H8S/2199R Series Internal States in Each Mode**

| Function                            |                          | High-Speed  | Medium-Speed | Sleep             | Module Stop                       | Watch                | Sub-active           | Sub-sleep            | Standby              |
|-------------------------------------|--------------------------|-------------|--------------|-------------------|-----------------------------------|----------------------|----------------------|----------------------|----------------------|
| System clock                        |                          | Functioning | Functioning  | Functioning       | Functioning                       | Halted               | Halted               | Halted               | Halted               |
| Subclock pulse generator            |                          | Functioning | Functioning  | Functioning       | Functioning                       | Functioning          | Functioning          | Functioning          | Functioning          |
| CPU operation                       | Instructions             | Functioning | Medium-speed | Halted            | Functioning                       | Halted               | Subclock operation   | Halted               | Halted               |
|                                     | Registers                |             |              | Retained          |                                   | Retained             |                      | Retained             | Retained             |
| External interrupts                 | IRQ0                     | Functioning | Functioning  | Functioning       | Functioning                       | Functioning          | Functioning          | Functioning          | Functioning          |
|                                     | IRQ1                     |             |              |                   |                                   |                      |                      |                      |                      |
|                                     | IRQ2                     |             |              |                   |                                   | Halted               | Halted               | Functioning          | Halted               |
|                                     | IRQ3                     |             |              |                   |                                   |                      |                      |                      |                      |
|                                     | IRQ4                     |             |              |                   |                                   |                      |                      |                      |                      |
|                                     | IRQ5                     |             |              |                   |                                   |                      |                      |                      |                      |
| On-chip supporting module operation | I/O                      | Functioning | Functioning  | Retained          | Functioning                       | Halted               | Functioning          | Retained             | Halted               |
|                                     | Timer A                  | Functioning | Functioning  | Functioning       | Functioning /halted (retained)    | Subclock operation   | Subclock operation   | Subclock operation   | Halted (retained)    |
|                                     | Timer B                  | Functioning | Functioning  | Functioning       | Functioning /halted (retained)    | Halted (retained)    | Halted (retained)    | Halted (retained)    | Halted (retained)    |
|                                     | Timer J                  |             |              |                   |                                   |                      |                      |                      |                      |
|                                     | Timer L                  |             |              |                   |                                   |                      |                      |                      |                      |
|                                     | Timer R                  |             |              |                   | Functioning /halted (reset)       | Halted (reset)       | Halted (reset)       | Halted (reset)       | Halted (reset)       |
|                                     | Timer X1* <sup>2</sup>   |             |              |                   |                                   |                      |                      |                      |                      |
|                                     | Watchdog timer           | Functioning | Functioning  | Functioning       | Functioning                       | Halted (retained)    | Halted (retained)    | Halted (retained)    | Halted (retained)    |
|                                     | 8-bit PWM                | Functioning | Functioning  | Functioning       | Functioning /halted (retained)    | Halted (retained)    | Halted (retained)    | Halted (retained)    | Halted (retained)    |
|                                     | 14-bit PWM* <sup>2</sup> |             |              |                   |                                   |                      |                      |                      |                      |
|                                     | 12-bit PWM               | Functioning | Functioning  | Halted (reset)    | Functioning /halted (reset)       | Halted (reset)       | Halted (reset)       | Halted (reset)       | Halted (reset)       |
|                                     | PSU                      | Functioning | Functioning  | Functioning       | Functioning /halted               | Subclock operation   | Subclock operation   | Subclock operation   | Halted               |
|                                     | SCI1                     | Functioning | Functioning  | Functioning       | Functioning /halted* <sup>1</sup> | Halted* <sup>1</sup> | Halted* <sup>1</sup> | Halted* <sup>1</sup> | Halted* <sup>1</sup> |
|                                     | IIC                      |             |              |                   | Functioning /halted (retained)    | Halted (retained)    | Halted (retained)    | Halted (retained)    | Halted (retained)    |
|                                     | A/D                      |             |              |                   | Functioning /halted (reset)       | Halted (reset)       | Halted (reset)       | Halted (reset)       | Halted (reset)       |
|                                     | Servo circuit            | Functioning | Functioning  | Halted (reset)    | Functioning /halted (reset)       | Halted (reset)       | Halted (reset)       | Halted (reset)       | Halted (reset)       |
|                                     | Sync separator           | Functioning | Functioning  | Halted (retained) | Functioning /halted (retained)    | Halted (retained)    | Halted (retained)    | Halted (retained)    | Halted (retained)    |
|                                     | Data slicer              | Functioning | Functioning  | Halted (reset)    | Functioning /halted (reset)       | Halted (reset)       | Halted (reset)       | Halted (reset)       | Halted (reset)       |
|                                     | OSD                      |             |              |                   |                                   |                      |                      |                      |                      |

- Notes: 1. "Halted (retained)" means that internal register values are retained. The internal state is "operation suspended."
2. "Halted (reset)" means that internal register values and internal states are initialized.
3. In module stop mode, only modules for which a stop setting has been made are halted (reset or retained).

4. In the power-down mode, the analog section of the servo circuits are not turned off, therefore Vcc (Servo) current does not go low. When power-down is needed, externally shut down the analog system power.
- \*1 The SCI1 status differs from the internal register. For details, refer to section 22, Serial Communication Interface 1.
- \*2 Not available in the H8S/2197S or H8S/2196S.

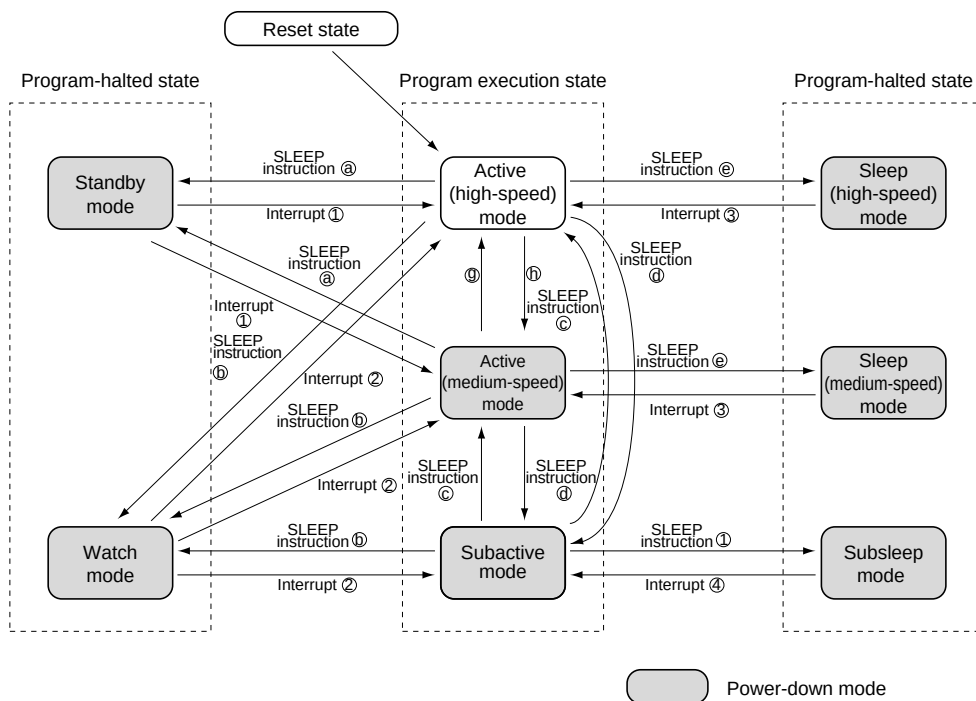

Conditions for mode transition (1)

| Flag | LSON                             | SSBY | TMA3 | DTON |
|------|----------------------------------|------|------|------|
| (a)  | 0                                | 1    | 0    | *    |
| (b)  | *                                | 1    | 1    | 0    |
| (c)  | 0                                | 1    | 1    | 1    |
| (d)  | 1                                | 1    | 1    | 1    |
| (e)  | 0                                | 0    | *    | *    |
| (f)  | 1                                | 0    | 1    | *    |
| (g)  | SCK1 to 0 = 0                    |      |      |      |
| (h)  | SCK1 to 0 ≠ 0 (either 1 bit = 0) |      |      |      |

Note: \* Don't care

Conditions for mode transition (2)

|     | Interruption factor                       |
|-----|-------------------------------------------|
| (1) | IRQ0 to 1                                 |
| (2) | IRQ0 to 1, Timer A interruption           |
| (3) | All interruption (excluding servo system) |
| (4) | IRQ0 to 5, Timer A interruption           |

Note: When a transition is made between modes by means of an interrupt, transition cannot be made on interrupt source generation alone. Ensure that interrupt handling is performed after accepting the interrupt request

Figure 4.1 Mode Transitions

**Table 4.2 Power-Down Mode Transition Conditions**

| State before Transition     | Control Bit States at Time of Transition |      |      |      | State after Transition by SLEEP Instruction | State after Return by Interrupt           |
|-----------------------------|------------------------------------------|------|------|------|---------------------------------------------|-------------------------------------------|
|                             | SSBY                                     | TMA3 | LSON | DTON |                                             |                                           |
| High-speed/<br>medium-speed | 0                                        | *    | 0    | *    | Sleep                                       | High-speed/<br>medium-speed* <sup>1</sup> |
|                             | 0                                        | *    | 1    | *    | —                                           | —                                         |
|                             | 1                                        | 0    | 0    | *    | Standby                                     | High-speed/<br>medium-speed* <sup>1</sup> |
|                             | 1                                        | 0    | 1    | *    | —                                           | —                                         |
|                             | 1                                        | 1    | 0    | 0    | Watch                                       | High-speed/<br>medium-speed* <sup>1</sup> |
|                             | 1                                        | 1    | 1    | 0    | Watch                                       | Subactive                                 |
|                             | 1                                        | 1    | 0    | 1    | —                                           | —                                         |
|                             | 1                                        | 1    | 1    | 1    | Subactive                                   | —                                         |
| Subactive                   | 0                                        | 0    | *    | *    | —                                           | —                                         |
|                             | 0                                        | 1    | 0    | *    | —                                           | —                                         |
|                             | 0                                        | 1    | 1    | *    | Subsleep                                    | Subactive                                 |
|                             | 1                                        | 0    | *    | *    | —                                           | —                                         |
|                             | 1                                        | 1    | 0    | 0    | Watch                                       | High-speed/<br>medium-speed* <sup>2</sup> |
|                             | 1                                        | 1    | 1    | 0    | Watch                                       | Subactive                                 |
|                             | 1                                        | 1    | 0    | 1    | High-speed/<br>medium-speed* <sup>2</sup>   | —                                         |
|                             | 1                                        | 1    | 1    | 1    | —                                           | —                                         |

Notes: \* Don't care

—: Do not set.

1. Returns to the state before transition.

2. Mode varies depending on the state of SCK1 to SCK0.

### 4.1.1 Register Configuration

The power-down state is controlled by the SBYCR, LPWRCR, TMA (Timer A), and MSTPCR registers. Table 4.3 summarizes these registers.

**Table 4.3 Power-Down State Registers**

| Name                         | Abbreviation | R/W | Initial Value | Address* |
|------------------------------|--------------|-----|---------------|----------|
| Standby control register     | SBYCR        | R/W | H'00          | H'FFEA   |
| Low-power control register   | LPWRCR       | R/W | H'00          | H'FFEB   |
| Module stop control register | MSTPCRH      | R/W | H'FF          | H'FFEC   |
|                              | MSTPCRL      | R/W | H'FF          | H'FFED   |
| Timer mode register A        | TMA          | R/W | H'30          | H'FFBA   |

Note: \*Lower 16 bits of the address.

## 4.2 Register Descriptions

### 4.2.1 Standby Control Register (SBYCR)

|                 |      |      |      |      |   |   |      |      |
|-----------------|------|------|------|------|---|---|------|------|
| Bit :           | 7    | 6    | 5    | 4    | 3 | 2 | 1    | 0    |
|                 | SSBY | STS2 | STS1 | STS0 | — | — | SCK1 | SCK0 |
| Initial value : | 0    | 0    | 0    | 0    | 0 | 0 | 0    | 0    |
| R/W :           | R/W  | R/W  | R/W  | R/W  | — | — | R/W  | R/W  |

SBYCR is an 8-bit readable/writable register that performs power-down mode control. SBYCR is initialized to H'00 by a reset.

**Bit 7—Software Standby (SSBY):** Determines the operating mode, in combination with other control bits, when a power-down mode transition is made by executing a SLEEP instruction. The SSBY setting is not changed by a mode transition due to an interrupt, etc.

#### Bit 7

| SSBY | Description                                                                                                                                                                                                                                  |
|------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 0    | Transition to sleep mode after execution of SLEEP instruction in high-speed mode or medium-speed mode<br>Transition to subsleep mode after execution of SLEEP instruction in subactive mode (Initial value)                                  |
| 1    | Transition to standby mode, subactive mode, or watch mode after execution of SLEEP instruction in high-speed mode or medium-speed mode<br>Transition to watch mode or high-speed mode after execution of SLEEP instruction in subactive mode |



**Bits 6 to 4—Standby Timer Select 2 to 0 (STS2 to STS0):** These bits select the time the MCU waits for the clock to stabilize when standby mode, watch mode, or subactive mode is cleared and a transition is made to high-speed mode or medium-speed mode by means of a specific interrupt or instruction. With crystal oscillation, see table 4.5 and make a selection according to the operating frequency so that the standby time is at least 10 ms (the oscillation settling time).

| Bit 6 | Bit 5 | Bit 4 | Description                  |
|-------|-------|-------|------------------------------|
| STS2  | STS1  | STS0  |                              |
| 0     | 0     | 0     | Standby time = 8192 states   |
| 0     | 0     | 1     | Standby time = 16384 states  |
| 0     | 1     | 0     | Standby time = 32768 states  |
| 0     | 1     | 1     | Standby time = 65536 states  |
| 1     | 0     | 0     | Standby time = 131072 states |
| 1     | 0     | 1     | Standby time = 262144 states |
| 1     | 1     | *     | Reserved                     |

Note: \*Don't care

**Bits 3 and 2—Reserved:** These bits cannot be modified and are always read as 0.

**Bits 1 and 0—System Clock Select 1 and 0 (SCK1, SCK0):** These bits select the CPU clock for the bus master in high-speed mode and medium-speed mode.

| Bit 1 | Bit 0 | Description                                      |
|-------|-------|--------------------------------------------------|
| SCK1  | SCK0  |                                                  |
| 0     | 0     | Bus master is in high-speed mode (Initial value) |
| 0     | 1     | Medium-speed clock is $\phi/16$                  |
| 1     | 0     | Medium-speed clock is $\phi/32$                  |
| 1     | 1     | Medium-speed clock is $\phi/64$                  |

### 4.2.2 Low-Power Control Register (LPWRCR)

|                 |      |      |       |   |   |   |     |     |
|-----------------|------|------|-------|---|---|---|-----|-----|
| Bit :           | 7    | 6    | 5     | 4 | 3 | 2 | 1   | 0   |
|                 | DTON | LSON | NESEL | — | — | — | SA1 | SA0 |
| Initial value : | 0    | 0    | 0     | 0 | 0 | 0 | 0   | 0   |
| R/W :           | R/W  | R/W  | R/W   | — | — | — | R/W | R/W |

LPWRCR is an 8-bit readable/writable register that performs power-down mode control.  
LPWRCR is initialized to H'00 by a reset.

**Bit 7—Direct-Transfer on Flag (DTON):** Specifies whether a direct transition is made between high-speed mode, medium-speed mode, and subactive mode when making a power-down transition by executing a SLEEP instruction. The operating mode to which the transition is made after SLEEP instruction execution is determined by a combination of other control bits.

#### Bit 7

| DTON | Description                                                                                                                                                                                                                                                                                                                                                                                   |
|------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 0    | <ul style="list-style-type: none"><li>When a SLEEP instruction is executed in high-speed mode or medium-speed mode, a transition is made to sleep mode, standby mode, or watch mode</li><li>When a SLEEP instruction is executed in subactive mode, a transition is made to subsleep mode or watch mode (Initial value)</li></ul>                                                             |
| 1    | <ul style="list-style-type: none"><li>When a SLEEP instruction is executed in high-speed mode or medium-speed mode, transition is made directly to subactive mode, or a transition is made to sleep mode or standby mode</li><li>When a SLEEP instruction is executed in subactive mode, a transition is made directly to high-speed mode, or a transition is made to subsleep mode</li></ul> |

**Bit 6—Low-Speed on Flag (LSON):** Determines the operating mode in combination with other control bits when making a power-down transition by executing a SLEEP instruction. Also controls whether a transition is made to high-speed mode or to subactive mode when watch mode is cleared.

**Bit 6**

| LSON | Description                                                                                                                                                                                                                                                                                                                                                                                                                     |
|------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 0    | <ul style="list-style-type: none"> <li>When a SLEEP instruction is executed in high-speed mode or medium-speed mode, transition is made to sleep mode, standby mode, or watch mode</li> <li>When a SLEEP instruction is executed in subactive mode, a transition is made to watch mode, or directly to high-speed mode</li> <li>After watch mode is cleared, a transition is made to high-speed mode (Initial value)</li> </ul> |
| 1    | <ul style="list-style-type: none"> <li>When a SLEEP instruction is executed in high-speed mode a transition is made to watch mode, subactive mode, sleep mode or standby mode</li> <li>When a SLEEP instruction is executed in subactive mode, a transition is made to subsleep mode or watch mode</li> <li>After watch mode is cleared, a transition is made to subactive mode</li> </ul>                                      |

**Bit 5—Noise Elimination Sampling Frequency Select (NESEL):** Selects the frequency at which the subclock ( $\phi_w$ ) generated by the subclock pulse generator is sampled with the clock ( $\phi$ ) generated by the system clock oscillator. When  $\phi = 5$  MHz or higher, clear this bit to 0.

**Bit 5**

| NESEL | Description                      |
|-------|----------------------------------|
| 0     | Sampling at $\phi$ divided by 16 |
| 1     | Sampling at $\phi$ divided by 4  |

**Bits 4 to 2—Reserved:** These bits cannot be modified and are always read as 0.

**Bits 1 and 0—Subactive Mode Clock Select 1 and 0 (SA1, SA0):** These bits select the CPU operating clock in the subactive mode. These bits cannot be modified in the subactive mode.

| Bit 1<br>SA1 | Bit 0<br>SA0 | Description                                          |
|--------------|--------------|------------------------------------------------------|
| 0            | 0            | Operating clock of CPU is $\phi_w/8$ (Initial value) |
| 0            | 1            | Operating clock of CPU is $\phi_w/4$                 |
| 1            | *            | Operating clock of CPU is $\phi_w/2$                 |

Note: \*Don't care

### 4.2.3 Timer Register A (TMA)

|                 |        |       |     |     |      |      |      |      |
|-----------------|--------|-------|-----|-----|------|------|------|------|
| Bit :           | 7      | 6     | 5   | 4   | 3    | 2    | 1    | 0    |
|                 | TMAOV  | TMAIE | —   | —   | TMA3 | TMA2 | TMA1 | TMA0 |
| Initial value : | 0      | 0     | 1   | 1   | 0    | 0    | 0    | 0    |
| R/W :           | R/(W)* | R/W   | R/W | R/W | R/W  | R/W  | R/W  | R/W  |

Note: \* Only 0 can be written, to clear the flag.

The timer register A (TMA) controls timer A interrupts and selects input clock.

Only bit 3 is explained here. For details of other bits, see section 11.2.1, Timer Mode Register A.

TMA is a readable/writable register which is initialized to H'30 by a reset.


**Bit 3—Clock Source, Prescaler Select (TMA3):** Selects timer A clock source between PSS and PSW. It also controls transition operation to the power-down mode. The operation mode to which the MCU is transitioned after SLEEP instruction execution is determined by the combination with other control bits.

For details, see the description of clock select 2 to 0 in section 11.2.1, Timer Mode Register A.

#### Bit 3

| TMA3 | Description                                                                                                                                                                                                                                                                                                                                                                                                                       |
|------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 0    | <ul style="list-style-type: none"><li>• Timer A counts <math>\phi</math>-based prescaler (PSS) divided clock pulses</li><li>• When a SLEEP instruction is executed in high-speed mode or medium-speed mode, a transition is made to sleep mode or software standby mode (Initial value)</li></ul>                                                                                                                                 |
| 1    | <ul style="list-style-type: none"><li>• Timer A counts <math>\phi_w</math>-based prescaler (PSW) divided clock pulses</li><li>• When a SLEEP instruction is executed in high-speed mode or medium-speed mode, a transition is made to sleep mode, watch mode, or subactive mode</li><li>• When a SLEEP instruction is executed in subactive mode, a transition is made to subsleep mode, watch mode, or high-speed mode</li></ul> |

4.2.4 Module Stop Control Register (MSTPCR)

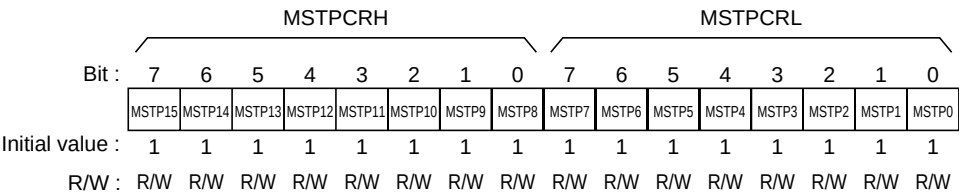

MSTPCR comprises two 8-bit readable/writable registers that perform module stop mode control.

MSTPCR is initialized to H'FFFF by a reset.

**MSTPCRH and MSTPCRL Bits 7 to 0—Module Stop (MSTP 15 to MSTP 0):** These bits specify module stop mode. See table 4.4 for the method of selecting on-chip supporting modules.

MSTPCRH, MSTPCRL  
Bits 7 to 0

| MSTP 15 to MSTP 0 | Description                             |
|-------------------|-----------------------------------------|
| 0                 | Module stop mode is cleared             |
| 1                 | Module stop mode is set (Initial value) |

## 4.3 Medium-Speed Mode

When the SCK1 and SCK0 bits in SBYCR are set to 1 in high-speed mode, the operating mode changes to medium-speed mode at the end of the bus cycle. In medium-speed mode, the CPU operates on the operating clock ( $\phi 16$ ,  $\phi 32$  or  $\phi 64$ ) specified by the SCK1 and SCK0 bits. The on-chip supporting modules other than the CPU always operate on the high-speed clock ( $\phi$ ).

In medium-speed mode, a bus access is executed in the specified number of states with respect to the bus master operating clock. For example, if  $\phi 16$  is selected as the operating clock, on-chip memory is accessed in 16 states, and internal I/O registers in 32 states.

Medium-speed mode is cleared by clearing the both bits SCK1 and SCK0 to 0. A transition is made to high-speed mode and medium-speed mode is cleared at the end of the current bus cycle.

If a SLEEP instruction is executed when the SSBY bit in SBYCR and the LSON bit in LPWRCR are cleared to 0, a transition is made to sleep mode. When sleep mode is cleared by an interrupt, medium-speed mode is restored.

If a SLEEP instruction is executed when the SSBY bit in SBYCR is set to 1, and the LSON bit in LPWRCR and the TMA3 bit in TMA (Timer A) are both cleared to 0, a transition is made to software standby mode. When standby mode is cleared by an external interrupt, medium-speed mode is restored.

When the  $\overline{\text{RES}}$  pin is driven low, a transition is made to the reset state, and medium-speed mode is cleared. The same applies in the case of a reset caused by overflow of the watchdog timer.

Figure 4.2 shows the timing for transition to and clearance of medium-speed mode.

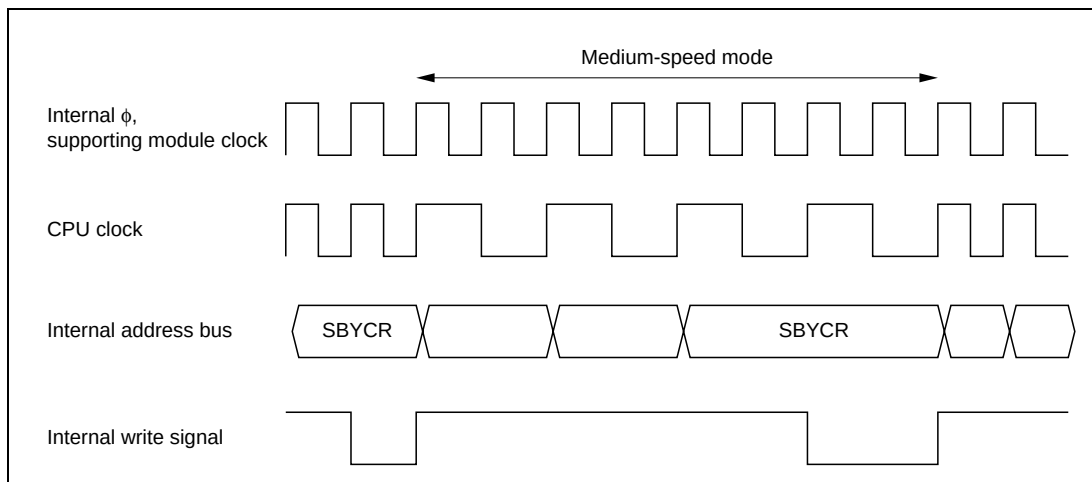


**Figure 4.2 Medium-Speed Mode Transition and Clearance Timing**

## 4.4 Sleep Mode

### 4.4.1 Sleep Mode

If a SLEEP instruction is executed when the SSBY bit in SBYCR and the LSON bit in LPWRCR are both cleared to 0, the CPU will enter sleep mode. In sleep mode, CPU operation stops but the contents of the CPU's internal registers are retained. Other supporting modules (excluding some functions) do not stop.

### 4.4.2 Clearing Sleep Mode

Sleep mode is cleared by any interrupt, or with the  $\overline{\text{RES}}$  pin.

**Clearing with an Interrupt:** When an interrupt request signal is input, sleep mode is cleared and interrupt exception handling is started. Sleep mode will not be cleared if interrupts are disabled, or if interrupts other than NMI have been masked by the CPU.

**Clearing with the  $\overline{\text{RES}}$  Pin:** When the  $\overline{\text{RES}}$  pin is driven low, the reset state is entered. When the  $\overline{\text{RES}}$  pin is driven high after the prescribed reset input period, the CPU begins reset exception handling.

## 4.5 Module Stop Mode

### 4.5.1 Module Stop Mode

Module stop mode can be set for individual on-chip supporting modules.

When the corresponding MSTP bit in MSTPCR is set to 1, module operation stops at the end of the bus cycle and a transition is made to module stop mode. The CPU continues operating independently.

Table 4.4 shows MSTP bits and the on-chip supporting modules.

When the corresponding MSTP bit is cleared to 0, module stop mode is cleared and the module starts operating again at the end of the bus cycle. In module stop mode, the internal states of modules excluding some modules are retained.

After reset release, all modules are in module stop mode.

When an on-chip supporting module is in module stop mode, read/write access to its registers is disabled.

**Table 4.4 MSTP Bits and Corresponding On-Chip Supporting Modules**

| Register | Bit    | Module                                  |
|----------|--------|-----------------------------------------|
| MSTPCRH  | MSTP15 | Timer A                                 |
|          | MSTP14 | Timer B                                 |
|          | MSTP13 | Timer J                                 |
|          | MSTP12 | Timer L                                 |
|          | MSTP11 | Timer R                                 |
|          | MSTP10 | Timer X1*                               |
|          | MSTP9  | Sync separator                          |
|          | MSTP8  | Serial communication interface 1 (SCI1) |
| MSTPCRL  | MSTP7  | I <sup>2</sup> C bus interface (IIC0)*  |
|          | MSTP6  | I <sup>2</sup> C bus interface (IIC1)   |
|          | MSTP5  | 14-bit PWM*                             |
|          | MSTP4  | 8-bit PWM                               |
|          | MSTP3  | Data slicer                             |
|          | MSTP2  | A/D converter                           |
|          | MSTP1  | Servo circuit, 12-bit PWM               |
|          | MSTP0  | OSD                                     |

Note: \* This bit has no function in the H8S/2197S or H8S/2196S.



## 4.6 Standby Mode

### 4.6.1 Standby Mode

If a SLEEP instruction is executed when the SSBY bit in SBYCR is set to 1, the LSON bit in LPWRCR is cleared to 0, and the TMA3 bit in TMA (Timer A) is cleared to 0, standby mode will be entered. In this mode, the CPU, on-chip supporting modules, and oscillator (except for subclock oscillator) all stop. However, the contents of the CPU's internal registers and data in the on-chip RAM, as well as on-chip peripheral circuits (with some exceptions), are maintained in the current state. (Timer X1 and SCI1 are partially reset.) The I/O port, at this time, is caused to the high impedance state.

In this mode the oscillator stops, and therefore power dissipation is significantly reduced.

### 4.6.2 Clearing Standby Mode

Standby mode is cleared by an external interrupt (pin  $\overline{\text{IRQ0}}$  to  $\overline{\text{IRQ1}}$ ), or by means of the  $\overline{\text{RES}}$  pin.

**Clearing with an Interrupt:** When an  $\overline{\text{IRQ0}}$  to  $\overline{\text{IRQ1}}$  interrupt request signal is input, clock oscillation starts, and after the elapse of the time set in bits STS2 to STS0 in SYSCR, stable clocks are supplied to the entire chip, standby mode is cleared, and interrupt exception handling is started.

Standby mode cannot be cleared with an  $\overline{\text{IRQ0}}$  to  $\overline{\text{IRQ1}}$  interrupt if the corresponding enable bit has been cleared to 0 or has been masked by the CPU.

**Clearing with the  $\overline{\text{RES}}$  Pin:** When the  $\overline{\text{RES}}$  pin is driven low, clock oscillation is started. At the same time as clock oscillation starts, clocks are supplied to the entire chip. Note that the  $\overline{\text{RES}}$  pin must be held low until clock oscillation stabilizes. When the  $\overline{\text{RES}}$  pin goes high, the CPU begins reset exception handling.

### 4.6.3 Setting Oscillation Settling Time after Clearing Standby Mode

Bits STS2 to STS0 in SBYCR should be set as described below.

**Using a Crystal Oscillator:** Set bits STS2 to STS0 so that the standby time is at least 10 ms (the oscillation settling time).

Table 4.5 shows the standby times for different operating frequencies and settings of bits STS2 to STS0.

**Table 4.5 Oscillation Settling Time Settings**

| STS2 | STS1 | STS0 | Standby Time  | 10 MHz             | 8 MHz              | Unit |
|------|------|------|---------------|--------------------|--------------------|------|
| 0    | 0    | 0    | 8192 states   | 0.8                | 1.0                | ms   |
|      |      | 1    | 16384 states  | 1.6                | 2.0                |      |
|      | 1    | 0    | 32768 states  | 3.3                | 4.1                |      |
|      |      | 1    | 65536 states  | 6.6                | 8.2                |      |
| 1    | 0    | 0    | 131072 states | 13.1 <sup>*1</sup> | 16.4 <sup>*1</sup> |      |
|      |      | 1    | 262144 states | 26.2               | 32.8               |      |
|      | 1    | *    | Reserved      | —                  | —                  |      |

Notes: \* Don't care

1. Recommended time setting

**Using an External Clock:** Any value can be set.

## 4.7 Watch Mode

### 4.7.1 Watch Mode

If a SLEEP instruction is executed in high-speed mode, medium-speed mode or subactive mode when the SSBY in SBYCR is set to 1, the DTON bit in LPWRCR is cleared to 0, and the TMA3 bit in TMA (Timer A) is set to 1, the CPU will make a transition to watch mode.

In this mode, the CPU and all on-chip supporting modules except timer A stop. As long as the prescribed voltage is supplied, the contents of CPU registers, some on-chip supporting module registers, and on-chip RAM, are retained, and I/O ports are placed in the high-impedance state.

### 4.7.2 Clearing Watch Mode

Watch mode is cleared by an interrupt (Timer A interrupt, or pin  $\overline{\text{IRQ0}}$  to  $\overline{\text{IRQ1}}$ ), or by means of the  $\overline{\text{RES}}$  pin.

**Clearing with an Interrupt:** When an interrupt request signal is input, watch mode is cleared and a transition is made to high-speed mode or medium-speed mode if the LSON bit in LPWRCR is cleared to 0, or to subactive mode if the LSON bit is set to 1. When making a transition to medium-speed mode, after the elapse of the time set in bits STS2 to STS0 in SBYCR, stable clocks are supplied to the entire chip, and interrupt exception handling is started.

Watch mode cannot be cleared with an  $\overline{\text{IRQ0}}$  to  $\overline{\text{IRQ1}}$  interrupt if the corresponding enable bit has been cleared to 0, or with an on-chip supporting module interrupt if acceptance of the relevant interrupt has been disabled by the interrupt enable register or masked by the CPU.

See section 4.6.3, Setting Oscillation Settling Time after Clearing Standby Mode, for the oscillation settling time setting when making a transition from watch mode to high-speed mode or medium-speed mode.

**Clearing with the  $\overline{\text{RES}}$  Pin:** See Clearing with the  $\overline{\text{RES}}$  Pin in section 4.6.2, Clearing Standby Mode.

## 4.8 Subsleep Mode

### 4.8.1 Subsleep Mode

If a SLEEP instruction is executed in subactive mode when the SSBY in SBYCR is cleared to 0, the LSON bit in LPWRCCR is set to 1, and the TMA3 bit in TMA (Timer A) is set to 1, the CPU will make a transition to subsleep mode.

In this mode, the CPU and all on-chip supporting modules other than Timer A stop. As long as the prescribed voltage is supplied, the contents of CPU registers, some on-chip supporting module registers, and on-chip RAM, are retained, and I/O ports are placed in the high-impedance state.

### 4.8.2 Clearing Subsleep Mode

Subsleep mode is cleared by an interrupt (Timer A interrupt, or pin  $\overline{\text{IRQ0}}$  to  $\overline{\text{IRQ5}}$ ), or by means of the  $\overline{\text{RES}}$  pin.

**Clearing with an Interrupt:** When an interrupt request signal is input, subsleep mode is cleared and interrupt exception handling is started. Subsleep mode cannot be cleared with an  $\overline{\text{IRQ0}}$  to  $\overline{\text{IRQ5}}$  interrupt if the corresponding enable bit has been cleared to 0, or with an on-chip supporting module interrupt if acceptance of the relevant interrupt has been disabled by the interrupt enable register or masked by the CPU.

**Clearing with the  $\overline{\text{RES}}$  Pin:** See (2) Clearing with the  $\overline{\text{RES}}$  Pin in section 4.6.2, Clearing Standby Mode.

## 4.9 Subactive Mode

### 4.9.1 Subactive Mode

If a SLEEP instruction is executed in high-speed mode when the SSBY bit in SBYCR, the DTON bit in LPWRCR, and the TMA3 bit in TMA (timer A) are all set to 1, the CPU will make a transition to subactive mode. When an interrupt is generated in watch mode, if the LSON bit in LPWRCR is set to 1, a transition is made to subactive mode. When an interrupt is generated in subsleep mode, a transition is made to subactive mode.

In subactive mode, the CPU performs sequential program execution at low speed on the subclock. In this mode, all on-chip supporting modules other than timer A stop.

### 4.9.2 Clearing Subactive Mode

Subsleep mode is cleared by a SLEEP instruction, or by means of the  $\overline{\text{RES}}$  pin.

**Clearing with a SLEEP Instruction:** When a SLEEP instruction is executed while the SSBY bit in SBYCR is set to 1, the DTON bit in LPWRCR is cleared to 0, and the TMA3 bit in TMA (timer A) is set to 1, subactive mode is cleared and a transition is made to watch mode. When a SLEEP instruction is executed while the SSBY bit in SBYCR is cleared to 0, the LSON bit in LPWRCR is set to 1, and the TMA3 bit in TMA (timer A) is set to 1, a transition is made to subsleep mode. When a SLEEP instruction is executed while the SSBY bit in SBYCR is set to 1, the DTON bit is set to 1 and the LSON bit is cleared to 0 in LPWRCR, and the TMA3 bit in TMA (timer A) is set to 1, a transition is made directly to high-speed or medium-speed mode.

For details of direct transition, see section 4.10, Direct Transition.

**Clearing with the  $\overline{\text{RES}}$  Pin:** See Clearing with the  $\overline{\text{RES}}$  Pin in section 4.6.2, Clearing Standby Mode.

## 4.10 Direct Transition

### 4.10.1 Overview of Direct Transition

There are three operating modes in which the CPU executes programs: high-speed mode, medium-speed mode, and subactive mode. A transition between high-speed mode and subactive mode without halting the program\* is called a direct transition. A direct transition can be carried out by setting the DTON bit in LPWRCR to 1 and executing a SLEEP instruction. After the transition, direct transition interrupt exception handling is started.

**Direct Transition from High-Speed Mode to Subactive Mode:** If a SLEEP instruction is executed in high-speed mode while the SSBY bit in SBYCR, the LSON bit and DTON bit in LPWRCR, and the TMA3 bit in TMA (Timer A) are all set to 1, a transition is made to subactive mode.

**Direct Transition from Subactive Mode to High-Speed Mode/Medium-Speed Mode:** If a SLEEP instruction is executed in subactive mode while the SSBY bit in SBYCR is set to 1, the LSON bit is cleared to 0 and the DTON bit is set to 1 in LPWRCR, and the TMA3 bit in TMA (timer A) is set to 1, after the elapse of the time set in bits STS2 to STS0 in SBYCR, a transition is made to directly to high-speed mode or medium-speed mode.

Note: \* At the time of transition from subactive mode to high- or medium-speed mode, an oscillation stabilization wait time is generated.

# Section 5 Exception Handling

## 5.1 Overview

### 5.1.1 Exception Handling Types and Priority

As table 5.1 indicates, exception handling may be caused by a reset, trap instruction, or interrupt. Exception handling is prioritized as shown in table 5.1. If two or more exceptions occur simultaneously, they are accepted and processed in order of priority. Trap instruction exceptions are accepted at all times in the program execution state.

Exception handling sources, the stack structure, and the operation of the CPU vary depending on the interrupt control mode set by the INTM0 and INTM1 bits in SYSCR.

**Table 5.1 Exception Types and Priority**

| Priority                                                                                 | Exception Type                         | Start of Exception Handling                                                                                                        |
|------------------------------------------------------------------------------------------|----------------------------------------|------------------------------------------------------------------------------------------------------------------------------------|
| <br>High | Reset                                  | Starts immediately after a low-to-high transition at the $\overline{\text{RES}}$ pin, or when the watchdog timer overflows         |
|                                                                                          | Trace* <sup>1</sup>                    | Starts when execution of the current instruction or exception handling ends, if the trace (T) bit is set to 1                      |
|                                                                                          | Interrupt                              | Starts when execution of the current instruction or exception handling ends, if an interrupt request has been issued* <sup>2</sup> |
|                                                                                          | Direct transition                      | Started by a direct transition resulting from execution of a SLEEP instruction                                                     |
|                                                                                          | Trap instruction (TRAPA)* <sup>3</sup> | Started by execution of a trap instruction (TRAPA)                                                                                 |
| Low                                                                                      |                                        |                                                                                                                                    |

- Notes:
1. Traces are enabled only in interrupt control modes 2 and 3. (They cannot be used in this LSI.) Trace exception handling is not executed after execution of an RTE instruction.
  2. Interrupt detection is not performed on completion of ANDC, ORC, XORC, or LDC instruction execution, or on completion of reset exception handling.
  3. Trap instruction exception handling requests are accepted at all times in the program execution state.

5.1.2      **Exception Handling Operation**

Exceptions originate from various sources. Trap instructions and interrupts are handled as follows:

- 1. The program counter (PC) and condition-code register (CCR) are pushed onto the stack.
- 2. The interrupt mask bits are updated. The T bit is cleared to 0.
- 3. A vector address corresponding to the exception source is generated, and program execution starts from that address.

For a reset exception, steps 2 and 3 above are carried out.

5.1.3      **Exception Sources and Vector Table**

The exception sources are classified as shown in figure 5.1. Different vector addresses are assigned to different exception sources.

Table 5.2 lists the exception sources and their vector addresses.

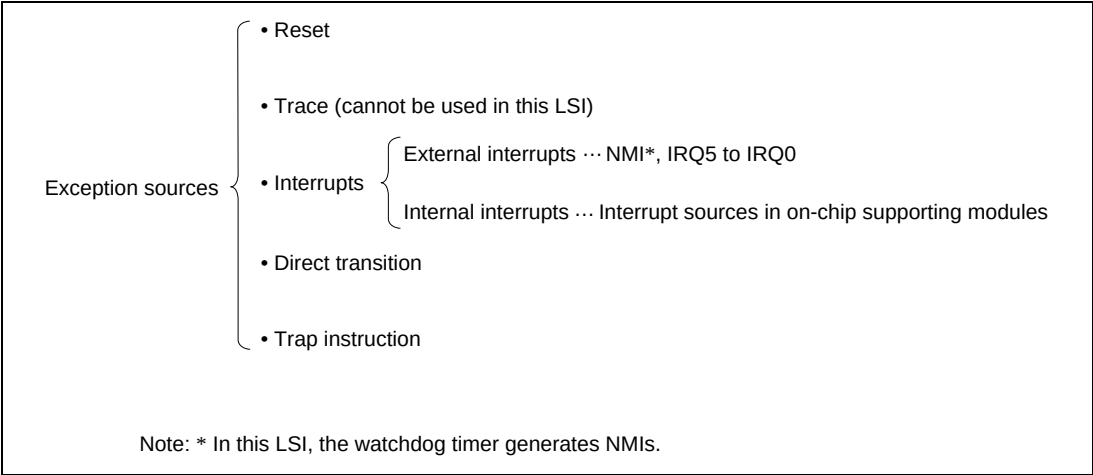


**Figure 5.1   Exception Sources**



**Table 5.2 Exception Vector Table**

| Exception Source                 |                   | Vector Number | Vector Address* <sup>1</sup> |
|----------------------------------|-------------------|---------------|------------------------------|
| Reset                            |                   | 0             | H'0000 to H'0003             |
| Reserved for system use          |                   | 1             | H'0004 to H'0007             |
|                                  |                   | 2             | H'0008 to H'000B             |
|                                  |                   | 3             | H'000C to H'000F             |
|                                  |                   | 4             | H'0010 to H'0013             |
|                                  |                   | 5             | H'0014 to H'0017             |
| Direct transition                |                   | 6             | H'0018 to H'001B             |
| External interrupt               | NMI* <sup>2</sup> | 7             | H'001C to H'001F             |
| Trap instruction (4 sources)     |                   | 8             | H'0020 to H'0023             |
|                                  |                   | 9             | H'0024 to H'0027             |
|                                  |                   | 10            | H'0028 to H'002B             |
|                                  |                   | 11            | H'002C to H'002F             |
| Reserved for system use          |                   | 12            | H'0030 to H'0033             |
|                                  |                   | 13            | H'0034 to H'0037             |
|                                  |                   | 14            | H'0038 to H'003B             |
|                                  |                   | 15            | H'003C to H'003F             |
| Address trap                     | #0                | 16            | H'0040 to H'0043             |
|                                  | #1                | 17            | H'0044 to H'0047             |
|                                  | #2                | 18            | H'0048 to H'004B             |
| Internal interrupt (IC)          |                   | 19            | H'004C to H'004F             |
| Internal interrupt (HSW1)        |                   | 20            | H'0050 to H'0053             |
| External interrupt               | IRQ0              | 21            | H'0054 to H'0057             |
|                                  | IRQ1              | 22            | H'0058 to H'005B             |
|                                  | IRQ2              | 23            | H'005C to H'005F             |
|                                  | IRQ3              | 24            | H'0060 to H'0063             |
|                                  | IRQ4              | 25            | H'0064 to H'0067             |
|                                  | IRQ5              | 26            | H'0068 to H'006B             |
| Internal interrupt* <sup>2</sup> |                   | 27            | H'006C to H'006F             |
|                                  |                   | 31            | H'007C to H'007F             |
| Reserved                         |                   | 32            | H'0080 to H'0083             |
|                                  |                   | 33            | H'0084 to H'0087             |
| Internal interrupt* <sup>3</sup> |                   | 34            | H'0088 to H'008B             |
|                                  |                   | 67            | H'010C to H'010F             |

Notes: 1. Lower 16 bits of the address.

2. In this LSI, the watch dog timer generates NMIs.

3. For details on internal interrupt vectors, see section 6.3.3, Interrupt Exception Vector Table.

## 5.2 Reset

### 5.2.1 Overview

A reset has the highest exception priority. When the  $\overline{\text{RES}}$  pin goes low, all processing halts and the LSI enters the reset state. A reset initializes the internal state of the CPU and the registers of on-chip supporting modules. Immediately after a reset, interrupt control mode 0 is set. Reset exception handling begins when the  $\overline{\text{RES}}$  pin changes from low to high. The LSIs can also be reset by overflow of the watchdog timer. For details, see section 17, Watchdog Timer.

### 5.2.2 Reset Sequence

The LSI enters the reset state when the  $\overline{\text{RES}}$  pin goes low.

To ensure that the chip is reset, hold the  $\overline{\text{RES}}$  pin low during the oscillation stabilizing time of the clock oscillator when powering on. To reset the chip during operation, hold the  $\overline{\text{RES}}$  pin low for at least 20 states. For pin states in a reset, see Appendix D, Port States in the Different Processing States.

When the  $\overline{\text{RES}}$  pin goes high after being held low for the necessary time, the chip starts reset exception handling as follows:

1. The internal state of the CPU and the registers of the on-chip supporting modules are initialized, and the I bit is set to 1 in CCR.
2. The reset exception vector address is read and transferred to the PC, and program execution starts from the address indicated by the PC.

Figure 5.2 shows examples of the reset sequence.

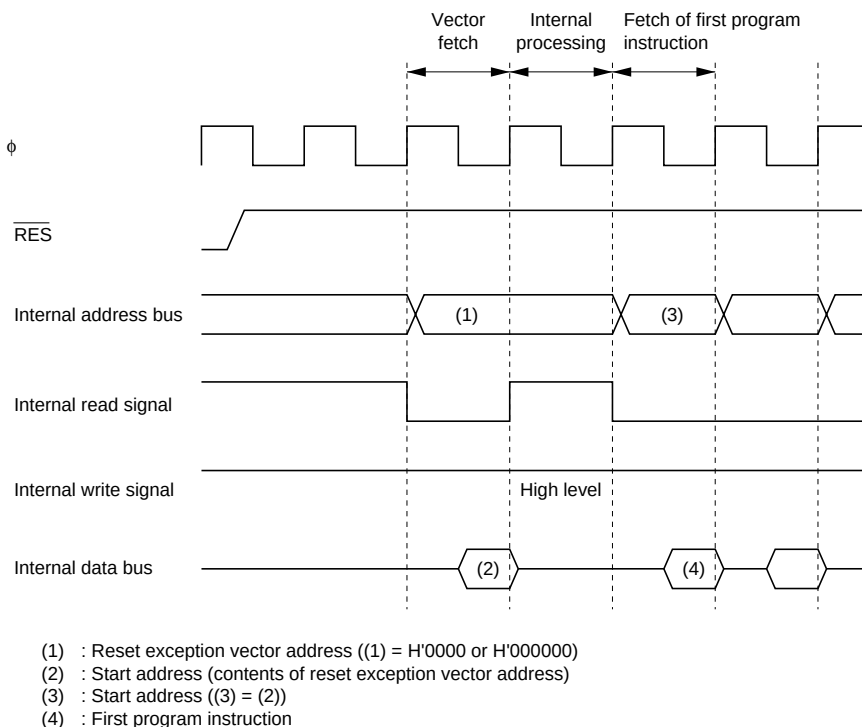


**Figure 5.2 Reset Sequence (Mode 1)**

### 5.2.3 Interrupts after Reset

If an interrupt is accepted after a reset but before the stack pointer (SP) is initialized, the PC and CCR will not be saved correctly, leading to a program crash. To prevent this, all interrupt requests, including NMI, are disabled immediately after a reset. Since the first instruction of a program is always executed immediately after the reset state ends, make sure that this instruction initializes the stack pointer (example: `MOV.L #xx:32, SP`).


## 5.3 Interrupts

Interrupt exception handling can be requested by six external sources ( $\overline{\text{IRQ5}}$  to  $\overline{\text{IRQ0}}$ ) and internal sources in the on-chip supporting modules. Figure 5.3 shows the interrupt sources and the number of interrupts of each type.

The on-chip supporting modules that can request interrupts include the watchdog timer (WDT), prescaler unit (PSU), Timers A, B, J, L, R and X1 (TMR), serial communication interface (SCI), A/D converter (ADC), I<sup>2</sup>C bus interface (IIC), servo circuits, sync detection, data slicer, OSD, address trap, etc. Each interrupt source has a separate vector address.

NMI is the highest-priority interrupt. Interrupts are controlled by the interrupt controller. The interrupt controller has two interrupt control modes and can assign interrupts other than NMI to either three priority/mask levels to enable multiplexed interrupt control.

For details on interrupts, see section 6, Interrupt Controller.

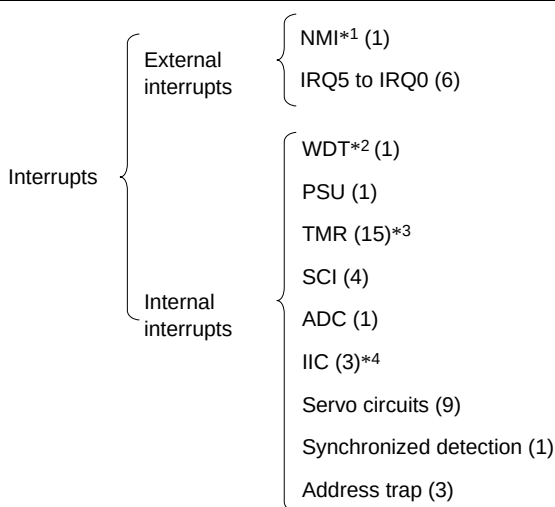

Notes: Numbers in parentheses are the numbers of interrupt sources.

1. In this LSI, the watchdog timer generates NMIs.
2. When the watchdog timer is used as an interval timer, it generates an interrupt request at each counter overflow.
3. The number of interrupt sources is eight in the H8S/2197S or H8S/2196S.
4. The number of interrupt sources is one in the H8S/2197S or H8S/2196S.

**Figure 5.3 Interrupt Sources and Number of Interrupts**

## 5.4 Trap Instruction

Trap instruction exception handling starts when a TRAPA instruction is executed. Trap instruction exception handling can be executed at all times in the program execution state. The TRAPA instruction fetches a start address from a vector table entry corresponding to a vector number from 0 to 3, as specified in the instruction code.

Table 5.3 shows the status of CCR and EXR after execution of trap instruction exception handling.

**Table 5.3 Status of CCR and EXR after Trap Instruction Exception Handling**

| Interrupt<br>Control Mode | CCR |    | EXR*     |   |
|---------------------------|-----|----|----------|---|
|                           | I   | UI | I2 to I0 | T |
| 0                         | 1   | —  | —        | — |
| 1                         | 1   | 1  | —        | — |

Legend:

1: Set to 1

0: Cleared to 0

—: Retains value prior to execution.

\*: Does not affect operation in this LSI.

## 5.5 Stack Status after Exception Handling

Figures 5.4 and 5.5 show the stack after completion of trap instruction exception handling and interrupt exception handling.

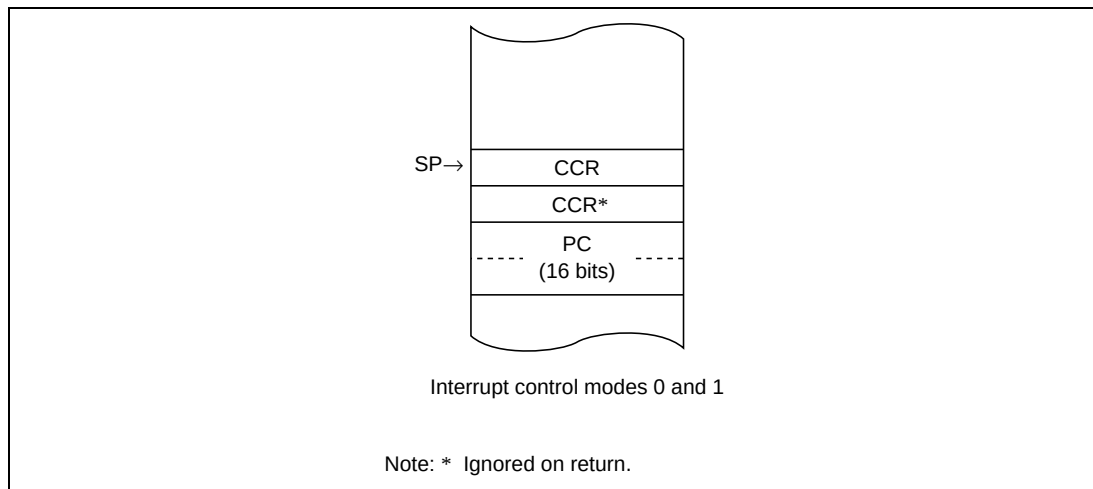


**Figure 5.4 Stack Status after Exception Handling (Normal Mode)\***

Note: \* Normal mode is not available for this LSI.

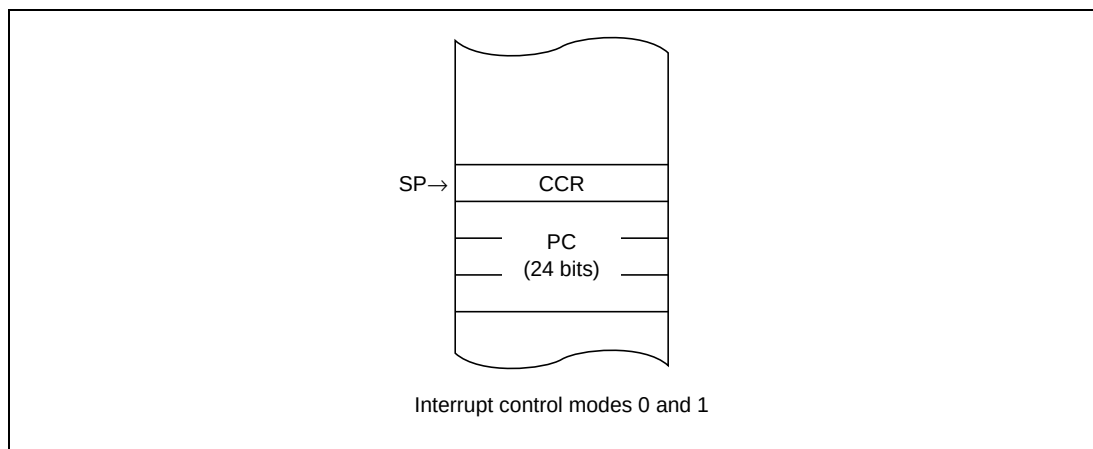


**Figure 5.5 Stack Status after Exception Handling (Advanced Mode)**

# 5.6 Notes on Use of the Stack

When accessing word data or longword data, this chip assumes that the lowest address bit is 0. The stack should always be accessed by word transfer instruction or longword transfer instruction, and the value of the stack pointer (SP: ER7) should always be kept even.

Use the following instructions to save registers:

```
PUSH.W   Rn      (or MOV.W Rn, @-SP)
PUSH.L   ERn     (or MOV.L ERn, @-SP)
```

Use the following instructions to restore registers:

```
POP.W Rn  (or MOV.W @SP+, Rn)
POP.L ERn (or MOV.L @SP+, ERn)
```

Setting SP to an odd value may lead to a malfunction. Figure 5.6 shows an example of what happens when the SP value is odd.

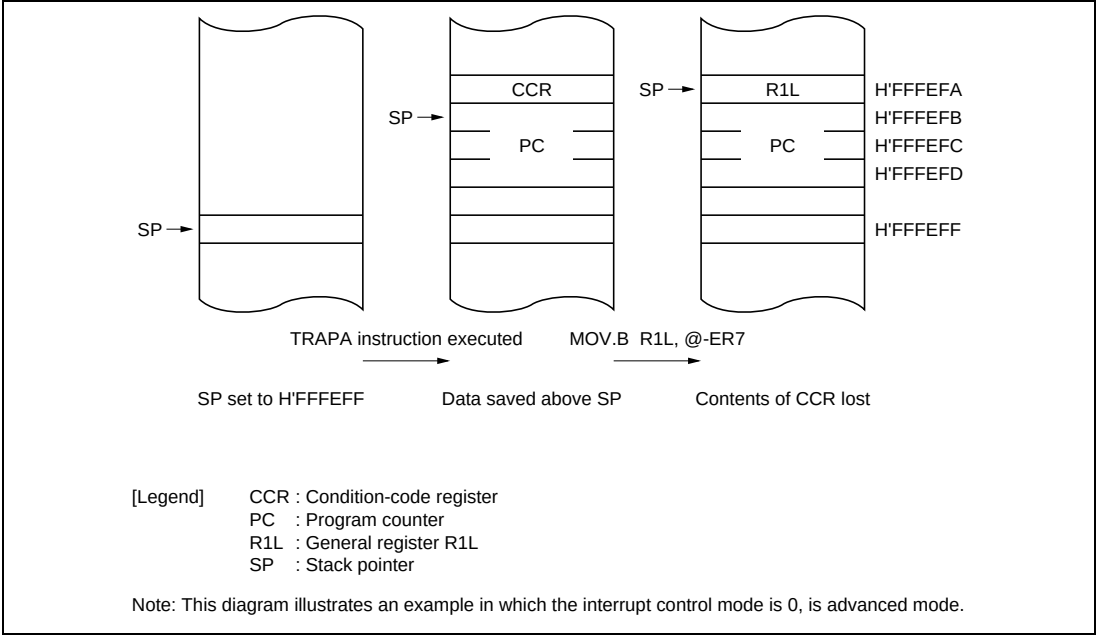


Figure 5.6 Operation when SP Value is Odd





# Section 6 Interrupt Controller

## 6.1 Overview

### 6.1.1 Features

This LSI controls interrupts by means of an interrupt controller. The interrupt controller has the following features:

- Two Interrupt Control Modes
  - Either of two interrupt control modes can be set by means of the INTM1 and INTM0 bits in the system control register (SYSCR).
- Priorities Settable with ICR
  - An interrupt control register (ICR) is provided for setting interrupt priorities. Three priority levels can be set for each module for all interrupts except NMI.
- Independent Vector Addresses
  - All interrupt sources are assigned independent vector addresses, making it unnecessary for the source to be identified in the interrupt handling routine.
- Six External Interrupt Pins
  - NMI is the highest-priority interrupt, and is accepted at all times.
  - Falling edge, rising edge, or both edge detection can be selected for interrupt IRQ0.
  - Falling edge or rising edge can be individually selected for interrupts IRQ5 to IRQ1.

Note: \* In this LSI, the watch dog timer generates NMIs.

### 6.1.2 Block Diagram

Figure 6.1 shows a block diagram of the interrupt controller.

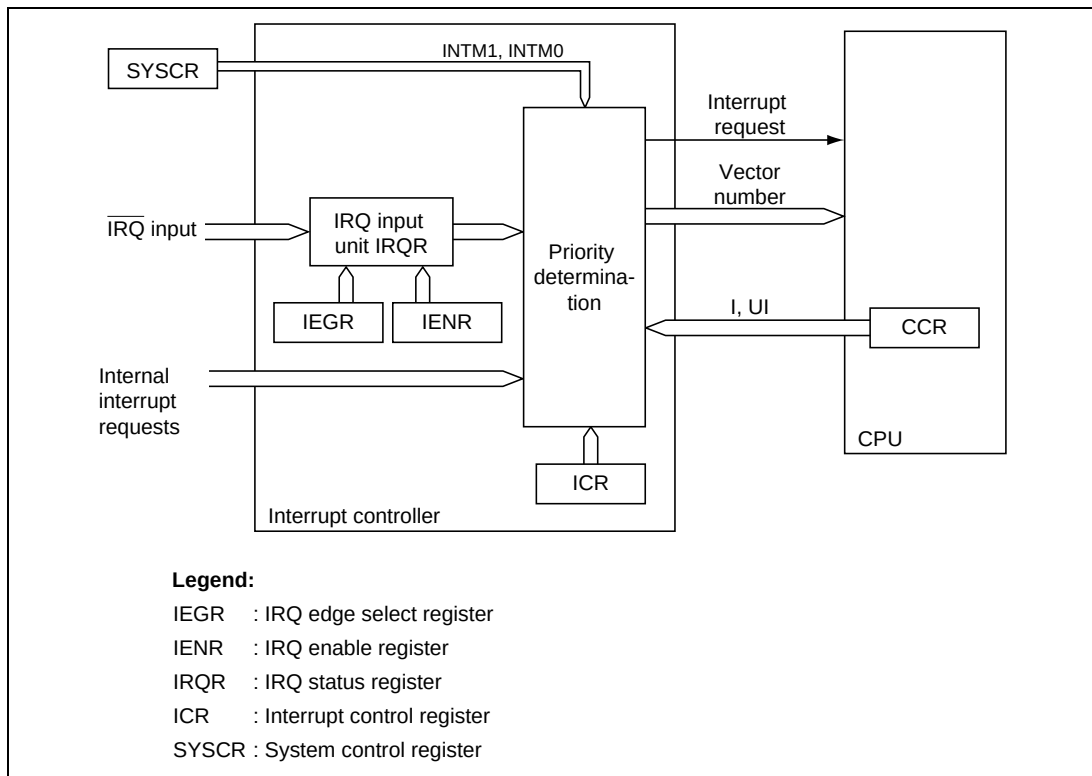


**Figure 6.1 Block Diagram of Interrupt Controller**

### 6.1.3 Pin Configuration

Table 6.1 summarizes the pins of the interrupt controller.

**Table 6.1 Interrupt Controller Pins**

| Name                               | Symbol       | I/O   | Function                                                                     |
|------------------------------------|--------------|-------|------------------------------------------------------------------------------|
| External interrupt request 0       | IRQ0         | Input | Maskable external interrupts; rising, falling, or both edges can be selected |
| External interrupt requests 1 to 5 | IRQ1 to IRQ5 | Input | Maskable external interrupts: rising, or falling edges can be selected       |

### 6.1.4 Register Configuration

Table 6.2 summarizes the registers of the interrupt controller.

**Table 6.2 Interrupt Controller Registers**

| Name                         | Abbreviation | R/W                  | Initial Value | Address* <sup>1</sup> |
|------------------------------|--------------|----------------------|---------------|-----------------------|
| System control register      | SYSCR        | R/W                  | H'00          | H'FFE8                |
| IRQ edge select register     | IEGR         | R/W                  | H'00          | H'FFF0                |
| IRQ enable register          | IENR         | R/W                  | H'00          | H'FFF1                |
| IRQ status register          | IRQR         | R/ (W)* <sup>2</sup> | H'00          | H'FFF2                |
| Interrupt control register A | ICRA         | R/W                  | H'00          | H'FFF3                |
| Interrupt control register B | ICRB         | R/W                  | H'00          | H'FFF4                |
| Interrupt control register C | ICRC         | R/W                  | H'00          | H'FFF5                |
| Interrupt control register D | ICRD         | R/W                  | H'00          | H'FFF6                |
| Port mode register 1         | PMR1         | R/W                  | H'00          | H'FFCE                |

Notes: 1. Lower 16 bits of the address.

2. Only 0 can be written, for flag clearing.

## 6.2 Register Descriptions

### 6.2.1 System Control Register (SYSCR)

|                 |   |   |       |       |      |   |   |   |
|-----------------|---|---|-------|-------|------|---|---|---|
| Bit :           | 7 | 6 | 5     | 4     | 3    | 2 | 1 | 0 |
|                 | — | — | INTM1 | INTM0 | XRST | — | — | — |
| Initial value : | 0 | 0 | 0     | 0     | 1    | 0 | 0 | 0 |
| R/W :           | — | — | R     | R/W   | R    | — | — | — |

SYSCR is an 8-bit readable register that selects the interrupt control mode.  
Only bits 5, 4, 2 and 1 are described here; for details on the other bits, see section 3.2.2, System Control Register (SYSCR).  
SYSCR is initialized to H'08 by a reset.

**Bits 5 and 4—Interrupt Control Mode (INTM1, INTM0):** These bits select one of two interrupt control modes for the interrupt controller. The INTM1 bit must not be set to 1.

| Bit 5 | Bit 4 | Interrupt Control Mode | Description                                        |
|-------|-------|------------------------|----------------------------------------------------|
| INTM1 | INTM0 |                        |                                                    |
| 0     | 0     | 0                      | Interrupts are controlled by I bit (Initial value) |
|       | 1     | 1                      | Interrupts are controlled by I and UI bits and ICR |
| 1     | 0     | —                      | Cannot be used in this LSI                         |
|       | 1     | —                      | Cannot be used in this LSI                         |

## 6.2.2 Interrupt Control Registers A to D (ICRA to ICRD)

|                 |      |      |      |      |      |      |      |      |
|-----------------|------|------|------|------|------|------|------|------|
| Bit :           | 7    | 6    | 5    | 4    | 3    | 2    | 1    | 0    |
|                 | ICR7 | ICR6 | ICR5 | ICR4 | ICR3 | ICR2 | ICR1 | ICR0 |
| Initial value : | 0    | 0    | 0    | 0    | 0    | 0    | 0    | 0    |
| R/W :           | R/W  | R/W  | R/W  | R/W  | R/W  | R/W  | R/W  | R/W  |

The ICR registers are four 8-bit readable/writable registers that set the interrupt control level for interrupts other than NMI.

The correspondence between ICR settings and interrupt sources is shown in table 6.3.

The ICR registers are initialized to H'00 by a reset.

**Bits 7 to 0—Interrupt Control Level (ICR7 to ICR0):** Set the control level for the corresponding interrupt source.

| Bit n        |                                                                                  |
|--------------|----------------------------------------------------------------------------------|
| ICRn         | Description                                                                      |
| 0            | Corresponding interrupt source is control level 0 (non-priority) (Initial value) |
| 1            | Corresponding interrupt source is control level 1 (priority)                     |
| (n = 7 to 0) |                                                                                  |

**Table 6.3 Correspondence between Interrupt Sources and ICR Settings**

|      |             |                         |                             |          |          |              |              |                     |
|------|-------------|-------------------------|-----------------------------|----------|----------|--------------|--------------|---------------------|
| ICRA | ICRA7       | ICRA6                   | ICRA5                       | ICRA4    | ICRA3    | ICRA2        | ICRA1        | ICRA0               |
|      | Reserved    | Input capture           | HSW1                        | IRQ0     | IRQ1     | IRQ2<br>IRQ3 | IRQ4<br>IRQ5 | Sync separator, OSD |
| ICRB | ICRB7       | ICRB6                   | ICRB5                       | ICRB4    | ICRB3    | ICRB2        | ICRB1        | ICRB0               |
|      | Data slicer | Sync separator          | Servo (drum, capstan latch) | Timer A  | Timer B  | Timer J      | Timer R      | Timer L             |
| ICRC | ICRC7       | ICRC6                   | ICRC5                       | ICRC4    | ICRC3    | ICRC2        | ICRC1        | ICRC0               |
|      | Timer X1*   | Synchro-nized detection | Watchdog timer              | Servo    | IIC1     | SCI1 (UART)  | IIC0*        | A/D                 |
| ICRD | ICRD7       | ICRD6                   | ICRD5                       | ICRD4    | ICRD3    | ICRD2        | ICRD1        | ICRD0               |
|      | HSW2        | Reserved                | Reserved                    | Reserved | Reserved | Reserved     | Reserved     | Reserved            |

Note: \* This bit has no function in the H8S/2197S or H8S/2196S.

6.2.3     **IRQ Enable Register (IENR)**

|                 |   |   |       |       |       |       |       |       |
|-----------------|---|---|-------|-------|-------|-------|-------|-------|
| Bit :           | 7 | 6 | 5     | 4     | 3     | 2     | 1     | 0     |
|                 | — | — | IRQ5E | IRQ4E | IRQ3E | IRQ2E | IRQ1E | IRQ0E |
| Initial value : | 0 | 0 | 0     | 0     | 0     | 0     | 0     | 0     |
| R/W :           | — | — | R/W   | R/W   | R/W   | R/W   | R/W   | R/W   |

IENR is an 8-bit readable/writable register that controls enabling and disabling of interrupt requests IRQ5 to IRQ0.  
IENR is initialized to H'00 by a reset.

**Bits 7 and 6—Reserved:** These bits are always read as 0. Do not write 1 to them.

**Bits 5 to 0—IRQ5 to IRQ0 Enable (IRQ5E to IRQ0E):** These bits select whether IRQ5 to IRQ0 are enabled or disabled.

| Bit n        |                                         |
|--------------|-----------------------------------------|
| IRQnE        | Description                             |
| 0            | IRQn interrupt disabled (Initial value) |
| 1            | IRQn interrupt enabled                  |
| (n = 5 to 0) |                                         |

## 6.2.4 IRQ Edge Select Registers (IEGR)

|                 |   |        |        |        |        |        |         |         |
|-----------------|---|--------|--------|--------|--------|--------|---------|---------|
| Bit :           | 7 | 6      | 5      | 4      | 3      | 2      | 1       | 0       |
|                 | — | IRQ5EG | IRQ4EG | IRQ3EG | IRQ2EG | IRQ1EG | IRQ0EG1 | IRQ0EG0 |
| Initial value : | 0 | 0      | 0      | 0      | 0      | 0      | 0       | 0       |
| R/W :           | — | R/W    | R/W    | R/W    | R/W    | R/W    | R/W     | R/W     |

IEGR is an 8-bit readable/writable register that selects detected edge of the input at pins  $\overline{\text{IRQ5}}$  to  $\overline{\text{IRQ0}}$ .

IEGR register is initialized to H'00 by a reset.

**Bit 7—Reserved:** This bit is always read as 0. Do not write 1 to it.

**Bits 6 to 2— $\overline{\text{IRQ5}}$  to  $\overline{\text{IRQ1}}$  Pins Detected Edge Select (IRQ5EG to IRQ1EG):** These bits select detected edge for interrupts IRQ5 to IRQ1.

### Bits 6 to 2

| IRQnEG | Description                                                                                       |
|--------|---------------------------------------------------------------------------------------------------|
| 0      | Interrupt request generated at falling edge of $\overline{\text{IRQn}}$ pin input (Initial value) |
| 1      | Interrupt request generated at rising edge of $\overline{\text{IRQn}}$ pin input                  |

(n = 5 to 1)

**Bits 1 and 0— $\overline{\text{IRQ0}}$  Pin Detected Edge Select (IRQ0EG1, IRQ0EG0):** These bits select detected edge for interrupt IRQ0.

| Bit 1   | Bit 0   | Description                                                                                        |
|---------|---------|----------------------------------------------------------------------------------------------------|
| IRQ0EG1 | IRQ0EG0 |                                                                                                    |
| 0       | 0       | Interrupt request generated at falling edge of $\overline{\text{IRQ0}}$ pin input (Initial value)  |
| 0       | 1       | Interrupt request generated at rising edge of $\overline{\text{IRQ0}}$ pin input                   |
| 1       | *       | Interrupt request generated at both falling and rising edges of $\overline{\text{IRQ0}}$ pin input |

Note: \* Don't care

6.2.5     **IRQ Status Register (IRQR)**

|                 |   |   |        |        |        |        |        |        |
|-----------------|---|---|--------|--------|--------|--------|--------|--------|
| Bit :           | 7 | 6 | 5      | 4      | 3      | 2      | 1      | 0      |
|                 | — | — | IRQ5F  | IRQ4F  | IRQ3F  | IRQ2F  | IRQ1F  | IRQ0F  |
| Initial value : | 0 | 0 | 0      | 0      | 0      | 0      | 0      | 0      |
| R/W :           | — | — | R/(W)* | R/(W)* | R/(W)* | R/(W)* | R/(W)* | R/(W)* |

Note: \* Only 0 can be written, to clear the flag.

IRQR is an 8-bit readable/writable register that indicates the status of IRQ5 to IRQ0 interrupt requests.

IRQR is initialized to H'00 by a reset.

**Bits 7 and 6—Reserved:** These bits are always read as 0. Do not write 1 to them.

**Bits 5 to 0—IRQ5 to IRQ0 Flags:** These bits indicate the status of IRQ5 to IRQ0 interrupt requests.

| Bit n        |                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
|--------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| IRQnF        | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| 0            | [Clearing conditions] (Initial value)<br>Cleared by reading IRQnF set to 1, then writing 0 in IRQnF<br>When IRQn interrupt exception handling is executed                                                                                                                                                                                                                                                                                                             |
| 1            | [Setting conditions] <ul style="list-style-type: none"><li>When a falling edge occurs in <math>\overline{\text{IRQn}}</math> input while falling edge detection is set (IRQnEG = 0)</li><li>When a rising edge occurs in <math>\overline{\text{IRQn}}</math> input while rising edge detection is set (IRQnEG = 0)</li><li>When a falling or rising edge occurs in <math>\overline{\text{IRQ0}}</math> input while both-edge detection is set (IRQ0EG1 = 1)</li></ul> |
| (n = 5 to 0) |                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |



## 6.2.6 Port Mode Register 1 (PMR1)

|                 |       |       |       |       |       |       |       |       |
|-----------------|-------|-------|-------|-------|-------|-------|-------|-------|
| Bit :           | 7     | 6     | 5     | 4     | 3     | 2     | 1     | 0     |
|                 | PMR17 | PMR16 | PMR15 | PMR14 | PMR13 | PMR12 | PMR11 | PMR10 |
| Initial value : | 0     | 0     | 0     | 0     | 0     | 0     | 0     | 0     |
| R/W :           | R/W   | R/W   | R/W   | R/W   | R/W   | R/W   | R/W   | R/W   |

Port Mode Register 1 (PMR1) controls pin function switching-over of port 1. Switching is specified for each bit.

PMR1 is an 8-bit readable/writable register and is initialized to H'00 by a reset.

Only bits 5 to 0 are explained here. For details, see section 10.3.2, Register Configuration.

**Bits 5 to 0—P15/ $\overline{\text{IRQ}}5$  to P10/ $\overline{\text{IRQ}}0$  pin switching (PMR15 to PMR10):** These bits are for setting the P1n/ $\overline{\text{IRQ}}n$  pin as the input pin for P1n or as the  $\overline{\text{IRQ}}n$  pin for external interrupt request input.

### Bit n

| PMR1n | Description                                                                                  |
|-------|----------------------------------------------------------------------------------------------|
| 0     | P1n/ $\overline{\text{IRQ}}n$ pin functions as the P1n input/output pin (Initial value)      |
| 1     | P1n/ $\overline{\text{IRQ}}n$ pin functions as the $\overline{\text{IRQ}}n$ input/output pin |

(n = 5 to 0)

Notes on switching the pin function by PMR1 are as follows:

- When the port is set as the  $\overline{\text{IC}}$  input pin or  $\overline{\text{IRQ}}5$  to  $\overline{\text{IRQ}}0$  input pin, the pin level must be high or low regardless of active mode or power-down mode. Do not set the pin level at medium.
- Switching the pin function of P16/ $\overline{\text{IC}}$  or P15/ $\overline{\text{IRQ}}5$  to P10/ $\overline{\text{IRQ}}0$  may be mistakenly identified as edge detection and detection signal may be generated. To prevent this, operate as follows:
  - Set the interrupt enable/disable flag to disable before switching the pin function.
  - Clear the applicable interrupt request flag to 0 after switching the pin function and executing another instruction.

### Program example

```

:
MOV.B R0L,@IENR ..... Interrupt disabled
MOV.B R1L,@PMR1 ..... Pin function change
NOP ..... Optional instruction
BCLR m @IRQR ..... Applicable interrupt clear
MOV.B R1L,@IENR ..... Interrupt enabled
:

```

## 6.3 Interrupt Sources

Interrupt sources comprise external interrupts (IRQ5 to IRQ0) and internal interrupts.

### 6.3.1 External Interrupts

There are six external interrupt sources; IRQ5 to IRQ0. Of these, IRQ1 to IRQ0 can be used to restore this chip from standby mode.

- **IRQ5 to IRQ0 Interrupts:** Interrupts IRQ5 to IRQ0 are requested by an input signal at pins  $\overline{\text{IRQ5}}$  to  $\overline{\text{IRQ0}}$ . Interrupts IRQ5 to IRQ0 have the following features:
  - (a) Using IEGR, it is possible to select whether an interrupt is requested by a falling edge, rising edge, or both edges, at pin IRQ0.
  - (b) Using IEGR, it is possible to select whether an interrupt is requested by a falling edge or rising edge at pins  $\overline{\text{IRQ5}}$  to  $\overline{\text{IRQ1}}$ .
  - (c) Enabling or disabling of interrupt requests IRQ5 to IRQ0 can be selected with IENR.
  - (d) The interrupt control level can be set with ICR.
  - (e) The status of interrupt requests IRQ5 to IRQ0 is indicated in IRQR. IRQR flags can be cleared to 0 by software.

Figure 6.2 shows a block diagram of interrupts IRQ5 to IRQ0.

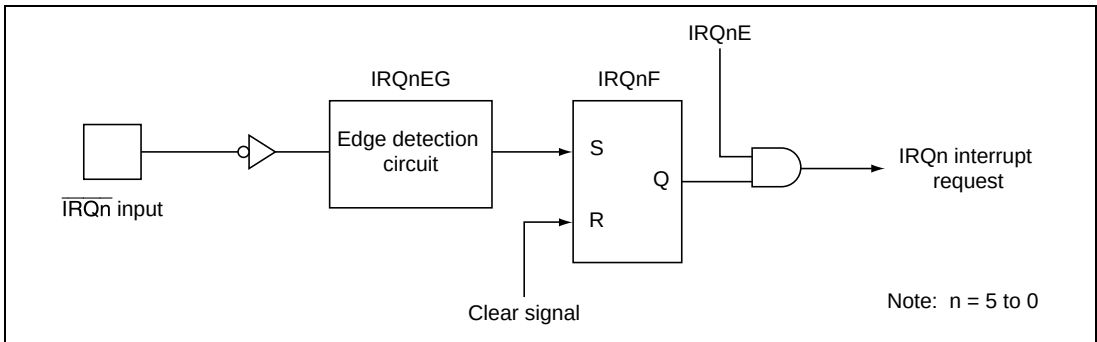


**Figure 6.2 Block Diagram of Interrupts IRQ5 to IRQ0**

Figure 6.3 shows the timing of IRQnF setting.

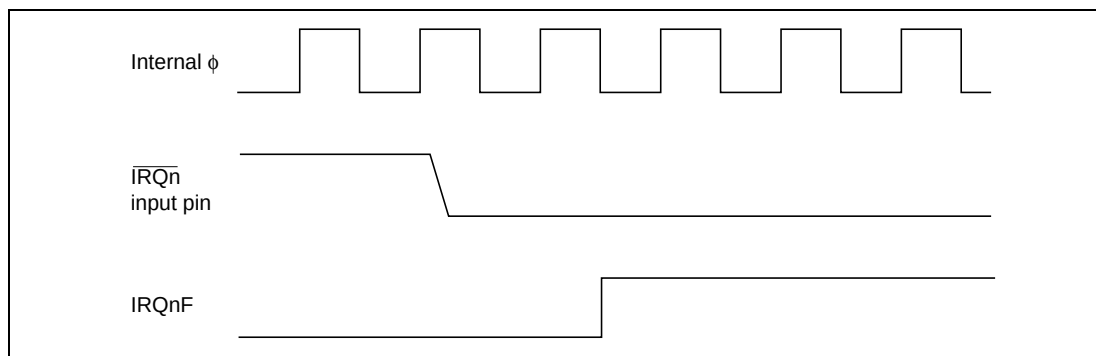


**Figure 6.3 Timing of IRQnF Setting**

The vector numbers for IRQ5 to IRQ0 interrupt exception handling are 21 to 26. Upon detection of IRQ5 to IRQ0 interrupts, the applicable pin is set in the port register 1 (PMR1) as  $\overline{\text{IRQn}}$  pin.

### 6.3.2 Internal Interrupts

There are 38 sources for internal interrupts from on-chip supporting modules.

- For each on-chip supporting module there are flags that indicate the interrupt request status, and enable bits that select enabling or disabling of these interrupts. If any one of these is set to 1, an interrupt request is issued to the interrupt controller.
- The interrupt control level can be set by means of ICR.
- The NMI is the highest priority interrupt and is always accepted regardless of the control mode and CPU interrupt mask bit. In this LSI, NMIs are used as interrupts generated by the watchdog timer.

### 6.3.3 Interrupt Exception Vector Table

Table 6.4 shows interrupt exception handling sources, vector addresses, and interrupt priorities. For default priorities, the lower the vector number, the higher the priority. Priorities among modules can be set by means of ICR. The situation when two or more modules are set to the same priority, and priorities within a module, are fixed as shown in table 6.4.

**Table 6.4 Interrupt Sources, Vector Addresses, and Interrupt Priorities**

| Priority                                                                                                                                                                                                                                                                                                                                                              | Interrupt Source  |         | Origin of Interrupt Source | Vector No. | Vector Address   | ICR | Remarks |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------|---------|----------------------------|------------|------------------|-----|---------|
| <div style="display: flex; align-items: center;"> <div style="flex: 1; border-left: 1px solid black; margin-left: 10px; position: relative;"> <div style="position: absolute; top: -10px; left: 50%; transform: translate(-50%, -100%);">▲</div> <div style="position: absolute; bottom: -10px; left: 50%; transform: translate(-50%, 100%);">Low</div> </div> </div> | Reset             |         | External pin               | 0          | H'0000 to H'0003 | —   |         |
|                                                                                                                                                                                                                                                                                                                                                                       | Reserved          |         | —                          | 1          | H'0004 to H'0007 | —   |         |
|                                                                                                                                                                                                                                                                                                                                                                       |                   |         | —                          | 2          | H'0008 to H'000B | —   |         |
|                                                                                                                                                                                                                                                                                                                                                                       |                   |         | —                          | 3          | H'000C to H'000F | —   |         |
|                                                                                                                                                                                                                                                                                                                                                                       |                   |         | —                          | 4          | H'0010 to H'0013 | —   |         |
|                                                                                                                                                                                                                                                                                                                                                                       |                   |         | —                          | 5          | H'0014 to H'0017 | —   |         |
|                                                                                                                                                                                                                                                                                                                                                                       | Direct transition |         | Instruction                | 6          | H'0018 to H'001B | —   |         |
|                                                                                                                                                                                                                                                                                                                                                                       | NMI               |         | Watchdog timer             | 7          | H'001C to H'001F | —   |         |
|                                                                                                                                                                                                                                                                                                                                                                       | Trap instruction  | TRAPA#0 | Instruction                | 8          | H'0020 to H'0023 | —   |         |
|                                                                                                                                                                                                                                                                                                                                                                       |                   | TRAPA#1 |                            | 9          | H'0024 to H'0027 | —   |         |
|                                                                                                                                                                                                                                                                                                                                                                       |                   | TRAPA#2 |                            | 10         | H'0028 to H'002B | —   |         |
|                                                                                                                                                                                                                                                                                                                                                                       |                   | TRAPA#3 |                            | 11         | H'002C to H'002F | —   |         |
|                                                                                                                                                                                                                                                                                                                                                                       | Reserved          |         | —                          | 12         | H'0030 to H'0033 | —   |         |
|                                                                                                                                                                                                                                                                                                                                                                       |                   |         |                            | 13         | H'0034 to H'0037 | —   |         |
|                                                                                                                                                                                                                                                                                                                                                                       |                   |         |                            | 14         | H'0038 to H'003B | —   |         |
|                                                                                                                                                                                                                                                                                                                                                                       |                   |         |                            | 15         | H'003C to H'003F | —   |         |

| Priority  | Interrupt Source                 | Origin of Interrupt Source | Vector No. | Vector Address | ICR              | Remarks |
|-----------|----------------------------------|----------------------------|------------|----------------|------------------|---------|
| High<br>▲ | Address trap                     | #0                         | ATC        | 16             | H'0040 to H'0043 | —       |
|           |                                  |                            |            | 17             | H'0044 to H'0047 |         |
|           |                                  |                            |            | 18             | H'0048 to H'004B |         |
|           | IC                               | PSU                        |            | 19             | H'004C to H'004F | ICRA6   |
|           | HSW1                             | Servo circuit              |            | 20             | H'0050 to H'0053 | ICRA5   |
|           | IRQ0                             | External pin               |            | 21             | H'0054 to H'0057 | ICRA4   |
|           | IRQ1                             |                            |            | 22             | H'0058 to H'005B | ICRA3   |
|           | IRQ2                             |                            |            | 23             | H'005C to H'005F | ICRA2   |
|           | IRQ3                             |                            |            | 24             | H'0060 to H'0063 |         |
|           | IRQ4                             |                            |            | 25             | H'0064 to H'0067 | ICRA1   |
|           | IRQ5                             |                            |            | 26             | H'0068 to H'006B |         |
|           | External V interrupt             | Sync separator             |            | 27             | H'006C to H'006F | ICRA0   |
|           | OSD V interrupt                  | OSD                        |            | 28             | H'0070 to H'0073 |         |
|           | Data slicer odd field interrupt  | Data slicer                |            | 29             | H'0074 to H'0077 | ICRB7   |
|           | Data slicer even field interrupt |                            |            | 30             | H'0078 to H'007B |         |
|           | Noise interrupt                  | Sync separator             |            | 31             | H'007C to H'007F | ICRB6   |
|           | Reserved                         | —                          |            | 32             | H'0080 to H'0083 | —       |
|           |                                  |                            |            | 33             | H'0084 to H'0087 |         |
|           | Drum latch 1 (speed)             | Servo circuit              |            | 34             | H'0088 to H'008B | ICRB5   |
|           | Capstan latch 1 (speed)          |                            |            | 35             | H'008C to H'008F |         |
|           | TMAI                             | Timer A                    |            | 36             | H'0090 to H'0093 | ICRB4   |
|           | TMBI                             | Timer B                    |            | 37             | H'0094 to H'0097 | ICRB3   |
|           | TMJ1I                            | Timer J                    |            | 38             | H'0098 to H'009B | ICRB2   |
|           | TMJ2I                            |                            |            | 39             | H'009C to H'009F |         |
|           | TMR1I                            | Timer R                    |            | 40             | H'00A0 to H'00A3 | ICRB1   |
|           | TMR2I                            |                            |            | 41             | H'00A4 to H'00A7 |         |
|           | TMR3I                            |                            |            | 42             | H'00A8 to H'00AB |         |
| Low       | TMLI                             | Timer L                    |            | 43             | H'00AC to H'00AF | ICRB0   |

| Priority  | Interrupt Source        |      | Origin of Interrupt Source | Vector No.    | Vector Address   | ICR              | Remarks |
|-----------|-------------------------|------|----------------------------|---------------|------------------|------------------|---------|
| High<br>▲ | ICXA*                   |      | Timer X1*                  | 44            | H'00B0 to H'00B3 | ICRC7            |         |
|           | ICXB*                   |      |                            | 45            | H'00B4 to H'00B7 |                  |         |
|           | ICXC*                   |      |                            | 46            | H'00B8 to H'00BB |                  |         |
|           | ICXD*                   |      |                            | 47            | H'00BC to H'00BF |                  |         |
|           | OCX1*                   |      |                            | 48            | H'00C0 to H'00C3 |                  |         |
|           | OCX2*                   |      |                            | 49            | H'00C4 to H'00C7 |                  |         |
|           | OVFX*                   |      |                            | 50            | H'00C8 to H'00CB |                  |         |
|           | VD interrupts           |      | Sync signal detection      | 51            | H'00CC to H'00CF | ICRC6            |         |
|           | Reserved                |      | —                          | 52            | H'00D0 to H'00D3 |                  |         |
|           | 8-bit interval timer    |      | Watchdog timer             | 53            | H'00D4 to H'00D7 | ICRC5            |         |
|           | CTL                     |      | Servo circuit              | 54            | H'00D8 to H'00DB |                  | ICRC4   |
|           | Drum latch 2 (speed)    |      |                            | 55            | H'00DC to H'00DF |                  |         |
|           | Capstan latch 2 (speed) |      |                            | 56            | H'00E0 to H'00E3 |                  |         |
|           | Drum latch 3 (phase)    |      |                            | 57            | H'00E4 to H'00D7 |                  |         |
|           | Capstan latch 3 (phase) |      |                            | 58            | H'00E8 to H'00EB |                  |         |
|           | IIC1                    |      | IIC1                       | 59            | H'00EC to H'00EF | ICRC3            |         |
|           | SCI1                    | ERI  | SCI1 (UART)                | 60            | H'00F0 to H'00F3 | ICRC2            |         |
|           |                         | RXI  |                            | 61            | H'00F4 to H'00F7 |                  |         |
|           |                         | TXI  |                            | 62            | H'00F8 to H'00FB |                  |         |
|           |                         | TEI  |                            | 63            | H'00FC to H'00FF |                  |         |
|           | IIC0*                   |      | IIC0*                      | 64            | H'0100 to H'0103 | ICRC1            |         |
|           | DDCSW*                  |      |                            | 65            | H'0104 to H'0107 |                  |         |
|           | A/D conversion end      |      | A/D                        | 66            | H'0108 to H'010B | ICRC0            |         |
|           | Low                     | HSW2 |                            | Servo circuit | 67               | H'010C to H'010F | ICRD7   |

Note: \* Not available in the H8S/2197S or H8S/2196S.

# 6.4 Interrupt Operation

## 6.4.1 Interrupt Control Modes and Interrupt Operation

Interrupt operations in this LSI differ depending on the interrupt control mode. The NMI interrupt\* and address trap interrupts are accepted at all times except in the reset state. In the case of IRQ interrupts and on-chip supporting module interrupts, an enable bit is provided for each interrupt. Clearing an enable bit to 0 disables the corresponding interrupt request. Interrupt sources in which the enable bits are set to 1 are controlled by the interrupt controller. Table 6.5 shows the interrupt control modes. The interrupt controller performs interrupt control according to the interrupt control mode set by the INTM1 and INTM0 bits in SYSCR, the priorities set in ICR, and the masking state indicated by the I and UI bits in the CPU's CCR.

Note: \* In this LSI, the NMI interrupt is generated by the watchdog timer.

Table 6.5 Interrupt Control Modes

| Interrupt Control Mode | SYSCR |       | Priority Setting Register | Interrupt Mask Bits | Description                                                                                      |
|------------------------|-------|-------|---------------------------|---------------------|--------------------------------------------------------------------------------------------------|
|                        | INTM1 | INTM0 |                           |                     |                                                                                                  |
| 0                      | 0     | 0     | ICR                       | I                   | Interrupt mask control is performed by the I bit<br>Priority can be set with ICR                 |
| 1                      |       | 1     | ICR                       | I, UI               | 3-level interrupt mask control is performed by the I and UI bits<br>Priority can be set with ICR |

Figure 6.4 shows a block diagram of the priority decision circuit.

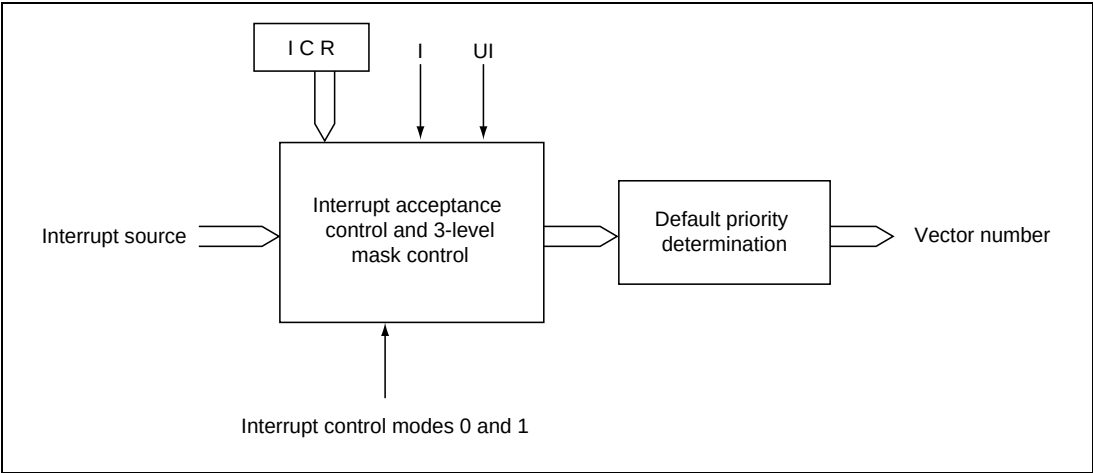


**Figure 6.4 Block Diagram of Interrupt Priority Determination Operation**

- **Interrupt Acceptance Control and 3-Level Control:** In interrupt control modes 0 and 1, interrupt acceptance control and 3-level mask control is performed by means of the I and UI bits in CCR, and ICR (control level).  
Table 6.6 shows the interrupts selected in each interrupt control mode.

**Table 6.6 Interrupts Selected in Each Interrupt Control Mode**

| Interrupt Control Mode | Interrupt Mask Bit |    | Selected Interrupts                                             |
|------------------------|--------------------|----|-----------------------------------------------------------------|
|                        | I                  | UI |                                                                 |
| 0                      | 0                  | *  | All interrupts (control level 1 has priority)                   |
|                        | 1                  | *  | NMI* <sup>1</sup> and address trap interrupts                   |
| 1                      | 0                  | *  | All interrupts (control level 1 has priority)                   |
|                        | 1                  | 0  | NMI* <sup>1</sup> , address trap and control level 1 interrupts |
|                        |                    | 1  | NMI* <sup>1</sup> and address trap interrupts                   |

Notes: \* Don't care

1. In this LSI, the NMI interrupt is generated by the watchdog timer.

- **Default Priority Determination:** If the same value is set for ICR, acceptance of multiple interrupts is enabled, and so only the interrupt source with the highest priority according to the preset default priorities is selected and has a vector number generated.  
Interrupt sources with a lower priority than the accepted interrupt source are held pending.  
Table 6.7 shows operations and control signal functions in each interrupt control mode.



**Table 6.7 Operations and Control Signal Functions in Each Interrupt Control Mode**

| Interrupt Control Mode | Setting |       | Interrupt Acceptance Control, 3-Level Control |    |     |    | Default Priority Determination |
|------------------------|---------|-------|-----------------------------------------------|----|-----|----|--------------------------------|
|                        | INTM1   | INTM0 | I                                             | UI | ICR |    |                                |
| 0                      | 0       | 0     | ○                                             | IM | —   | PR | ○                              |
| 1                      |         | 1     | ○                                             | IM | IM  | PR | ○                              |

Legend:

- : Interrupt operation control performed
- IM: Used as interrupt mask bit
- PR: Sets priority
- : Not used

### 6.4.2 Interrupt Control Mode 0

Enabling and disabling of IRQ interrupts and on-chip supporting module interrupts can be set by the I bit in the CPU's CCR, and ICR. Interrupts are enabled when the I bit is cleared to 0, and disabled when set to 1. Control level 1 interrupt sources have higher priority.

Figure 6.5 shows a flowchart of the interrupt acceptance operation in this case.

- If an interrupt source occurs when the corresponding interrupt enable bit is set to 1, an interrupt request is sent to the interrupt controller.
- When interrupt requests are sent to the interrupt controller, a control level 1 interrupt, according to the control level set in ICR, has priority for selection, and other interrupt requests are held pending. If a number of interrupt requests with the same control level setting are generated at the same time, the interrupt request with the highest priority according to the priority system shown in table 6.4 is selected.
- The I bit is then referenced. If the I bit is cleared to 0, the interrupt request is accepted. If the I bit is set to 1, only an NMI\*<sup>1</sup> or an address trap interrupt is accepted, and other interrupt requests are held pending.
- When an interrupt request is accepted, interrupt exception handling starts after execution of the current instruction has been completed.
- The PC and CCR are saved to the stack area by interrupt exception handling. The PC saved on the stack shows the address of the first instruction to be executed after returning from the interrupt handling routine.
- Next, the I bit in CCR is set to 1. This disables all interrupts except NMI\* and address trap.
- A vector address is generated for the accepted interrupt, and execution of the interrupt handling routine starts at the address indicated by the contents of that vector address.

Note: \* In this LSI, the NMI interrupt is generated by the watchdog timer.

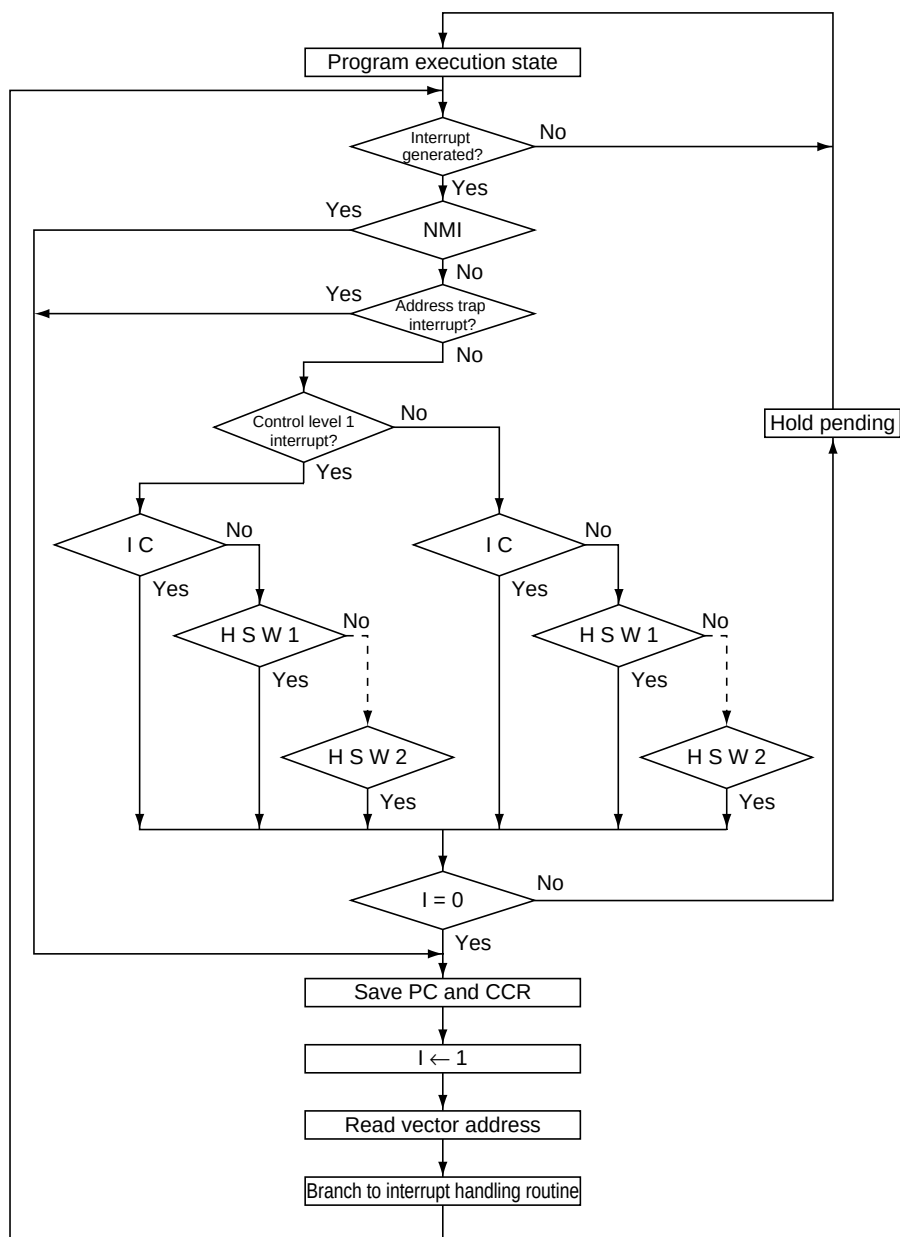


**Figure 6.5 Flowchart of Procedure Up to Interrupt Acceptance in Interrupt Control Mode 0**

### 6.4.3 Interrupt Control Mode 1

Three-level masking is implemented for IRQ interrupts and on-chip supporting module interrupts by means of the I and UI bits in the CPU's CCR and ICR.

- Control level 0 interrupt requests are enabled when the I bit is cleared to 0, and disabled when set to 1.
- Control level 1 interrupt requests are enabled when the I bit or UI bit is cleared to 0, and disabled when both the I bit and the UI bit are set to 1.

For example, if the interrupt enable bit for an interrupt request is set to 1, and H'04, H'00, H'00 and H'00 are set in ICRA, ICRB, ICRC and ICRD respectively, (i.e. IRQ2 interrupt is set to control level 1 and other interrupts to control level 0), the situation is as follows:

- When  $I = 0$ , all interrupts are enabled  
(Priority order: NMI > IRQ2 > IC > HSW1 > ...)
- When  $I = 1$  and  $UI = 0$ , only NMI, address trap and IRQ2 interrupts are enabled
- When  $I = 1$  and  $UI = 1$ , only NMI and address trap interrupts are enabled

Figure 6.6 shows the state transitions in these cases.

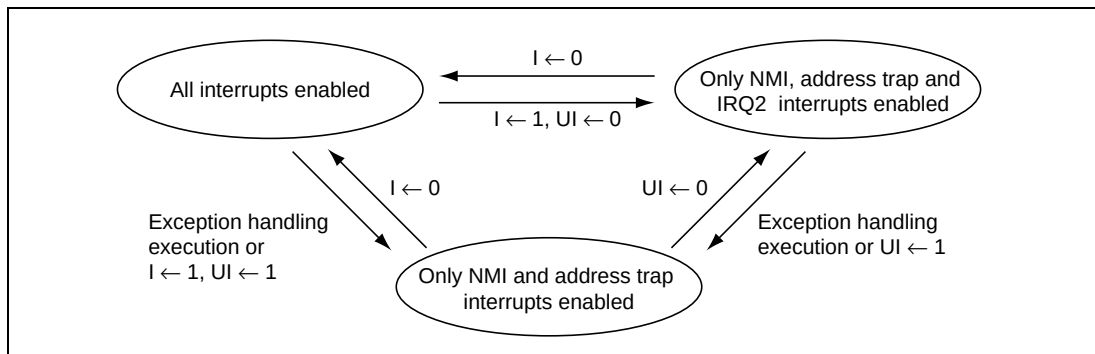


**Figure 6.6 Example of State Transitions in Interrupt Control Mode 1**

Figure 6.7 shows an operation flowchart of interrupt reception.

- (1) If an interrupt source occurs when the corresponding interrupt enable bit is set to 1, an interrupt request is sent to the interrupt controller.
- (2) When interrupt requests are sent to the interrupt controller, a control level 1 interrupt, according to the control level set in ICR, has priority for selection, and other interrupt requests are held pending. If a number of interrupt requests with the same control level setting are generated at the same time, the interrupt request with the highest priority according to the priority system shown in table 6.4 is selected.
- (3) The I bit is then referenced. If the I bit is cleared to 0, the UI bit has no effect.

An interrupt request set to interrupt control level 0 is accepted when the I bit is cleared to 0. If the I bit is set to 1, only NMI\* and address trap interrupts are accepted, and other interrupt requests are held pending.

An interrupt request set to interrupt control level 1 has priority over an interrupt request set to interrupt control level 0, and is accepted if the I bit is cleared to 0, or if the I bit is set to 1 and the UI bit is cleared to 0.

When both the I bit and the UI bit are set to 1, only NMI\* and address trap interrupts are accepted, and other interrupt requests are held pending.
- (4) When an interrupt request is accepted, interrupt exception handling starts after execution of the current instruction has been completed.
- (5) The PC and CCR are saved to the stack area by interrupt exception handling. The PC saved on the stack shows the address of the first instruction to be executed after returning from the interrupt handling routine.
- (6) Next, the I and UI bits in CCR are set to 1. This masks all interrupts except NMI\* and address trap.
- (7) A vector address is generated for the accepted interrupt, and execution of the interrupt handling routine starts at the address indicated by the contents of that vector address.

Note: \* In this LSI, the NMI interrupt is generated by the watchdog timer.

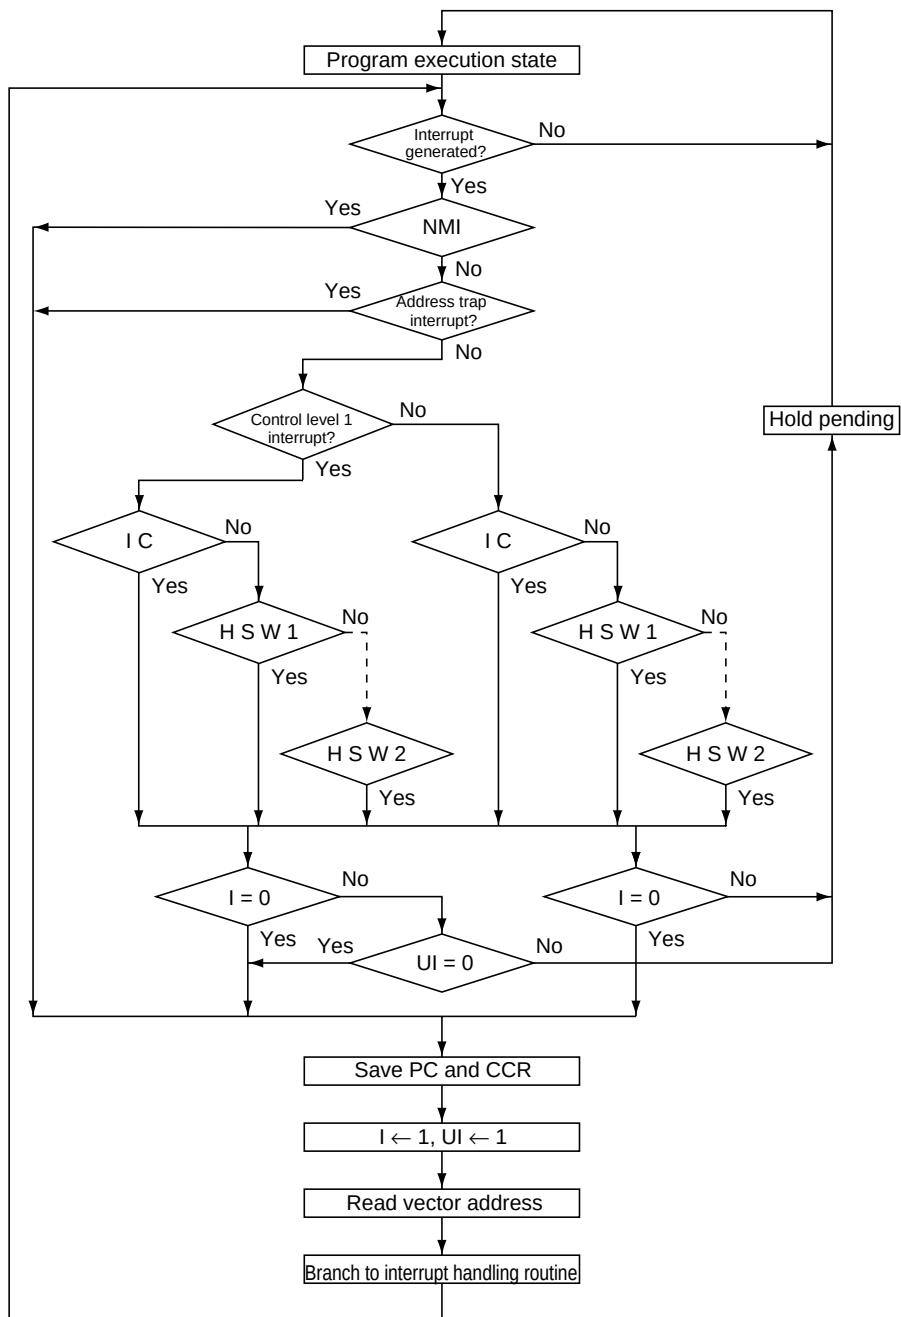


**Figure 6.7 Flowchart of Procedure Up to Interrupt Acceptance in Interrupt Control Mode 1**

6.4.4 Interrupt Exception Handling Sequence

Figure 6.8 shows the interrupt exception handling sequence. The example shown is for the case where interrupt control 0 is set in advanced mode, and the program area and stack area are in on-chip memory.

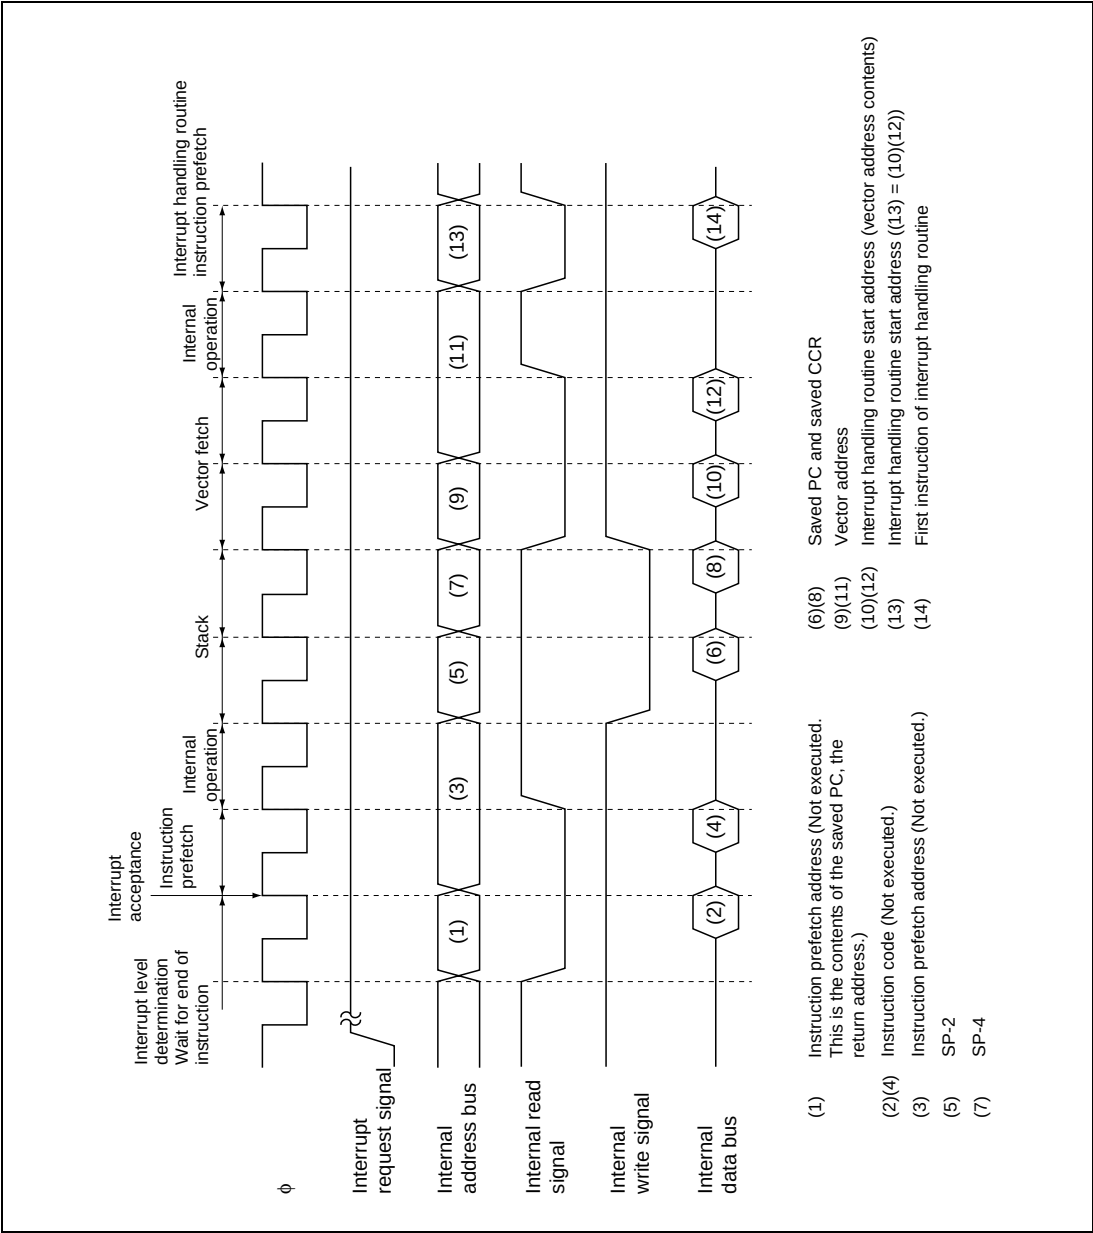


Figure 6.8 Interrupt Exception Handling

### 6.4.5 Interrupt Response Times

Table 6.8 shows interrupt response times—the interval between generation of an interrupt request and execution of the first instruction in the interrupt handling routine. The symbols used in table 6.8 are explained in table 6.9.

**Table 6.8 Interrupt Response Times**

| No.                          | Number of States                                                     | Advanced Mode         |
|------------------------------|----------------------------------------------------------------------|-----------------------|
| 1                            | Interrupt priority determination* <sup>1</sup>                       | 3                     |
| 2                            | Number of wait states until executing instruction ends* <sup>2</sup> | 1 to $19+2 \cdot S_i$ |
| 3                            | PC, CCR stack save                                                   | $2 \cdot S_k$         |
| 4                            | Vector fetch                                                         | $2 \cdot S_i$         |
| 5                            | Instruction fetch* <sup>3</sup>                                      | $2 \cdot S_i$         |
| 6                            | Internal processing* <sup>4</sup>                                    | 2                     |
| Total (using on-chip memory) |                                                                      | 12 to 32              |

Notes: 1. Two states in case of internal interrupt.  
2. Refers to MULXS and DIVXS instruction.  
3. Prefetch after interrupt acceptance and interrupt handling routine prefetch.  
4. Internal processing after interrupt acceptance and internal processing after vector fetch.

**Table 6.9 Number of States in Interrupt Handling Routine Execution**

| Symbol                  | Object of Access |
|-------------------------|------------------|
|                         | Internal Memory  |
| Instruction fetch $S_i$ | 1                |
| Stack operation SK      | 1                |

## 6.5 Usage Notes

### 6.5.1 Contention between Interrupt Generation and Disabling

When an interrupt enable bit is cleared to 0 to disable interrupts, the disabling becomes effective after execution of the instruction.

In other words, when an interrupt enable bit is cleared to 0 by an instruction such as BCLR or MOV, if an interrupt is generated during execution of the instruction, the interrupt concerned will still be enabled on completion of the instruction, and so interrupt exception handling for that interrupt will be executed on completion of the instruction. However, if there is an interrupt request of higher priority than that interrupt, interrupt exception handling will be executed for the higher-priority interrupt, and the lower-priority interrupt will be ignored.

The same also applies when an interrupt source flag is cleared to 0.

Figure 6.9 shows an example in which the OCIAE bit in timer X1 TIER is cleared to 0.

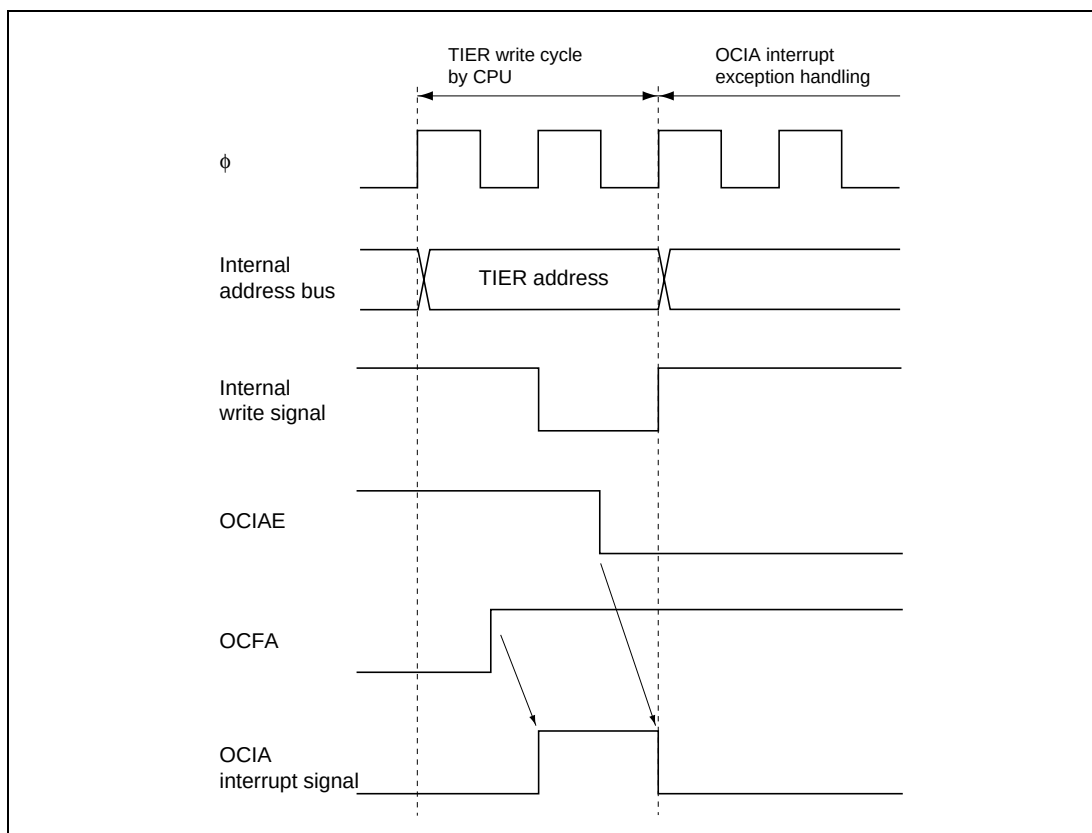


**Figure 6.9** Contention between Interrupt Generation and Disabling



The above contention will not occur if an enable bit or interrupt source flag is cleared to 0 while the interrupt is masked.

## 6.5.2 Instructions that Disable Interrupts

Instructions that disable interrupts are LDC, ANDC, ORC, and XORC. After any of these instructions is executed, all interrupts including NMI are disabled and the next instruction is always executed. When the I bit or UI bit is set by one of these instructions, the new value becomes valid two states after execution of the instruction ends.

## 6.5.3 Interrupts during Execution of EEPMOV Instruction

Interrupt operation differs between the EEPMOV.B instruction and the EEPMOV.W instruction. With the EEPMOV.B instruction, an interrupt request (including NMI) issued during the transfer is not accepted until the move is completed.

With the EEPMOV.W instruction, if an interrupt request is issued during the transfer, interrupt exception handling starts at a break in the transfer cycle. The PC value saved on the stack in this case is the address of the next instruction.

Therefore, if an interrupt is generated during execution of an EEPMOV.W instruction, the following coding should be used.

```
L1: EEPMOV.W
    MOV.W   R4, R4
    BNE     L1
```



# Section 7 ROM

## 7.1 Overview

The H8S/2199R has 128 kbytes or 256 kbytes of on-chip ROM (flash memory or mask ROM), the H8S/2198R has 112 kbytes, the H8S/2197R and H8S/2197S have 96 kbytes, and the H8S/2196R and H8S/2196S have 80 kbytes\*. The ROM is connected to the CPU by a 16-bit data bus. The CPU accesses both byte and word data in one state, enabling faster instruction fetches and higher processing speed.

The flash memory versions of the H8S/2199R can be erased and programmed on-board as well as with a general-purpose PROM programmer.

Note: \* For details on product line-up, refer to section 1, Overview.

### 7.1.1 Block Diagram

Figure 7.1 shows a block diagram of the ROM.

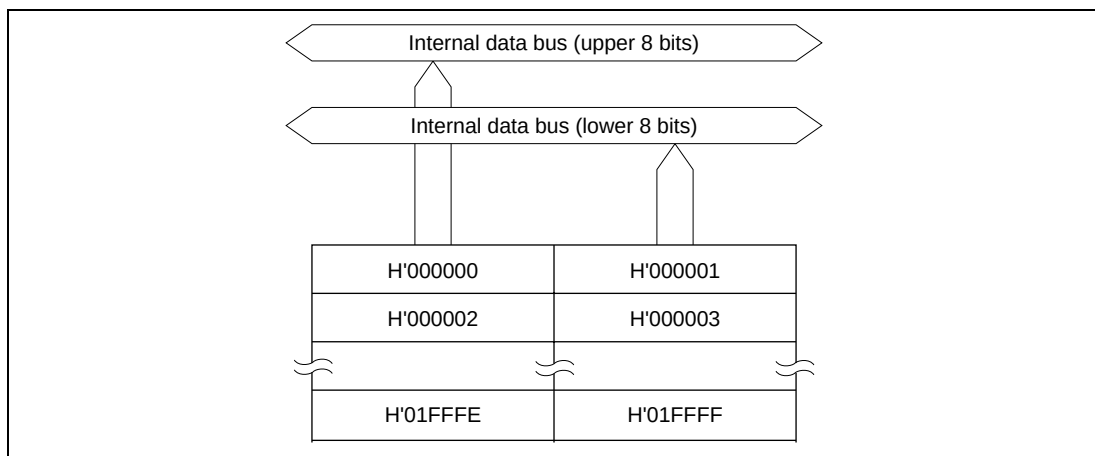


**Figure 7.1 ROM Block Diagram (H8S/2199R)**

## 7.2 Overview of Flash Memory

### 7.2.1 Features

The features of the flash memory are summarized below.

- Four flash memory operating modes
  - Program mode
  - Erase mode
  - Program-verify mode
  - Erase-verify mode
- Programming/erase methods

The flash memory is programmed 128 bytes at a time. Erasing is performed by block erase (in single-block units). When erasing all blocks, the individual blocks must be erased sequentially. Block erasing can be performed as required on 4-kbyte, 32-kbyte, and 64-kbyte blocks. (In OSD ROM, block erasing can be performed on 1-kbyte, 2-kbyte, and 28-kbyte blocks).
- Programming/erase times

The flash memory programming time is 10 ms (typ.) for simultaneous 128-byte programming, equivalent to 78  $\mu$ s (typ.) per byte, and the erase time is 100 ms (typ.) per block.
- Reprogramming capability

The flash memory can be reprogrammed up to 100 times.
- On-board programming modes

There are two modes in which flash memory can be programmed/erased/verified on-board:

  - Boot mode
  - User program mode
- Automatic bit rate adjustment

If data transfer on boot mode, automatic adjustment is possible at host transfer bit rates and LSI's bit rates.
- Protect modes

There are three protect modes, hardware, software, and error protect, which allow protected status to be designated for flash memory program/erase/verify operations.
- Programmer mode

Flash memory can be programmed/erased in programmer mode, using a PROM programmer, as well as in on-board programming mode.

## 7.2.2 Block Diagram

Figure 7.2 shows a block diagram of the flash memory.

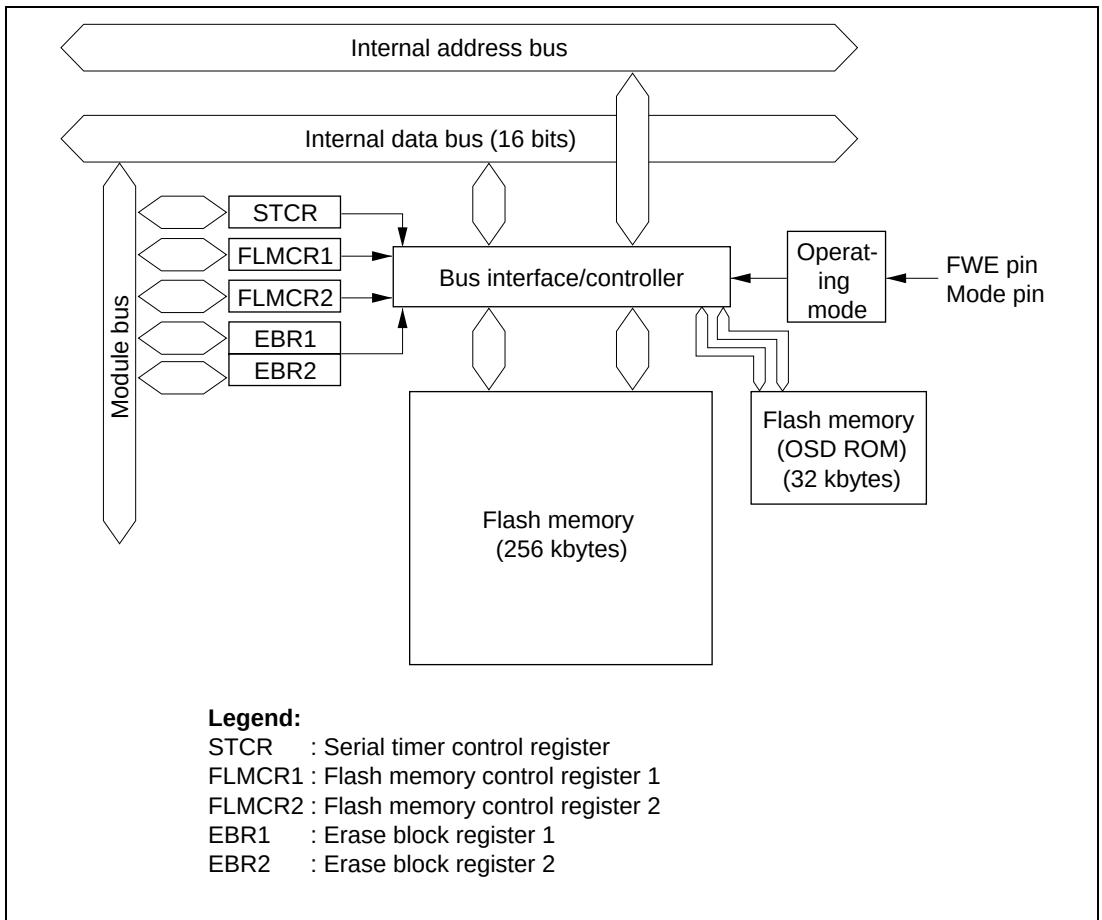


**Figure 7.2 Block Diagram of Flash Memory (H8S/2199R Only)**

### 7.2.3 Flash Memory Operating Modes

#### Mode Transitions

When each mode pin and the FWE pin are set in the reset state and a reset-start is executed, the MCU enters one of the operating modes shown in figure 7.3. In user mode, flash memory can be read but not programmed or erased.

Flash memory can be programmed and erased in boot mode, user program mode, and programmer mode.

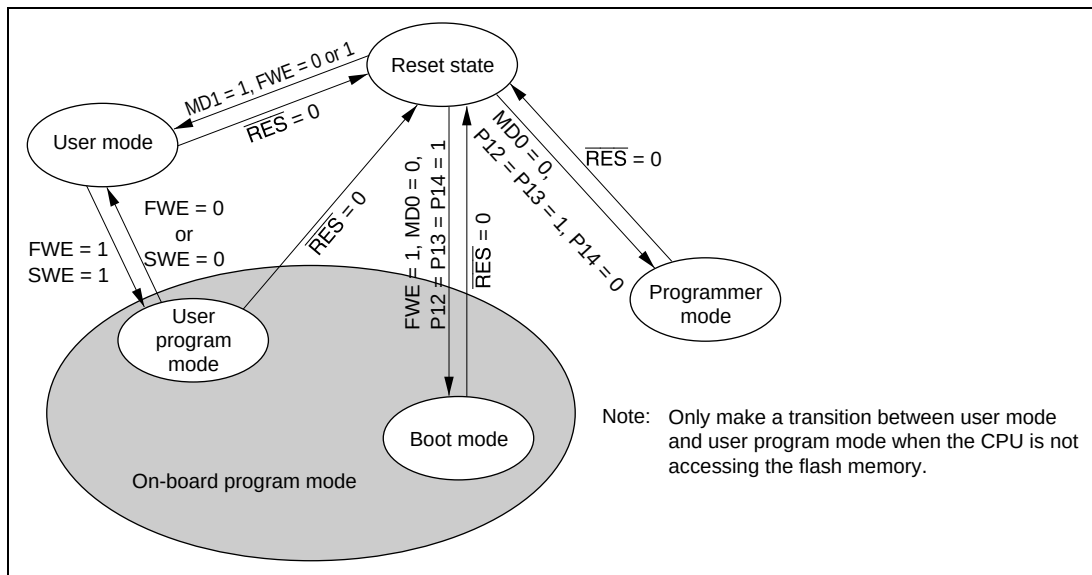



**Figure 7.3 Flash Memory Mode Transitions**

## On-Board Programming Modes

- Boot mode


### 1. Initial state

The flash memory is in the erased state when the device is shipped. The description here applies to the case where the old program version or data is being rewritten. The user should prepare the programming control program and new application program beforehand in the host.

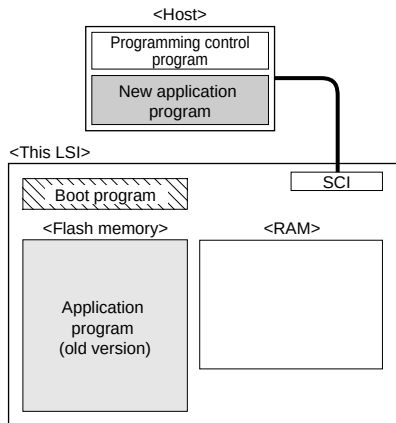


### 2. Writing control program transfer

When boot mode is entered, the boot program in this LSI chip (originally incorporated in the chip) is started, and SCI communication check is carried out, and the boot program required for flash memory erasing is automatically transferred to the RAM boot program area.

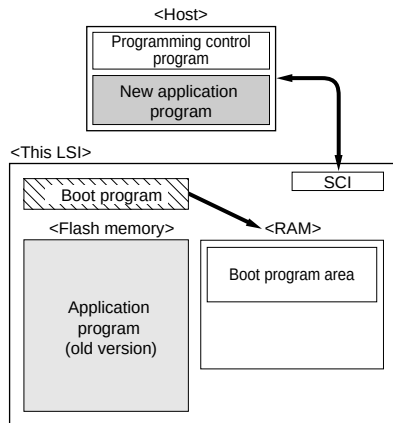


### 3. Flash memory initialization

The erase program in the boot program area (in RAM) is executed, and the flash memory is initialized (to H'FF). In boot mode, entire flash memory erasure is performed, without regard to blocks.

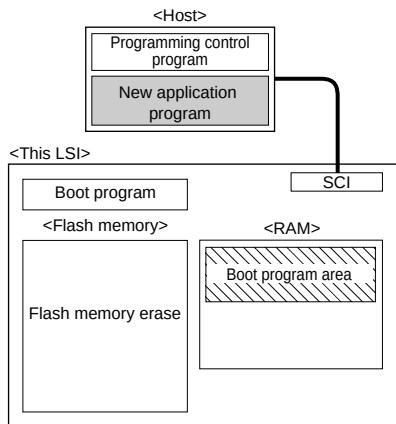

### 4. Writing new application program

The programming control program transferred from the host to RAM by SCI communication is executed, and the new application program in the host is written into the flash memory.

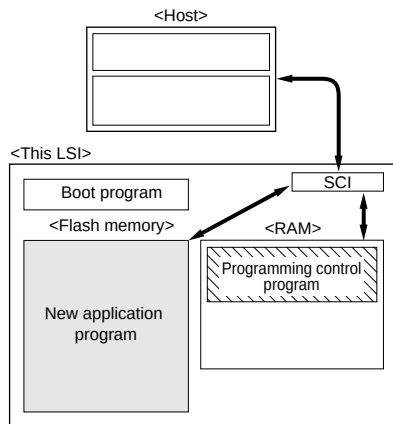


 Program execution state

**Figure 7.4 Boot Mode**

- User program mode


### 1. Initial state

(1) The FWE assessment program that confirms that the FWE pin has been driven high, and (2) the program that will transfer the programming/erase control program from the flash memory to on-chip RAM should be written into the flash memory by the user beforehand. (3) The programming/erase control program should be prepared in the host or in the flash memory.

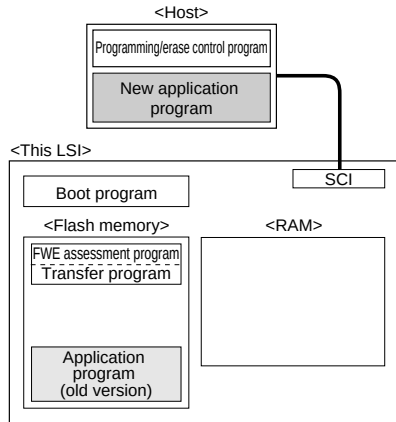


### 2. Programming/erase control program transfer

When the FWE pin is driven high, user software confirms this fact, executes the transfer program in the flash memory, and transfers the programming/erase control program to RAM.

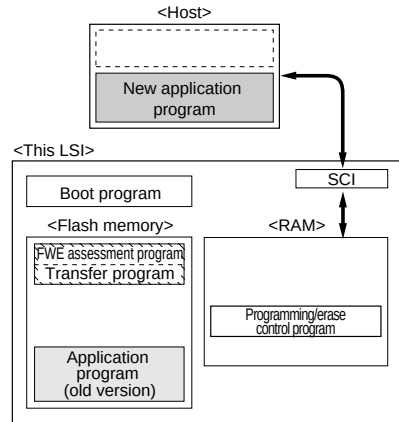


### 3. Flash memory initialization

The programming/erase control program in RAM is executed, and the flash memory is initialized (to H'FF). Erasing can be performed in block units, but not in byte units.

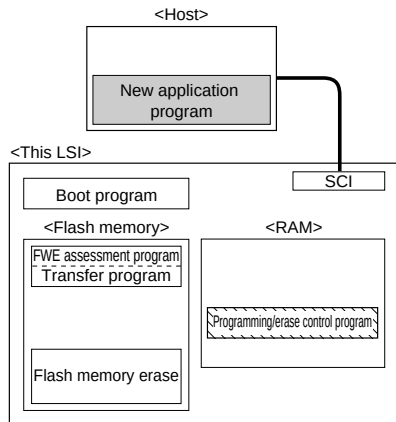

### 4. Writing new application program

Next, the new application program in the host is written into the erased flash memory blocks. Do not write to unerased blocks.

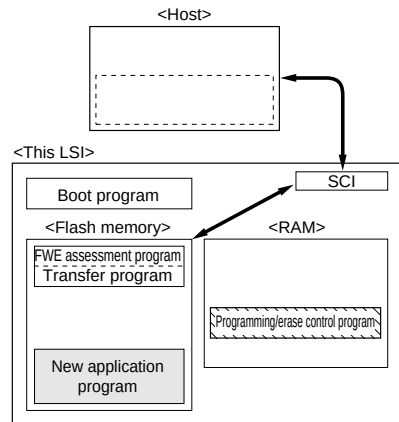

 Program execution state

**Figure 7.5 User Program Mode (Example)**



## Differences between Boot Mode and User Program Mode

|                              | Boot Mode              | User Program Mode                            |
|------------------------------|------------------------|----------------------------------------------|
| Entire memory erase          | Yes                    | Yes                                          |
| Block erase                  | No                     | Yes                                          |
| Programming control program* | Program/program-verify | Erase/erase-verify<br>Program/program-verify |

Note: \* To be provided by the user, in accordance with the recommended algorithm.

## Block Configuration

The main ROM area is divided into three 64-kbyte blocks, one 32-kbyte block, and eight 4-kbyte blocks. The OSD ROM area is divided into two 1-kbyte blocks, one 2-kbyte block, and one 28-kbyte block.

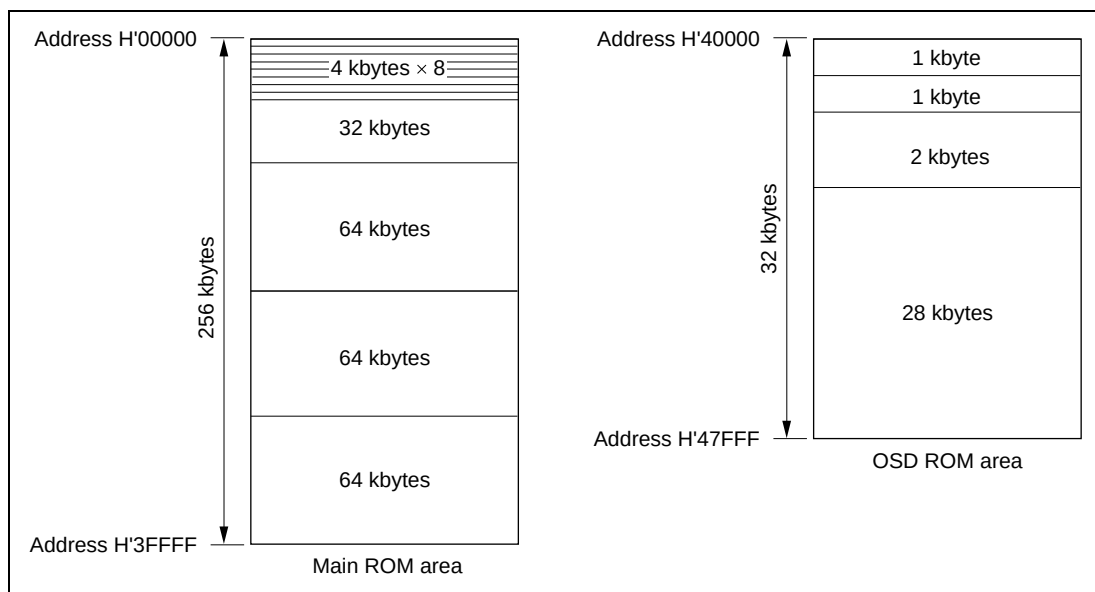


**Figure 7.6 Flash Memory Block Configuration**

## 7.2.4 Pin Configuration

The flash memory is controlled by means of the pins shown in table 7.1.

**Table 7.1 Flash Memory Pins**

| Pin Name           | Abbreviation | I/O    | Function                                   |
|--------------------|--------------|--------|--------------------------------------------|
| Reset              | RES          | Input  | Reset                                      |
| Flash write enable | FWE          | Input  | Flash program/erase protection by hardware |
| Mode 0             | MD0          | Input  | Sets this LSI operating mode               |
| Port 12            | P12          | Input  | Sets this LSI operating mode when MD0 = 0  |
| Port 13            | P13          | Input  | Sets this LSI operating mode when MD0 = 0  |
| Port 14            | P14          | Input  | Sets this LSI operating mode when MD0 = 0  |
| Transmit data      | SO1          | Output | Serial transmit data output                |
| Receive data       | SI1          | Input  | Serial receive data input                  |

## 7.2.5 Register Configuration

Table 7.2 shows the registers used to control the flash memory when enabled.  
In order for these registers to be accessed, the FLSHE bit must be set to 1 in STCR.

**Table 7.2 Flash Memory Registers**

| Register Name                   | Abbreviation         | R/W               | Initial Value      | Address* <sup>1</sup> |
|---------------------------------|----------------------|-------------------|--------------------|-----------------------|
| Flash memory control register 1 | FLMCR1* <sup>5</sup> | R/W* <sup>2</sup> | H'00* <sup>3</sup> | H'FFF8                |
| Flash memory control register 2 | FLMCR2* <sup>5</sup> | R/W* <sup>2</sup> | H'00* <sup>4</sup> | H'FFF9                |
| Erase block register 1          | EBR1* <sup>5</sup>   | R/W* <sup>2</sup> | H'00* <sup>4</sup> | H'FFFA                |
| Erase block register 2          | EBR2* <sup>5</sup>   | R/W* <sup>2</sup> | H'00* <sup>4</sup> | H'FFFB                |
| Serial timer control register   | STCR                 | R/W               | H'00               | H'FFEE                |

Notes: 1. Lower 16 bits of the address.

2. When the FWE bit in FLMCR1 is not set at 1, writes are disabled.

3. When a high level is input to the FWE pin, the initial value is H'80.

4. When a low level is input to the FWE pin, or if a high level is input and the SWE bit in FLMCR1 is not set, these registers are initialized to H'00.

5. FLMCR1, FLMCR2, EBR1, and EBR2 are 8-bit registers. Only byte accesses are valid for these registers, the access requiring 2 states.

## 7.3 Flash Memory Register Descriptions

### 7.3.1 Flash Memory Control Register 1 (FLMCR1)

|                 |     |      |      |      |     |     |     |     |
|-----------------|-----|------|------|------|-----|-----|-----|-----|
| Bit :           | 7   | 6    | 5    | 4    | 3   | 2   | 1   | 0   |
|                 | FWE | SWE1 | ESU1 | PSU1 | EV1 | PV1 | E1  | P1  |
| Initial value : | —*  | 0    | 0    | 0    | 0   | 0   | 0   | 0   |
| R/W :           | R   | R/W  | R/W  | R/W  | R/W | R/W | R/W | R/W |

Note: \* Determined by the state of the FWE pin.

FLMCR1 is an 8-bit register used for flash memory operating mode control. With addresses H'00000 to H'3FFFF, program-verify mode or erase-verify mode is entered by setting SWE to 1 when FWE = 1, then setting the PV1 bit and EV1 bit. Program mode is entered by setting SWE1 when FWE = 1, then setting the SWE1 bit and PSU1, and finally setting the P1 bit. With addresses H'00000 to H'3FFFF, erase mode is entered by setting SWE1 when FWE = 1, then setting the ESU1 bit, and finally setting the E1 bit. FLMCR1 is initialized by a reset, in standby mode or watch mode, when a low level is input to the FWE pin, and when a high level is input to the FWE pin while the SWE1 bit in FLMCR1 is not set to 1. Its initial value is H'80 when a high level is input to the FWE pin, and H'00 when a low level is input. When on-chip flash memory is disabled, a read will return H'00, and writes are invalid.

Writes to the SWE1 bit in FLMCR1 are enabled only when FWE = 1; writes to the ESU1, PSU1, EV1 and PV1 bits only when FWE = 1 and SWE1 = 1; writes to the E1 bit only when FWE = 1, SWE1 = 1, and ESU1 = 1; and writes to the P1 bit only when FWE = 1, SWE1 = 1, and PSU1 = 1.

**Bit 7—Flash Write Enable (FWE):** Sets hardware protection against flash memory programming/erasing.

#### Bit 7

| FWE | Description                                                         |
|-----|---------------------------------------------------------------------|
| 0   | When a low level is input to the FWE pin (hardware-protected state) |
| 1   | When a high level is input to the FWE pin                           |

**Bit 6—Software Write Enable (SWE):** Enables or disables flash memory programming. SWE should be set before setting bits 5 to 0, bits 7 to 0 in EBR1, and bits 3 to 0 in EBR2.

#### Bit 6

| SWE1 | Description                                                                                |
|------|--------------------------------------------------------------------------------------------|
| 0    | Writes are disabled (Initial value)                                                        |
| 1    | Writes are enabled<br>[Setting condition]<br>Setting is available when FWE = 1 is selected |

**Bit 5—Erase Set-Up 1 (ESU1):** Prepares for erase mode. ESU1 should be set to 1 before setting the E1 bit in FLMCR1 to 1. Do not set the SWE1, PSU1, EV1, PV1, E1, or P1 bit at the same time.

#### Bit 5

| ESU1 | Description                                                                                                           |
|------|-----------------------------------------------------------------------------------------------------------------------|
| 0    | Erase set-up cleared (Initial value)                                                                                  |
| 1    | Transition to erase set-up mode<br>[Setting condition]<br>Setting is available when FWE = 1 and SWE1 = 1 are selected |

**Bit 4—Program Set-Up 1 (PSU1):** Prepares for program mode. PSU1 should be set to 1 before setting the P1 bit in FLMCR1 to 1. Do not set the SWE1, ESU1, EV1, PV1, E1 or P1 bit at the same time.

#### Bit 4

| PSU1 | Description                                                                                                             |
|------|-------------------------------------------------------------------------------------------------------------------------|
| 0    | Program set-up cleared (Initial value)                                                                                  |
| 1    | Transition to program set-up mode<br>[Setting condition]<br>Setting is available when FWE = 1 and SWE1 = 1 are selected |

**Bit 3—Erase-Verify (EV1):** Selects erase-verify mode transition or clearing. Do not set the SWE1, ESU1, PSU1, PV1, E1, or P1 bit at the same time.

**Bit 3**

| EV1 | Description                                                                                                           |
|-----|-----------------------------------------------------------------------------------------------------------------------|
| 0   | Erase-verify mode cleared (Initial value)                                                                             |
| 1   | Transition to erase-verify mode<br>[Setting condition]<br>Setting is available when FWE = 1 and SWE1 = 1 are selected |

**Bit 2—Program-Verify (PV1):** Selects program-verify mode transition or clearing. Do not set the SWE1, ESU1, PSU1, EV1, E1, or P1 bit at the same time.

**Bit 2**

| PV1 | Description                                                                                                             |
|-----|-------------------------------------------------------------------------------------------------------------------------|
| 0   | Program-verify mode cleared (Initial value)                                                                             |
| 1   | Transition to program-verify mode<br>[Setting condition]<br>Setting is available when FWE = 1 and SWE1 = 1 are selected |

**Bit 1—Erase (E1):** Selects erase mode transition or clearing. Do not set the SWE1, ESU1, PSU1, EV1, PV1, or P1 bit at the same time.

**Bit 1**

| E1 | Description                                                                                                               |
|----|---------------------------------------------------------------------------------------------------------------------------|
| 0  | Erase mode cleared (Initial value)                                                                                        |
| 1  | Transition to erase mode<br>[Setting condition]<br>Setting is available when FWE = 1, SWE1 = 1, and ESU1 = 1 are selected |

**Bit 0—Program (P1):** Selects program mode transition or clearing (target address range : H'00000 to H'3FFFF). Do not set the SWE1, PSU1, ESU1, EV1, PV1, or E1 bit at the same time.

**Bit 0**

| P1 | Description                                                                                                                 |
|----|-----------------------------------------------------------------------------------------------------------------------------|
| 0  | Program mode cleared (Initial value)                                                                                        |
| 1  | Transition to program mode<br>[Setting condition]<br>Setting is available when FWE = 1, SWE1 = 1, and PSU1 = 1 are selected |

### 7.3.2 Flash Memory Control Register 2 (FLMCR2)

|                 |      |      |      |      |     |     |     |     |
|-----------------|------|------|------|------|-----|-----|-----|-----|
| Bit :           | 7    | 6    | 5    | 4    | 3   | 2   | 1   | 0   |
|                 | FLER | SWE2 | ESU2 | PSU2 | EV2 | PV2 | E2  | P2  |
| Initial value : | 0    | 0    | 0    | 0    | 0   | 0   | 0   | 0   |
| R/W :           | R    | R/W  | R/W  | R/W  | R/W | R/W | R/W | R/W |

FLMCR2 is an 8-bit register used for flash memory operating control mode.

With addresses H'40000 to H'47FFF, program-verify mode and erase-verify mode is entered by setting SWE2 when FWE (FLMCR1) = 1, then setting the EV2 bit and the PV2 bit. Program mode is entered by setting SWE2 when FWE (FLMCR1) = 1, then setting the SWE2 bit and PSU2 bit, and finally setting the P2 bit.

With addresses H'40000 to H'47FFF, erase mode is entered by setting SWE2 when FWE (FLMCR1) = 1, then setting the ESU2 bit, and finally setting the E2 bit. FLMCR2 is initialized to H'00 by a reset, in standby mode or watch mode, when a low level is input to the FWE pin, and when a high level is input to the FWE pin while the SWE2 bit in FLMCR2 is set to 1. FLER can be initialized only by a reset.

Writes to the SWE2 bit in the FLMCR2 are enabled only when FWE (FLMCR1) = 1; writes to the ESU2, PSV2, EV2, and PV2 bits only when FWE (FLMCR1) = 1 and SWE2 = 1; writes to the E2 bit only when FWE (FLMCR1) = 1, SW2 = 1, and ESU2 = 1; writes to the P2 bit only when FWE (FLMCR1) = 1, SWE2 = 1, and PSU2 = 1.

**Bit 7—Flash Memory Error (FLER):** Indicates that an error has occurred during an operation on flash memory (programming or erasing). When FLER is set to 1, flash memory goes to the error-protection state.

#### Bit 7

| FLER | Description                                                                                                                                                                                        |
|------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 0    | Flash memory is operating normally<br>Flash memory program/erase protection (error protection) is disabled<br>[Clearing condition]<br>Reset (Initial value)                                        |
| 1    | An error has occurred during flash memory programming/erasing<br>Flash memory program/erase protection (error protection) is enabled<br>[Setting condition]<br>See section 7.6.3, Error Protection |

**Bit 6—Software Write Enable 2 (SWE2):** Enables or disables flash memory programming (target address range: H'40000 to H'47FFF). SW2 should be set when setting bits 5 to 0 and bits 7 to 4 in EBR2.

#### Bit 6

| SWE2 | Description                                                                              |
|------|------------------------------------------------------------------------------------------|
| 0    | Writes are disabled (Initial value)                                                      |
| 1    | Writes are enabled<br>[Setting condition]<br>Setting is available when FWE=1 is selected |

**Bit 5—Erase Set-up 2 (ESU2):** Prepares for erase mode. (Target address range: H'40000 to H'47FFF). Do not set the PSU2, EV2, PV2, W2, P2 bits at the same time.

#### Bit 5

| ESU2 | Description                                                                                                     |
|------|-----------------------------------------------------------------------------------------------------------------|
| 0    | Erase set-up cleared (Initial value)                                                                            |
| 1    | Transition to erase set-up mode<br>[Setting condition]<br>Setting is enabled when FWE=1 and SWE2=1 are selected |

**Bit 4—Program Set-up 2 (PSU2):** Prepares for program mode (Target address rang: H'40000 to H'47FFF). Do not set the ESU2, EV2, PV2, E2, P2 bits at the same time.

#### Bit 4

| PSU2 | Description                                                                                                       |
|------|-------------------------------------------------------------------------------------------------------------------|
| 0    | Program set-up cleared (Initial value)                                                                            |
| 1    | Transition to program set-up mode<br>[Setting condition]<br>Setting is enabled when FWE=1 and SWE2=1 are selected |

**Bit 3—Erase-Verify 2 (EV2):** Selects erase-verify mode transition or clearing (target address range : H'40000 to H'47FFF). Do not set the ESU2, PSU2, PV2, E2, P2 bits at the same time.

#### Bit 3

| EV2 | Description                                                                                                       |
|-----|-------------------------------------------------------------------------------------------------------------------|
| 0   | Erase-verify mode cleared (Initial value)                                                                         |
| 1   | Transition to erase-verify mode<br>[Setting condition]<br>Setting is available when FWE=1 and SWE2=1 are selected |

**Bit 2—Program-Verify 2 (PV2):** Selects program-verify mode transition or clearing (target address range: H'40000 to H'47FFF). Do not set the ESU2, PSU2, EV2, E2, and P2 bits at the same time.

#### Bit 2

| PV2 | Description                                                                                                         |
|-----|---------------------------------------------------------------------------------------------------------------------|
| 0   | Program-verify mode cleared                                                                                         |
| 1   | Transition to program-verify mode<br>[Setting condition]<br>Setting is available when FWE=1 and SWE2=1 are selected |

**Bit 1—Erase 2 (E2):** Selects erase mode transition or clearing (target address range: H'40000 to H'47FFF, do not set the ESU2, PSU2, EV2, PV2, and P2 bits at the same time.

#### Bit 1

| E2 | Description                                                                                                         |
|----|---------------------------------------------------------------------------------------------------------------------|
| 0  | Erase mode cleared                                                                                                  |
| 1  | Transition to erase mode<br>[Setting condition]<br>Setting is available when FWE=1, SWE2=1, and ESU2=1 are selected |

**Bit 0—Program 2 (P2):** Selects program mode transition or clearing (target address range: H'40000 to H'47FFF). Do not set the ESU2, PSU2, EV2, PV2, and E2 bits at the same time.

#### Bit 0

| P2 | Description                                                                                                           |
|----|-----------------------------------------------------------------------------------------------------------------------|
| 0  | Program mode cleared                                                                                                  |
| 1  | Transition to program mode<br>[Setting condition]<br>Setting is available when FWE=1, SWE2=1, and PSU2=1 are selected |



### 7.3.3 Erase Block Register 1 (EBR1)

|                 |     |     |     |     |     |     |     |     |
|-----------------|-----|-----|-----|-----|-----|-----|-----|-----|
| Bit :           | 7   | 6   | 5   | 4   | 3   | 2   | 1   | 0   |
| EBR2 :          | EB7 | EB6 | EB5 | EB4 | EB3 | EB2 | EB1 | EB0 |
| Initial value : | 0   | 0   | 0   | 0   | 0   | 0   | 0   | 0   |
| R/W :           | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |

EBR1 is an 8-bit register that specify the flash memory erase area block by block.

EBR1 is initialized to H'00 by a reset, in standby mode or watch mode, when a low level is input to the FWE pin, and when a high level is input to the FWE pin and the SWE1 bit in FLMCR1 is not set. When a bit in EBR1 is set to 1, the corresponding block can be erased. Other blocks are erase-protected. Set only one bit in EBR1 and EBR2. More than one bit cannot be set. If set, all bits are cleared to 0.

Table 7.3 shows the flash memory block configuration.

### 7.3.4 Erase Block Register 2 (EBR2)

|                 |      |      |      |      |      |      |     |     |
|-----------------|------|------|------|------|------|------|-----|-----|
| Bit :           | 7    | 6    | 5    | 4    | 3    | 2    | 1   | 0   |
| EBR2 :          | EB15 | EB14 | EB13 | EB12 | EB11 | EB10 | EB9 | EB8 |
| Initial value : | 0    | 0    | 0    | 0    | 0    | 0    | 0   | 0   |
| R/W :           | R/W  | R/W  | R/W  | R/W  | R/W  | R/W  | R/W | R/W |

EBR2 is an 8-bit register that specify the flash memory erase area block by block; EBR2 is initialized to H'00 by a reset, in standby mode or watch mode, and when a low level is input to the FWE pin. Bits 3 to 0 are initialized to 0 when a high level is input to the FWE pin and the SWE1 in FLMCR1 is not set. Bits7 to 4 are initialized to 0 when the SWE2 in FLMCR2 is not set. When a bit in EBR2 is set to 1, the corresponding block can be erased. Other blocks are erase-protected.

Set only one bit in EBR1 and EBR2. More than one bit cannot be set. If set, all bits are cleared to 0.

The flash memory block configuration is shown in table 7.3.

**Table 7.3 Flash Memory Erase Blocks**

| Block (Size)     | Address              |
|------------------|----------------------|
| EB0 (4 kbytes)   | H'000000 to H'000FFF |
| EB1 (4 kbytes)   | H'001000 to H'001FFF |
| EB2 (4 kbytes)   | H'002000 to H'002FFF |
| EB3 (4 kbytes)   | H'003000 to H'003FFF |
| EB4 (4 kbytes)   | H'004000 to H'004FFF |
| EB5 (4 kbytes)   | H'005000 to H'005FFF |
| EB6 (4 kbytes)   | H'006000 to H'006FFF |
| EB7 (4 kbytes)   | H'007000 to H'007FFF |
| EB8 (32 kbytes)  | H'008000 to H'00FFFF |
| EB9 (64 kbytes)  | H'010000 to H'01FFFF |
| EB10 (64 kbytes) | H'020000 to H'02FFFF |
| EB11 (64 kbytes) | H'030000 to H'03FFFF |
| EB12 (1 kbyte)   | H'040000 to H'0403FF |
| EB13 (1 kbyte)   | H'040400 to H'0407FF |
| EB14 (2 kbytes)  | H'040800 to H'040FFF |
| EB15 (28 kbytes) | H'041000 to H'047FFF |

### 7.3.5 Serial/Timer Control Register (STCR)

|               |   |   |       |       |   |       |        |   |   |
|---------------|---|---|-------|-------|---|-------|--------|---|---|
| Bit           | : | 7 | 6     | 5     | 4 | 3     | 2      | 1 | 0 |
|               |   | — | IICX1 | IICX0 | — | FLSHE | OSROME | — | — |
| Initial value | : | 0 | 0     | 0     | 0 | 0     | 0      | 0 | 0 |
| R/W           | : | — | R/W   | R/W   | — | R/W   | R/W    | — | — |

STCR is an 8-bit read/write register that controls the I<sup>2</sup>C bus interface operating mode, on-chip flash memory (in F-ZTAT versions), and OSD ROM. For details on IIC bus interface, refer to section 23, I<sup>2</sup>C Bus Interface. If a module controlled by STCR is not used, do not write 1 to the corresponding bit. STCR is initialized to H'00 by a reset.

**Bits 6 and 5—I<sup>2</sup>C Control (IICX1, IICX0):** These bits control the operation of the I<sup>2</sup>C bus interface. For details, see section 23, I<sup>2</sup>C Bus Interface.

**Bit 3—Flash Memory Control Register Enable (FLSHE):** Setting the FLSHE bit to 1 enables read/write access to the flash memory control registers. If FLSHE is cleared to 0, the flash memory control registers are deselected. In this case, the flash memory control register contents are retained.

#### Bit 3

| FLSHE | Description                                               |
|-------|-----------------------------------------------------------|
| 0     | Flash memory control registers deselected (Initial value) |
| 1     | Flash memory control registers selected                   |

**Bit 2—OSD ROM Enable (OSROME):** Controls the OSD character data ROM (OSDROM) access. When this bit is set to 1, the OSDROM can be accessed by the CPU, and when this bit is cleared to 0, the OSDROM cannot be accessed by the CPU but accessed by the OSD module.

Before writing to or erasing the OSDROM in the F-ZTAT version, be sure to set this bit to 1.

Note: During OSD display, the OSDROM cannot be accessed by the CPU. Before accessing the OSDROM by the CPU, be sure to clear the OSDON bit in the screen control register to 0 then set the OSROME bit to 1. If the OSROME bit is set to 1 during OSD display, the character data ROM cannot be accessed correctly by CPU.

#### Bit 2

| OSROME | Description                                    |
|--------|------------------------------------------------|
| 0      | OSD ROM is accessed by the OSD (Initial value) |
| 1      | OSD ROM is accessed by the CPU                 |

**Bits 7, 4, 1 and 0—Reserved:** Always read as 0. Do not write 1 to these bits.

## 7.4 On-Board Programming Modes

When pins are set to on-board programming mode, program/erase/verify operations can be performed on the on-chip flash memory. There are two on-board programming modes: boot mode and user program mode. The pin settings for transition to each of these modes are shown in table 7.4. For a diagram of the transitions to the various flash memory modes, see figure 7.3.

**Table 7.4 Setting On-Board Programming Modes**

| Mode              | Pin             |     |                 |                 |                 |
|-------------------|-----------------|-----|-----------------|-----------------|-----------------|
| Mode Name         | FWE             | MD0 | P12             | P13             | P14             |
| Boot mode         | 1               | 0   | 1* <sup>2</sup> | 1* <sup>2</sup> | 1* <sup>2</sup> |
| User program mode | 1* <sup>1</sup> | 1   | —               | —               | —               |

Notes: 1. In user program mode, the FWE pin should not be constantly set to 1. Set FWE to 1 to make a transition to user program mode before performing a program/erase/verify operation.

2. Can be used as I/O ports after boot mode is initiated.

### 7.4.1 Boot Mode

When boot mode is used, the flash memory programming control program must be prepared in the host beforehand. The channel 1 SCI to be used is set to asynchronous mode.

When a reset-start is executed after the LSI's pins have been set to boot mode, the boot program built into the LSI is started and the programming control program prepared in the host is serially transmitted to the LSI via the SCI. In the LSI, the programming control program received via the SCI is written into the programming control program area in on-chip RAM. After the transfer is completed, control branches to the start address of the programming control program area and the programming control program execution state is entered (flash memory programming is performed).

The transferred programming control program must therefore include coding that follows the programming algorithm given later.

Figure 7.7 shows the system configuration in boot mode. Figure 7.8 shows the boot program mode execution procedure.


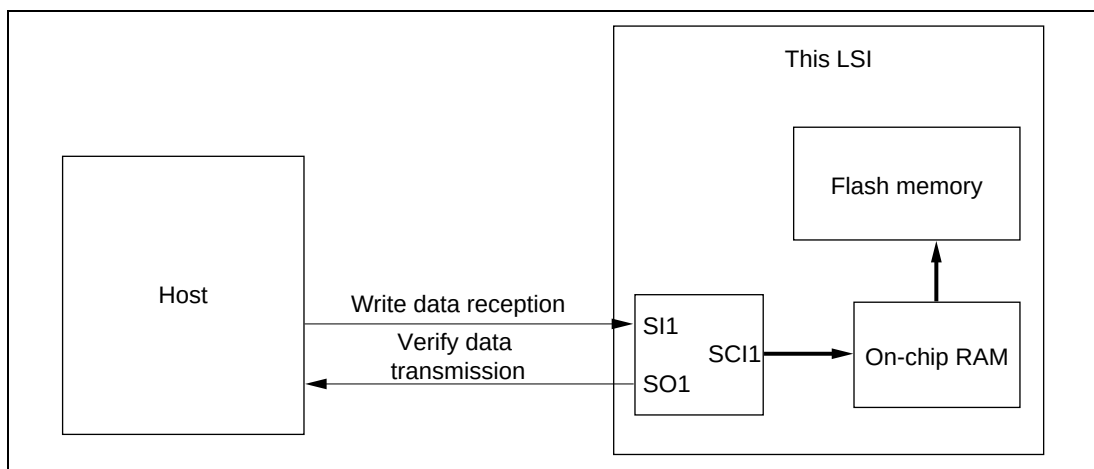


**Figure 7.7 System Configuration in Boot Mode**

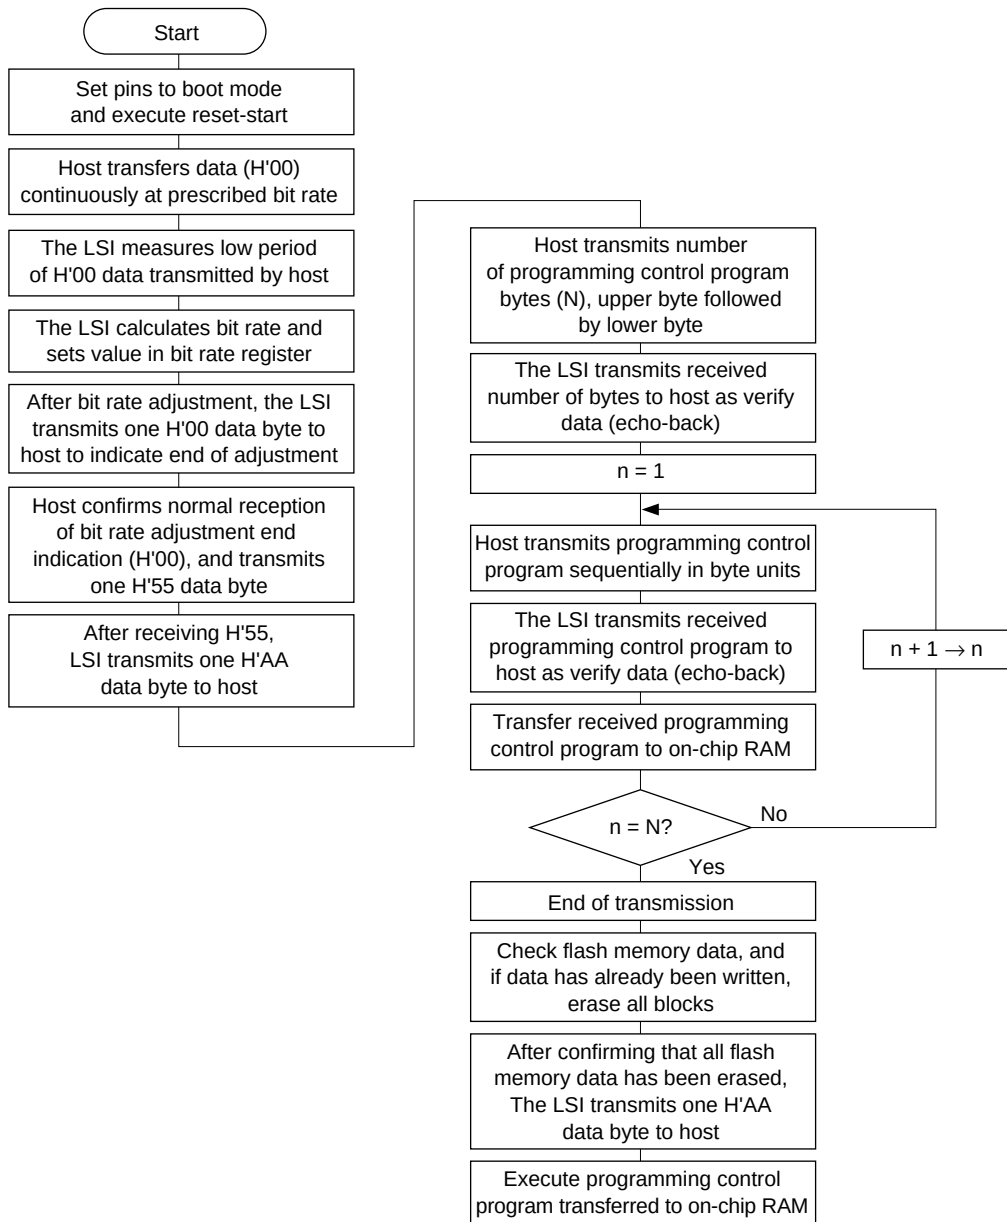

Note: If a memory cell does not operate normally and cannot be erased, one H'FF byte is transmitted as an erase error, and the erase operation and subsequent operations are halted.

**Figure 7.8 Boot Mode Execution Procedure**

## Automatic SCI Bit Rate Adjustment

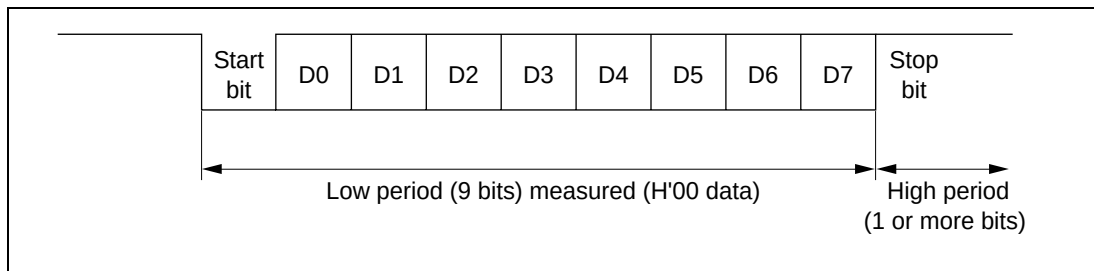


**Figure 7.9 Automatic SCI Bit Rate Adjustment**


When boot mode is initiated, the LSI measures the low period of the asynchronous SCI communication data (H'00) transmitted continuously from the host. The SCI transmit/receive format should be set as follows: 8-bit data, 1 stop bit, no parity. The LSI calculates the bit rate of the transmission from the host from the measured low period, and transmits one H'00 byte to the host to indicate the end of bit rate adjustment. The host should confirm that this adjustment end indication (H'00) has been received normally, and transmit one H'55 byte to the LSI. If reception cannot be performed normally, initiate boot mode again (reset), and repeat the above operations. Depending on the host's transmission bit rate and the LSI system clock frequency, there will be a discrepancy between the bit rates of the host and the LSI. To ensure correct SCI operation, the host's transfer bit rate should be set to (4800, 9600, 19200) bps.

Table 7.5 shows typical host transfer bit rates and system clock frequencies for which automatic adjustment of the LSI's bit rate is possible. The boot program should be executed within this system clock range.

**Table 7.5 System Clock Frequencies for which Automatic Adjustment of This LSI Bit Rate Is Possible**

| Host Bit Rate (bps) | System Clock Frequency |
|---------------------|------------------------|
| 4800                | 8 MHz to 10 MHz        |
| 9600                | 8 MHz to 10 MHz        |
| 19200               | 8 MHz to 10 MHz        |

**On-Chip RAM Area Divisions in Boot Mode:** In boot mode, the 2048-byte area from H'FFDFB0 to H'FFE7AF is reserved for use by the boot program, as shown in figure 7.10. The area to which the programming control program is transferred is H'FFE7B0 to H'FFFFAF (6144 bytes). The boot program area can be used when the programming control program transferred into RAM enters the execution state. A stack area should be set up as required.

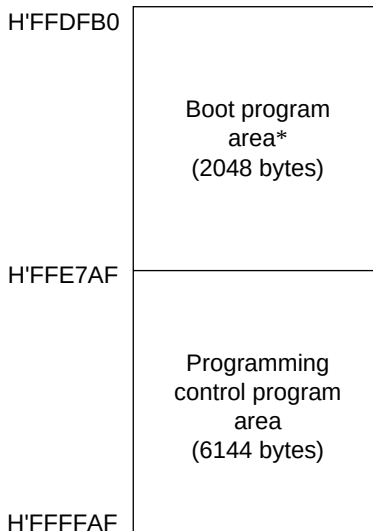

Note: \* The boot program area cannot be used until a transition is made to the execution state for the programming control program transferred to RAM. Note that the boot program remains stored in this area after a branch is made to the programming control program.

**Figure 7.10 RAM Areas in Boot Mode**



## Notes on Use of Boot Mode:

1. When the LSI comes out of reset in boot mode, it measures the low period of the input at the SCI's SI1 pin. The reset should end with SI1 pin high. After the reset ends, it takes about 100 states for the LSI to get ready to measure the low period of the SI1 pin input.
2. In boot mode, if any data has been programmed into the flash memory (if all data is not 1), all flash memory blocks are erased. Boot mode is for use when user program mode is unavailable, such as the first time on-board programming is performed, or if the program activated in user program mode is accidentally erased.
3. Interrupts cannot be used while the flash memory is being programmed or erased.
4. The SI1 and SO1 pins should be pulled up on the board.
5. Before branching to the programming control program (H'FFE7B0 in RAM area), the LSI terminates transmit and receive operations by the on-chip SCI (channel 1) (by clearing the RE and TE bits in SCR to 0), but the adjusted bit rate value remains set in BRR. The transmit data output pin, SO1, goes to the high-level output state (P21PCR = 1, P21PDR = 1).

The contents of the CPU's internal general registers are undefined at this time, so these registers must be initialized immediately after branching to the programming control program. In particular, since the stack pointer (SP) is used implicitly in subroutine calls, etc., a stack area must be specified for use by the programming control program.

The initial values of other on-chip registers are not changed.

6. Boot mode can be entered by making the pin settings shown in table 7.4 and executing a reset-start.

When the LSI detects the boot mode setting at reset release\*, it retains that state internally.

Boot mode can be cleared by driving the reset pin low, waiting at least 20 states, then setting the FWE pin and mode pins, and executing reset release\*. Boot mode can also be cleared by a WDT overflow reset.

If the mode pin input levels are changed in boot mode, the boot mode state will be maintained in the microcomputer, and boot mode continued, unless a reset occurs. However, the FWE pin must not be driven low while the boot program is running or flash memory is being programmed or erased.

Note: \* Mode pin and FWE pin input must satisfy the mode programming setup time ( $t_{MDS} = 4$  states) with respect to the reset release timing.


## 7.4.2 User Program Mode

When set to user program mode, the LSI can program and erase its flash memory by executing a user program/erase control program. Therefore, on-board reprogramming of the on-chip flash memory can be carried out by providing on-board means of FWE control and supply of programming data, and storing a program/erase control program in part of the program area as necessary.

In this mode, the LSI starts up in mode 1 and applies a high level to the FWE pin.

The flash memory itself cannot be read while the SWE1 bit is set to 1 to perform programming or erasing, so the control program that performs programming and erasing should be run in on-chip RAM or external memory.

Figure 7.11 shows the procedure for executing the program/erase control program when transferred to on-chip RAM.

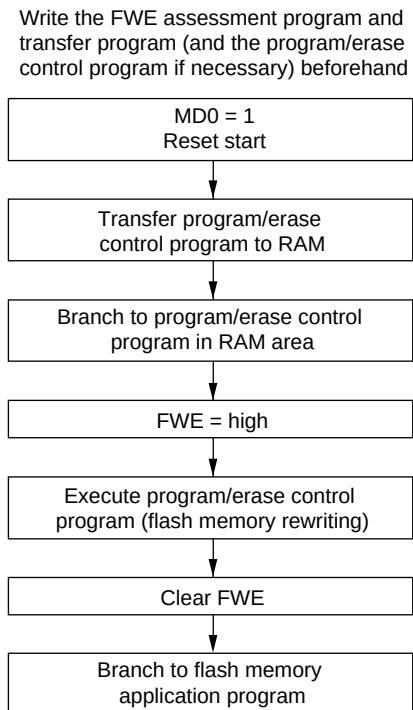

Note: Do not apply a constant high level to the FWE pin. Apply a high level to the FWE pin only when the flash memory is programmed or erased. Also, while a high level is applied to the FWE pin, the watchdog timer should be activated to prevent overprogramming or overerasing due to program runaway, etc.

**Figure 7.11 User Program Mode Execution Procedure**

## 7.5 Programming/Erasing Flash Memory

In the on-board programming modes, flash memory programming and erasing is performed by software, using the CPU. There are four flash memory operating modes: program mode, erase mode, program-verify mode, and erase-verify mode. With addresses H'00000 to H'3FFFF, transitions to these modes can be made by setting the PSU1, ESU1, P1, E1, PV1 and EV1 bits in FLMCR1. With addresses H'40000 to H'47FFF, transitions to these modes can be made by setting the PSU2, ESU2, P2, E2, PV2, and EV2 bits in the FLMCR2.

The flash memory cannot be read while being programmed or erased. Therefore, the program that controls flash memory programming/erasing (the programming control program) should be located and executed in on-chip RAM or external memory.

- Notes:
1. Operation is not guaranteed if setting/resetting of the SWE1, ESU1, PSU1, EV1, PV1, E1, and P1 bits in FLMCR1, and the SWE2, ESU2, PSU2, EV2, PV2, E2, and P2 in FLMCR2, is executed by a program in flash memory.
  2. When programming or erasing, set FWE to 1 (programming/erasing will not be executed if FWE = 0).
  3. Perform programming in the erased state. Do not perform additional programming on previously programmed addresses.
  4. Do not write to addresses H'00000 to H'3FFFF and H'40000 to H'47FFF at the same time. Otherwise operation cannot be guaranteed.
  5. Do not operate the OSD when writing or erasing addresses H'40000 to H'47FFF. Do not set the OSROME in STCR to 1 before manipulating the flash control register.

### 7.5.1 Program Mode (n=1 when the target address range is H'00000 to H'3FFFF and n=2 when the target address range is H'40000 to H'47FFF)

Follow the procedure shown in the program/program-verify flowchart in figure 7.12 to write data or programs to flash memory. Performing program operations according to this flowchart will enable data or programs to be written to flash memory without subjecting the device to voltage stress or sacrificing program data reliability. Programming should be carried out 128 bytes at a time.

Following the elapse of 1.0  $\mu$ s or more after the SWEn bit is set to 1 in flash memory control register n (FLMCRn), 128-byte program data is stored in the program data area and reprogram data area, and the 128-byte data in the reprogram data area written consecutively to the write addresses. The lower 8 bits of the start address written to must be H'00, or H'80. One hundred and twenty-eight consecutive byte data transfers are performed. The program address and program data are latched in the flash memory. A 128-byte data transfer must be performed even if writing fewer than 128 bytes; in this case, H'FF data must be written to the extra addresses.

Next, the watchdog timer is set to prevent overprogramming in the event of program runaway, etc. Set 6.6 ms as the WDT overflow period. After this, preparation for program mode (program setup) is carried out by setting the PSUn bit in FLMCRn, and after the elapse of 50  $\mu$ s or more, the operating mode is switched to program mode by setting the Pn bit in FLMCRn. The time during


which the Pn bit is set is the flash memory programming time. Make a program setting for one programming operation using the table in the programming flowchart.

### **7.5.2 Program-Verify Mode (n = 1 when the target address range is H'00000 to H'3FFFF and n = 2 when the target address range is H'40000 to H'47FFF)**

In program-verify mode, the data written in program mode is read to check whether it has been correctly written in the flash memory.

After the elapse of a given programming time, the programming mode is exited (the Pn bit in FLPCRn is cleared, then the PSUn bit is cleared at least 5  $\mu$ s later). The watchdog timer is cleared after the elapse of 5  $\mu$ s or more, and the operating mode is switched to program-verify mode by setting the PVn bit in FLPCRn. Before reading in program-verify mode, a dummy write of H'FF data should be made to the addresses to be read. The dummy write should be executed after the elapse of 4  $\mu$ s or more. When the flash memory is read in this state (verify data is read in 16-bit units), the data at the latched address is read. Wait at least 2  $\mu$ s after the dummy write before performing this read operation. Next, the originally written data is compared with the verify data, and reprogram data is computed (see figure 7.12) and transferred to the reprogram data area. After 128 bytes of data have been verified, exit program-verify mode, wait for at least 2  $\mu$ s, then clear the SWEn bit in FLPCRn. If reprogramming is necessary, set program mode again, and repeat the program/program-verify sequence as before. However, ensure that the program/program-verify sequence is not repeated more than 1,000 times on the same bits.

### Write pulse application subroutine

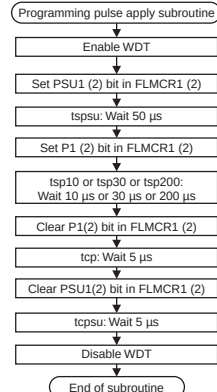

Note: 6. Programming pulse width

| Number of times of programming | Programming time (z) μs |
|--------------------------------|-------------------------|
| 1                              | 30                      |
| 2                              | 30                      |
| 3                              | 30                      |
| 4                              | 30                      |
| 5                              | 30                      |
| 6                              | 30                      |
| 7                              | 200                     |
| 8                              | 200                     |
| 9                              | 200                     |
| 10                             | 200                     |
| 11                             | 200                     |
| 12                             | 200                     |
| 13                             | 200                     |
| .                              | .                       |
| .                              | .                       |
| .                              | .                       |
| 998                            | 200                     |
| 999                            | 200                     |
| 1000                           | 200                     |

The programming pulse must be 10 μs in additional programming

| RAM                                              |
|--------------------------------------------------|
| Program data storage area (128 bytes)            |
| Reprogram data storage area (128 bytes)          |
| Additional program data storage area (128 bytes) |

Perform programming after erasing data. Do not perform additional programming to addresses that have already been written to.

- Notes:
1. Data transfer is performed by byte transfer. The lower eight bits of the start address must be H'00 or H'80. A 128-byte data transfer must be performed even if writing fewer than 128 bytes; in this case, H'FF must be written to the extra addresses.
  2. Verify data is read in 16-bit (word) units.
  3. Even in case of the bit which is already-programmed in the 128-byte programming loop, perform additional programming if the bit fails at the next verify.
  4. An area for storing program data (128 bytes), reprogram data (128 bytes), and additional program (128bytes) must be provided in RAM. The contents of the reprogram and additional program areas are rewritten as programming processes.
  5. A 30 μs or 200 μs programming pulse must be applied.  
For details on programming pulse, refer to Notes\*6.

To perform additional data programming, apply a programming pulse of 10 μs. Reprogram data 'X' is the reprogram data after program pulse is applied.

Reprogram Data Calculation Table

| Source Data (D) | Verify data (V) | Reprogram data (X) | Comments                          |
|-----------------|-----------------|--------------------|-----------------------------------|
| 0               | 0               | 1                  | Programming completed             |
| 0               | 1               | 0                  | Programming incomplete; reprogram |
| 1               | 0               | 1                  |                                   |
| 1               | 1               | 1                  | Still in erased state; no action  |

Additional program data calculation table

| Reprogram data (X) | Verify data (V) | Additional program data (Y) | Comments                             |
|--------------------|-----------------|-----------------------------|--------------------------------------|
| 0                  | 0               | 0                           | Additional programming performed     |
| 0                  | 1               | 1                           | Additional programming not performed |
| 1                  | 0               | 1                           |                                      |
| 1                  | 1               | 1                           | Additional programming not performed |

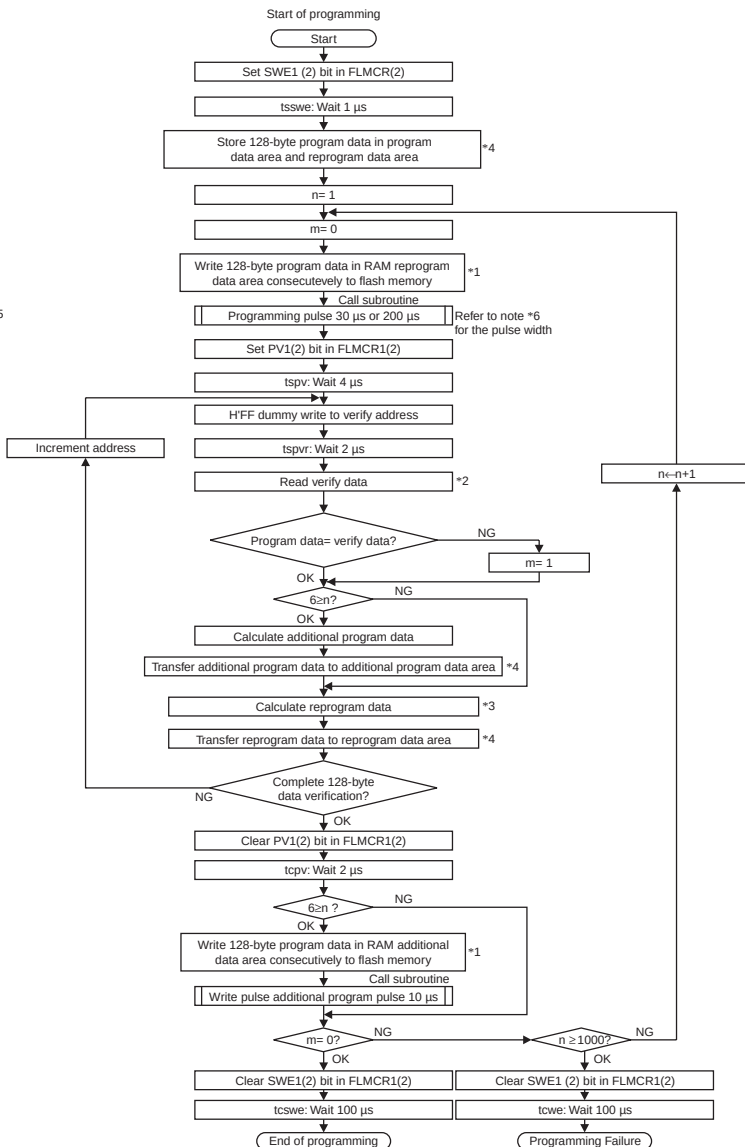


Figure 7.12 Program/Program-Verify Flowchart


### **7.5.3 Erase Mode (n = 1 when the target address range is H'00000 to H'3FFFF and n = 2 when the target address range is H'40000 to H'47FFF)**

Flash memory erasing should be performed block by block following the procedure shown in the erase/erase-verify flowchart (single-block erase) shown in figure 7.13.

To perform data or program erasure, make a 1 bit setting for the flash memory area to be erased in erase block register 1 or 2 (EBR1 or EBR2) at least 1  $\mu$ s after setting the SWEn bit to 1 in flash memory control register n (FLMCRn). Next, the watchdog timer is set to prevent overerasing in the event of program runaway, etc.

Set more than 19.8 ms as the WDT overflow period. After this, preparation for erase mode (erase setup) is carried out by setting the ESUn bit in FLMCRn, and after a elapse of 100  $\mu$ s or more, the operating mode is switched to erase mode by setting the En bit in FLMCRn. The time during which the En bit is set is the flash memory erase time. Ensure that erase time does not exceed 10 ms.

**Note:** With flash memory erasing, preprogramming (setting all data in the memory to be erased to 0) is not necessary before starting the erase procedure.

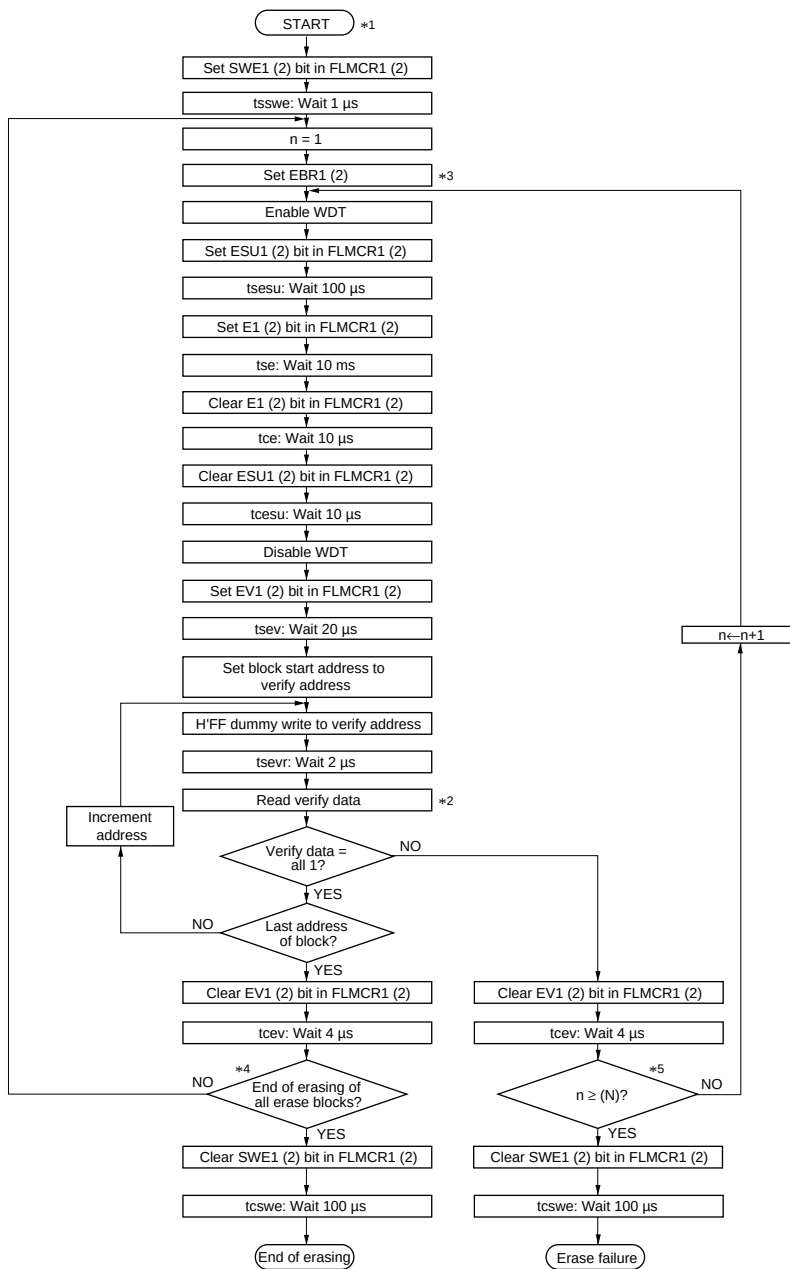

- Notes:
1. Preprogramming (setting erase block data to all 0) is not necessary.
  2. Verify data is read in 16-bit (word) units.
  3. Set only one bit in EBR. More than two bit cannot be set.
  4. Erasing is performed in block units. To erase a number of blocks, the individual blocks must be erased sequentially.
  5. For the value of N, see table 31.32, Flash Memory Characteristics.

**Figure 7.13 Erase/Erase-Verify Flowchart**

#### **7.5.4 Erase-Verify Mode (n = 1 when the target address range is H'00000 to H'3FFFF and n = 2 when the target address range is H'40000 to H'47FFF)**

In erase-verify mode, data is read after memory has been erased to check whether it has been correctly erased.

After the elapse of the erase time, erase mode is exited (the En bit in FLMCRn is cleared, then the ESUn bit is cleared at least 10  $\mu$ s later), the watchdog timer is cleared after the elapse of 10  $\mu$ s or more, and the operating mode is switched to erase-verify mode by setting the EVn bit in FLMCRn. Before reading in erase-verify mode, a dummy write of H'FF data should be made to the addresses to be read. The dummy write should be executed after the elapse of 6.0  $\mu$ s or more. When the flash memory is read in this state (verify data is read in 16-bit units), the data at the latched address is read. Wait at least 2  $\mu$ s after the dummy write before performing this read operation. If the read data has been erased (all 1), a dummy write is performed to the next address, and erase-verify is performed. If the read data has not been erased, set erase mode again, and repeat the erase/erase-verify sequence in the same way. However, ensure that the erase/erase-verify sequence is not repeated more than 100 times. When verification is completed, exit erase-verify mode, and wait for at least 4  $\mu$ s. If erasure has been completed on all the erase blocks, clear the SWEn bit in FLMCRn. If there are any unerased blocks, make a 1 bit setting for the flash memory area to be erased, and repeat the erase/erase-verify sequence in the same way.



## 7.6 Flash Memory Protection

There are three kinds of flash memory program/erase protection: hardware protection, software protection, and error protection.

### 7.6.1 Hardware Protection

Hardware protection refers to a state in which programming/erasing of flash memory is forcibly disabled or aborted. Hardware protection is reset by settings in flash memory control registers 1 and 2 (FLMCR1, FLMCR2) and erase block registers 1 and 2 (EBR1, EBR2). (See table 7.6.)

In error protected state, the FLMCR1, FLMCR2, EBR1, and EBR2 settings are maintained.

**Table 7.6 Hardware Protection**

| Item                     | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | Functions |       |
|--------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------|-------|
|                          |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | Program   | Erase |
| FWE pin protection       | <ul style="list-style-type: none"><li>When a low level is input to the FWE pin, FLMCR1, FLMCR2 (excluding the FLER bit), EBR1, and EBR2 are initialized, and the program/erase-protected state is entered</li></ul>                                                                                                                                                                                                                                                                                                                                                                                                                     | Yes       | Yes   |
| Reset/standby protection | <ul style="list-style-type: none"><li>In a reset (including a WDT overflow reset) and in standby mode or watch mode, FLMCR1, FLMCR2, EBR1, and EBR2 are initialized, and the program/erase-protected state is entered</li><li>In a reset via the <math>\overline{\text{RES}}</math> pin, the reset state is not entered unless the <math>\overline{\text{RES}}</math> pin is held low until oscillation stabilizes after powering on. In the case of a reset during operation, hold the <math>\overline{\text{RES}}</math> pin low for the <math>\overline{\text{RES}}</math> pulse width specified in the AC characteristics</li></ul> | Yes       | Yes   |

## 7.6.2 Software Protection

Software protection can be implemented by setting the SWE1 bit in FLMCR1 and SWE2 bit in FLMCR2 and erase block registers 1 and 2 (EBR1, EBR2). When software protection is in effect, setting the P1 or E1 bit in flash memory control register 1 (FLMCR1) or P2 or E2 bit in flash memory control register 2 (FLMCR2) does not cause a transition to program mode or erase mode. (See table 7.7.)

**Table 7.7 Software Protection**

| Item                           | Description                                                                                                                                                                                                                                      | Functions |       |
|--------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------|-------|
|                                |                                                                                                                                                                                                                                                  | Program   | Erase |
| SWE bit protection             | <ul style="list-style-type: none"><li>Clearing the SWE bit to 0 in FLMCR1 sets the program/erase-protected state for all blocks (Execute in on-chip RAM or external memory)</li></ul>                                                            | Yes       | Yes   |
| Block specification protection | <ul style="list-style-type: none"><li>Erase protection can be set for individual blocks by settings in erase block registers 1 and 2 (EBR1, EBR2)</li><li>Setting EBR1 and EBR2 to H'00 places all blocks in the erase-protected state</li></ul> | —         | Yes   |

### 7.6.3 Error Protection

In error protection, an error is detected when MCU runaway occurs during flash memory programming/erasing, or operation is not performed in accordance with the program/erase algorithm, and the program/erase operation is aborted. Aborting the program/erase operation prevents damage to the flash memory due to overprogramming or overerasing.

If the MCU malfunctions during flash memory programming/erasing, the FLER bit is set to 1 in FLMCR2 and the error protection state is entered. The FLMCR1, FLMCR2, EBR1, and EBR2 settings are retained, but program mode or erase mode is aborted at the point at which the error occurred. Program mode or erase mode cannot be re-entered by re-setting the P or E bit. However, PV1, PV2, EV1 and EV2 bit setting is enabled, and a transition can be made to verify mode.

FLER bit setting conditions are as follows:

- When flash memory is read during programming/erasing (including a vector read or instruction fetch)
- Immediately after exception handling (excluding a reset) during programming/erasing
- When a SLEEP instruction (including standby) is executed during programming/erasing

Error protection is released only by a reset and in hardware standby mode.

Figure 7.14 shows the flash memory state transition diagram.

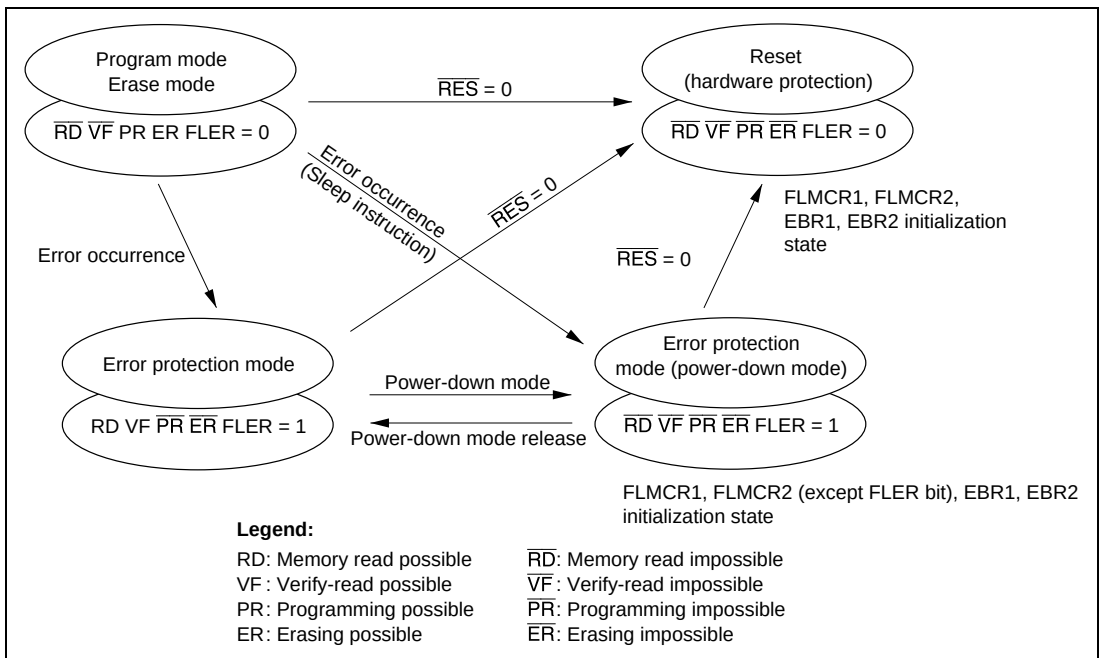


**Figure 7.14 Flash Memory State Transitions**

## 7.7 Interrupt Handling when Programming/Erasing Flash Memory

All interrupts are disabled when flash memory is being programmed or erased (when the P1 or E1 bit is set in FLMCR1, or the P2 or E2 bit is set in FLMR2), and while the boot program is executing in boot mode<sup>\*1</sup>, to give priority to the program or erase operation. There are three reasons for this:

- Interrupt during programming or erasing might cause a violation of the programming or erasing algorithm, with the result that normal operation could not be assured.
- In the interrupt exception handling sequence during programming or erasing, the vector would not be read correctly<sup>\*2</sup>, possibly resulting in MCU runaway.
- If interrupt occurred during boot program execution, it would not be possible to execute the normal boot mode sequence.

For these reasons, in on-board programming mode alone there are conditions for disabling interrupt, as an exception to the general rule. However, this provision does not guarantee normal erasing and programming or MCU operation. All requests must therefore be disabled inside and outside the MCU during FWE application. Interrupt is also disabled in the error-protection state while the P1 or E1 bit remains set in FLMCR1, or the P2 or E2 bit remains set in FLMCR2.

- Notes:
1. Interrupt requests must be disabled inside and outside the MCU until data write by the write control program is complete.
  2. The vector may not be read correctly in this case for the following two reasons:
    - If flash memory is read while being programmed or erased (while the P or E bit is set in FLMCR1 or FLMCR2), correct read data will not be obtained (undetermined values will be returned).
    - If the interrupt entry in the interrupt vector table has not been programmed yet, interrupt exception handling will not be executed correctly.

## 7.8 Flash Memory Programmer Mode

### 7.8.1 Programmer Mode Setting

Programs and data can be written and erased in programmer mode as well as in the on-board programming modes. In programmer mode, flash memory read mode, auto-program mode, auto-erase mode, and status read mode are supported with these device types. In auto-program mode, auto-erase mode, and status read mode, a status polling procedure is used, and in status read mode, detailed internal signals are output after execution of an auto-program or auto-erase operation.

### 7.8.2 Socket Adapters and Memory Map

In programmer mode, a socket adapter is mounted on the PROM programmer. The socket adapter product codes are listed in table 7.8.

Figure 7.15 shows the memory map in programmer mode.

**Table 7.8 Socket Adapter Product Codes**

| Product Codes | Package     | Socket Adapter Product Code          |
|---------------|-------------|--------------------------------------|
| HD64F2199R    | 112-pin QFP | ME2199ESHF1H<br>(Minato Electronics) |

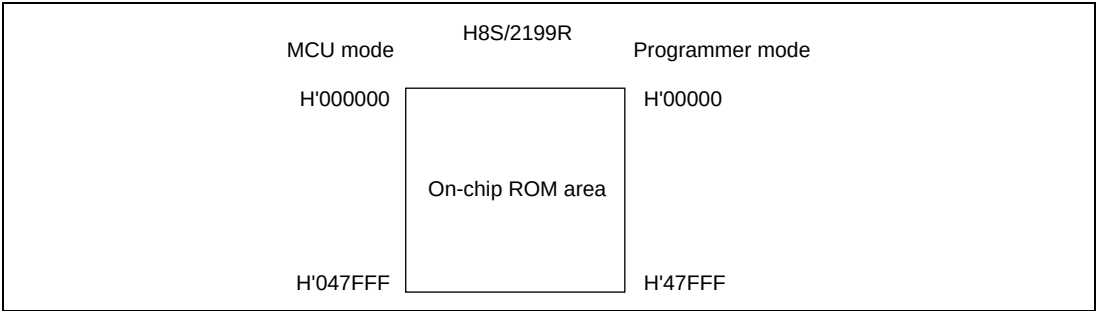


**Figure 7.15 Memory Map in Programmer Mode**

### 7.8.3 Programmer Mode Operation

Table 7.9 shows how the different operating modes are set when using programmer mode, and table 7.10 lists the commands used in programmer mode. Details of each mode are given below.

- Memory Read Mode: Memory read mode supports byte reads.
- Auto-Program Mode: Auto-program mode supports programming of 128 bytes at a time. Status polling is used to confirm the end of auto-programming.
- Auto-Erase Mode: Auto-erase mode supports automatic erasing of the entire flash memory. Status polling is used to confirm the end of auto-erasing.
- Status Read Mode: Status polling is used for auto-programming and auto-erasing, and normal termination can be confirmed by reading the IO6 signal. In status read mode, error information is output if an error occurs.

**Table 7.9 Settings for Each Operating Mode in Programmer Mode**

| Mode                       | Pin Names            |                 |                 |                 |             |                   |
|----------------------------|----------------------|-----------------|-----------------|-----------------|-------------|-------------------|
|                            | FWE                  | $\overline{CE}$ | $\overline{OE}$ | $\overline{WE}$ | IO0 to IO7  | A0 to A17         |
| Read                       | H or L               | L               | L               | H               | Data output | Ain               |
| Output disable             | H or L               | L               | H               | H               | Hi-z        | X                 |
| Command write              | H or L <sup>*3</sup> | L               | H               | L               | Data input  | Ain <sup>*2</sup> |
| Chip disable <sup>*1</sup> | H or L               | H               | X               | X               | Hi-z        | X                 |

Notes: 1. Chip disable is not a standby state; internally, it is an operation state.

2. Ain indicates that there is also address input in auto-program mode.

3. For command writes when making a transition to auto-program or auto-erase mode, input a high level to the FWE pin.

**Table 7.10 Programmer Mode Commands**

| Command Name      | Number of Cycles | 1st Cycle |         |      | 2nd Cycle |         |      |
|-------------------|------------------|-----------|---------|------|-----------|---------|------|
|                   |                  | Mode      | Address | Data | Mode      | Address | Data |
| Memory read mode  | 1 + n            | write     | X       | H'00 | Read      | RA      | Dout |
| Auto-program mode | 129              | write     | X       | H'40 | write     | WA      | Din  |
| Auto-erase mode   | 2                | write     | X       | H'20 | write     | X       | H'20 |
| Status read mode  | 2                | write     | X       | H'71 | write     | X       | H'71 |

Notes: 1. In auto-program mode. 129 cycles are required for command writing by a simultaneous 128-byte write.

2. In memory read mode, the number of cycles depends on the number of address write cycles (n).

## 7.8.4 Memory Read Mode

- After the end of an auto-program, auto-erase, or status read operation, the command wait state is entered. To read memory contents, a transition must be made to memory read mode by means of a command write before the read is executed.
- Command writes can be performed in memory read mode, just as in the command wait state.
- Once memory read mode has been entered, consecutive reads can be performed.
- After power-on, memory read mode is entered.

**Table 7.11 AC Characteristics in Memory Read Mode (1)**

– Preliminary –

Conditions:  $V_{CC} = 5.0 \text{ V} \pm 10\%$ ,  $V_{SS} = 0 \text{ V}$ ,  $T_a = 25^\circ\text{C} \pm 5^\circ\text{C}$

| Item                              | Symbol     | Min | Max | Unit          |
|-----------------------------------|------------|-----|-----|---------------|
| Command write cycle               | $t_{nxtc}$ | 20  | —   | $\mu\text{s}$ |
| $\overline{\text{CE}}$ hold time  | $t_{ceh}$  | 0   | —   | ns            |
| $\overline{\text{CE}}$ setup time | $t_{ces}$  | 0   | —   | ns            |
| Data hold time                    | $t_{dh}$   | 50  | —   | ns            |
| Data setup time                   | $t_{ds}$   | 50  | —   | ns            |
| Write pulse width                 | $t_{wep}$  | 70  | —   | ns            |
| $\overline{\text{WE}}$ rise time  | $t_r$      | —   | 30  | ns            |
| $\overline{\text{WE}}$ fall time  | $t_f$      | —   | 30  | ns            |

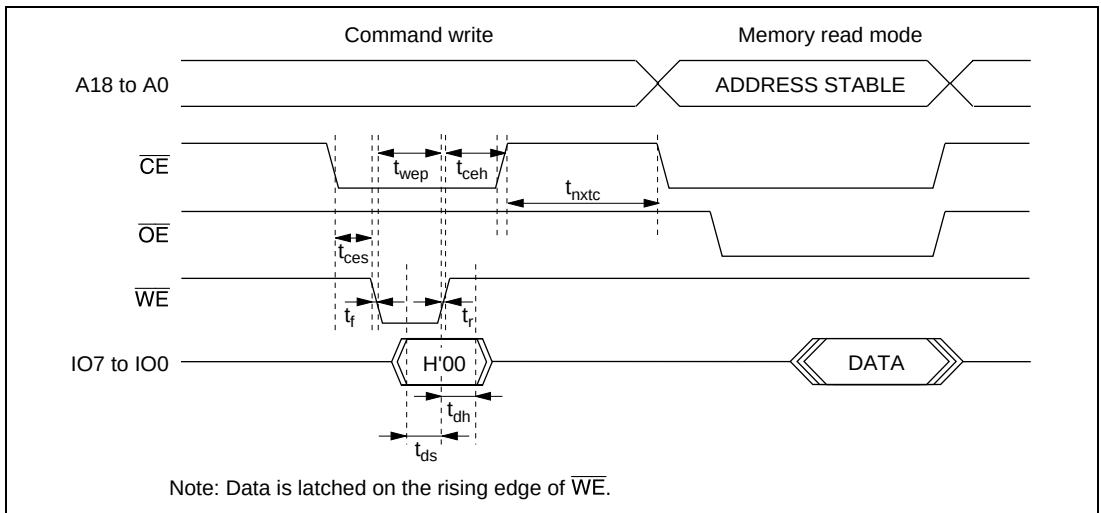


**Figure 7.16 Memory Read Mode Timing Waveforms after Command Write**

**Table 7.12 AC Characteristics when Entering Another Mode from Memory Read Mode**  
**– Preliminary –**

Conditions:  $V_{CC} = 5.0 \text{ V} \pm 10\%$ ,  $V_{SS} = 0 \text{ V}$ ,  $T_a = 25^\circ\text{C} \pm 5^\circ\text{C}$

| Item                              | Symbol     | Min | Max | Unit          |
|-----------------------------------|------------|-----|-----|---------------|
| Command write cycle               | $t_{nxtc}$ | 20  | —   | $\mu\text{s}$ |
| $\overline{\text{CE}}$ hold time  | $t_{ceh}$  | 0   | —   | ns            |
| $\overline{\text{CE}}$ setup time | $t_{ces}$  | 0   | —   | ns            |
| Data hold time                    | $t_{dh}$   | 50  | —   | ns            |
| Data setup time                   | $t_{ds}$   | 50  | —   | ns            |
| Write pulse width                 | $t_{wep}$  | 70  | —   | ns            |
| $\overline{\text{WE}}$ rise time  | $t_r$      | —   | 30  | ns            |
| $\overline{\text{WE}}$ fall time  | $t_f$      | —   | 30  | ns            |

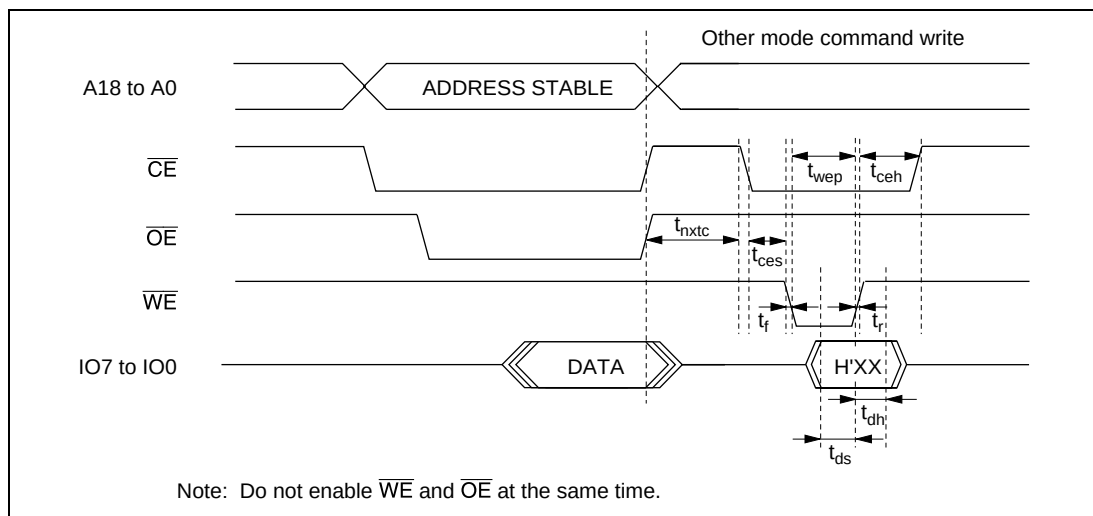


**Figure 7.17 Timing Waveforms when Entering Another Mode from Memory Read Mode**



Conditions:  $V_{CC} = 5.0 \text{ V} \pm 10\%$ ,  $V_{SS} = 0 \text{ V}$ ,  $T_a = 25^\circ\text{C} \pm 5^\circ\text{C}$

| Item                                     | Symbol    | Min | Max | Unit          |
|------------------------------------------|-----------|-----|-----|---------------|
| Access time                              | $t_{acc}$ | —   | 20  | $\mu\text{s}$ |
| $\overline{\text{CE}}$ output delay time | $t_{ce}$  | —   | 150 | ns            |
| $\overline{\text{OE}}$ output delay time | $t_{oe}$  | —   | 150 | ns            |
| Output disable delay time                | $t_{df}$  | —   | 100 | ns            |
| Data output hold time                    | $t_{oh}$  | 5   | —   | ns            |

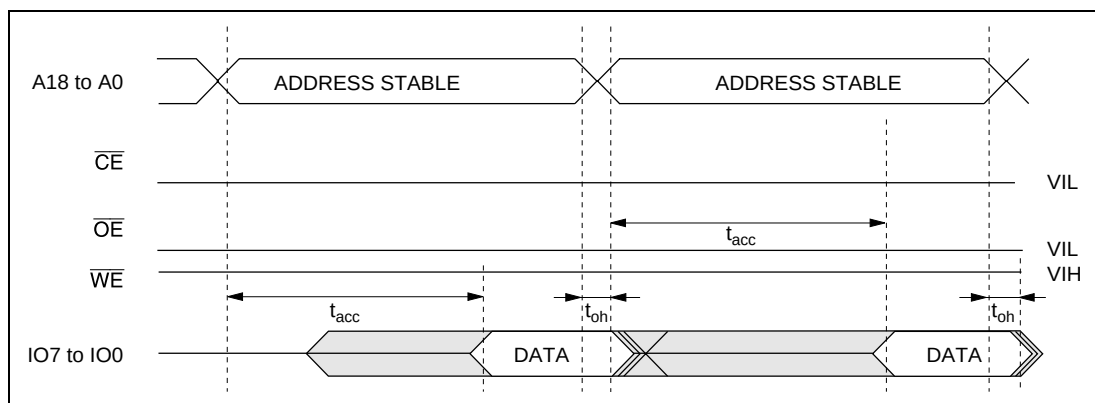


Figure 7.18 Timing Waveforms for  $\overline{\text{CE}}/\overline{\text{OE}}$  Enable State Read

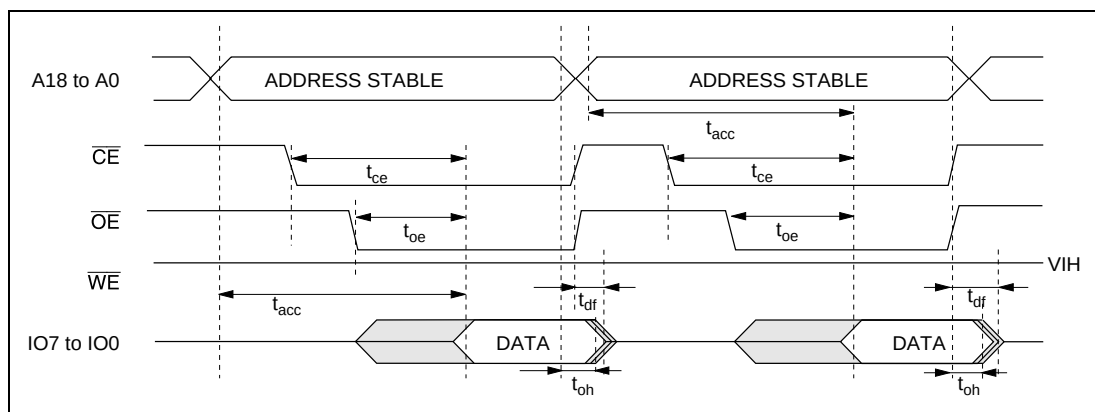


Figure 7.19 Timing Waveforms for  $\overline{\text{CE}}/\overline{\text{OE}}$  Clocked Read

## 7.8.5 Auto-Program Mode

### AC Characteristics

**Table 7.14 AC Characteristics in Auto-Program**

– Preliminary –

Conditions:  $V_{CC} = 5.0 \text{ V} \pm 10\%$ ,  $V_{SS} = 0 \text{ V}$ ,  $T_a = 25^\circ\text{C} \pm 5^\circ\text{C}$

| Item                              | Symbol      | Min | Max  | Unit          |
|-----------------------------------|-------------|-----|------|---------------|
| Command write cycle               | $t_{nxtc}$  | 20  | —    | $\mu\text{s}$ |
| $\overline{\text{CE}}$ hold time  | $t_{ceh}$   | 0   | —    | ns            |
| $\overline{\text{CE}}$ setup time | $t_{ces}$   | 0   | —    | ns            |
| Data hold time                    | $t_{dh}$    | 50  | —    | ns            |
| Data setup time                   | $t_{ds}$    | 50  | —    | ns            |
| Write pulse width                 | $t_{wep}$   | 70  | —    | ns            |
| Status polling start time         | $t_{wsts}$  | 1   | —    | ms            |
| Status polling access time        | $t_{spa}$   | —   | 150  | ns            |
| Address setup time                | $t_{as}$    | 0   | —    | ns            |
| Address hold time                 | $t_{ah}$    | 60  | —    | ns            |
| Memory write time                 | $t_{write}$ | 1   | 3000 | ms            |
| $\overline{\text{WE}}$ rise time  | $t_r$       | —   | 30   | ns            |
| $\overline{\text{WE}}$ fall time  | $t_f$       | —   | 30   | ns            |
| Write setup time                  | $t_{pns}$   | 100 | —    | ns            |
| Write end setup time              | $t_{pnh}$   | 100 | —    | ns            |

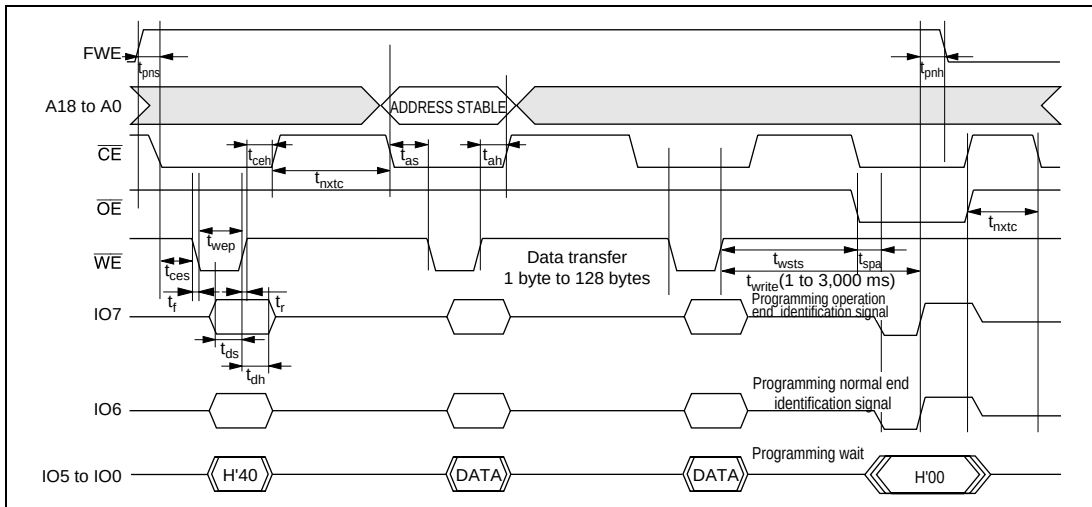


**Figure 7.20 Auto-Program Mode Timing Waveforms**

### Notes on Use of Auto-Program Mode

- In auto-program mode, 128 bytes are programmed simultaneously. This should be carried out by executing 128 consecutive byte transfers.
- A 128-byte data transfer is necessary even when programming fewer than 128 bytes. In this case, H'FF data must be written to the extra addresses.
- The lower 8 bits of the transfer address must be H'00 or H'80. If a value other than an effective address is input, processing will switch to a memory write operation but a write error will be flagged.
- Memory address transfer is performed in the second cycle (figure 7.20). Do not perform transfer after the second cycle.
- Do not perform a command write during a programming operation.
- Perform one auto-programming operation for a 128-byte block for each address. Characteristics are not guaranteed for two or more programming operations.
- Confirm normal end of auto-programming by checking IO6. Alternatively, status read mode can also be used for this purpose (IO7 status polling uses the auto-program operation end identification pin).
- The status polling IO6 and IO7 pin information is retained until the next command write. Until the next command write is performed, reading is possible by enabling  $\overline{CE}$  and  $\overline{OE}$ .

## 7.8.6 Auto-Erase Mode

### AC Characteristics

**Table 7.15 AC Characteristics in Auto-Erase Mode**

– Preliminary –

Conditions:  $V_{CC} = 5.0 \text{ V} \pm 10\%$ ,  $V_{SS} = 0 \text{ V}$ ,  $T_a = 25^\circ\text{C} \pm 5^\circ\text{C}$

| Item                              | Symbol      | Min | Max   | Unit          |
|-----------------------------------|-------------|-----|-------|---------------|
| Command write cycle               | $t_{nxtc}$  | 20  | —     | $\mu\text{s}$ |
| $\overline{\text{CE}}$ hold time  | $t_{ceh}$   | 0   | —     | ns            |
| $\overline{\text{CE}}$ setup time | $t_{ces}$   | 0   | —     | ns            |
| Data hold time                    | $t_{dh}$    | 50  | —     | ns            |
| Data setup time                   | $t_{ds}$    | 50  | —     | ns            |
| Write pulse width                 | $t_{wep}$   | 70  | —     | ns            |
| Status polling start time         | $t_{ests}$  | 1   | —     | ms            |
| Status polling access time        | $t_{spa}$   | —   | 150   | ns            |
| Memory erase time                 | $t_{erase}$ | 100 | 40000 | ms            |
| $\overline{\text{WE}}$ rise time  | $t_r$       | —   | 30    | ns            |
| $\overline{\text{WE}}$ fall time  | $t_f$       | —   | 30    | ns            |
| Erase setup time                  | $t_{ens}$   | 100 | —     | ns            |
| Erase end setup time              | $t_{enh}$   | 100 | —     | ns            |

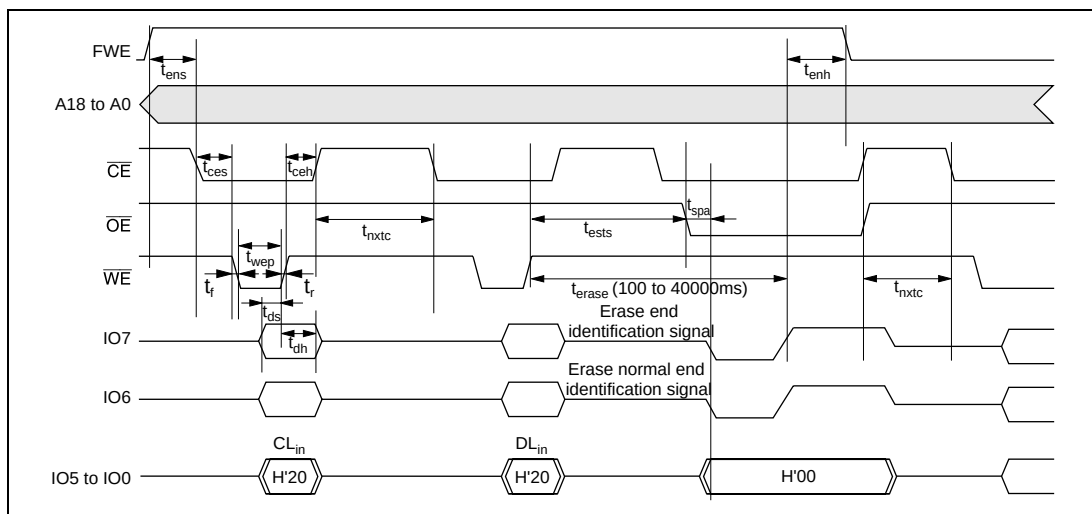


**Figure 7.21 Auto-Erase Mode Timing Waveforms**

## Notes on Use of Erase-Program Mode

- Auto-erase mode supports only entire memory erasing.
- Do not perform a command write during auto-erasing.
- Confirm normal end of auto-erasing by checking IO6. Alternatively, status read mode can also be used for this purpose (IO7 status polling uses the auto-erase operation end identification pin).
- The status polling IO6 and IO7 pin information is retained until the next command write. Until the next command write is performed, reading is possible by enabling  $\overline{\text{CE}}$  and  $\overline{\text{OE}}$ .

### 7.8.7 Status Read Mode

Status read mode is used to identify what type of abnormal end has occurred. Use this mode when an abnormal end occurs in auto-program mode or auto-erase mode.

The return code is retained until a command write for other than status read mode is performed.

**Table 7.16 AC Characteristics in Status Read Mode**

– Preliminary –

Conditions:  $V_{CC} = 5.0 \text{ V} \pm 10\%$ ,  $V_{SS} = 0 \text{ V}$ ,  $T_a = 25^\circ\text{C} \pm 5^\circ\text{C}$

| Item                                     | Symbol            | Min | Max | Unit          |
|------------------------------------------|-------------------|-----|-----|---------------|
| Command write cycle                      | $t_{\text{nwtc}}$ | 20  | —   | $\mu\text{s}$ |
| $\overline{\text{CE}}$ hold time         | $t_{\text{ceh}}$  | 0   | —   | ns            |
| $\overline{\text{CE}}$ setup time        | $t_{\text{ces}}$  | 0   | —   | ns            |
| Data hold time                           | $t_{\text{dh}}$   | 50  | —   | ns            |
| Data setup time                          | $t_{\text{ds}}$   | 50  | —   | ns            |
| Write pulse width                        | $t_{\text{wep}}$  | 70  | —   | ns            |
| $\overline{\text{OE}}$ output delay time | $t_{\text{oe}}$   | —   | 150 | ns            |
| Disable delay time                       | $t_{\text{df}}$   | —   | 100 | ns            |
| $\overline{\text{CE}}$ output delay time | $t_{\text{ce}}$   | —   | 150 | ns            |
| $\overline{\text{WE}}$ rise time         | $t_{\text{r}}$    | —   | 30  | ns            |
| $\overline{\text{WE}}$ fall time         | $t_{\text{f}}$    | —   | 30  | ns            |



7.8.8      **Status Polling**

The IO7 status polling flag indicates the operating status in auto-program or auto-erase mode.

The IO6 status polling flag indicates a normal or abnormal end in auto-program or auto-erase mode.

**Table 7.18    Status Polling Output Truth Table**

| Pin Names  | Internal Operation<br>in Progress | Abnormal End | — | Normal End |
|------------|-----------------------------------|--------------|---|------------|
| IO7        | 0                                 | 1            | 0 | 1          |
| IO6        | 0                                 | 0            | 1 | 1          |
| IO0 to IO5 | 0                                 | 0            | 0 | 0          |

7.8.9 Programmer Mode Transition Time

Commands cannot be accepted during the oscillation stabilization period or the programmer mode setup time. After the programmer mode setup time, a transition is made to memory read mode.

Table 7.19 Command Wait State Transition Time Specifications

| Item                                                | Symbol     | Min | Max | Unit |
|-----------------------------------------------------|------------|-----|-----|------|
| Standby release<br>(oscillation stabilization time) | $t_{osc1}$ | 10  | —   | ms   |
| Programmer mode setup time                          | $t_{bmV}$  | 10  | —   | ms   |
| $V_{CC}$ hold time                                  | $t_{dwn}$  | 0   | —   | ms   |

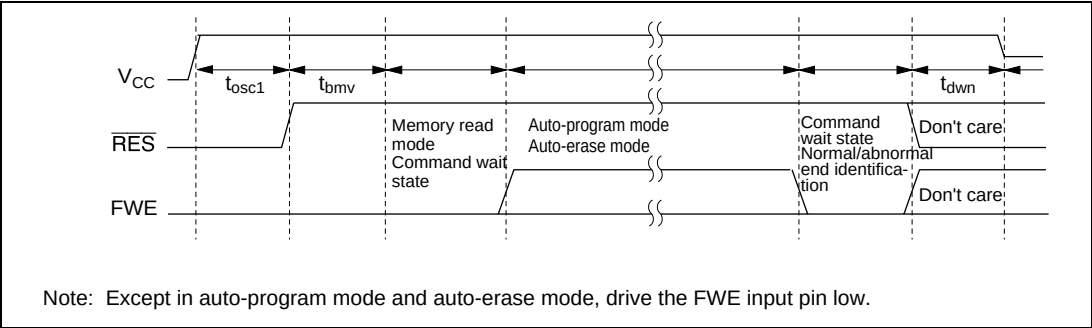


Figure 7.23 Oscillation Stabilization Time, Boot Program Transfer Time, and Power Supply Fall Sequence

7.8.10 Notes on Memory Programming

- When programming addresses which have previously been programmed, carry out auto-erasing before auto-programming.
- When performing programming using programmer mode on a chip that has been programmed/erased in an on-board programming mode, auto-erasing is recommended before carrying out auto-programming.

- Notes:
1. The flash memory is initially in the erased state when the device is shipped by Hitachi. For other chips for which the erasure history is unknown, it is recommended that auto-erasing be executed to check and supplement the initialization (erase) level.
  2. Auto-programming should be performed once only on the same address block.



## 7.9 Note on Switching from F-ZTAT Version to Mask-ROM Version

The mask ROM version does not have the internal registers for flash memory control that are provided in the F-ZTAT version. Table 7.20 lists the registers that are present in the F-ZTAT version but not in the mask ROM version. If a register listed in table 7.20 is read in the mask ROM version, an undefined value will be returned. Therefore, if application software developed on the F-ZTAT version is switched to a mask ROM version product, it must be modified to ensure that the registers in table 7.20 have no effect.

**Table 7.20 Registers Present in F-ZTAT Version but Absent in Mask ROM Version**

| Register                        | Abbreviation | Address |
|---------------------------------|--------------|---------|
| Flash memory control register 1 | FLMCR1       | H'FFF8  |
| Flash memory control register 2 | FLMCR2       | H'FFF9  |
| Erase block register 1          | EBR1         | H'FFFA  |
| Erase block register 2          | EBR2         | H'FFFB  |



# Section 8 RAM

## 8.1 Overview

The H8S/2199R, H8S/2198R, H8S/2197R, and H8S/2196R have 4 kbytes, H8S/2197S, and H8S/2196S have 3 kbytes, and H8S/2199R F-ZTAT version has 8 kbytes of on-chip high-speed static RAM. The on-chip RAM is connected to the CPU by a 16-bit data bus, enabling both byte data and word data to be accessed in one state. This makes it possible to perform fast word data transfer.

### 8.1.1 Block Diagram

Figure 8.1 shows a block diagram of the on-chip RAM.

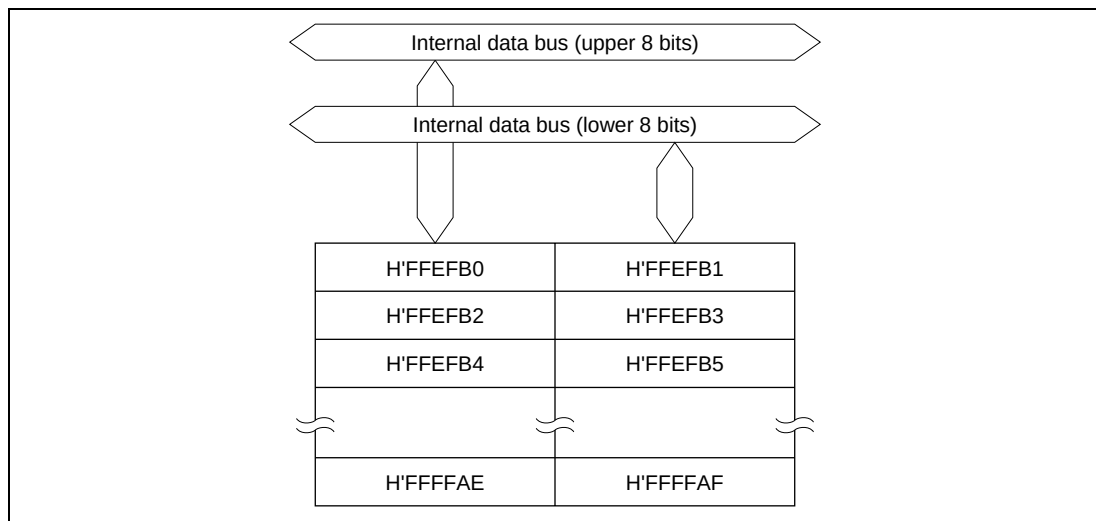


**Figure 8.1 Block Diagram of RAM (H8S/2199R)**



# Section 9 Clock Pulse Generator

## 9.1 Overview

This LSI has a built-in clock pulse generator (CPG) that generates the system clock ( $\phi$ ), the bus master clock, and internal clocks.

The clock pulse generator consists of a system clock oscillator, a duty adjustment circuit, clock selection circuit, medium-speed clock divider, subclock oscillator, and subclock division circuit.

### 9.1.1 Block Diagram

Figure 9.1 shows a block diagram of the clock pulse generator.

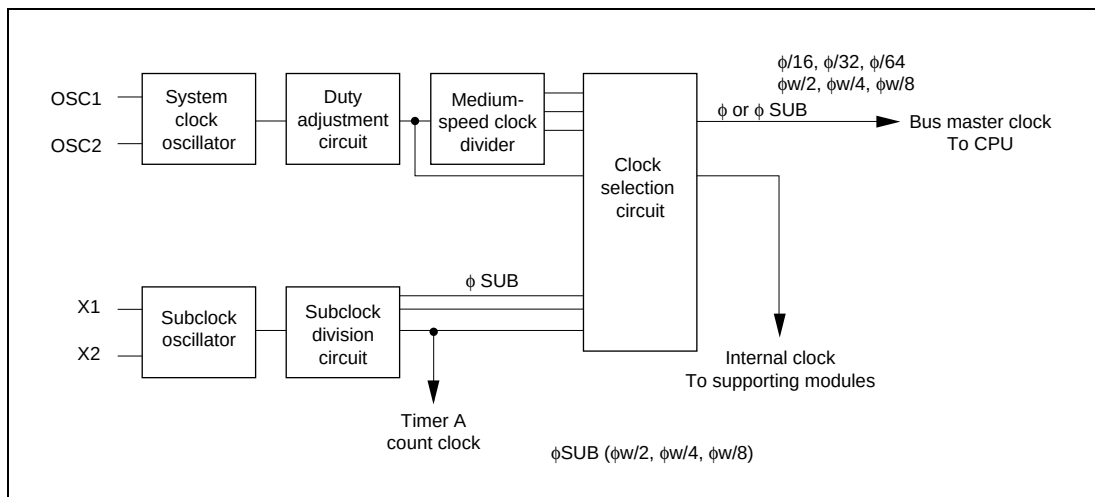


**Figure 9.1 Block Diagram of Clock Pulse Generator**

### 9.1.2 Register Configuration

The clock pulse generator is controlled by SBYCR and LPWRCR. Table 9.1 shows the register configuration.

**Table 9.1 CPG Registers**

| Name                       | Abbreviation | R/W | Initial Value | Address* |
|----------------------------|--------------|-----|---------------|----------|
| Standby control register   | SBYCR        | R/W | H'00          | H'FFEA   |
| Low-power control register | LPWRCR       | R/W | H'00          | H'FFEB   |

Note: \* Lower 16 bits of the address.

## 9.2 Register Descriptions

### 9.2.1 Standby Control Register (SBYCR)

|                 |      |      |      |      |   |   |      |      |
|-----------------|------|------|------|------|---|---|------|------|
| Bit :           | 7    | 6    | 5    | 4    | 3 | 2 | 1    | 0    |
|                 | SSBY | STS2 | STS1 | STS0 | — | — | SCK1 | SCK0 |
| Initial value : | 0    | 0    | 0    | 0    | 0 | 0 | 0    | 0    |
| R/W :           | R/W  | R/W  | R/W  | R/W  | — | — | R/W  | R/W  |

SBYCR is an 8-bit readable/writable register that performs power-down mode control.

Only bits 0 and 1 are described here. For a description of the other bits, see section 4.2.1, Standby Control Register (SBYCR). SBYCR is initialized to H'00 by a reset.

**Bits 1 and 0—System Clock Select 1 and 0 (SCK1, SCK0):** These bits select the bus master clock for high-speed mode and medium-speed mode.

| Bit 1 | Bit 0 | Description                                      |
|-------|-------|--------------------------------------------------|
| SCK1  | SCK0  |                                                  |
| 0     | 0     | Bus master is in high-speed mode (Initial value) |
|       | 1     | Medium-speed clock is $\phi/16$                  |
| 1     | 0     | Medium-speed clock is $\phi/32$                  |
|       | 1     | Medium-speed clock is $\phi/64$                  |

9.2.2 Low-Power Control Register (LPWRCR)

|                 |      |      |       |   |   |   |     |     |
|-----------------|------|------|-------|---|---|---|-----|-----|
| Bit :           | 7    | 6    | 5     | 4 | 3 | 2 | 1   | 0   |
|                 | DTON | LSON | NESEL | — | — | — | SA1 | SA0 |
| Initial value : | 0    | 0    | 0     | 0 | 0 | 0 | 0   | 0   |
| R/W :           | R/W  | R/W  | R/W   | — | — | — | R/W | R/W |

LPWRCR is an 8-bit readable/writable register that performs power-down mode control. Only bit 1 and 0 is described here. For a description of the other bits, see section 4.2.2, Low-Power Control Register (LPWRCR). LPWRCR is initialized to H'00 by a reset.

**Bits 1 and 0—Subactive Mode Clock Select (SA1, SA0):** Select CPU clock for subactive mode. In subactive mode, writes are disabled.

| Bit 1 | Bit 0 | Description                                       |
|-------|-------|---------------------------------------------------|
| SA1   | SA0   |                                                   |
| 0     | 0     | CPU operating clock is $\phi w/8$ (Initial value) |
|       | 1     | CPU operating clock is $\phi w/4$                 |
| 1     | *     | CPU operating clock is $\phi w/2$                 |

Note: \* Don't care

9.3 Oscillator

Clock pulses can be supplied by connecting a crystal resonator, or by input of an external clock.

9.3.1 Connecting a Crystal Resonator

**Circuit Configuration:** A crystal resonator can be connected as shown in the example in figure 9.2. An AT-cut parallel-resonance crystal should be used.

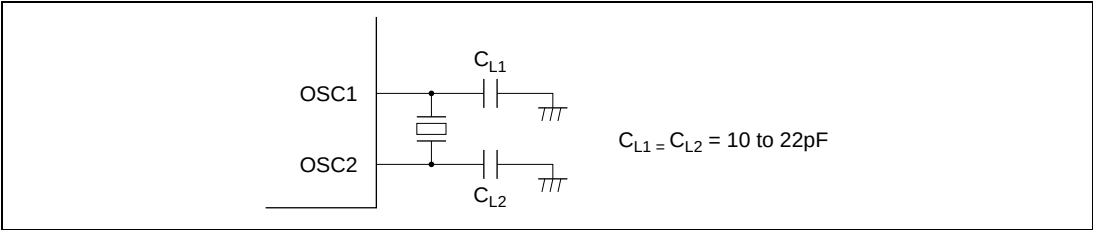


Figure 9.2 Connection of Crystal Resonator (Example)

**Crystal Resonator:** Figure 9.3 shows the equivalent circuit of the crystal resonator. Use a crystal resonator that has the characteristics shown in table 9.2 and the same frequency as the system clock ( $\phi$ ).

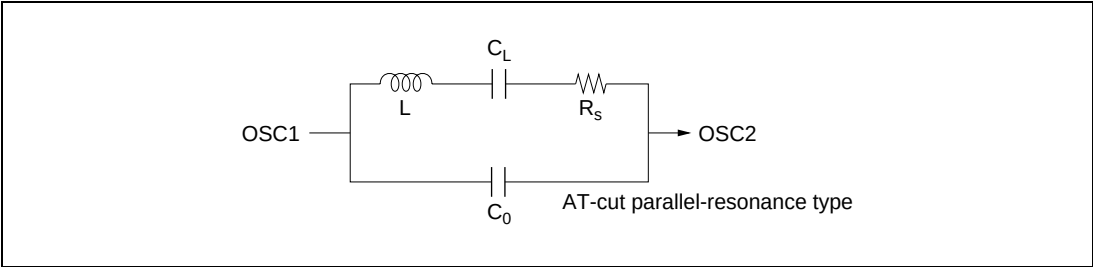


Figure 9.3 Crystal Resonator Equivalent Circuit

Table 9.2 Crystal Resonator Parameters

| Frequency (MHz)              | 8  | 10 |
|------------------------------|----|----|
| $R_s\text{max}$ ( $\Omega$ ) | 80 | 60 |
| $C_o\text{max}$ (pF)         | 7  | 7  |



**Note on Board Design:** When a crystal resonator is connected, the following points should be noted.

Other signal lines should be routed away from the oscillator circuit to prevent induction from interfering with correct oscillation. See figure 9.4.

When designing the board, place the crystal resonator and its load capacitors as close as possible to the OSC1 and OSC2 pins.

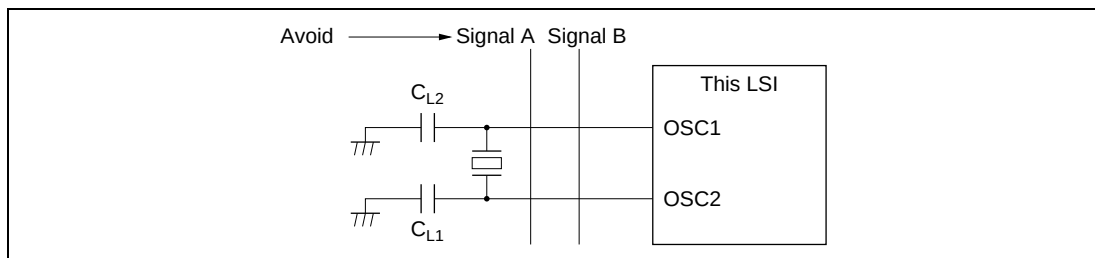


**Figure 9.4 Example of Incorrect Board Design**

### 9.3.2 External Clock Input

**Circuit Configuration:** An external clock signal can be input as shown in the examples in figure 9.5. If the OSC2 pin is left open, make sure that stray capacitance is no more than 10 pF.

In example (b), make sure that the external clock is held high in standby mode, subactive mode, subsleep mode, and watch mode.

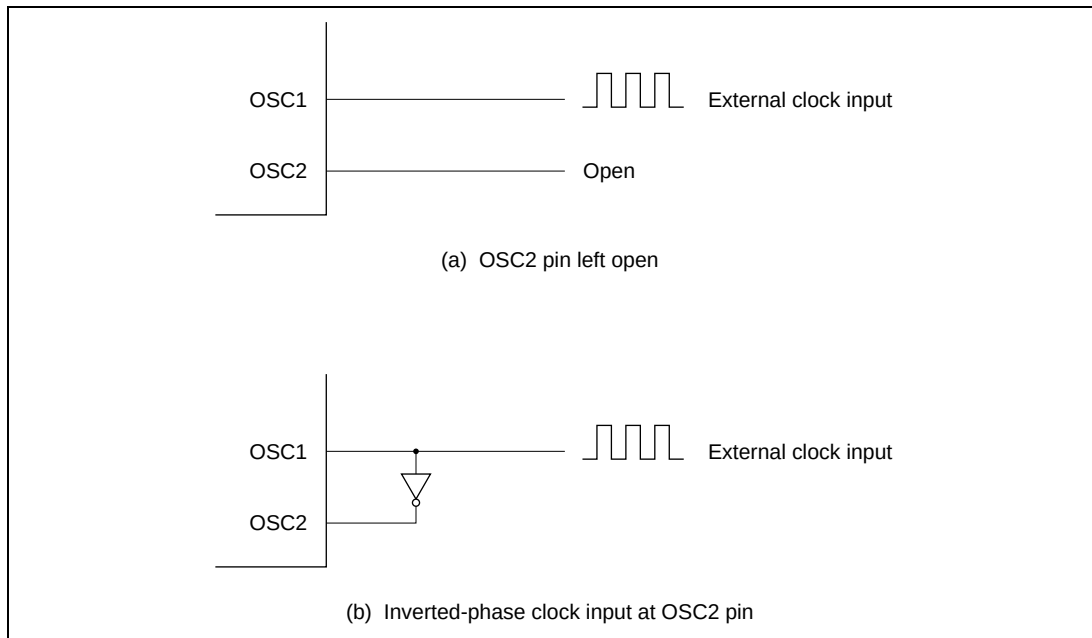


**Figure 9.5 External Clock Input (Examples)**

**External Clock:** The external clock signal should have the same frequency as the system clock ( $\phi$ ).

Table 9.3 and figure 9.6 show the input conditions for the external clock.

**Table 9.3 External Clock Input Conditions**

| Item                                  | Symbol    | $V_{CC} = 4.0 \text{ to } 5.5 \text{ V}$ |     | Unit | Test Conditions |
|---------------------------------------|-----------|------------------------------------------|-----|------|-----------------|
|                                       |           | Min                                      | Max |      |                 |
| External clock input low pulse width  | $t_{EXL}$ | 40                                       | —   | ns   | Figure 9.6      |
| External clock input high pulse width | $t_{EXH}$ | 40                                       | —   | ns   |                 |
| External clock rise time              | $t_{EXr}$ | —                                        | 10  | ns   |                 |
| External clock fall time              | $t_{EXf}$ | —                                        | 10  | ns   |                 |

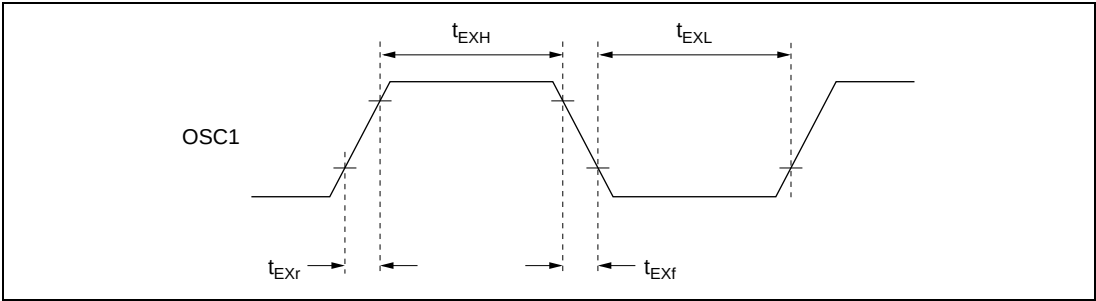


**Figure 9.6 External Clock Input Timing**

Table 9.4 shows the external clock output settling delay time, and figure 9.7 shows the external clock output settling delay timing. The oscillator and duty adjustment circuit have a function for adjusting the waveform of the external clock input at the OSC1 pin. When the prescribed clock signal is input at the OSC1 pin, internal clock signal output is fixed after the elapse of the external clock output settling delay time ( $t_{DEXT}$ ). As the clock signal output is not fixed during the  $t_{DEXT}$  period, the reset signal should be driven low to maintain the reset state.

# Table 9.4 External Clock Output Settling Delay Time

Conditions:  $V_{CC} = 4.0 \text{ V to } 5.5 \text{ V}$ ,  $AV_{CC} = 4.0 \text{ V to } 5.5 \text{ V}$ ,  $V_{SS} = AV_{SS} = 0 \text{ V}$

| Item                                      | Symbol              | Min | Max | Unit          | Notes      |
|-------------------------------------------|---------------------|-----|-----|---------------|------------|
| External clock output settling delay time | $t_{\text{DEXT}}^*$ | 500 | —   | $\mu\text{s}$ | Figure 9.7 |

Note:  $*t_{\text{DEXT}}$  includes  $20 t_{\text{CYC}}$  of  $\overline{\text{RES}}$  pulse width ( $t_{\text{RESW}}$ ).

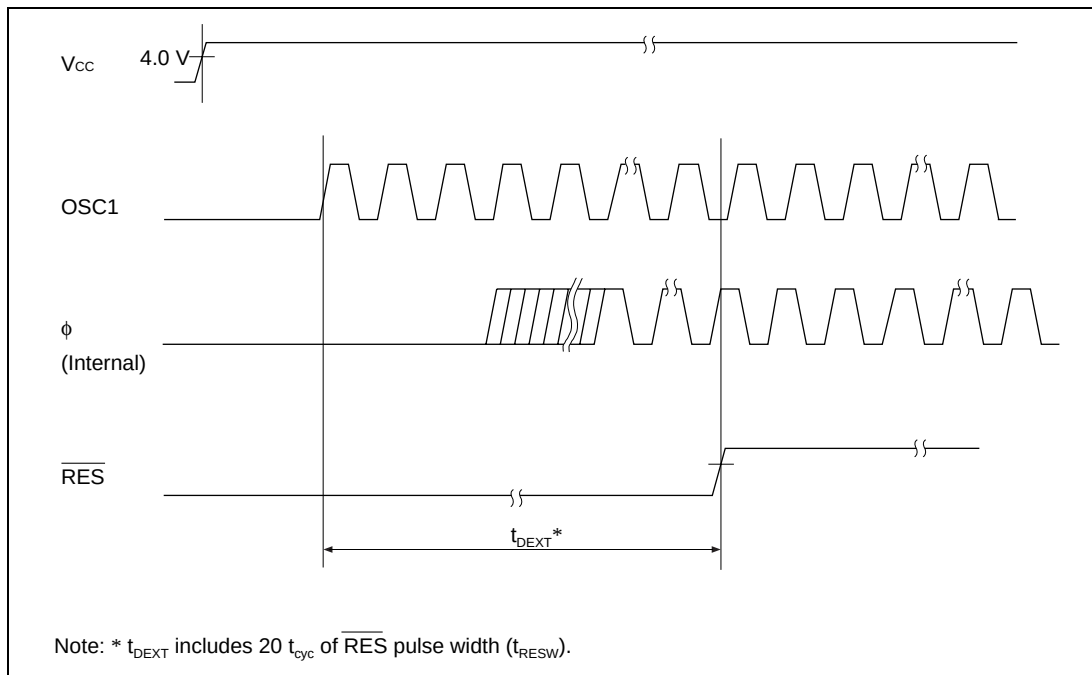


**Figure 9.7 External Clock Output Settling Delay Timing**

## 9.4 Duty Adjustment Circuit

When the oscillator frequency is 5 MHz or higher, the duty adjustment circuit adjusts the duty cycle of the clock signal from the oscillator to generate the system clock ( $\phi$ ).

## 9.5 Medium-Speed Clock Divider

The medium-speed divider divides the system clock to generate  $\phi/16$ ,  $\phi/32$ , and  $\phi/64$  clocks.

## 9.6 Bus Master Clock Selection Circuit

The bus master clock selection circuit selects the system clock ( $\phi$ ) or one of the medium-speed clocks ( $\phi/16$ ,  $\phi/32$  or  $\phi/64$ ) to be supplied to the bus master (CPU), according to the settings of bits SCK2 to SCK0 in SBYCR.

## 9.7 Subclock Oscillator Circuit

### 9.7.1 Connecting 32.768 kHz Crystal Resonator

When using a subclock, connect a 32.768 kHz crystal resonator to X1 and X2 pins as shown in figure 9.8.

For precautions on connecting, see Note on Board Design, in section 9.3.1 Connecting a Crystal Resonator.


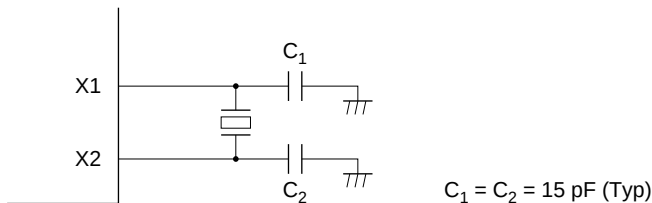


**Figure 9.8 Connecting a 32.768 kHz Crystal Resonator (Example)**

Figure 9.9 shows a crystal resonator equivalent circuit.

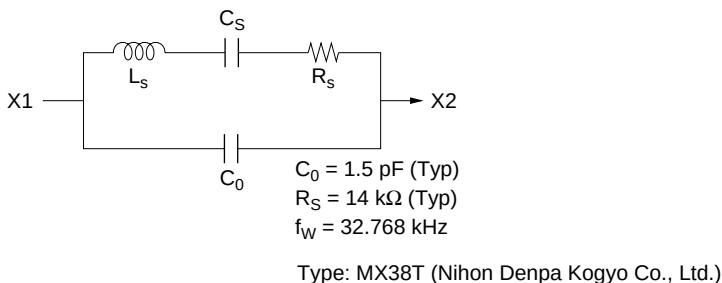

Note: Values shown are the reference values.

**Figure 9.9 32.768 kHz Crystal Resonator Equivalent Circuit**

### 9.7.2 When Subclock is not Needed

Connect X1 pin to  $V_{CL}$ , and X2 pin should remain open as shown in figure 9.10.

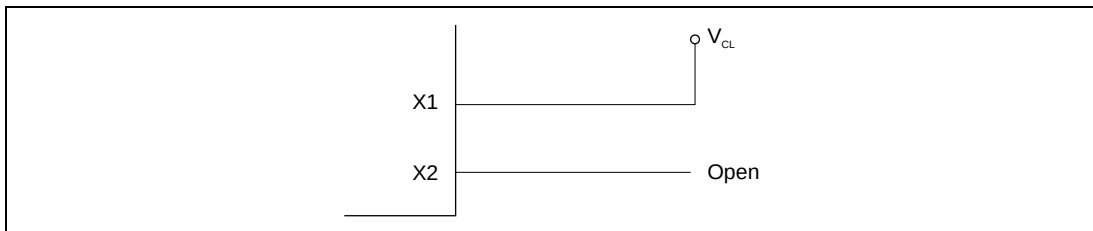


**Figure 9.10 Terminal When Subclock is not Needed**

## 9.8 Subclock Waveform Shaping Circuit

To eliminate noise in the subclock input from the X1 pin, this circuit samples the clock using a clock obtained by dividing the  $\phi$  clock. The sampling frequency is set with the NESEL bit in LPWRCR. For details, see section 4.2.2, Low-Power Control Register (LPWRCR). The clock is not sampled in subactive mode, subsleep mode, or watch mode.

## 9.9 Notes on the Resonator

Resonator characteristics are closely related to the user board design. Perform appropriate assessment of resonator connection, mask version and F-ZTAT, by referring to the connection example given in this section. The resonator circuit rate differs depending on the free capacity of the resonator and the execution circuit, so consult with the resonator manufacturer before determination. Make sure the voltage applied to the resonator pin does not exceed the maximum rated voltage.





# Section 10 I/O Port

## 10.1 Overview

### 10.1.1 Port Functions

This LSI has seven 8-bit I/O ports (including one CMOS high-current port), and one 8-bit input port. Table 10.1 shows the functions of each port. Each I/O port has a port control register (PCR) that controls an input and output and a port data register (PDR) for storing output data. The input and output can be controlled in a unit of bit. The pin whose peripheral function is used both as an alternative function can set the pin function in a unit of bit by a port mode register (PMR).

### 10.1.2 Port Input

- Reading a Port
  - When a general port of PCR = 0 (input) is read, the pin level is read.
  - When a general port of PCR = 1 (output) is read, the value of the corresponding PDR bit is read.
  - When the pins (excluding AN7 to AN0 and RPB7 to RP0 pins) set to the peripheral function are read, the results are as given in items (1) and (2) according to the PCR value.

- Processing Input Pins

The general input port or general I/O port is gated by read signals. Unused pins can be left open if they are not read. However, if an open pin is read, a feedthrough current may apply during the read period according to an intermediate level. The read period is about one-state. Relevant ports: P0, P1, P2, P3, P4, P5, P6, P7, and P8

When an alternative pin is set to an alternative function other than the general I/O, always set the pin level to a high or low level. If the pin is left open, a feedthrough current applies according to an intermediate level, which adversely affects reliability, causes malfunctions, and in the worst case may damage the pin.

Because the PMR is not initialized in low power consumption mode, pay attention to the pin input level after the mode has been shifted to the low power consumption mode.

Relevant pins:  $\overline{IC}$ ,  $\overline{IRQ0}$  to  $\overline{IRQ5}$ , SCK1, SI1, SDA1, SCL1, SDA0\*, SCL0\*, SYNCI\*, FTIA\*, FTIB\*, FTIC\*, FTID\*, RPTRG, TMBI,  $\overline{ADTRG}$ , EXCTL, COMP, DPG, EXCAP, and EXTTRG

Note: \* Not available in the H8S/2197S or H8S/2196S.

**Table 10.1 Port Functions**

| Port   | Description                                             | Pins                                             | Alternative Functions                                               | Function Switching Register |
|--------|---------------------------------------------------------|--------------------------------------------------|---------------------------------------------------------------------|-----------------------------|
| Port 0 | P07 to P00 input-only ports                             | P07/AN7 to P00/AN0                               | Analog data input channels 7 to 0                                   | PMR0                        |
| Port 1 | P17 to P10 I/O ports (Built-in MOS pull-up transistors) | P17/TMOW                                         | Prescaler unit frequency division clock output                      | PMR1                        |
|        |                                                         | P16/ $\overline{IC}$                             | Prescaler unit input capture input                                  |                             |
|        |                                                         | P15/ $\overline{IRQ5}$ to P10/ $\overline{IRQ0}$ | External interrupt request input                                    |                             |
| Port 2 | P27 to P20 I/O ports (Built-in MOS pull-up transistors) | P27/SYNCI                                        | Formatless serial clock input*                                      | STCR<br>ICCR                |
|        |                                                         | P26/SCL0                                         | I <sup>2</sup> C bus interface clock I/O*                           |                             |
|        |                                                         | P25/SDA0                                         | I <sup>2</sup> C bus interface data I/O*                            | SMR<br>SCR                  |
|        |                                                         | P24/SCL1                                         | I <sup>2</sup> C bus interface clock I/O                            |                             |
|        |                                                         | P23/SDA1                                         | I <sup>2</sup> C bus interface data I/O                             |                             |
|        |                                                         | P22/SCK1                                         | SCI1 clock I/O                                                      |                             |
|        |                                                         | P21/SO1                                          | SCI1 transmit data output                                           |                             |
|        |                                                         | P20/SI1                                          | SCI1 receive data input                                             |                             |
| Port 3 | P37 to P30 I/O ports (Built-in MOS pull-up transistors) | P37/TMO                                          | Timer J timer output                                                | PMR3                        |
|        |                                                         | P36/BUZZ                                         | Timer J buzzer output                                               |                             |
|        |                                                         | P35/PWM3                                         | 8-bit PWM3 output*                                                  |                             |
|        |                                                         | P34/PWM2                                         | 8-bit PWM2 output*                                                  |                             |
|        |                                                         | P33/PWM1                                         | 8-bit PWM1 output                                                   |                             |
|        |                                                         | P32/PWM0                                         | 8-bit PWM0 output                                                   |                             |
|        |                                                         | P31/SV2<br>P30/SV1                               | Servo monitor output                                                |                             |
| Port 4 | P47 to P40 I/O ports                                    | P47/RPTRG                                        | Realtime output port trigger input                                  | —                           |
|        |                                                         | P46/FTOB                                         | Timer X output compare B output*                                    |                             |
|        |                                                         | P45/FTOA                                         | Timer X output compare A output*                                    |                             |
|        |                                                         | P44/FTID                                         | Timer X input capture D input*                                      | —                           |
|        |                                                         | P43/FTIC                                         | Timer X input capture C input*                                      |                             |
|        |                                                         | P42/FTIB                                         | Timer X input capture B input*                                      |                             |
|        |                                                         | P41/FTIA                                         | Timer X input capture A input*                                      |                             |
| Port 6 | P63 to P60 I/O ports                                    | P40/PWM14                                        | 14-bit PWM output*                                                  | PMR4                        |
|        |                                                         | P67/RP7/<br>TMBI                                 | Realtime output port<br>Timer B event output                        | PMR6<br>PMRA                |
|        |                                                         | P66/RP6/<br>ADTRG                                | Realtime output port<br>A/D conversion start external trigger input |                             |
|        |                                                         | P65/RP5 to<br>P60/RP0                            | Realtime output port                                                |                             |
| Port 7 | P77 to P70 I/O ports                                    | P77/PPG7/<br>RPB to P74/<br>PPG4/RP8             | PPG output<br>Realtime output port                                  | PMR7<br>PMRB                |
|        |                                                         | P73/PPG3 to<br>P70/PPG0                          | PPG output                                                          |                             |
|        |                                                         |                                                  |                                                                     |                             |


| Port   | Description          | Pins           | Alternative Functions                              | Function Switching Register |
|--------|----------------------|----------------|----------------------------------------------------|-----------------------------|
| Port 8 | P87 to P80 I/O ports | P87/DPG        | DPG signal input                                   | PMR8                        |
|        |                      | P86/EXTTRG     | External trigger signal input                      | PMRC                        |
|        |                      | P85/COMP/B     | Pre-amplifier output result signal input           |                             |
|        |                      |                | Color signal output (B)                            |                             |
|        |                      | P84/H.Amp SW/G | Pre-amplifier output select signal input           |                             |
|        |                      |                | Color signal output (G)                            |                             |
|        |                      | P83/C.Rotary/R | Control signal output for processing color signals |                             |
|        |                      |                | Color signal output (R)                            |                             |
|        |                      | P82/EXCTL      | External CTL signal input                          |                             |
|        |                      | P81/EXCAP/YBO  | External capstan signal input                      |                             |
|        |                      |                | OSD character position output                      |                             |
|        |                      | P80/YCO        | OSD character data output                          |                             |

Note: This LSI does not have port 5.

\* These alternative functions are not available in the H8S/2197S or H8S/2196S.

### 10.1.3 MOS Pull-Up Transistors

The MOS pull-up transistors in ports 1 to 3 can be switched on or off by the MOS pull-up select registers 1 to 3 (PUR1 to PUR3) in units of bits. Settings in PUR1 to PUR3 are valid when the pin function is set to an input by PCR1 to PCR3. If the pin function is set to an output, the MOS pull-up transistor is turned off. Figure 10.1 shows the circuit configuration of a pin with a MOS pull-up transistor.

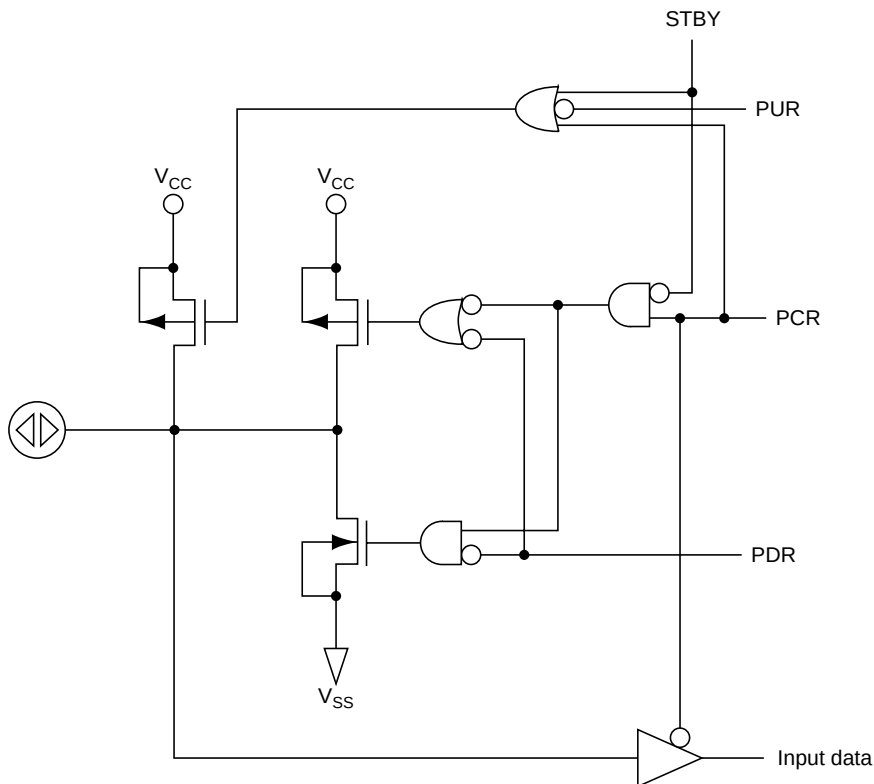

#### Legend

- STBY : Low power consumption mode signal  
(The pull-up MOS transistor is turned off by the STBY signal in low power consumption mode except for sleep mode)
- PUR : MOS pull-up select register
- PCR : Port control register
- PDR : Port data register

**Figure 10.1 Circuit Configuration of Pin with MOS Pull-Up Transistor**

## 10.2 Port 0

### 10.2.1 Overview

Port 0 is an 8-bit input-only port. Table 10.2 shows the port 0 configuration.

Port 0 consists of pins that are used both as standard input ports (P07 to P00) and analog input channels (AN7 to AN0). It is switched by port mode register 0 (PMR0).

**Table 10.2 Port 0 Configuration**

| Port   | Function                  | Alternative Function       |
|--------|---------------------------|----------------------------|
| Port 0 | P07 (standard input port) | AN7 (analog input channel) |
|        | P06 (standard input port) | AN6 (analog input channel) |
|        | P05 (standard input port) | AN5 (analog input channel) |
|        | P04 (standard input port) | AN4 (analog input channel) |
|        | P03 (standard input port) | AN3 (analog input channel) |
|        | P02 (standard input port) | AN2 (analog input channel) |
|        | P01 (standard input port) | AN1 (analog input channel) |
|        | P00 (standard input port) | AN0 (analog input channel) |

10.2.2 Register Configuration

Table 10.3 shows the port 0 register configuration.

Table 10.3 Port 0 Register Configuration

| Name                 | Abbrev. | R/W | Size | Initial Value | Address* |
|----------------------|---------|-----|------|---------------|----------|
| Port mode register 0 | PMR0    | R/W | Byte | H'00          | H'FFCD   |
| Port data register 0 | PDR0    | R   | Byte | —             | H'FFC0   |

Note: \* Lower 16 bits of the address.

Port Mode Register 0 (PMR0)

|                 |       |       |       |       |       |       |       |       |
|-----------------|-------|-------|-------|-------|-------|-------|-------|-------|
| Bit :           | 7     | 6     | 5     | 4     | 3     | 2     | 1     | 0     |
|                 | PMR07 | PMR06 | PMR05 | PMR04 | PMR03 | PMR02 | PMR01 | PMR00 |
| Initial value : | 0     | 0     | 0     | 0     | 0     | 0     | 0     | 0     |
| R/W :           | R/W   | R/W   | R/W   | R/W   | R/W   | R/W   | R/W   | R/W   |

Port mode register 0 (PMR0) controls switching of each pin function of port 0. The switching is specified in a unit of bit.  
PMR0 is an 8-bit read/write enable register. When reset, PMR0 is initialized to H'00.

**Bits 7 to 0—P07/AN7 to P00/AN0 Pin Switching (PMR07 to PMR00):** PMR07 to PMR00 set whether the P0n/ANn pin is used as a P0n input pin or an ANn pin for the analog input channel of an A/D converter.

| Bit n |                                                              |
|-------|--------------------------------------------------------------|
| PMR0n | Description                                                  |
| 0     | The P0n/ANn pin functions as a P0n input pin (Initial value) |
| 1     | The P0n/ANn pin functions as an ANn input pin                |

(n = 7 to 0)

Port Data Register 0 (PDR0)

|                 |       |       |       |       |       |       |       |       |
|-----------------|-------|-------|-------|-------|-------|-------|-------|-------|
| Bit @:          | 7     | 6     | 5     | 4     | 3     | 2     | 1     | 0     |
|                 | PDR07 | PDR06 | PDR05 | PDR04 | PDR03 | PDR02 | PDR01 | PDR00 |
| Initial value : | —     | —     | —     | —     | —     | —     | —     | —     |
| R/W :           | R     | R     | R     | R     | R     | R     | R     | R     |

Port data register 0 (PDR0) reads the port states. When the corresponding bit of PMR0 is 0 (general input port), the pin state is read if PDR0 is read. When the corresponding bit of PMR0 is 1 (analog input channel), 1 is read if PDR0 is read.  
PDR0 is an 8-bit read-only register. When PDR0 is reset, its values become undefined.

10.2.3 Pin Functions

This section describes the pin functions of port 0 and their selection methods.

**P07/AN7 to P00/AN0:** P07/AN7 to P00/AN0 are switched according to the PMR0n bit of PMR0 as shown below.

| PMR0n | Pin Function  |
|-------|---------------|
| 0     | P0n input pin |
| 1     | ANn input pin |

(n = 7 to 0)

10.2.4 Pin States

Table 10.4 shows the pin 0 states in each operation mode.

Table 10.4 Port 0 Pin States

| Pins                  | Reset          | Active         | Sleep          | Standby        | Watch          | Subactive      | Subsleep       |
|-----------------------|----------------|----------------|----------------|----------------|----------------|----------------|----------------|
| P07/AN7 to<br>P00/AN0 | High-impedance | High-impedance | High-impedance | High-impedance | High-impedance | High-impedance | High-impedance |

## 10.3 Port 1

### 10.3.1 Overview

Port 1 is an 8-bit I/O port. Table 10.5 shows the port 1 configuration.

Port 1 consists of pins that are used both as standard I/O ports (P17 to P10) and frequency division clock output (TMOW), input capture input ( $\overline{IC}$ ), or external interrupt request inputs ( $\overline{IRQ5}$  to  $\overline{IRQ0}$ ). It is switched by port mode register 1 (PMR1) and port control register 1 (PCR1).

Port 1 can select the functions of MOS pull-up transistors.

**Table 10.5 Port 1 Configuration**

| Port   | Function                | Alternative Function                                 |
|--------|-------------------------|------------------------------------------------------|
| Port 1 | P17 (standard I/O port) | TMOW (frequency division clock output)               |
|        | P16 (standard I/O port) | $\overline{IC}$ (input capture input)                |
|        | P15 (standard I/O port) | $\overline{IRQ5}$ (external interrupt request input) |
|        | P14 (standard I/O port) | $\overline{IRQ4}$ (external interrupt request input) |
|        | P13 (standard I/O port) | $\overline{IRQ3}$ (external interrupt request input) |
|        | P12 (standard I/O port) | $\overline{IRQ2}$ (external interrupt request input) |
|        | P11 (standard I/O port) | $\overline{IRQ1}$ (external interrupt request input) |
|        | P10 (standard I/O port) | $\overline{IRQ0}$ (external interrupt request input) |

### 10.3.2 Register Configuration

Table 10.6 shows the port 1 register configuration.

**Table 10.6 Port 1 Register Configuration**

| Name                          | Abbrev. | R/W | Size | Initial Value | Address* |
|-------------------------------|---------|-----|------|---------------|----------|
| Port mode register 1          | PMR1    | R/W | Byte | H'00          | H'FFCE   |
| Port control register 1       | PCR1    | W   | Byte | H'00          | H'FFD1   |
| Port data register 1          | PDR1    | R/W | Byte | H'00          | H'FFC1   |
| MOS pull-up select register 1 | PUR1    | R/W | Byte | H'00          | H'FFE1   |

Note: \* Lower 16 bits of the address.



## Port Mode Register 1 (PMR1)

|                 |       |       |       |       |       |       |       |       |
|-----------------|-------|-------|-------|-------|-------|-------|-------|-------|
| Bit :           | 7     | 6     | 5     | 4     | 3     | 2     | 1     | 0     |
|                 | PMR17 | PMR16 | PMR15 | PMR14 | PMR13 | PMR12 | PMR11 | PMR10 |
| Initial value : | 0     | 0     | 0     | 0     | 0     | 0     | 0     | 0     |
| R/W :           | R/W   | R/W   | R/W   | R/W   | R/W   | R/W   | R/W   | R/W   |

Port mode register 1 (PMR1) controls switching of each pin function of port 1. The switching is specified in a unit of bit.

PMR1 is an 8-bit read/write enable register. When reset, PMR1 is initialized to H'00.

Note the following items when the pin functions are switched by PMR1.

- If port 1 is set to an  $\overline{IC}$  input pin and  $\overline{IRQ5}$  to  $\overline{IRQ0}$  by PMR1, the pin level needs be set to the high or low level regardless of the active mode and low power consumption mode. The pin level must not be set to an intermediate level.
- When the pin functions of P16/ $\overline{IC}$  and P15/ $\overline{IPQ5}$  to P10/ $\overline{IRQ0}$  are switched by PMR1, they are incorrectly recognized as edge detection according to the state of a pin signal and a detection signal may be generated. To prevent this, perform the operation in the following procedure.
  - Before switching the pin functions, inhibit an interrupt enable flag from being interrupted.
  - After having switched the pin functions, clear the relevant interrupt request flag to 0 by a single instruction.

Program Example:

```
:  
MOV.B R0L,@IENR ..... Interrupt disabled  
MOV.B R1L,@PMR1 ..... Pin function change  
NOP ..... Optional instruction  
BCLR m @IRQR ..... Applicable interrupt clear  
MOV.B R1L,@IENR ..... Interrupt enabled  
:
```

**Bit 7—P17/TMOW Pin Switching (PMR17):** PMR17 sets whether the P17/TMOW pin is used as a P17 I/O pin or a TMOW pin for the frequency division clock output.

#### Bit 7

| PMR17 | Description                                                 |
|-------|-------------------------------------------------------------|
| 0     | The P17/TMOW pin functions as a P17 I/O pin (Initial value) |
| 1     | The P17/TMOW pin functions as a TMOW output pin             |

**Bit 6—P16/ $\overline{\text{IC}}$  Pin Switching (PMR16):** PMR16 sets whether the P16/ $\overline{\text{IC}}$  pin as a P16 I/O pin or an  $\overline{\text{IC}}$  pin for the input capture input of the prescaler unit. The  $\overline{\text{IC}}$  pin has a built-in noise cancel circuit. See section 21, Prescaler Unit.

#### Bit 6

| PMR16 | Description                                                                          |
|-------|--------------------------------------------------------------------------------------|
| 0     | The P16/ $\overline{\text{IC}}$ pin functions as a P16 I/O pin (Initial value)       |
| 1     | The P16/ $\overline{\text{IC}}$ pin functions as an $\overline{\text{IC}}$ input pin |

**Bits 5 to 0—P15/ $\overline{\text{IRQ5}}$  to P10/ $\overline{\text{IRQ0}}$  Pin Switching (PMR15 to PMR10):** PMR15 to PMR10 set whether the P1n/ $\overline{\text{IRQn}}$  pin is used as a P1n I/O pin or an  $\overline{\text{IRQn}}$  pin for the external interrupt request input.

#### Bit n

| PMR1n | Description                                                                              |
|-------|------------------------------------------------------------------------------------------|
| 0     | The P1n/ $\overline{\text{IRQn}}$ pin functions as a P1n I/O pin (Initial value)         |
| 1     | The P1n/ $\overline{\text{IRQn}}$ pin functions as an $\overline{\text{IRQn}}$ input pin |

(n = 5 to 0)

### Port Control Register 1 (PCR1)

|                 |       |       |       |       |       |       |       |       |
|-----------------|-------|-------|-------|-------|-------|-------|-------|-------|
| Bit :           | 7     | 6     | 5     | 4     | 3     | 2     | 1     | 0     |
|                 | PCR17 | PCR16 | PCR15 | PCR14 | PCR13 | PCR12 | PCR11 | PCR10 |
| Initial value : | 0     | 0     | 0     | 0     | 0     | 0     | 0     | 0     |
| R/W :           | W     | W     | W     | W     | W     | W     | W     | W     |

Port control register 1 (PCR1) controls the I/Os of pins P17 to P10 of port 1 in a unit of bit. When PCR1 is set to 1, the corresponding P17 to P10 pins become output pins, and when it is set to 0, they become input pins. When the relevant pin is set to a general I/O by PMR1, settings of PCR1 and PDR1 become valid.

PCR1 is an 8-bit write-only register. When PCR1 is read, 1 is read. When reset, PCR1 is initialized to H'00.

## Bits 7 to 0—P17 to P10 Pin Switching (PCR17 to PCR10)

Bit n

| PCR1n | Description                                           |
|-------|-------------------------------------------------------|
| 0     | The P1n pin functions as an input pin (Initial value) |
| 1     | The P1n pin functions as an output pin                |

(n = 7 to 0)

## Port Data Register 1 (PDR1)

|                 |       |       |       |       |       |       |       |       |
|-----------------|-------|-------|-------|-------|-------|-------|-------|-------|
| Bit :           | 7     | 6     | 5     | 4     | 3     | 2     | 1     | 0     |
|                 | PDR17 | PDR16 | PDR15 | PDR14 | PDR13 | PDR12 | PDR11 | PDR10 |
| Initial value : | 0     | 0     | 0     | 0     | 0     | 0     | 0     | 0     |
| R/W :           | R/W   | R/W   | R/W   | R/W   | R/W   | R/W   | R/W   | R/W   |

Port data register 1 (PDR1) stores the data for the pins P17 to P10 of port 1. When PCR1 is 1 (output), the PDR1 values are directly read if port 1 is read. Accordingly, the pin states are not affected. When PCR1 is 0 (input), the pin states are read if port 1 is read.

PDR1 is an 8-bit read/ write enable register. When reset, PDR1 is initialized to H'00.

## MOS Pull-Up Select Register 1 (PUR1)

|                 |       |       |       |       |       |       |       |       |
|-----------------|-------|-------|-------|-------|-------|-------|-------|-------|
| Bit :           | 7     | 6     | 5     | 4     | 3     | 2     | 1     | 0     |
|                 | PUR17 | PUR16 | PUR15 | PUR14 | PUR13 | PUR12 | PUR11 | PUR10 |
| Initial value : | 0     | 0     | 0     | 0     | 0     | 0     | 0     | 0     |
| R/W :           | R/W   | R/W   | R/W   | R/W   | R/W   | R/W   | R/W   | R/W   |

MOS pull-up selector register 1 (PUR1) controls the on and off of the MOS pull-up transistor of port 1. Only the pin whose corresponding bit of PCR1 was set to 0 (input) becomes valid. When the corresponding bit of PCR1 is set to 1 (output), the corresponding bit of PUR1 becomes invalid and the MOS pull-up transistor is turned off.

PUR1 is an 8-bit read/ write enable register. When reset, PUR1 is initialized to H'00.

## Bits 7 to 0—P17 to P10 MOS Pull-Up Control (PCR17 to PCR10)

Bit n

| PUR1n | Description                                               |
|-------|-----------------------------------------------------------|
| 0     | The P1n pin has no MOS pull-up transistor (Initial value) |
| 1     | The P1n pin has a MOS pull-up pin                         |

(n = 7 to 0)

### 10.3.3 Pin Functions

This section describes the port 1 pin functions and their selection methods.

**P17/TMOW:** P17/TMOW is switched as shown below according to the PMR17 bit in PMR1 and the PCR17 bit in PCR1.

| PMR17 | PCR17 | Pin Function    |
|-------|-------|-----------------|
| 0     | 0     | P17 input pin   |
|       | 1     | P17 output pin  |
| 1     | *     | TMOW output pin |

Note: \*Don't care

**P16/ $\overline{IC}$ :** P16/ $\overline{IC}$  is switched as shown below according to the PMR16 bit in PMR1, the NC on/off bit in prescaler unit control/status register (PCSR), and the PCR16 bit in PCR1.

| PMR16 | PCR16 | NC on/off | Pin Function              |
|-------|-------|-----------|---------------------------|
| 0     | 0     | *         | P16 input pin             |
|       | 1     |           | P16 output pin            |
| 1     | *     | 0         | $\overline{IC}$ input pin |
|       |       | 1         | Noise cancel invalid      |
|       |       |           | Noise cancel valid        |

Note: \*Don't care

**P15/ $\overline{IRQ5}$  to P10/ $\overline{IRQ0}$ :** P15/ $\overline{IRQ15}$  to P10/ $\overline{IRQ0}$  are switched as shown below according to the PMR1n bit in PMR1 and the PCR1n bit in PCR1.

| PMR1n | PCR1n | Pin Function                |
|-------|-------|-----------------------------|
| 0     | 0     | P1n input pin               |
|       | 1     | P1n output pin              |
| 1     | *     | $\overline{IRQn}$ input pin |

(n = 5 to 0)

Notes: 1. \* Don't care.

2. The  $\overline{IRQ5}$  to  $\overline{IRQ0}$  input pins can select the leading or falling edge as an edge sense (the  $\overline{IRQ0}$  pin can select both edges). See section 6.2.4, IRQ Edge Select Register (IEGR).

3.  $\overline{IRQ1}$  or  $\overline{IRQ2}$  can be used as a timer J event input and  $\overline{IRQ3}$  can be used as a timer R input capture input. For details, see section 13, Timer J or section 15, Timer R.

10.3.4 Pin States

Table 10.7 shows the port 1 pin states in each operation mode.

Table 10.7 Port 1 Pin States

| Pins                   | Reset          | Active    | Sleep   | Standby        | Watch          | Subactive | Subsleep |
|------------------------|----------------|-----------|---------|----------------|----------------|-----------|----------|
| P17/TMOW               | High-impedance | Operation | Holding | High-impedance | High-impedance | Operation | Holding  |
| P16/ $\overline{IC}$   |                |           |         |                |                |           |          |
| P15/ $\overline{IRQ5}$ |                |           |         |                |                |           |          |
| P10/ $\overline{IRQ0}$ |                |           |         |                |                |           |          |

Note: If the  $\overline{IC}$  input pin and  $\overline{IRQ5}$  to  $\overline{IRQ0}$  input pins are set, the pin level need be set to the high or low level regardless of the active mode and low power consumption mode. Note that the pin level must not reach an intermediate level.

## 10.4 Port 2

### 10.4.1 Overview

Port 2 is an 8-bit I/O port. Table 10.8 shows the port 2 configuration.

Port 2 consists of pins that are used both as standard I/O ports (P27 to P20) and SCI clock I/O (SCK1), receive data input (SI1), send data output (SO1), I<sup>2</sup>C bus interface clock I/O (SCL0, SCL1), or data I/O (SDA0, SDA1). It is switched by serial mode register (SMR), serial control register (SCR), and port control register 2 (PCR2).

Port 2 can select the MOS pull-up function.

**Table 10.8 Port 2 Configuration**

| Port   | Function                | Alternative Function                            |
|--------|-------------------------|-------------------------------------------------|
| Port 2 | P27 (standard I/O port) | SYNCl (Formatless serial clock input)           |
|        | P26 (standard I/O port) | SCL0 (I <sup>2</sup> C bus interface clock I/O) |
|        | P25 (standard I/O port) | SDA0 (I <sup>2</sup> C bus interface data I/O)  |
|        | P24 (standard I/O port) | SCL1 (I <sup>2</sup> C bus interface clock I/O) |
|        | P23 (standard I/O port) | SDA1 (I <sup>2</sup> C bus interface data I/O)  |
|        | P22 (standard I/O port) | SCK1 (SCI1 clock I/O)                           |
|        | P21 (standard I/O port) | SO1 (SCI1 transmit data output)                 |
|        | P20 (standard I/O port) | SI1 (SCI1 receive data input)                   |

Note: The H8S/2197S and H8S/2196S do not have SYNCl, SCL0, and SDA0 pin functions.

### 10.4.2 Register Configuration

Table 10.9 shows the port 2 register configuration.

**Table 10.9 Port 2 Register Configuration**

| Name                          | Abbrev. | R/W | Size | Initial Value | Address* |
|-------------------------------|---------|-----|------|---------------|----------|
| Port control register 2       | PCR2    | W   | Byte | H'00          | H'FFD2   |
| Port data register 2          | PDR2    | R/W | Byte | H'00          | H'FFC2   |
| MOS pull-up select register 2 | PUR2    | R/W | Byte | H'00          | H'FFE2   |

Note: \* Lower 16 bits of the address.

## Port Control Register 2 (PCR2)

|                 |       |       |       |       |       |       |       |       |
|-----------------|-------|-------|-------|-------|-------|-------|-------|-------|
| Bit :           | 7     | 6     | 5     | 4     | 3     | 2     | 1     | 0     |
|                 | PCR27 | PCR26 | PCR25 | PCR24 | PCR23 | PCR22 | PCR21 | PCR20 |
| Initial value : | 0     | 0     | 0     | 0     | 0     | 0     | 0     | 0     |
| R/W :           | W     | W     | W     | W     | W     | W     | W     | W     |

Port control register 2 (PCR2) controls the I/Os of pins P27 to P20 of port 2 in a unit of bit. When PCR2 is set to 1, the corresponding P27 to P20 pins become output pins, and when it is set to 0, they become input pins. When the relevant pin is set to a general I/O, settings of PCR2 and PDR2 are valid.

PCR2 is an 8-bit write-only register. When PCR2 is read, 1 is read. When reset, PCR2 is initialized to H'00.

### Bits 7 to 0—P27 to P20 Pin Switching (PCR27 to PCR20)

| Bit n |                                                       |
|-------|-------------------------------------------------------|
| PCR2n | Description                                           |
| 0     | The P2n pin functions as an input pin (Initial value) |
| 1     | The P2n pin functions as an output pin                |

(n = 7 to 0)

## Port Data Register 2 (PDR2)

|                 |       |       |       |       |       |       |       |       |
|-----------------|-------|-------|-------|-------|-------|-------|-------|-------|
| Bit :           | 7     | 6     | 5     | 4     | 3     | 2     | 1     | 0     |
|                 | PDR27 | PDR26 | PDR25 | PDR24 | PDR23 | PDR22 | PDR21 | PDR20 |
| Initial value : | 0     | 0     | 0     | 0     | 0     | 0     | 0     | 0     |
| R/W :           | R/W   | R/W   | R/W   | R/W   | R/W   | R/W   | R/W   | R/W   |

Port data register 2 (PDR2) stores the data for the pins P27 to P20 of port 2. When PCR2 is 1 (output), the PDR2 values are directly read if port 2 is read. Accordingly, the pin states are not affected. When PCR2 is 0 (input), the pin states are read if port 2 is read.

PDR2 is an 8-bit read/write enable register. When reset, PDR2 is initialized to H'00.

MOS Pull-Up Select Register 2 (PUR2)

|                 |       |       |       |       |       |       |       |       |
|-----------------|-------|-------|-------|-------|-------|-------|-------|-------|
| Bit :           | 7     | 6     | 5     | 4     | 3     | 2     | 1     | 0     |
|                 | PUR27 | PUR26 | PUR25 | PUR24 | PUR23 | PUR22 | PUR21 | PUR20 |
| Initial value : | 0     | 0     | 0     | 0     | 0     | 0     | 0     | 0     |
| R/W :           | R/W   | R/W   | R/W   | R/W   | R/W   | R/W   | R/W   | R/W   |

MOS pull-up selector register 2 (PUR2) controls the ON and OFF of the MOS pull-up transistor of port 2. Only the pin whose corresponding bit of PCR2 was set to 0 (input) becomes valid. If the corresponding bit of PCR2 is set to 1 (output), the corresponding bit of PUR2 becomes invalid and the MOS pull-up transistor is turned off.

PUR2 is an 8-bit read/write enable register. When reset, PUR2 is initialized to H'00.

Bits 7 to 0—P27 to P20 Pull-Up MOS Control (PUR27 to PUR20)

| Bit n |                                                           |
|-------|-----------------------------------------------------------|
| PUR2n | Description                                               |
| 0     | The P2n pin has no MOS pull-up transistor (Initial value) |
| 1     | The P2n pin has a MOS pull-up transistor                  |

(n = 7 to 0)



### 10.4.3 Pin Functions

This section describes the port 2 pin functions and their selection methods.

**P27/SYNCI:** P27/SYNCI is switched as shown below according to the PCR27 bit in PCR2.

| PCR | Pin Function   |
|-----|----------------|
| 0   | P27 input pin  |
| 1   | P27 output pin |

Notes: Because the SYNCI always functions, the alternative pin need always be set to the high or low level regardless of active mode or low power consumption mode.

The H8S/2197S and H8S/2196S do not have SYNCI pin function.

**P26/SCL0:** P26/SCL0 is switched as shown below according to the PCR26 bit in PCR2 and the ICE bit in the I<sup>2</sup>C Bus control register 0 (ICCR0).

| ICE | PCR26 | Pin Function   |
|-----|-------|----------------|
| 0   | 0     | P26 input pin  |
|     | 1     | P26 output pin |
| 1   | *     | SCL0 I/O pin   |

Notes: \* Don't care

The H8S/2197S and H8S/2196S do not have SCL0 pin function.

**P25/SDA0:** P25/SDA0 is switched as shown below according to the PCR25 bit in PCR2 and the ICE bit in the I<sup>2</sup>C Bus control register 0 (ICCR0).

| ICE | PCR25 | Pin Function   |
|-----|-------|----------------|
| 0   | 0     | P25 input pin  |
|     | 1     | P25 output pin |
| 1   | *     | SDA0 I/O pin   |

Notes: \* Don't care

The H8S/2197S and H8S/2196S do not have SDA0 pin function.

**P24/SCL1:** P24/SCL1 is switched as shown below according to the PCR24 bit in PCR2 and the ICE bit in the I<sup>2</sup>C Bus control register 1 (ICCR1).

| ICE | PCR24 | Pin Function   |
|-----|-------|----------------|
| 0   | 0     | P24 input pin  |
|     | 1     | P24 output pin |
| 1   | *     | SCL1 I/O pin   |

Note: \* Don't care

**P23/SDA1:** P23/SDA1 is switched as shown below according to the PCR23 bit in PCR2 and the ICE bit in the I<sup>2</sup>C Bus control register 1 (ICCR1).

| ICE | PCR23 | Pin Function   |
|-----|-------|----------------|
| 0   | 0     | P23 input pin  |
|     | 1     | P23 output pin |
| 1   | *     | SDA1 I/O pin   |

Note: \* Don't care

**P22/SCK1:** P22/SCK1 is switched as shown below according to the PCR22 bit in PCR2, the C/ $\bar{A}$  bit in SMR, and the CKE1 and CKE0 bits in SCR.

| CKE1 | C/ $\bar{A}$ | CKE0 | PCR22 | Pin Function    |
|------|--------------|------|-------|-----------------|
| 0    | 0            | 0    | 0     | P22 input pin   |
|      |              |      | 1     | P22 output pin  |
|      | 1            | 1    | *     | SCK1 output pin |
|      |              | *    |       |                 |
| 1    | *            |      |       | SCK1 input pin  |

Note: \* Don't care

**P21/SO1:** P21/SO1 is switched as shown below according to the PCR21 bit in PCR2 and the TE bit in SCR.

| TE | PCR21 | Pin Function   |
|----|-------|----------------|
| 0  | 0     | P21 input pin  |
|    | 1     | P21 output pin |
| 1  | *     | SO1 output pin |

Note: \* Don't care

**P20/SI1:** P20/SI1 is switched as shown below according to the PCR20 bit in PCR2 and the RE bit in SCR.

| RE | PCR20 | Pin Function   |
|----|-------|----------------|
| 0  | 0     | P20 input pin  |
|    | 1     | P20 output pin |
| 1  | *     | SI1 input pin  |

Note: \* Don't care

#### 10.4.4 Pin States

Table 10.10 shows the port 2 pin states in each operation mode.

**Table 10.10 Port 2 Pin States**

| Pins      | Reset          | Active    | Sleep   | Standby        | Watch          | Subactive | Subsleep |
|-----------|----------------|-----------|---------|----------------|----------------|-----------|----------|
| P27/SYNCl | High-impedance | Operation | Holding | High-impedance | High-impedance | Operation | Holding  |
| P26/SCL0  |                |           |         |                |                |           |          |
| P25/SDA0  |                |           |         |                |                |           |          |
| P24/SCL1  |                |           |         |                |                |           |          |
| P23/SDA1  |                |           |         |                |                |           |          |
| P22/SCK1  |                |           |         |                |                |           |          |
| P21/SO1   |                |           |         |                |                |           |          |
| P20/SI1   |                |           |         |                |                |           |          |

Note: Because the SYNCl, SCL0, SDA0, SCL1, and SDA1 always function, the alternative pin need always be set to the high or low level regardless of active mode or low power consumption mode.

If the SCK1, and SI1 input pins are set, the pin level needs be set to the high or low level regardless of the active mode and low power consumption mode. Note that the pin level must not reach an intermediate level.

## 10.5 Port 3

### 10.5.1 Overview

Port 3 is an 8-bit I/O port. Table 10.11 shows the port 3 configuration.

Port 3 consists of pins that are used both as standard I/O ports (P37 to P30) and timer J timer output (TMO), buzzer output (BUZZ), 8-bit PWM outputs (PWM3 to PWM0), SCI2 strobe output (STRB), or chip select input ( $\overline{\text{CS}}$ ). It is switched by port mode register 3 (PMR3) and port control register 3 (PCR3).

Port 3 can select the MOS pull-up function.

**Table 10.11 Port 3 Configuration**

| Port   | Function                | Alternative Function         |
|--------|-------------------------|------------------------------|
| Port 3 | P37 (standard I/O port) | TMO (timer J timer output)   |
|        | P36 (standard I/O port) | BUZZ (timer J buzzer output) |
|        | P35 (standard I/O port) | PWM3 (8-bit PWM output)      |
|        | P34 (standard I/O port) | PWM2 (8-bit PWM output)      |
|        | P33 (standard I/O port) | PWM1 (8-bit PWM output)      |
|        | P32 (standard I/O port) | PWM0 (8-bit PWM output)      |
|        | P31 (standard I/O port) | SV2 (servo monitor output)   |
|        | P30 (standard I/O port) | SV1 (servo monitor output)   |

Note: The H8S/2197S and H8S/2196S do not have PWM3 and PWM2 pin functions.

### 10.5.2 Register Configuration

Table 10.12 shows the port 3 register configuration.

**Table 10.12 Port 3 Register Configuration**

| Name                          | Abbrev. | R/W | Size | Initial Value | Address* |
|-------------------------------|---------|-----|------|---------------|----------|
| Port mode register 3          | PMR3    | R/W | Byte | H'00          | H'FFD0   |
| Port control register 3       | PCR3    | W   | Byte | H'00          | H'FFD3   |
| Port data register 3          | PDR3    | R/W | Byte | H'00          | H'FFC3   |
| MOS pull-up select register 3 | PUR3    | R/W | Byte | H'00          | H'FFE3   |

Note: \* Lower 16 bits of the address.

## Port Mode Register 3 (PMR3)

|                 |       |       |       |       |       |       |       |       |
|-----------------|-------|-------|-------|-------|-------|-------|-------|-------|
| Bit :           | 7     | 6     | 5     | 4     | 3     | 2     | 1     | 0     |
|                 | PMR37 | PMR36 | PMR35 | PMR34 | PMR33 | PMR32 | PMR31 | PMR30 |
| Initial value : | 0     | 0     | 0     | 0     | 0     | 0     | 0     | 0     |
| R/W :           | R/W   | R/W   | R/W   | R/W   | R/W   | R/W   | R/W   | R/W   |

Port mode register 3 (PMR3) controls switching of each pin function of port 3. The switching is specified in a unit of bit.

PMR3 is an 8-bit read/write enable register. When reset, PMR3 is initialized to H'00.

**Bit 7—P37/TMO Pin Switching (PMR37):** PMR37 sets whether the P37/TMO pin is used as a P37 I/O pin or a TMO pin for the timer J output timer.

### Bit 7

| PMR37 | Description                                                |
|-------|------------------------------------------------------------|
| 0     | The P37/TMO pin functions as a P37 I/O pin (Initial value) |
| 1     | The P37/TMO pin functions as a TMO output pin              |

Notes: If the TMO pin is used for remote control sending, a careless timer output pulse may be output when the remote control mode is set after the output has been switched to the TMO output. Perform the switching and setting in the following order.

1. Set the remote control mode.
2. Set the TMJ-1 and 2 counter data of the timer J.
3. Switch the P37/TMO pin to the TMO output pin.
4. Set the ST bit to 1.

**Bit 6—P36/BUZZ Pin Switching (PMR36):** PMR36 sets whether the P36/BUZZ pin as a P36 I/O pin or an BUZZ pin for the timer J buzzer output. For the selection of the BUZZ output, see 13.2.2, Timer J Control Register (TMJC).

### Bit 6

| PMR36 | Description                                                 |
|-------|-------------------------------------------------------------|
| 0     | The P36/BUZZ pin functions as a P36 I/O pin (Initial value) |
| 1     | The P36/BUZZ pin functions as a BUZZ output pin             |

**Bits 5 to 2—P35/PWM3 to P32/PWM0 Pin Switching (PMR35 to PMR32):** PMR35 to PMR32 set whether the P3n/PWMm pin is used as a P3n I/O pin or a PWMm pin for the 8-bit PWM output.

**Bit n**

| PMR3n | Description                                                 |
|-------|-------------------------------------------------------------|
| 0     | The P3n/PWMm pin functions as a P3n I/O pin (Initial value) |
| 1     | The P3n/PWMm pin functions as a PWMm output pin             |

(n = 5 to 2, m = 3 to 0)

Note: The H8S/2197S and H8S/2196S do not have PWM3 and PWM2 pin functions.

**Bit 1—P31/SV2 Pin Switching (PMR31):** PMR31 sets whether the P31/SV2 pin is used as a P31 I/O pin or an SV2 pin for the servo monitor output.

**Bit 1**

| PMR31 | Description                                                |
|-------|------------------------------------------------------------|
| 0     | The P31/SV2 pin functions as a P31 I/O pin (Initial value) |
| 1     | The P31/SV2 pin functions as an SV2 output pin             |

**Bit 0—P30/SV1 Pin Switching (PMR30):** PMR30 sets whether the P30/SV1 pin is used as a P30 I/O pin or an SV1 pin for servo monitor output.

**Bit 0**

| PMR30 | Description                                                |
|-------|------------------------------------------------------------|
| 0     | The P30/SV1 pin functions as a P30 I/O pin (Initial value) |
| 1     | The P30/SV1 pin functions as an SV1 output pin             |

## Port Control Register 3 (PCR3)

|                 |       |       |       |       |       |       |       |       |
|-----------------|-------|-------|-------|-------|-------|-------|-------|-------|
| Bit :           | 7     | 6     | 5     | 4     | 3     | 2     | 1     | 0     |
|                 | PCR37 | PCR36 | PCR35 | PCR34 | PCR33 | PCR32 | PCR31 | PCR30 |
| Initial value : | 0     | 0     | 0     | 0     | 0     | 0     | 0     | 0     |
| R/W :           | W     | W     | W     | W     | W     | W     | W     | W     |

Port control register 3 (PCR3) controls the I/Os of pins P37 to P30 of port 3 in a unit of bit. When PCR3 is set to 1, the corresponding P37 to P30 pins become output pins, and when it is set to 0, they become input pins. When the relevant pin is set to a general I/O by PMR3, settings of PCR3 and PDR3 become valid.

PCR3 is an 8-bit write-only register. When PCR3 is read, 1 is read. When reset, PCR3 is initialized to H'00.

### Bits 7 to 0—Pin 37 to P30 Pin Switching (PCR37 to PCR30)

| Bit n |                                                       |
|-------|-------------------------------------------------------|
| PCR3n | Description                                           |
| 0     | The P3n pin functions as an input pin (Initial value) |
| 1     | The P3n pin functions as an output pin                |

(n = 7 to 0)

## Port Data Register 3 (PDR3)

|                 |       |       |       |       |       |       |       |       |
|-----------------|-------|-------|-------|-------|-------|-------|-------|-------|
| Bit :           | 7     | 6     | 5     | 4     | 3     | 2     | 1     | 0     |
|                 | PDR37 | PDR36 | PDR35 | PDR34 | PDR33 | PDR32 | PDR31 | PDR30 |
| Initial value : | 0     | 0     | 0     | 0     | 0     | 0     | 0     | 0     |
| R/W :           | R/W   | R/W   | R/W   | R/W   | R/W   | R/W   | R/W   | R/W   |

Port data register 3 (PDR3) stores the data for the pins P37 to P30 of port 3. When PCR3 is 1 (output), the PDR3 values are directly read if port 3 is read. Accordingly, the pin states are not affected. When PCR3 is 0 (input), the pin states are read if port 3 is read.

PDR3 is an 8-bit read/write enable register. When reset, PDR3 is initialized to H'00.

## MOS Pull-Up Select Register 3 (PUR3)

|                 |       |       |       |       |       |       |       |       |
|-----------------|-------|-------|-------|-------|-------|-------|-------|-------|
| Bit :           | 7     | 6     | 5     | 4     | 3     | 2     | 1     | 0     |
|                 | PUR37 | PUR36 | PUR35 | PUR34 | PUR33 | PUR32 | PUR31 | PUR30 |
| Initial value : | 0     | 0     | 0     | 0     | 0     | 0     | 0     | 0     |
| R/W :           | R/W   | R/W   | R/W   | R/W   | R/W   | R/W   | R/W   | R/W   |

MOS pull-up selector register 3 (PUR3) controls the ON and OFF of the MOS pull-up transistor of port 3. Only the pin whose corresponding bit of PCR3 was set to 0 (input) becomes valid. If the corresponding bit of PCR3 is set to 1 (output), the corresponding bit of PUR3 becomes invalid and the MOS pull-up transistor is turned off.

PUR3 is an 8-bit read/write enable register. When reset, PUR3 is initialized to H'00.

### Bits 7 to 0—P37 to P30 MOS Pull-Up Control (PUR37 to PUR30)

Bit n

| PCR3n | Description                                               |
|-------|-----------------------------------------------------------|
| 0     | The P3n pin has no MOS pull-up transistor (Initial value) |
| 1     | The P3n pin has a MOS pull-up transistor                  |

(n = 7 to 0)

### 10.5.3 Pin Functions

This section describes the port 3 pin functions and their selection methods.

**P37/TMO:** P37/TMO is switched as shown below according to the PMR37 bit in PMR3 and the PCR37 bit in PCR3.

| PMR37 | PCR37 | Pin Function   |
|-------|-------|----------------|
| 0     | 0     | P37 input pin  |
|       | 1     | P37 output pin |
| 1     | *     | TMO output pin |

Note: \* Don't care



**P36/BUZZ:** P36/BUZZ is switched as shown below according to the PMR36 bit in PMR3 and the PCR36 bit in PCR3.

| PMR36 | PCR36 | Pin Function    |
|-------|-------|-----------------|
| 0     | 0     | P36 input pin   |
|       | 1     | P36 output pin  |
| 1     | *     | BUZZ output pin |

Note: \* Don't care

**P35/PWM3:** P35/PWM3 is switched as shown below according to the PMR3n bit in PMR3 and the PCR3n bit in PCR3.

| PMR35 | PCR35 | Pin Function    |
|-------|-------|-----------------|
| 0     | 0     | P35 input pin   |
|       | 1     | P35 output pin  |
| 1     | *     | PWM3 output pin |

Notes: \* Don't care

The H8S/2197S and H8S/2196S do not have PWM3 pin function.

**P34/PMW2:** P34/PMW2 is switched as shown below according to the PMR34 bit in PCR3 and the PCR34 bit in PCR3.

| PMR34 | PCR34 | Pin Function    |
|-------|-------|-----------------|
| 0     | 0     | P34 input pin   |
|       | 1     | P34 output pin  |
| 1     | *     | PWM2 output pin |

Notes: \* Don't care

The H8S/2197S and H8S/2196S do not have PWM2 pin function.

**P33/PWM1:** P33/PWM1 is switched as shown below according to the PMR33 bit in PMR3 and the PCR33 bit in PCR3.

| PMR33 | PCR33 | Pin Function   |
|-------|-------|----------------|
| 0     | 0     | P33 input pin  |
|       | 1     | P33 output pin |
| 1     | *     | PWM1 input pin |

Note: \* Don't care

**P32/PWM0:** P32/PWM0 is switched as shown below according to the PMR32 bit in PMR3 and the PCR32 bit in PCR.

| PMR32 | PCR32 | Pin Function    |
|-------|-------|-----------------|
| 0     | 0     | P32 input pin   |
|       | 1     | P32 output pin  |
| 1     | *     | PWM0 output pin |

**P31/SV2:** P31/SV2 is switched as shown below according to the PMR31 bit in PMR3 and the PCR31 bit in PCR3.

| PMR31 | PCR31 | Pin Function   |
|-------|-------|----------------|
| 0     | 0     | P31 input pin  |
|       | 1     | P31 output pin |
| 1     | *     | SV2 output pin |

**P30/SV1:** P30/SV1 is switched as shown below according to the PMR30 bit in PMR3 and the PCR30 bit in PCR3.

| PMR30 | PCR30 | Pin Function   |
|-------|-------|----------------|
| 0     | 0     | P30 input pin  |
|       | 1     | P30 output pin |
| 1     | *     | SV1 output pin |

Note: \*Don't care

10.5.4 Pin States

Table 10.13 shows the port 3 pin states in each operation mode.

Table 10.13 Port 3 Pin States

| Pins                                                                    | Reset          | Active    | Sleep   | Standby        | Watch          | Subactive | Subsleep |
|-------------------------------------------------------------------------|----------------|-----------|---------|----------------|----------------|-----------|----------|
| P37/TMO<br>P36/BUZZ<br>P35/PWM3<br>to<br>P32/PWM0<br>P31/SV2<br>P30/SV1 | High-impedance | Operation | Holding | High-impedance | High-impedance | Operation | Holding  |

## 10.6 Port 4

### 10.6.1 Overview

Port 4 is an 8-bit I/O port. Table 10.14 shows the port 4 configuration.

Port 4 consists of pins that are used both as standard I/O ports (P47 to P40) and output compare output (FTOA, FTOB), input capture input (FTIA, FTIB, FTIC, FTID) or 14-bit PWM output (PWM14). It is switched by port mode register 4 (PRM4), timer output compare control register (TOCR), and port control register 4 (PCR4).

**Table 10.14 Port 4 Configuration**

| Port   | Function                | Alternative Function                       |
|--------|-------------------------|--------------------------------------------|
| Port 4 | P47 (standard I/O port) | RPTRG (realtime output port trigger input) |
|        | P46 (standard I/O port) | FTOB (timer X1 output compare output)      |
|        | P45 (standard I/O port) | FTOA (timer X1 output compare output)      |
|        | P44 (standard I/O port) | FTID (timer X1 input capture input)        |
|        | P43 (standard I/O port) | FTIC (timer X1 input capture input)        |
|        | P42 (standard I/O port) | FTIB (timer X1 input capture input)        |
|        | P41 (standard I/O port) | FTIA (timer X1 input capture input)        |
|        | P40 (standard I/O port) | PWM14 (14-bit PWM output)                  |

Note: The H8S/2197S and H8S/2196S do not have PWM14, FTIA, FTIB, FTIC, FTID, FTOA, and FTOB pin functions.

### 10.6.2 Register Configuration

Table 10.15 shows the port 4 register configuration.

**Table 10.15 Port 4 Register Configuration**

| Name                    | Abbrev. | R/W | Size | Initial Value | Address* |
|-------------------------|---------|-----|------|---------------|----------|
| Port mode register 4    | PMR4    | R/W | Byte | H'7E          | H'FFDB   |
| Port control register 4 | PCR4    | W   | Byte | H'00          | H'FFD4   |
| Port data register 4    | PDR4    | R/W | Byte | H'00          | H'FFC4   |

Note: \* Lower 16 bits of the address.

Port Mode Register 4 (PMR4)

|                 |       |   |   |   |   |   |   |       |
|-----------------|-------|---|---|---|---|---|---|-------|
| Bit :           | 7     | 6 | 5 | 4 | 3 | 2 | 1 | 0     |
|                 | PMR47 | — | — | — | — | — | — | PMR40 |
| Initial value : | 0     | 1 | 1 | 1 | 1 | 1 | 1 | 0     |
| R/W :           | R/W   | — | — | — | — | — | — | R/W   |

Port mode register 4 (PMR4) controls switching of the P47/RPTRG pin and the P40/PWM14 pin function. The switchings of the P46/FTOB and P45/FTOA functions are controlled by TOCR. See section 16, Timer X1. The FTIA, FTIB, FTIC, and FTID inputs always function. PMR4 is an 8-bit read/write enable register. When reset, PMR4 is initialized to H'7E.

Because the RPTRG input always function, the alternative pin need always be set to the high or low level regardless of the active mode and low power consumption mode. Note that the pin level must not reach an intermediate level.

Because the FTIA, FTIB, FTIC, and FTID inputs always function, each input uses the input edge to the alternative general I/O pins P44, P43, P42, and P41 as input signals.

**Bit 7—P47/RPTRG Pin Switching (PMR47):** PMR47 sets whether the P47/RPTRG pin is used as a P40 I/O pin or a RPTRG pin for the realtime output port trigger input.

Bit 7

| PMR47 | Description                                                  |
|-------|--------------------------------------------------------------|
| 0     | The P47/RPTRG pin functions as a P47 I/O pin (Initial value) |
| 1     | The P47/RPTRG pin functions as a RPTRG I/O pin               |

**Bits 6 to 1—Reserved Bits:** Reserved bits. When the bits are read, 1 is always read. The write operation is invalid.

**Bit 0—P40/PWM14 Pin Switching (PMR40):** PMR40 sets whether the P40/PWM14 pin is used as a P40 I/O pin or a PWM14 pin for the 14-bit PWM square wave output.

Bit 0

| PMR40 | Description                                                  |
|-------|--------------------------------------------------------------|
| 0     | The P40/PWM14 pin functions as a P40 I/O pin (Initial value) |
| 1     | The P40/PWM14 pin functions as a PWM14 output pin            |

Note: The H8S/2197S and H8S/2196S do not have PWM14 pin function.

Port Control Register 4 (PCR4)

|                 |       |       |       |       |       |       |       |       |
|-----------------|-------|-------|-------|-------|-------|-------|-------|-------|
| Bit :           | 7     | 6     | 5     | 4     | 3     | 2     | 1     | 0     |
|                 | PCR47 | PCR46 | PCR45 | PCR44 | PCR43 | PCR42 | PCR41 | PCR40 |
| Initial value : | 0     | 0     | 0     | 0     | 0     | 0     | 0     | 0     |
| R/W :           | W     | W     | W     | W     | W     | W     | W     | W     |

Port control register 4 (PCR4) controls the I/Os of pins P47 to P40 of port 4 in a unit of bit. When PCR4 is set to 1, the corresponding P47 to P40 pins become output pins, and when it is set to 0, they become input pins. When the relevant pin is set to a general I/O by PMR4, settings of PCR4 and PDR4 become valid. PCR4 is an 8-bit write-only register. When PCR4 is read, 1 is read. When reset, PCR4 is initialized to H'00.

Bits 7 to 0—P47 to P40 Pin Switching (PCR47 to PCR40)

| Bit n |                                                       |
|-------|-------------------------------------------------------|
| PCR4n | Description                                           |
| 0     | The P4n pin functions as an input pin (Initial value) |
| 1     | The P4n pin functions as an output pin                |

(n = 7 to 0)

Port Data Register 4 (PDR4)

|                 |       |       |       |       |       |       |       |       |
|-----------------|-------|-------|-------|-------|-------|-------|-------|-------|
| Bit :           | 7     | 6     | 5     | 4     | 3     | 2     | 1     | 0     |
|                 | PDR47 | PDR46 | PDR45 | PDR44 | PDR43 | PDR42 | PDR41 | PDR40 |
| Initial value : | 0     | 0     | 0     | 0     | 0     | 0     | 0     | 0     |
| R/W :           | R/W   | R/W   | R/W   | R/W   | R/W   | R/W   | R/W   | R/W   |

Port data register 4 (PDR4) stores the data for the pins P47 to P40 of port 4. When PCR4 is 1 (output), the PDR4 values are directly read if port 4 is read. Accordingly, the pin states are not affected. When PCR4 is 0 (input), the pin states are read if port 4 is read. PDR4 is an 8-bit read/write enable register. When reset, PDR4 is initialized to H'00.

### 10.6.3 Pin Functions

This section describes the port 4 pin functions and their selection methods.

**P47/RPTRG:** P47/RPTRG is switched as shown below according to the PMR47 bit in PMR4 and the PCR47 bit in PCR4.

| PMR47 | PCR47 | Pin Function    |
|-------|-------|-----------------|
| 0     | 0     | P47 input pin   |
|       | 1     | P47 output pin  |
| 1     | *     | RPTRG input pin |

Note: \* Don't care

**P46/FTOB:** P46/FTOB is switched as shown below according to the PCR46 bit in PCR4 and the OEB bit in TOCR.

| OEB | PCR46 | Pin Function    |
|-----|-------|-----------------|
| 0   | 0     | P46 input pin   |
|     | 1     | P46 output pin  |
| 1   | *     | FTOB output pin |

Notes: \* Don't care

The H8S/2197S and H8S/2196S do not have FTOB pin function.

**P45/FTOA:** P45/FTOA is switched as shown below according to the PCR45 bit in PCR4 and the OEA bit in TOCR.

| OEA | PCR45 | Pin Function    |
|-----|-------|-----------------|
| 0   | 0     | P45 input pin   |
|     | 1     | P45 output pin  |
| 1   | *     | FTOA output pin |

Notes: \* Don't care

The H8S/2197S and H8S/2196S do not have FTOA pin function.

**P44/FTID:** P44/FTID is switched as shown below according to the PCR44 bit in PCR4.

| PCR44 | Pin Function                    |
|-------|---------------------------------|
| 0     | P44 input pin<br>FTID input pin |
| 1     | P44 output pin                  |

Note: The H8S/2197S and H8S/2196S do not have FTID pin function.

**P43/FTIC:** P43/FTIC is switched as shown below according to the PCR43 bit in PCR4.

| PCR43 | Pin Function   |                |
|-------|----------------|----------------|
| 0     | P43 input pin  | FTIC input pin |
| 1     | P43 output pin |                |

Note: The H8S/2197S and H8S/2196S do not have FTIC pin function.

**P42/FTIB:** P42/FTIB is switched as shown below according to the PCR42 bit in PCR4.

| PCR42 | Pin Function   |                |
|-------|----------------|----------------|
| 0     | P42 input pin  | FTIB input pin |
| 1     | P42 output pin |                |

Note: The H8S/2197S and H8S/2196S do not have FTIB pin function.

**P41/FTIA:** P41/FTIA is switched as shown below according to the PCR41 bit in PCR4.

| PCR41 | Pin Function   |                |
|-------|----------------|----------------|
| 0     | P41 input pin  | FTIA input pin |
| 1     | P41 output pin |                |

Note: The H8S/2197S and H8S/2196S do not have FTIA pin function.

**P40/PWM14:** P40/PWM14 is switched as shown below according to the PMR40 bit in PMR4 and the PCR40 bit in PCR4.

| PMR40 | PCR40 | Pin Function    |
|-------|-------|-----------------|
| 0     | 0     | P40 input pin   |
|       | 1     | P40 output pin  |
| 1     | *     | PWM14 input pin |

Notes: \* Don't care

The H8S/2197S and H8S/2196S do not have PWM14 pin function.



## 10.6.4 Pin States

Table 10.16 shows the port 4 pin states in each operation mode.

**Table 10.16 Port 4 Pin States**

| Pins      | Reset          | Active    | Sleep   | Standby        | Watch          | Subactive | Subsleep |
|-----------|----------------|-----------|---------|----------------|----------------|-----------|----------|
| P47/RPTRG | High-impedance | Operation | Holding | High-impedance | High-impedance | Operation | Holding  |
| P46/FTOB  |                |           |         |                |                |           |          |
| P45/FTOA  |                |           |         |                |                |           |          |
| P44/FTID  |                |           |         |                |                |           |          |
| P43/FTIC  |                |           |         |                |                |           |          |
| P42/FTIB  |                |           |         |                |                |           |          |
| P41/FTIA  |                |           |         |                |                |           |          |
| P40/PWM14 |                |           |         |                |                |           |          |

Note: If the RPTRG input pin is set, the pin level must be set to the high or low level regardless of the active mode or low power consumption mode. Note that the pin level must not reach an intermediate level.

Because the FTIA, FTIB, FTIC, and FTID inputs always function, the alternative pin need be set to the high or low level regardless of the active mode and low power consumption mode.

## 10.7 Port 6

### 10.7.1 Overview

Port 6 is an 8-bit I/O port. Table 10.17 shows the port 6 configuration. Port 6 is a large current I/O port.

The sink current is 20 mA maximum ( $V_{OL}=1.7$  V) and four pins can be turned on at the same time. Port 6 consists of pins that are used as large current I/O ports (P67 to P60) and realtime output ports (RP7 to RP0). It is switched by port mode register 6 (PMR6), port mode register A (PMRA), and port control register 6 (PCR6).

The realtime output function can instantaneously switch the output data by an external or internal trigger port.

**Table 10.17 Port 6 Configuration**

| Port   | Function                     | Alternative Function                                                  |
|--------|------------------------------|-----------------------------------------------------------------------|
| Port 6 | P67 (large current I/O port) | RP7/TMBI (timer B event input)                                        |
|        | P66 (large current I/O port) | RP6/ $\overline{ADTRG}$ (A/D conversion start external trigger input) |
|        | P65 (large current I/O port) | RP5 (realtime output port pin)                                        |
|        | P64 (large current I/O port) | RP4 (realtime output port pin)                                        |
|        | P63 (large current I/O port) | RP3 (realtime output port pin)                                        |
|        | P62 (large current I/O port) | RP2 (realtime output port pin)                                        |
|        | P61 (large current I/O port) | RP1 (realtime output port pin)                                        |
|        | P60 (large current I/O port) | RP0 (realtime output port pin)                                        |

## 10.7.2 Register Configuration

Table 10.18 shows the port 6 register configuration.

**Table 10.18 Port 6 Register Configuration**

| Name                                         | Abbrev.              | R/W | Size | Initial Value | Address* |
|----------------------------------------------|----------------------|-----|------|---------------|----------|
| Port mode register 6                         | PMR6                 | R/W | Byte | H'00          | H'FFDD   |
| Port mode register A                         | PMRA                 | R/W | Byte | H'3F          | H'FFD9   |
| Port control register 6                      | PCR6                 | W   | Byte | H'00          | H'FFD6   |
| Port data register 6                         | PDR6                 | R/W | Byte | H'00          | H'FFC6   |
| Realtime output trigger select register 1    | RTPSR1               | R/W | Byte | H'00          | H'FFE5   |
| Realtime output trigger edge select register | RTPEGR* <sup>2</sup> | R/W | Byte | H'FC          | H'FFE4   |
| Port control register slave 6                | PCRS6                | —   | Byte | H'00          | —        |
| Port data register slave 6                   | PDRS6                | —   | Byte | H'00          | —        |

Notes: 1. Lower 16 bits of the address.

2. RTPEGR is also used by port 7.

### Port Mode Register 6 (PMR6)

|                 |       |       |       |       |       |       |       |       |
|-----------------|-------|-------|-------|-------|-------|-------|-------|-------|
| Bit :           | 7     | 6     | 5     | 4     | 3     | 2     | 1     | 0     |
|                 | PMR67 | PMR66 | PMR65 | PMR64 | PMR63 | PMR62 | PMR61 | PMR60 |
| Initial value : | 0     | 0     | 0     | 0     | 0     | 0     | 0     | 0     |
| R/W :           | R/W   | R/W   | R/W   | R/W   | R/W   | R/W   | R/W   | R/W   |

Port mode register 6 (PMR6) controls switching of each pin function of port 6. The switching is specified in units of bits.

PMR6 is an 8-bit read/write enable register. When reset, PMR6 is initialized to H'00.

**Bits 7 to 0—P67/RP7 to P60/RP0 Pin Switching (PMR67 to PMR60):** PMR67 to PMR60 set whether the P6n/RPn pin is used as a P6n I/O pin or an RPn pin for the realtime output port.

#### Bit n

| PMR6n | Description                                                |
|-------|------------------------------------------------------------|
| 0     | The P6n/RPn pin functions as a P6n I/O pin (Initial value) |
| 1     | The P6n/RPn pin functions as an RPn output pin             |

(n = 7 to 0)

Port Mode Register A (PMRA)

|                 |       |       |   |   |   |   |   |   |
|-----------------|-------|-------|---|---|---|---|---|---|
| Bit :           | 7     | 6     | 5 | 4 | 3 | 2 | 1 | 0 |
|                 | PMRA7 | PMRA6 | — | — | — | — | — | — |
| Initial value : | 0     | 0     | 1 | 1 | 1 | 1 | 1 | 1 |
| R/W :           | R/W   | R/W   | — | — | — | — | — | — |

Port mode register A (PMRA) switches the pin functions in port 6. Switching is specified in a unit of bit. PMR6 is an 8-bit read/write register.

When reset, PMRA is initialized to H'3F.

**Bit 7—P67/RP7/TMBI Pin Switching (PMRA7):** PMRA7 can be used as a P6n I/O pin or a TMBI pin for timer B event input.

Bit 7

| PMRA7 | Description                                                     |
|-------|-----------------------------------------------------------------|
| 0     | P67/RP7/TMBI pin functions as a P67/RP7 I/O pin (Initial value) |
| 1     | P67/RP7/TMBI pin functions as a TMBI pin                        |

**Bit 6—Timer B Event Input Edge Switching (PMRA6):** PMRA6 selects the TMBI edge sense.

Bit 6

| PMRA6 | Description                              |
|-------|------------------------------------------|
| 0     | Timer B event input detects falling edge |
| 1     | Timer B event input detects rising edge  |

Port Control Register 6 (PCR6)

|                 |       |       |       |       |       |       |       |       |
|-----------------|-------|-------|-------|-------|-------|-------|-------|-------|
| Bit :           | 7     | 6     | 5     | 4     | 3     | 2     | 1     | 0     |
|                 | PCR67 | PCR66 | PCR65 | PCR64 | PCR63 | PCR62 | PCR61 | PCR60 |
| Initial value : | 0     | 0     | 0     | 0     | 0     | 0     | 0     | 0     |
| R/W :           | W     | W     | W     | W     | W     | W     | W     | W     |

Port control register 6 (PCR6) selects the general I/O of port 6 and controls the realtime output in a unit of bit together with PMR6.

When PMR6 = 0, the corresponding P67 to P60 pins become general output pins if PCR6 is set to 1, and they become general input pins if it is set to 0.

When PMR6 = 1, PCR6 controls the corresponding RP7 to RP0 realtime output pins. For details, see section 10.7.4, Operation.

PCR6 is an 8-bit write-only register. When PCR6 is read, 1 is read. When reset, PCR6 is initialized to H'00.

| PMR6  | PCR6  |                                                                             |
|-------|-------|-----------------------------------------------------------------------------|
| Bit n | Bit n |                                                                             |
| PMR6n | PCR6n | Description                                                                 |
| 0     | 0     | The P6n/RPn pin functions as a P6n general I/O input pin<br>(Initial value) |
|       | 1     | The P6n/RPn pin functions as a P6n general output pin                       |
| 1     | *     | The P6n/RPn pin functions as an RPn realtime output pin                     |

Note: \* Don't care (n = 7 to 0)

Port Data Register 6 (PDR6)

|                 |       |       |       |       |       |       |       |       |
|-----------------|-------|-------|-------|-------|-------|-------|-------|-------|
| Bit :           | 7     | 6     | 5     | 4     | 3     | 2     | 1     | 0     |
|                 | PDR67 | PDR66 | PDR65 | PDR64 | PDR63 | PDR62 | PDR61 | PDR60 |
| Initial value : | 0     | 0     | 0     | 0     | 0     | 0     | 0     | 0     |
| R/W :           | R/W   | R/W   | R/W   | R/W   | R/W   | R/W   | R/W   | R/W   |

Port data register 6 (PDR6) stores the data for the pins P67 to P60 of port 6.

For PMR6 = 0, when PCR6 is 1 (output), the PDR6 values are directly read if port 6 is read. Accordingly, the pin states are not affected. When PCR6 is 0 (input), the pin states are read if port 6 is read.

For PMR6 = 1, port 6 becomes a realtime output pin. For details, see section 10.7.4, Operation.

PDR6 is an 8-bit read/write enable register. When reset, PDR6 is initialized to H'00.

Realtime Output Trigger Select Register (RTPSR1)

|                 |         |         |         |         |         |         |         |         |
|-----------------|---------|---------|---------|---------|---------|---------|---------|---------|
| Bit :           | 7       | 6       | 5       | 4       | 3       | 2       | 1       | 0       |
|                 | RTPSR17 | RTPSR16 | RTPSR15 | RTPSR14 | RTPSR13 | RTPSR12 | RTPSR11 | RTPSR10 |
| Initial value : | 0       | 0       | 0       | 0       | 0       | 0       | 0       | 0       |
| R/W :           | R/W     | R/W     | R/W     | R/W     | R/W     | R/W     | R/W     | R/W     |

The realtime output trigger select register (RTPSR1) sets whether the external trigger (RPTRG pin input) or the internal trigger (HSW) is used as an trigger input for the realtime output in a unit of bit. For the internal trigger HSW, see section 26.4, HSW Timing Generation Circuit. RTPSR is an 8-bit read/write enable register. When reset, RTPSR is initialized to H'00.

Bits 7 to 0—RP7 to RP0 Trigger Switching

Bit n

| RTPSR1n | Description                                                                       |
|---------|-----------------------------------------------------------------------------------|
| 0       | Selects the external trigger (RPTRG pin input) as a trigger input (Initial value) |
| 1       | Selects the internal trigger (HSW) a trigger input                                |

(n = 7 to 0)

Real Time Output Trigger Edge Select Register (RTPEGR)

|                 |   |   |   |   |   |   |         |         |
|-----------------|---|---|---|---|---|---|---------|---------|
| Bit :           | 7 | 6 | 5 | 4 | 3 | 2 | 1       | 0       |
|                 | — | — | — | — | — | — | RTPEGR1 | RTPEGR0 |
| Initial value : | 1 | 1 | 1 | 1 | 1 | 1 | 0       | 0       |
| R/W :           | — | — | — | — | — | — | R/W     | R/W     |

The realtime output trigger edge select register (RTPEGR) specifies the edge sense of the external or internal trigger input for the realtime output.  
RTPEGR is an 8-bit read/write enable register. When reset, RTPEGR is initialized to H'FC.

**Bits 7 to 2—Reserved Bits:** Reserved bits. When the bits are read, 1 is always read. The write operation is invalid.

**Bits 1 and 0—Realtime Output Trigger Edge Select (RTPEGR1, RTPEGR0):** RTPEGR1 and RTPEGR0 select the edge sense of the external or internal trigger input for the realtime output.

| Bit 1   | Bit 0   | Description                                                   |
|---------|---------|---------------------------------------------------------------|
| RTPEGR1 | RTPEGR0 |                                                               |
| 0       | 0       | Inhibits a trigger input (Initial value)                      |
|         | 1       | Selects the rising edge of a trigger input                    |
| 1       | 0       | Selects the falling edge of a trigger input                   |
|         | 1       | Selects both the leading and falling edges of a trigger input |

### 10.7.3 Pin Functions

This section describes the port 6 pin functions and their selection methods.

**P67/RP7/TMBI:** P67/RP7/TMBI is switched as shown below according to the PMRA7 bit in PMRA, PMR67 bit in PMR6, and PCR67 bit in PCR6.

| PMRA7 | PMR67 | PCR67 | Pin Function   | Output Value          | Value When PDR6n Was Read |
|-------|-------|-------|----------------|-----------------------|---------------------------|
| 0     | 0     | 0     | P67 input pin  | —                     | P67 pin                   |
|       |       | 1     | P67 output pin | PDR67                 | PDR67                     |
|       | 1     | 0     | RP7 output pin | Hi-Z <sup>*1,*2</sup> | PDR67                     |
|       |       | 1     |                | PDRS67 <sup>*2</sup>  |                           |
| 1     | *     | 0     | TMBI input pin | —                     | P67 pin                   |
|       |       | 1     |                |                       | PDR67                     |

Notes: 1. Hi-Z: High impedance

2. When PMR67=1 (realtime output pin), indicates the state after the PCR67 setup value has been transferred to PCRS67 by a trigger input.

**P66/RP6/ $\overline{\text{ADTRG}}$ :** P66/RP6/ $\overline{\text{ADTRG}}$  is switched as shown below according to the PMR66 bit in PMR6 and PCR66 bit in PCR6. The  $\overline{\text{ADTRG}}$  pin function switching is controlled by the ADTSR. For details, refer to section 24, A/D converter.

| PMR66 | PCR66 | Pin Function   | Output Value          | Value When PDR66 Was Read |
|-------|-------|----------------|-----------------------|---------------------------|
| 0     | 0     | P66 input pin  | —                     | P67 pin                   |
|       | 1     | P66 output pin | PDR66                 | PDR66                     |
| 1     | 0     | RP6 output pin | Hi-Z <sup>*1,*2</sup> | PDR66                     |
|       | 1     |                | PDRS66 <sup>*2</sup>  |                           |

Notes: 1. Hi-Z: High impedance

2. When PMR66=1 (realtime output pin), indicates the state after the PCR66 setup value has been transferred to PCRS66 by a trigger input.



**P65/RP5 to P60/RPD:** P65/RP5 to P60/RPD are switched below according to the PMRAn bit in PMRA, PMR6n bit in PMR6, and PCR6n bit in PCR6.

| PMR6n | PCR6n | Pin Function   | Output Value          | Value When PDR6n Was Read |
|-------|-------|----------------|-----------------------|---------------------------|
| 0     | 0     | P6n input pin  | —                     | P6n pin                   |
|       | 1     | P6n output pin | PDR6n                 | PDR6n                     |
| 1     | 0     | RPn output pin | Hi-Z <sup>*1,*2</sup> | PDR6n                     |
|       | 1     | RPn output pin | PDRS6n <sup>*2</sup>  |                           |

(n = 5 to 0)

- Notes:
- 1. Hi-Z: High impedance
  - 2. When PMR6n=1 (realtime output pin), indicates the state after the PCR6n setup value has been transferred to PCRS6n by a trigger input.

## 10.7.4 Operation

Port 6 can be used as a realtime output port or general I/O output port by PMR6. Port 6 functions as a realtime output port when PMR6 = 1 and as a general I/O port when PMR6 = 0. The operation per port 6 function is shown below. (See figure 10.2.)

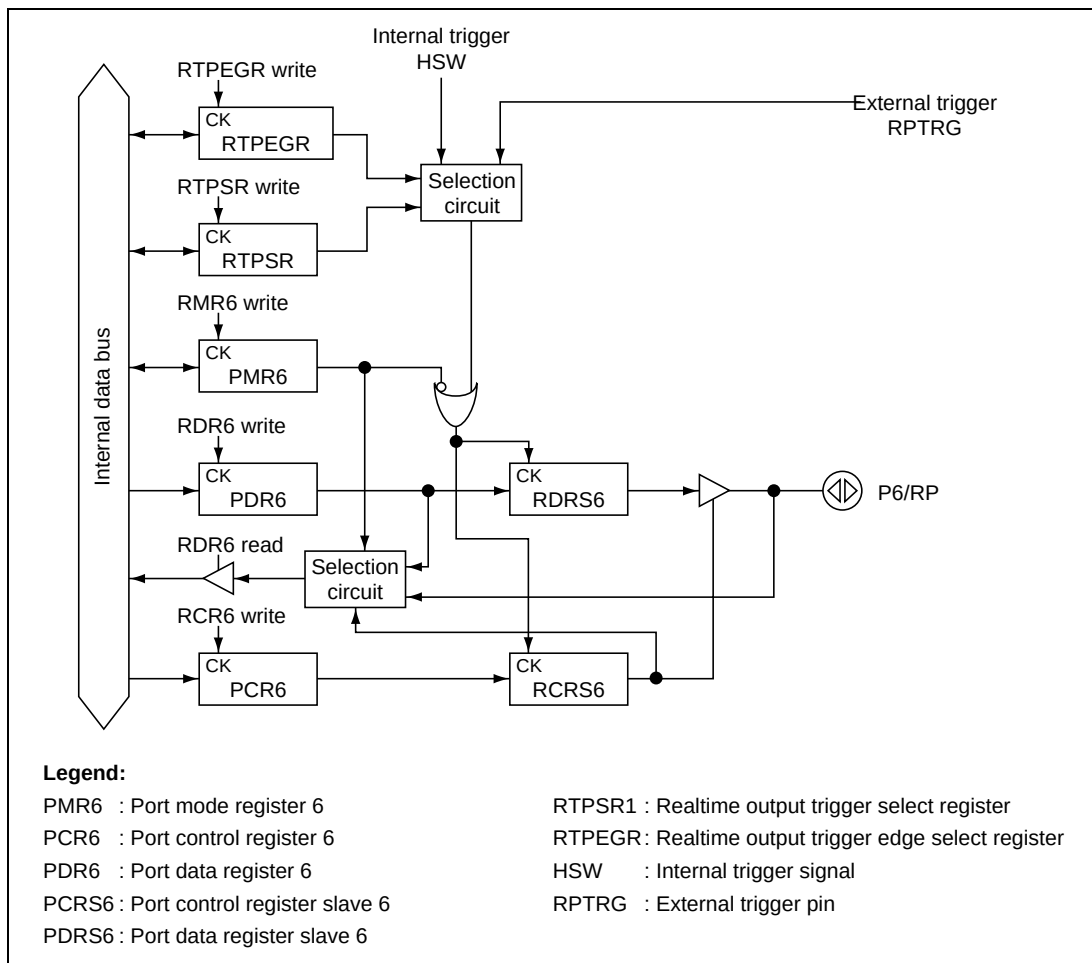


**Figure 10.2 Port 6 Function Block Diagram**

- Operation of the Realtime Output Port (PMR6 = 1)

When PMR6 is 1, it operates as a realtime output port. When a trigger is input, the PDR6 data is transferred to PDRS6 and the PCR6 is transferred data to PCRS6, respectively. In this case, when PCRS6 is 1, the PDR6 data of the corresponding bit is output to the RP pin. When PCRS6 is 0, the RP pin of the corresponding bit is output to the high-impedance state. In other words, the pin output state (high or low) or high-impedance state can instantaneously be switched by a trigger input.

Adversely, when PDR6 is read, the PDR6 values are read regardless of the PCR6 and PCRS6 values.

- Operation of the general I/O port (PMR6 = 0)

When PMR6 is 0, it operates as a general I/O port. When data is written to PDR6, the same data is also written to PDRS6. Accordingly, because both PDR6 and PDRS6 and both PCR6 and PCRS6 can be handled as one register, respectively, they can be used in the same way as a normal general I/O port. In other words, if PCR6 is 1, the PDR6 data of the corresponding bit is output to the P6 pin. If PCR6 is 0, the P6 pin of the corresponding bit becomes an input.

Adversely, assuming that PDR6 is read, the PDR6 values are read when PCR6 is 1 and the pin values are read when PCR6 is 0.

## 10.7.5 Pin States

Table 10.19 shows the port 6 pin states in each operation mode.

**Table 10.19 Port 6 Pin States**

| Pins                                                      | Reset              | Active    | Sleep   | Standby            | Watch              | Subactive | Subsleep |
|-----------------------------------------------------------|--------------------|-----------|---------|--------------------|--------------------|-----------|----------|
| P67/RP7/TMBI<br>P66/RP6/ADTRG<br>P65/RP5<br>to<br>P60/RP0 | High-<br>impedance | Operation | Holding | High-<br>impedance | High-<br>impedance | Operation | Holding  |

Note: If the TMBI and ADTRG input pins are set, the pin level must be set to the high or low level regardless of the active mode or low power consumption mode. Note that pin level must not reach an intermediate level.

# 10.8 Port 7

## 10.8.1 Overview

Port 7 is an 8-bit I/O port. Table 10.20 shows the port 7 configuration. Port 7 consists of pins that are used both as standard I/O ports (P77 to P70) and HSW timing generation circuit (programmable pattern generator: PPG) outputs (PPG7 to PPG0). It is switched by port mode register 7 (PMR7) and port control register 7 (PCR7). For the programmable generator (PPG), see section 26.4, HSW (Head-switch) Timing Generation Circuit.

Table 10.20 Port 7 Configuration

| Port   | Function                | Alternative Function       |
|--------|-------------------------|----------------------------|
| Port 7 | P77 (standard I/O port) | PPG7 (HSW timing output)   |
|        |                         | RPB (realtime output port) |
|        | P76 (standard I/O port) | PPG6 (HSW timing output)   |
|        |                         | RPA (realtime output port) |
|        | P75 (standard I/O port) | PPG5 (HSW timing output)   |
|        |                         | RP9 (realtime output port) |
|        | P74 (standard I/O port) | PPG4 (HSW timing output)   |
|        |                         | RP8 (realtime output port) |
|        | P73 (standard I/O port) | PPG3 (HSW timing output)   |
|        | P72 (standard I/O port) | PPG2 (HSW timing output)   |
|        | P71 (standard I/O port) | PPG1 (HSW timing output)   |
|        | P70 (standard I/O port) | PPG0 (HSW timing output)   |
|        |                         |                            |
|        |                         |                            |
|        |                         |                            |
|        |                         |                            |

## 10.8.2 Register Configuration

Table 10.21 shows the port 7 register configuration.

**Table 10.21 Port 7 Register Configuration**

| Name                                         | Abbrev. | R/W | Size | Initial Value | Address* |
|----------------------------------------------|---------|-----|------|---------------|----------|
| Port mode register 7                         | PMR7    | R/W | Byte | H'00          | H'FFDE   |
| Port mode register B                         | PMRB    | R/W | Byte | H'0F          | H'FFDA   |
| Port control register 7                      | PCR7    | W   | Byte | H'00          | H'FFD7   |
| Port data register 7                         | PDR7    | R/W | Byte | H'00          | H'FFC7   |
| Realtime output trigger select register 2    | RTPSR2  | R/W | Byte | H'0F          | H'FFE6   |
| Realtime output trigger edge select register | RTPEGR  | R/W | Byte | H'FC          | H'FFE4   |
| Port control register slave 7                | PCRS7   | —   | Byte | H'00          | —        |
| Port data register slave 7                   | PDRS7   | —   | Byte | H'00          | —        |

Note: \* Lower 16 bits of the address.

## Port Mode Register 7 (PMR7)

|                 |       |       |       |       |       |       |       |       |
|-----------------|-------|-------|-------|-------|-------|-------|-------|-------|
| Bit :           | 7     | 6     | 5     | 4     | 3     | 2     | 1     | 0     |
|                 | PMR77 | PMR76 | PMR75 | PMR74 | PMR73 | PMR72 | PMR71 | PMR70 |
| Initial value : | 0     | 0     | 0     | 0     | 0     | 0     | 0     | 0     |
| R/W :           | R/W   | R/W   | R/W   | R/W   | R/W   | R/W   | R/W   | R/W   |

Port mode register 7 (PMR7) controls switching of each pin function of port 7. The switching is specified in a unit of bit.

PMR7 is an 8-bit read/write enable register. When reset, PMR7 is initialized to H'00.

**Bits 7 to 0—P77/PPG7 to P70/PPG0 Pin Switching (PMR77 to PMR70):** PMR77 to PMR70 set whether the P7n/PPGn pin is used as a P7n I/O pin or a PPGn pin for the HSW timing generation circuit output.

### Bit n

| PMR7n | Description                                                 |
|-------|-------------------------------------------------------------|
| 0     | The P7n/PPGn pin functions as a P7n I/O pin (Initial value) |
| 1     | The P7n/PPGn pin functions as a PPGn output pin             |

(n = 7 to 0)

## Port Mode Register B (PMRB)

|                 |       |       |       |       |   |   |   |   |
|-----------------|-------|-------|-------|-------|---|---|---|---|
| Bit :           | 7     | 6     | 5     | 4     | 3 | 2 | 1 | 0 |
|                 | PMRB7 | PMRB6 | PMRB5 | PMRB4 | — | — | — | — |
| Initial value : | 0     | 0     | 0     | 0     | 1 | 1 | 1 | 1 |
| R/W :           | R/W   | R/W   | R/W   | R/W   | — | — | — | — |

Port mode register B (PMRB) controls switching of each pin function of port 7. The switching is specified in a unit of bit.

PMRB is an 8-bit read/write enable register. When reset, PMRB is initialized to H'0F.

**Bits 7 to 4—P77/RP7B to P74/RP8 Pin Switching (PMRB7 to PMRB4):** P77/RP7B to P74/RP8 set whether the P7n/RPm pin is used as a P7n I/O pin or a RPm pin for the realtime output port. (n= 7 to 4 and m= B, A, 9, or 8)

**Bit n**

| PMRBn | Description                                            |
|-------|--------------------------------------------------------|
| 0     | P7n/RPm pin functions as a P7n I/O pin (Initial value) |
| 1     | P7n/RPm pin functions as a RPm I/O pin                 |

(n = 7 to 4 and m = B, A, 9, and 8)

**Bits 3 to 0—Reserved Bits:** Reserved bits. When the bits are read, 1 is always read. The write operation is invalid.

**Port Control Register 7 (PCR7)**

|                 |       |       |       |       |       |       |       |       |
|-----------------|-------|-------|-------|-------|-------|-------|-------|-------|
| Bit :           | 7     | 6     | 5     | 4     | 3     | 2     | 1     | 0     |
|                 | PCR77 | PCR76 | PCR75 | PCR74 | PCR73 | PCR72 | PCR71 | PCR70 |
| Initial value : | 0     | 0     | 0     | 0     | 0     | 0     | 0     | 0     |
| R/W :           | W     | W     | W     | W     | W     | W     | W     | W     |

Port control register 7, together with PMRB, enable the general-purpose input/output of port 7 and controls realtime output in bit units.

For details, refer to section 10.8.4. Operation.

PCR7 is an 8-bit write-only register. When the PCR7 is read, 1 is always read. When reset, PCR7 is initialized to H'00.

**Bits 7 to 0—P77 to P70 Pin I/O Switching (PCR77 to PCR70)**

| PMRB  | PCR7  |                                                                  |
|-------|-------|------------------------------------------------------------------|
| Bitn  | Bitn  |                                                                  |
| PMRBn | PCR7n | Description                                                      |
| 0     | 0     | P7n/RPm pin functions as a P7n general input pin (Initial Value) |
|       | 1     | P7n/RPm pin functions as a P7n general output pin                |
| 1     | *     | P7n/RPm pin functions as a RPm realtime output pin               |

(n = 7 to 4 and m = B, A, 9, and 8)

Note: \* Don't care

## Port Data Register 7 (PDR7)

|                 |       |       |       |       |       |       |       |       |
|-----------------|-------|-------|-------|-------|-------|-------|-------|-------|
| Bit :           | 7     | 6     | 5     | 4     | 3     | 2     | 1     | 0     |
|                 | PDR77 | PDR76 | PDR75 | PDR74 | PDR73 | PDR72 | PDR71 | PDR70 |
| Initial value : | 0     | 0     | 0     | 0     | 0     | 0     | 0     | 0     |
| R/W :           | R/W   | R/W   | R/W   | R/W   | R/W   | R/W   | R/W   | R/W   |

Port data register 7 (PDR7) stores the data for the pins P77 to P70 of port 7.

If PCR7 is 1 (output) when PMRB=0, the PDR7 values are directly read when port 7 is read.

Accordingly, the pin states are not affected. When PCR7 is 0 (input), the pin states are read if port 7 is read. When PMRB=1, port 7 pin functions as a realtime output pin. For details, refer to section 10.8.4, Operation.

PDR7 is an 8-bit read/write enable register. When reset, PDR7 is initialized to H'00.

## Realtime Output Trigger Select Register 2 (RTPSR2)

|                 |         |         |         |         |   |   |   |   |
|-----------------|---------|---------|---------|---------|---|---|---|---|
| Bit :           | 7       | 6       | 5       | 4       | 3 | 2 | 1 | 0 |
|                 | RTPSR27 | RTPSR26 | RTPSR25 | RTPSR24 | — | — | — | — |
| Initial value : | 0       | 0       | 0       | 0       | 1 | 1 | 1 | 1 |
| R/W :           | R/W     | R/W     | R/W     | R/W     | — | — | — | — |

Realtime output trigger select register (RTPSR2) selects whether to use an external trigger (RPTRG pin input) or internal trigger (HSW) for the realtime output trigger input by specifying a unit of bit. For details on internal trigger HSW, refer to section 26.4, HSW (Head-switch) Timing Generator.

RTPSR2 is an 8-bit read/write enable register.

When reset, RTPSR2 is initialized to H'0F.



Bits 7 to 4—RPB to RP8 Pin Trigger Switching (RTPSR27 to RTPSR24)

Bit7

| RTPSR2n | Description                                                                  |
|---------|------------------------------------------------------------------------------|
| 0       | Selects external trigger (RPTRG pin input) for trigger input (Initial value) |
| 1       | Selects internal trigger (HSW) for trigger input                             |

(n = 7 to 4)

Realtime Output Trigger Edge Selection Register (RTPEGR)

|                 |   |   |   |   |   |   |         |         |
|-----------------|---|---|---|---|---|---|---------|---------|
| Bit :           | 7 | 6 | 5 | 4 | 3 | 2 | 1       | 0       |
|                 | — | — | — | — | — | — | RTPEGR1 | RTPEGR0 |
| Initial value : | 1 | 1 | 1 | 1 | 1 | 1 | 0       | 0       |
| R/W :           | — | — | — | — | — | — | R/W     | R/W     |

The realtime output trigger edge selection register (RTPEGR) specifies the sensed edge(s) of external or internal trigger input for realtime output.

RTPEGR is an 8-bit readable/writable register. In a reset, RTPEGR is initialized to H'FC.

**Bits 7 to 2—Reserved:** These bits are always read as 1 and cannot be modified.

**Bits 1 and 0—Realtime Output Trigger Edge Select (RTPEGR1, RTPEGR0):** These bits select the sensed edge(s) of external or internal trigger input for realtime output.

| Bit 1   | Bit 0   | Description                                    |
|---------|---------|------------------------------------------------|
| RTPEGR1 | RTPEGR0 |                                                |
| 0       | 0       | Disables trigger input (Initial value)         |
|         | 1       | Selects trigger input rising edge              |
| 1       | 0       | Selects trigger input falling edge             |
|         | 1       | Selects trigger input rising and falling edges |

### 10.8.3 Pin Functions

This section describes the port 7 pin functions and their selection methods.

**P77/PPG7/RPB to P74/PPG4/RP8:** P77/PPG7/RPB to P74/PPG4/RP8 are switched as shown below according to the PMRBn bit in PMRB and the PCR7n bit in PCR7.

| PMRBn | PMR7n | PCR7n | Pin Function    | Output Value         | Value Returned when PDR7n is Read |
|-------|-------|-------|-----------------|----------------------|-----------------------------------|
| 0     | 0     | 0     | P7n input pin   | —                    | P7n pin                           |
|       |       | 1     | P7n output pin  | PDR7n                | PDR7n                             |
| 0     | 1     | 0     | PPGn output pin | PPGn                 | P7n pin                           |
|       |       | 1     |                 |                      | PDR7n                             |
| 1     | *     | 0     | RPm output pin  | Hi-Z* <sup>1</sup>   | PDR7n                             |
|       |       | 1     |                 | PDRS7n* <sup>1</sup> |                                   |

(n = 7 to 4, m = B, A, 9, 8)

Notes: Hi-Z: High impedance

\* Don't care

1. When PMRBn = 1 (realtime output pin), the state indicated is that after the PCR7n set value has been transferred to PCRS7n by trigger input.

**P73/PPG to P70/PPG0:** P73/PPG to P70/PPG0 are switched as shown below according to the PMR7n bit in PMR7 and the PCR7n bit in PCR7.

| PMR7n | PCR7n | Pin Function    | Output Value | Value Returned when PDR7n is Read |
|-------|-------|-----------------|--------------|-----------------------------------|
| 0     | 0     | P7n input pin   | —            | P7n pin                           |
|       | 1     | P7n output pin  | PDR7n        | PDR7n                             |
| 1     | 0     | PPGn output pin | PPGn         | P7n pin                           |
|       | 1     |                 |              | PDR7n                             |

(n = 3 to 0)

## 10.8.4 Operation

Port 7 can be used by the PMRB as a realtime output port or an I/O port.

Port 7 functions as a realtime output port when PMRB=1 and functions as an I/O port when PMRB=0. Figure 10.3 show the block diagram of port 7.

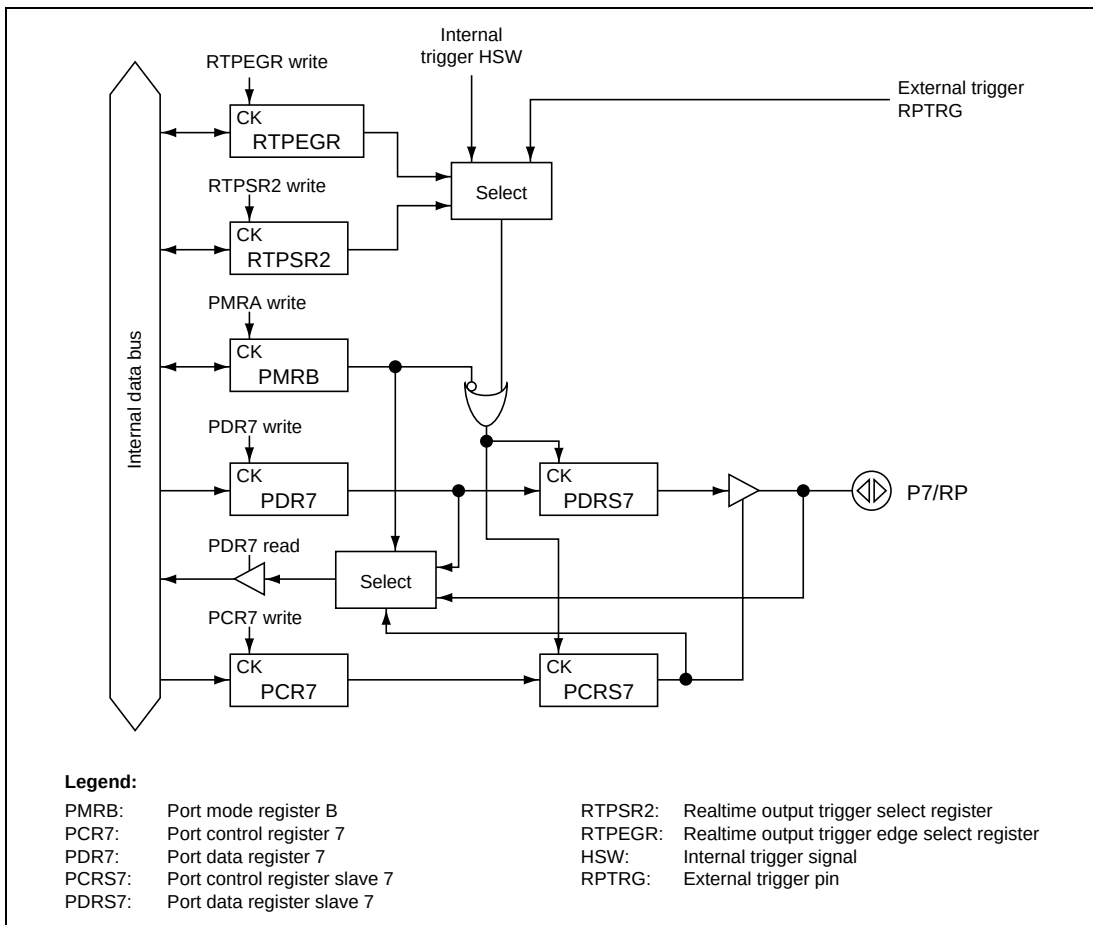


**Figure 10.3 Block Diagram of Port 7**

Port 7 functions as follows:

1. Realtime output port function (PMRB=1)

Port function as a realtime output port when PMRB is 1. After a trigger input, the PDR7 data is transferred to PDRS7 and PCR7 data is transferred to PCRS7. In this case, when PCRS7 is 1, the PDRS7 data of the corresponding bit is output from the RP pin. When PCRS7 is 0, the RP pin of the corresponding bit enters high-impedance state. In other words, the realtime output port function can instantaneously switch the pin output state (High or Low) or high-impedance by a trigger input.

2. I/O port function (PMRB=0)

Port 7 functions as an I/O port when PMRB is 0. After data is written to PDR7, the same data is written to PDRS7. After data is written to PCR7, the same data is written to PCRS7. Since PDR and PDRS7, and PCR7 and PCRS7 can be used as one register, the registers can be used as the I/O ports. In other words, if PCR7 is 1, the PDR7 data of the corresponding bit is output from the P7 pin. If PCR is 0, the P7 pin of the corresponding bit is an input pin. If PD7 is read, the PDR7 value is read when PCR7 is 1 and the pin value is read when PCR7 is 0.

10.8.5 Pin States

Table 10.22 shows the port 7 pin states in each operation mode.

Table 10.22 Port 6 Pin States

| Pins                                                             | Reset          | Active    | Sleep   | Standby        | Watch          | Subactive | Subsleep |
|------------------------------------------------------------------|----------------|-----------|---------|----------------|----------------|-----------|----------|
| P77/PPG7/RPB<br>to<br>P74/PPG4/RP8<br>P73/PPG3<br>to<br>P70/PPG0 | High-impedance | Operation | Holding | High-impedance | High-impedance | Operation | Holding  |

## 10.9 Port 8

### 10.9.1 Overview

Port 8 is an 8-bit I/O port. Table 10.23 shows the port 8 configuration.

Port 8 consists of pins that are used both as standard-current I/O ports (P87 to P80) and an external CTL signal input (EXCTL), a pre-amplifier output result signal input (COMP), color signal outputs (R, G, and B), a pre-amplifier output selection signal output (H.Amp SW), a control signal output for processing color signal (C.Rotary), a DPG signal input (DPG), a capstan external sync signal input (EXCAP), an OSD character display position output (YB0), an OSD character data output (YC0), and an external reference signal input (EXTTRG). It is switched by port mode register 8 (PMR8), port mode register C (PMRC), and port control register 8 (PCR8).

**Table 10.23 Port 8 Configuration**

| Port   | Function                | Alternative Function                              |
|--------|-------------------------|---------------------------------------------------|
| Port 8 | P87 (standard I/O port) | DPG signal input                                  |
|        | P86 (standard I/O port) | External reference signal input                   |
|        | P85 (standard I/O port) | Pre-amplifier output result signal input          |
|        |                         | Color signal output                               |
|        | P84 (standard I/O port) | Pre-amplifier output selection signal output      |
|        |                         | Color signal output                               |
|        | P83 (standard I/O port) | Control signal output for processing color signal |
|        |                         | Color signal output                               |
|        | P82 (standard I/O port) | External CTL signal input                         |
|        | P81 (standard I/O port) | Capstan external sync signal input                |
|        |                         | OSD character display position output             |
|        | P80 (standard I/O port) | OSD character data output                         |

## 10.9.2 Register Configuration

Table 10.24 shows the port 8 register configuration.

**Table 10.24 Port 8 Register Configuration**

| Name                    | Abbrev. | R/W | Size | Initial Value | Address* |
|-------------------------|---------|-----|------|---------------|----------|
| Port mode register 8    | PMR8    | R/W | Byte | H'00          | H'FFDF   |
| Port mode register C    | PMRC    | R/W | Byte | H'C5          | H'FFE0   |
| Port control register 8 | PCR8    | W   | Byte | H'00          | H'FFD8   |
| Port data register 8    | PDR8    | R/W | Byte | H'00          | H'FFC8   |

Note: \* Lower 16 bits of the address.

## Port Mode Register 8 (PMR8)

|                 |       |       |       |       |       |       |       |       |
|-----------------|-------|-------|-------|-------|-------|-------|-------|-------|
| Bit :           | 7     | 6     | 5     | 4     | 3     | 2     | 1     | 0     |
|                 | PMR87 | PMR86 | PMR85 | PMR84 | PMR83 | PMR82 | PMR81 | PMR80 |
| Initial value : | 0     | 0     | 0     | 0     | 0     | 0     | 0     | 0     |
| R/W :           | R/W   | R/W   | R/W   | R/W   | R/W   | R/W   | R/W   | R/W   |

Port mode register 8 (PMR8) controls switching of each pin function of port 8. The switching is specified in a unit of bit.

PMR8 is an 8-bit read/write enable register. When reset, PMR8 is initialized to H'F0.

If the EXCTL, COMP, DPG and EXTTRG input pins are set, the pin level need always be set to the high or low level regardless of the active mode and low power consumption mode. Note that the pin level must not reach an intermediate level.

**Bit 7—P87/DPG Pin Switching (PMR87):** PMR87 sets whether the P87/DPG pin is used as a P87 I/O pin or a DPG signal input pin.

### Bit 7

| PMR87 | Description                                                                                                        |
|-------|--------------------------------------------------------------------------------------------------------------------|
| 0     | P87/DPG pin functions as a P87 I/O pin<br>(Drum control signals are input as an overlapped signal) (Initial value) |
| 1     | P87/DPG pin functions as a DPG input pin<br>(Drum control signals are input as separate signals)                   |

**Bit 6—P86/EXTTRG Pin Switching (PMR86):** PMR86 sets whether the P86/EXTTRG pin is used as a P86 I/O pin or an external trigger signal input pin.

### Bit 6

| PMR86 | Description                                               |
|-------|-----------------------------------------------------------|
| 0     | P86/EXTTRG pin functions as a P86 I/O pin (Initial value) |
| 1     | P86/EXTTRG pin functions as a EXTTRG input pin            |

**Bit 5—P85/COMP Pin Switching (PMR85):** PMR85 sets whether the P85/COMP pin is used as a P85 I/O pin or a COMP input pin of the preamplifier output result signal.

### Bit 5

| PMR85 | Description                                             |
|-------|---------------------------------------------------------|
| 0     | P85/COMP pin functions as a P85 I/O pin (Initial value) |
| 1     | P85/COMP pin functions as a COMP input pin              |

**Bit 4—P84/H.Amp SW Pin Switching (PMR84):** PMR84 sets whether the P84/H.Amp SW pin is used as a P84 I/O pin or H.Amp SW pin of the preamplifier output select signal output.

#### Bit 4

| PMR84 | Description                                                 |
|-------|-------------------------------------------------------------|
| 0     | P84/H.Amp SW pin functions as a P84 I/O pin (Initial value) |
| 1     | P84/H.Amp SW pin functions as a H.Amp SW output pin         |

**Bit 3—P83/C. Rotary Pin Switching (PMR83):** PMR83 sets whether the P83/C. Rotary pin is used as a P83 I/O pin or a C.Rotary pin of a control signal output for processing color signal.

#### Bit 3

| PMR83 | Description                                                 |
|-------|-------------------------------------------------------------|
| 0     | P83/C.Rotary pin functions as a P83 I/O pin (Initial value) |
| 1     | P83/C.Rotary pin functions as a C.Rotary output pin         |

**Bit 2—P82/EXCTL Pin Switching (PMR82):** PMR82 sets whether the P82/EXCTL pin functions as a P82 I/O pin or a EXCTL input pin of external CTL signal input.

#### Bit 2

| PMR82 | Description                                              |
|-------|----------------------------------------------------------|
| 0     | P82/EXCTL pin functions as a P82 I/O pin (Initial value) |
| 1     | P82/EXCTL pin functions as a EXCTL input pin             |

**Bit 1—P81/EXCAP Pin Switching (PMR81):** PMR81 sets whether the P81/EXCAP pin functions as a P81 I/O pin or a EXCAP pin of capstan external synchronous signal input.

#### Bit 1

| PMR81 | Description                                              |
|-------|----------------------------------------------------------|
| 0     | P81/EXCAP pin functions as a P81 I/O pin (Initial value) |
| 1     | P81/EXCAP pin functions as a EXCAP input pin             |

**Bit 0—P80/YCO Pin Switching (PMR80):** PMR80 sets whether the P80/YCO pin functions as a P80 I/O pin or a YCO pin of OSD character data output.

#### Bit 0

| PMR80 | Description                                            |
|-------|--------------------------------------------------------|
| 0     | P80/YCO pin functions as a P80 I/O pin (Initial value) |
| 1     | P80/YCO pin functions as a YCO output pin              |



Port Mode Register C (PMRC)

|                 |   |   |       |       |       |   |       |   |
|-----------------|---|---|-------|-------|-------|---|-------|---|
| Bit :           | 7 | 6 | 5     | 4     | 3     | 2 | 1     | 0 |
|                 | — | — | PMRC5 | PMRC4 | PMRC3 | — | PMRC1 | — |
| Initial value : | 1 | 1 | 0     | 0     | 0     | 1 | 0     | 1 |
| R/W :           | — | — | R/W   | R/W   | R/W   | — | R/W   | — |

Port mode register C (PMRC) controls switching of each pin function of port 8. The switching is specified in a unit of a bit.

PMRC is an 8-bit read/write enable register. When reset, PMRC is initialized to H'C5.

**Bits 7, 6, 2, and 0—Reserved Bits:** Reserved bits. When the bits are read, 1 is always read. The write operation is invalid.

**Bit 5—P85/B Pin Switching (PMRC5):** PMRC5 sets whether to use the P85/B pin as a P85 I/O pin or a B pin of the OSD color signal output.

Bit 5

| PMRC5 | Description                                      |
|-------|--------------------------------------------------|
| 0     | P85/B pin functions as a P85 pin (Initial value) |
| 1     | P85/B pin functions as a B output pin            |

**Bit 4—P84/G Pin Switching (PMRC4):** PMRC4 sets whether to use the P84/G pin as a P84 I/O pin or a G pin of the OSD color signal output.

Bit 4

| PMRC4 | Description                                          |
|-------|------------------------------------------------------|
| 0     | P84/G pin functions as a P84 I/O pin (Initial value) |
| 1     | P84/G pin functions as a G output pin                |

**Bit 3—P83/R Pin Switching (PMRC3):** PMRC3 sets whether to use the P83/R pin as a P83 I/O pin or a R pin of the OSD color signal output.

Bit 3

| PMRC3 | Description                                          |
|-------|------------------------------------------------------|
| 0     | P83/R pin functions as a P83 I/O pin (Initial value) |
| 1     | P83/R pin functions as a R output pin                |

**Bit 1—P81/YBO Pin Switching (PMRC1):** PMRC1 sets whether to use the P81/YBO pin as a P81 I/O pin or a YBO pin of the OSD character display position output.

#### Bit7

| PMR1 | Description                                            |
|------|--------------------------------------------------------|
| 0    | P81/YBO pin functions as a P81 I/O pin (Initial value) |
| 1    | P81/YBO pin functions as a YBO output pin              |

### Port Control Register 8 (PCR8)

|                 |       |       |       |       |       |       |       |       |
|-----------------|-------|-------|-------|-------|-------|-------|-------|-------|
| Bit :           | 7     | 6     | 5     | 4     | 3     | 2     | 1     | 0     |
|                 | PCR87 | PCR86 | PCR85 | PCR84 | PCR83 | PCR82 | PCR81 | PCR80 |
| Initial value : | 0     | 0     | 0     | 0     | 0     | 0     | 0     | 0     |
| R/W :           | W     | W     | W     | W     | W     | W     | W     | W     |

Port control register 8 (PCR8) controls I/O of pins P87 to P80 of port 8. The I/O is specified in a unit of bit.

When PCR8 is set to 1, the corresponding P87 to P80 pins become output pins, and when it is set to 0, they become input pins.

When the pins are set as general I/O pins, the settings of PCR8 and PDR8 become valid.

PCR8 is an 8-bit write-only register. When PCR8 is read, 1 is read. When reset PCR8 is initialized to H'00.

### Bits 7 to 0—P87 to P80 Pin I/O Switching

#### Bit n

| PCR8n | Description                                       |
|-------|---------------------------------------------------|
| 0     | P8n pin functions as an input pin (Initial value) |
| 1     | P8n pin functions as an output pin                |

(n = 7 to 0)

Port Data Register 8 (PDR8)

|                 |       |       |       |       |       |       |       |       |
|-----------------|-------|-------|-------|-------|-------|-------|-------|-------|
| Bit :           | 7     | 6     | 5     | 4     | 3     | 2     | 1     | 0     |
|                 | PDR87 | PDR86 | PDR85 | PDR84 | PDR83 | PDR82 | PDR81 | PDR80 |
| Initial value : | 0     | 0     | 0     | 0     | 0     | 0     | 0     | 0     |
| R/W :           | R/W   | R/W   | R/W   | R/W   | R/W   | R/W   | R/W   | R/W   |

Port data register 8 (PDR8) stores the data of pins P87 to P80 port 8. When PCR is 1 (output), the pin states are read is port 8 is read. Accordingly, the pin states are not affected. When PCR8 is 0 (input), the pin states are read it port 8 is read.

PDR8 is an 8-bit read/write enable register. When reset, PDR8 is initialized to H'00.

### 10.9.3 Pin Functions

This section describes the port 8 pin functions and their selection methods.

**P87/DPG:** P87/DPG is switched as shown below according to the PMR87 bit in PMR8 and PCR87 bit in PCR8.

| PMR87 | PCR87 | Pin Function   |
|-------|-------|----------------|
| 0     | 0     | P87 input pin  |
|       | 1     | P87 output pin |
| 1     | *     | DPG input pin  |

Note: \* Don't care

**P86/EXTTRG:** P86/EXTTRG is switched as shown below according to the PMR86 bit in PMR8 and PCR86 bit in PCR8.

| PMR86 | PCR86 | Pin Function     |
|-------|-------|------------------|
| 0     | 0     | P86 input pin    |
|       | 1     | P86 output pin   |
| 1     | *     | EXTTRG input pin |

Note: \* Don't care

**P85/COMP/B:** P85/COMP/B is switched as shown below according to the PMR85 bit in PMR8, PMRC5 bit in PMRC, and PCR85 bit in PCR8.

| PMRC5 | PMR85 | PCR85 | Pin Function   |
|-------|-------|-------|----------------|
| 0     | 0     | 0     | P85 input pin  |
|       |       | 1     | P85 output pin |
| *     | 1     | *     | COMP input pin |
| 1     | 0     | *     | B output pin   |

Note: \* Don't care

**P84/H.Amp SW/G:** P84/H.Amp SW/G is switched as shown below according to the PMR84 bit in PMR, PMRC4 bit in PMRC, and PCR84 bit in PCR8.

| PMRC4 | PMR84 | PCR84 | Pin Function        |
|-------|-------|-------|---------------------|
| 0     | 0     | 0     | P84 input pin       |
|       |       | 1     | P84 output pin      |
| *     | 1     | *     | H.Amp SW output pin |
| 1     | 0     | *     | G output pin        |

Note: \* Don't care

**P83/C.Rotary/R:** P83/C.Rotary/R is switched as shown below according to the PMR83bit in PMR8, PMRC3 bit in PMRC, and PCR83 bit in PCR8.

| PMRC3 | PMR83 | PCR83 | Pin Function        |
|-------|-------|-------|---------------------|
| 0     | 0     | 0     | P83 input pin       |
|       |       | 1     | P83 output pin      |
| *     | 1     | *     | C.Rotary output pin |
| 1     | 0     | *     | R output pin        |

Note: \* Don't care

**P82/EXCTL:** P82/EXCTL is switched as shown below according to the PMR82 bit in PMR8 and PCR82 bit in PCR8.

| PMR82 | PCR82 | Pin Function    |
|-------|-------|-----------------|
| 0     | 0     | P82 input pin   |
|       | 1     | P82 output pin  |
| 1     | *     | EXCTL input pin |

Note: \* Don't care

**P81/EXCAP/YBO:** P81/EXCAP/YBO is switched as shown below according to the PMR81 bit in PMR8, PMRC1 bit in PMRC, and PCR81 bit in PCR8.

| PMRC1 | PMR81 | PCR81 | Pin Function     |
|-------|-------|-------|------------------|
| 0     | 0     | 0     | P81 input pin    |
|       |       | 1     | P81 output pin   |
| *     | 1     | *     | EXCAP output pin |
| 1     | 0     | *     | YBO output pin   |

Note: \* Don't care

**P80/YCO:** P80/YCO is switched as shown below according to the PMR80 bit in PMR8 and PCR80 bit in PCR

| PMR80 | PCR80 | Pin Function   |
|-------|-------|----------------|
| 0     | 0     | P80 input pin  |
|       | 1     | P80 output pin |
| 1     | *     | YCO output pin |

Note: \* Don't care

#### 10.9.4 Pin States

Table 10.25 shows the port 8 pin states in each operation mode.

**Table 10.25 Port 8 Pin States**

| Pins           | Reset          | Active    | Sleep   | Standby        | Watch          | Subactive | Subsleep |
|----------------|----------------|-----------|---------|----------------|----------------|-----------|----------|
| P87/DPG        | High-impedance | Operation | Holding | High-impedance | High-impedance | Operation | Holding  |
| P86/EXTTRG     |                |           |         |                |                |           |          |
| P85/COMP/B     |                |           |         |                |                |           |          |
| P84/H.Amp SW/G |                |           |         |                |                |           |          |
| P83/C.Rotary/R |                |           |         |                |                |           |          |
| P82/EXCTL      |                |           |         |                |                |           |          |
| P81/EXCAP/YB0  |                |           |         |                |                |           |          |
| P80/YCO        |                |           |         |                |                |           |          |

Notes: 1. If the EXCTL, COMP, DPG, and EXTTRG input pins are set, the pin level need always be set to the high or low level regardless of the active mode and low power consumption mode. Note that the pin level must not reach an intermediate level.

2. As the DPG always functions, a high or low pin level must be input to the multiplexed pins regardless of whether active mode or power-down mode is in effect.

# Section 11 Timer A

## 11.1 Overview

Timer A is an 8-bit interval timer. It can be used as a clock timer when connected to a 32.768 kHz crystal oscillator.

### 11.1.1 Features

Features of timer A are as follows:

- Choices of eight different types of internal clocks ( $\phi/16384$ ,  $\phi/8192$ ,  $\phi/4096$ ,  $\phi/1024$ ,  $\phi/512$ ,  $\phi/256$ ,  $\phi/64$  and  $\phi/16$ ) are available for your selection.
- Four different overflowing cycles (1s, 0.5s, 0.25s and 0.03125s) are selectable as a clock timer. (When using a 32.768 kHz crystal oscillator.)
- Requests for interrupt will be output when the counter overflows.

### 11.1.2 Block Diagram

Figure 11.1 shows a block diagram of timer A.

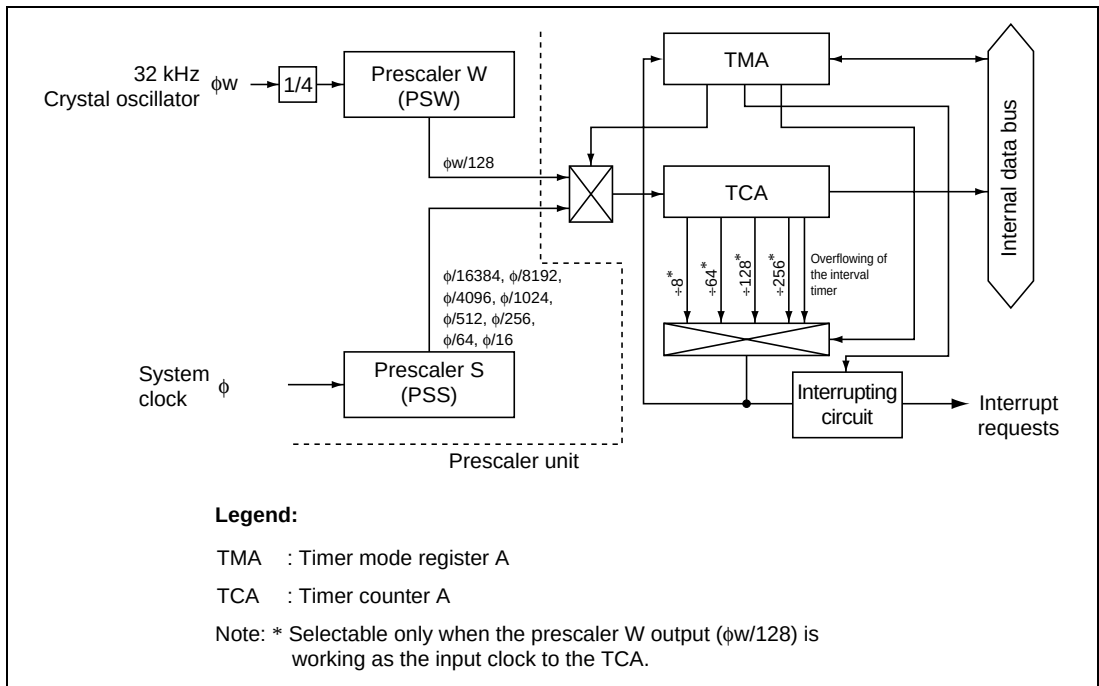


**Figure 11.1 Block Diagram of Timer A**

### 11.1.3 Register Configuration

Table 11.1 shows the register configuration of timer A.

**Table 11.1 Register Configuration**

| Name                  | Abbrev. | R/W | Size | Initial Value | Address* |
|-----------------------|---------|-----|------|---------------|----------|
| Timer mode register A | TMA     | R/W | Byte | H'30          | H'FFBA   |
| Timer counter A       | TCA     | R   | Byte | H'00          | H'FFBB   |

Note: \* Lower 16 bits of the address.



## 11.2 Register Descriptions

### 11.2.1 Timer Mode Register A (TMA)

|                 |        |       |   |   |      |      |      |      |
|-----------------|--------|-------|---|---|------|------|------|------|
| Bit :           | 7      | 6     | 5 | 4 | 3    | 2    | 1    | 0    |
|                 | TMAOV  | TMAIE | — | — | TMA3 | TMA2 | TMA1 | TMA0 |
| Initial value : | 0      | 0     | 1 | 1 | 0    | 0    | 0    | 0    |
| R/W :           | R/(W)* | R/W   | — | — | R/W  | R/W  | R/W  | R/W  |

Note: \* Only 0 can be written to clear the flag.

The timer mode register A (TMA) works to control the interrupts of timer A and to select the input clock.

TMA is an 8-bit read/write register. When reset, the TMA will be initialized to H'30.

**Bit 7—Timer A Overflow Flag (TMAOV):** This is a status flag indicating the fact that the TCA is overflowing (H'FF → H'00).

#### Bit 7

| TMAOV | Description                                                                                                                                |
|-------|--------------------------------------------------------------------------------------------------------------------------------------------|
| 0     | [Clearing conditions] (Initial value)<br>When 0 is written to the TMAOV flag after reading the TMAOV flag under the status where TMAOV = 1 |
| 1     | [Setting conditions]<br>When the TCA overflows                                                                                             |

**Bit 6—Enabling Interrupt of the Timer A (TMAIE):** This bit works to permit/prohibit occurrence of interrupt of the Timer A (TMAI) when the TCA overflows and when the TMAOV of the TMA is set to 1.

#### Bit 6

| TMAIE | Description                                                             |
|-------|-------------------------------------------------------------------------|
| 0     | Prohibits occurrence of interrupt of the Timer A (TMAI) (Initial value) |
| 1     | Permits occurrence of interrupt of the Timer A (TMAI)                   |

**Bits 5 and 4—Reserved:** These bits cannot be modified and are always read as 1.

**Bit 3—Selection of the Clock Source and Prescaler (TMA3):** This bit works to select the PSS or PSW as the clock source for the Timer A.

### Bit 3

| TMA3 | Description                                                         |
|------|---------------------------------------------------------------------|
| 0    | Selects the PSS as the clock source for the Timer A (Initial value) |
| 1    | Selects the PSW as the clock source for the Timer A                 |

**Bits 2 to 0—Clock Selection (TMA2 to TMA0):** These bits work to select the clock to input to the TCA. In combination with the TMA3 bit, the choices are as follows:

| Bit 3 | Bit 2 | Bit 1 | Bit 0 | Prescaler Division Ratio (Interval Timer)<br>or Overflow Cycle (Time Base) | Operation<br>Mode       |
|-------|-------|-------|-------|----------------------------------------------------------------------------|-------------------------|
| TMA3  | TMA2  | TMA1  | TMA0  |                                                                            |                         |
| 0     | 0     | 0     | 0     | PSS, $\phi/16384$ (Initial value)                                          | Interval<br>timer mode  |
|       |       |       | 1     | PSS, $\phi/8192$                                                           |                         |
|       |       | 1     | 0     | PSS, $\phi/4096$                                                           |                         |
|       |       |       | 1     | PSS, $\phi/1024$                                                           |                         |
|       | 1     | 0     | 0     | PSS, $\phi/512$                                                            |                         |
|       |       |       | 1     | PSS, $\phi/256$                                                            |                         |
|       |       | 1     | 0     | PSS, $\phi/64$                                                             |                         |
|       |       |       | 1     | PSS, $\phi/16$                                                             |                         |
| 1     | 0     | 0     | 0     | 1s                                                                         | Clock time<br>base mode |
|       |       |       | 1     | 0.5s                                                                       |                         |
|       |       | 1     | 0     | 0.25s                                                                      |                         |
|       |       |       | 1     | 0.03125s                                                                   |                         |
|       | 1     | 0     | 0     | Works to clear the PSW and TCA to H'00                                     |                         |
|       |       |       | 1     |                                                                            |                         |
|       |       | 1     | 0     |                                                                            |                         |
|       |       |       | 1     |                                                                            |                         |

Note:  $\phi = f_{osc}$

11.2.2 Timer Counter A (TCA)

|                 |      |      |      |      |      |      |      |      |
|-----------------|------|------|------|------|------|------|------|------|
| Bit :           | 7    | 6    | 5    | 4    | 3    | 2    | 1    | 0    |
|                 | TCA7 | TCA6 | TCA5 | TCA4 | TCA3 | TCA2 | TCA1 | TCA0 |
| Initial value : | 0    | 0    | 0    | 0    | 0    | 0    | 0    | 0    |
| R/W :           | R    | R    | R    | R    | R    | R    | R    | R    |

The timer counter A (TCA) is an 8-bit up-counter that counts up on inputs from the internal clock. The inputting clock can be selected by TMA3 to TMA0 bits of the TMA. When the TCA overflows, the TMAOV bit of the TMA is set to 1. The TCA can be cleared by setting the TMA3 and TMA2 bits of the TMA to 1. The TCA is always readable. When reset, the TCA will be initialized into H'00.

11.2.3 Module Stop Control Register (MSTPCR)

|                 |                     |        |        |        |        |        |       |       |                     |       |       |       |       |       |       |       |
|-----------------|---------------------|--------|--------|--------|--------|--------|-------|-------|---------------------|-------|-------|-------|-------|-------|-------|-------|
|                 | MSTPCR <sub>H</sub> |        |        |        |        |        |       |       | MSTPCR <sub>L</sub> |       |       |       |       |       |       |       |
| Bit :           | 7                   | 6      | 5      | 4      | 3      | 2      | 1     | 0     | 7                   | 6     | 5     | 4     | 3     | 2     | 1     | 0     |
|                 | MSTP15              | MSTP14 | MSTP13 | MSTP12 | MSTP11 | MSTP10 | MSTP9 | MSTP8 | MSTP7               | MSTP6 | MSTP5 | MSTP4 | MSTP3 | MSTP2 | MSTP1 | MSTP0 |
| Initial value : | 1                   | 1      | 1      | 1      | 1      | 1      | 1     | 1     | 1                   | 1     | 1     | 1     | 1     | 1     | 1     | 1     |
| R/W :           | R/W                 | R/W    | R/W    | R/W    | R/W    | R/W    | R/W   | R/W   | R/W                 | R/W   | R/W   | R/W   | R/W   | R/W   | R/W   | R/W   |

The MSTPCR are 8-bit read/write twin registers which work to control the module stop mode. When the MSTP15 bit is set to 1, the Timer A stops its operation at the ending point of the bus cycle to shift to the module stop mode. For more information, see section 4.5, Module Stop Mode. When reset, the MSTPCR will be initialized into H'FFFF.

**Bit 7—Module Stop (MSTP15):** This bit works to designate the module stop mode for the Timer A.

MSTPCRH

Bit 7

| MSTP15 | Description                                              |
|--------|----------------------------------------------------------|
| 0      | Cancels the module stop mode of the Timer A              |
| 1      | Sets the module stop mode of the Timer A (Initial value) |

## 11.3 Operation

Timer A is an 8-bit interval timer. It can be used as a clock timer when connected to a 32.768 kHz crystal oscillator.

### 11.3.1 Operation as the Interval Timer

When the TMA3 bit of the TMA is cleared to 0, timer A works as an 8-bit interval timer.

After reset, the TCA is cleared to H'00 and as the TMA3 bit is cleared to 0, the Timer A continues counting up as the interval counter without interrupts right after resetting.

As the operation clock for timer A, selection can be made from eight different types of internal clocks being output from the PSS by the TMA2 to TMA0 bits of the TMA.

When the clock signal is input after the reading of the TCA reaches H'FF, timer A overflows and the TMAOV bit of the TMA will be set to 1. An interrupt occurs when the TMAIE bit of the TMA is 1.

When overflowing occurs, the reading of the TCA returns to H'00 before resuming counting up. Consequently, it works as the interval timer to produce overflow outputs periodically at every 256 input clocks.

### 11.3.2 Operation as Clock Timer

When the TMA3 bit of the TMA is set to 1, timer A works as a time base for the clock.

As the overflow cycles for timer A, selection can be made from four different types by counting the clock being output from the PSW by the TMA1 bit and TMA0 bit of the TMA.

### 11.3.3 Initializing the Counts

When the TMA3 and TMA2 bits are set to 11, the PSW and TCA will be cleared to H'00 to come to a stop.

At this state, writing 10 to the TMA3 bit and TMA2 bit makes timer A start counting from H'00 in the time base mode for clocks.

After clearing the PSW and TCA using the TMA3 and TMA2 bits, writing 00 or 01 to the TMA3 bit and TMA2 bit to make timer A start counting from H'00 in the interval timer mode. However, the period to the first count is not constant, since the PSS is not cleared.

# Section 12 Timer B

## 12.1 Overview

Timer B is an 8-bit up-counter. Timer B is equipped with two different types of functions namely, the interval function and the auto reloading function.

### 12.1.1 Features

- Seven different types of internal clocks ( $\phi/16384$ ,  $\phi/4096$ ,  $\phi/1024$ ,  $\phi/512$ ,  $\phi/128$ ,  $\phi/32$  and  $\phi/8$ ) or an of external clock can be selected.
- When the counter overflows, a interrupt request will be issued.

### 12.1.2 Block Diagram

Figure 12.1 shows a block diagram of timer B.

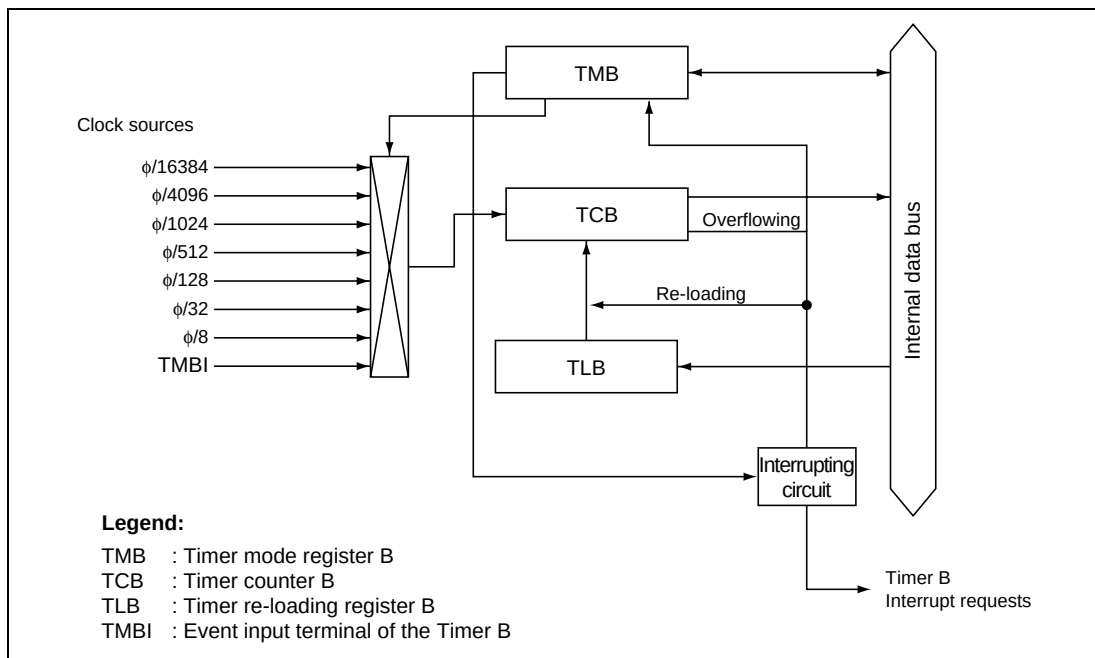


Figure 12.1 Block Diagram of Timer B

### 12.1.3 Pin Configuration

Table 12.1 shows the pin configuration of timer B.

**Table 12.1 Pin Configuration**

| Name                    | Abbrev. | I/O   | Function                              |
|-------------------------|---------|-------|---------------------------------------|
| Event inputs to timer B | TMBI    | Input | Event input pin for inputs to the TCB |

### 12.1.4 Register Configuration

Table 12.2 shows the register configuration of timer B.

The TCB and TLB are being allocated to the same address. Reading or writing determines the accessing register.

**Table 12.2 Register Configuration**

| Name                  | Abbrev. | R/W | Size | Initial Value | Address* |
|-----------------------|---------|-----|------|---------------|----------|
| Timer mode register B | TMB     | R/W | Byte | H'18          | H'D110   |
| Timer counter B       | TCB     | R   | Byte | H'00          | H'D111   |
| Timer load register B | TLB     | W   | Byte | H'00          | H'D111   |
| Port mode register A  | PMRA    | R/W | Byte | H'3F          | H'FFD9   |

Note: \* Lower 16 bits of the address.

## 12.2 Register Descriptions

### 12.2.1 Timer Mode Register B (TMB)

|                 |       |        |       |   |   |       |       |       |
|-----------------|-------|--------|-------|---|---|-------|-------|-------|
| Bit :           | 7     | 6      | 5     | 4 | 3 | 2     | 1     | 0     |
|                 | TMB17 | TMBIF  | TMBIE | — | — | TMB12 | TMB11 | TMB10 |
| Initial value : | 0     | 0      | 0     | 1 | 1 | 0     | 0     | 0     |
| R/W :           | R/W   | R/(W)* | R/W   | — | — | R/W   | R/W   | R/W   |

Note: \* Only 0 can be written to clear the flag.

The TMB is an 8-bit read/write register which works to control the interrupts, to select the auto reloading function and to select the input clock.

When reset, the TMB is initialized to H'18.

**Bit 7—Selecting the Auto Reloading Function (TMB17):** This bit works to select the auto reloading function of the Timer B.

#### Bit 7

| TMB17 | Description                                   |
|-------|-----------------------------------------------|
| 0     | Selects the interval function (Initial value) |
| 1     | Selects the auto reloading function           |

**Bit 6—Interrupt Requesting Flag for the Timer B (TMBIF):** This is an interrupt requesting flag for the Timer B. It indicates the fact that the TCB is overflowing.

#### Bit 6

| TMBIF | Description                                                                |
|-------|----------------------------------------------------------------------------|
| 0     | [Clearing conditions]<br>When 0 is written after reading 1 (Initial value) |
| 1     | [Setting conditions]<br>When the TCB overflows                             |

**Bit 5—Enabling Interrupt of the Timer B (TMBIE):** This bit works to permit/prohibit occurrence of interrupt of timer B when the TCB overflows and when the TMBIF is set to 1.

#### Bit 5

| TMBIE | Description                                    |
|-------|------------------------------------------------|
| 0     | Prohibits interrupt of timer B (Initial value) |
| 1     | Permits interrupt of timer B                   |

**Bits 4 and 3—Reserved:** These bits cannot be modified and are always read as 1.

**Bits 2 to 0—Clock Selection (TMB12 to TMB10):** These bits work to select the clock to input to the TCB. Selection of the rising edge or the falling edge is workable with the external event inputs.

| Bit 2 | Bit 1 | Bit 0 |                                                                                 |
|-------|-------|-------|---------------------------------------------------------------------------------|
| TMB12 | TMB11 | TMB10 | Descriptions                                                                    |
| 0     | 0     | 0     | Internal clock: Counts at $\phi/16384$ (Initial value)                          |
| 0     | 0     | 1     | Internal clock: Counts at $\phi/4096$                                           |
| 0     | 1     | 0     | Internal clock: Counts at $\phi/1024$                                           |
| 0     | 1     | 1     | Internal clock: Counts at $\phi/512$                                            |
| 1     | 0     | 0     | Internal clock: Counts at $\phi/128$                                            |
| 1     | 0     | 1     | Internal clock: Counts at $\phi/32$                                             |
| 1     | 1     | 0     | Internal clock: Counts at $\phi/8$                                              |
| 1     | 1     | 1     | Counts at the rising edge and the falling edge of external event inputs (TMBI)* |

Note: \* The edge selection for the external event inputs is made by setting the PMRA6 of the port mode register A (PMRA). See section 12.2.4, Port Mode Register A (PMRA).



### 12.2.2 Timer Counter B (TCB)

|                 |       |       |       |       |       |       |       |       |
|-----------------|-------|-------|-------|-------|-------|-------|-------|-------|
| Bit :           | 7     | 6     | 5     | 4     | 3     | 2     | 1     | 0     |
|                 | TCB17 | TCB16 | TCB15 | TCB14 | TCB13 | TCB12 | TCB11 | TCB10 |
| Initial value : | 0     | 0     | 0     | 0     | 0     | 0     | 0     | 0     |
| R/W :           | R     | R     | R     | R     | R     | R     | R     | R     |

The TCB is an 8-bit readable register which works to count up by the internal clock inputs and external event inputs. The input clock can be selected by the TMB12 to TMB10 of the TMB. When the TCB overflows (H'FF → H'00 or H'FF → TLB setting), a interrupt request of the Timer B will be issued.

When reset, the TCB is initialized to H'00.

### 12.2.3 Timer Load Register B (TLB)

|                 |       |       |       |       |       |       |       |       |
|-----------------|-------|-------|-------|-------|-------|-------|-------|-------|
| Bit :           | 7     | 6     | 5     | 4     | 3     | 2     | 1     | 0     |
|                 | TLB17 | TLB16 | TLB15 | TLB14 | TLB13 | TLB12 | TLB11 | TLB10 |
| Initial value : | 0     | 0     | 0     | 0     | 0     | 0     | 0     | 0     |
| R/W :           | W     | W     | W     | W     | W     | W     | W     | W     |

The TLB is an 8-bit write only register which works to set the reloading value of the TCB. When the reloading value is set to the TLB, the value will be simultaneously loaded to the TCB and the TCB starts counting up from the set value. Also, during an auto reloading operation, when the TCB overflows, the value of the TLB will be loaded to the TCB. Consequently, the overflowing cycle can be set within the range of 1 to 256 input clocks.

When reset, the TLB is initialized to H'00.

12.2.4 Port Mode Register A (PMRA)

|                 |       |       |   |   |   |   |   |   |
|-----------------|-------|-------|---|---|---|---|---|---|
| Bit :           | 7     | 6     | 5 | 4 | 3 | 2 | 1 | 0 |
|                 | PMRA7 | PMRA6 | — | — | — | — | — | — |
| Initial value : | 0     | 0     | 1 | 1 | 1 | 1 | 1 | 1 |
| R/W :           | R/W   | R/W   | — | — | — | — | — | — |


The port mode register A (PMRA) works to changeover the pin functions of the port 6 and to designate the edge sense of the event inputs of timer B (TMBI).  
The PMRA is an 8-bit read/write register. When reset, the PMRA will be initialized to H'3F. See section 10.7, Port 6 for other information than bit 6.

**Bit 6—Selecting the Edges of the Event Inputs to the Timer B (PMRA6):** This bit works to select the input edge sense of the TMBI pins.

Bit 6

| PMRA6 | Description                                                                 |
|-------|-----------------------------------------------------------------------------|
| 0     | Detects the falling edge of the event inputs to the Timer B (Initial value) |
| 1     | Detects the rising edge of the event inputs to the Timer B                  |

12.2.5 Module Stop Control Register (MSTPCR)

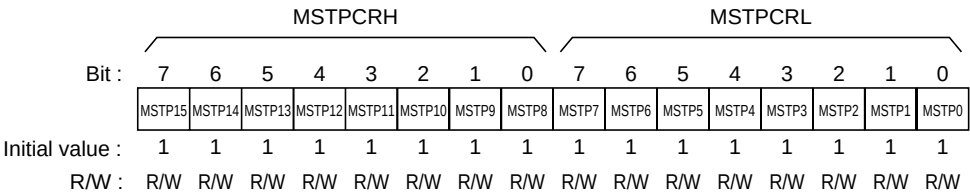

The MSTPCR are 8-bit read/write twin registers which work to control the module stop mode. When the MSTP14 bit is set to 1, the Timer B stops its operation at the ending point of the bus cycle to shift to the module stop mode. For more information, see section 4.5, Module stop mode. When reset, the MSTPCR is initialized to H'FFFF.

**Bit 6—Module Stop (MSTP14):** This bit works to designate the module stop mode for the Timer B.

MSTPCRH

Bit 6

| MSTP14 | Description                                              |
|--------|----------------------------------------------------------|
| 0      | Cancels the module stop mode of the Timer B              |
| 1      | Sets the module stop mode of the Timer B (Initial value) |

## 12.3 Operation

### 12.3.1 Operation as the Interval Timer

When the TMB17 bit of the TMB is set to 0, timer B works as an 8-bit interval timer.

When reset, since the TCB is cleared to H'00 and as the TMB17 bit is cleared to 0, timer B continues counting up as the interval timer without interrupts right after resetting.

As the clock source for timer B, selection can be made from seven different types of internal clocks being output from the prescaler unit by the TMB12 to TMB10 bits of the TMB or an external clock through the TMBI input pin can be chosen instead.

When the clock signal is input after the reading of the TCB reaches H'FF, timer B overflows and the TMBIF bit of the TMB will be set to 1. At this time, when the TMBIE bit of the TMB is 1, interrupt occurs.

When overflowing occurs, the reading of the TCB returns to H'00 before resuming counting up.

When a value is set to the TLB while the interval timer is in operation, the value which has been set to the TLB will be loaded to the TCB simultaneously.

### 12.3.2 Operation as the Auto Reload Timer

When the TMB17 of the TMB is set to 1, the Timer B works as an 8-bit auto reload timer.

When a reload value is set in the TLB, the value is loaded onto the TCB at the same time, and the TCB starts counting up from the value.

When the clock signal is input after the reading of the TCB reaches H'FF, timer B overflows and the TLB value is loaded onto the TCB, then the TCB continues counting up from the loaded value. Accordingly, overflow interval can be set within the range of 1 to 256 clocks depending on the TLB value.

Clock source and interrupts in the auto reload operation are the same as those in the interval operation. When the TLB value is re-set while the auto reload timer is in operation, the value which has been set to the TLB will be loaded onto the TCB simultaneously.

### 12.3.3 Event Counter

Timer B works as an event counter using the TMBI pin as the event input pin. When the TMB12 to TMB10 are set to 111, the external event will be selected as the clock source and the TCB counts up at the leading edge or the trailing edge of the TMBI pin inputs.

# Section 13 Timer J

## 13.1 Overview

Timer J consists of twin counters. It carries different operation modes such as reloading and event counting.

### 13.1.1 Features

Timer J consists of an 8-bit reloading timer and an 8-bit/16-bit selectable reloading timer. It has various functions as listed below. The two timers can be used separately, or they can be connected together to operate as a single timer.

- Reloading timers
- Event counters
- Remote-controlled transmissions
- Takeup/Supply reel pulse division

### 13.1.2 Block Diagram

Figure 13.1 is a block diagram of timer J. Timer J consists of two reload timers namely, TMJ-1 and TMJ-2.

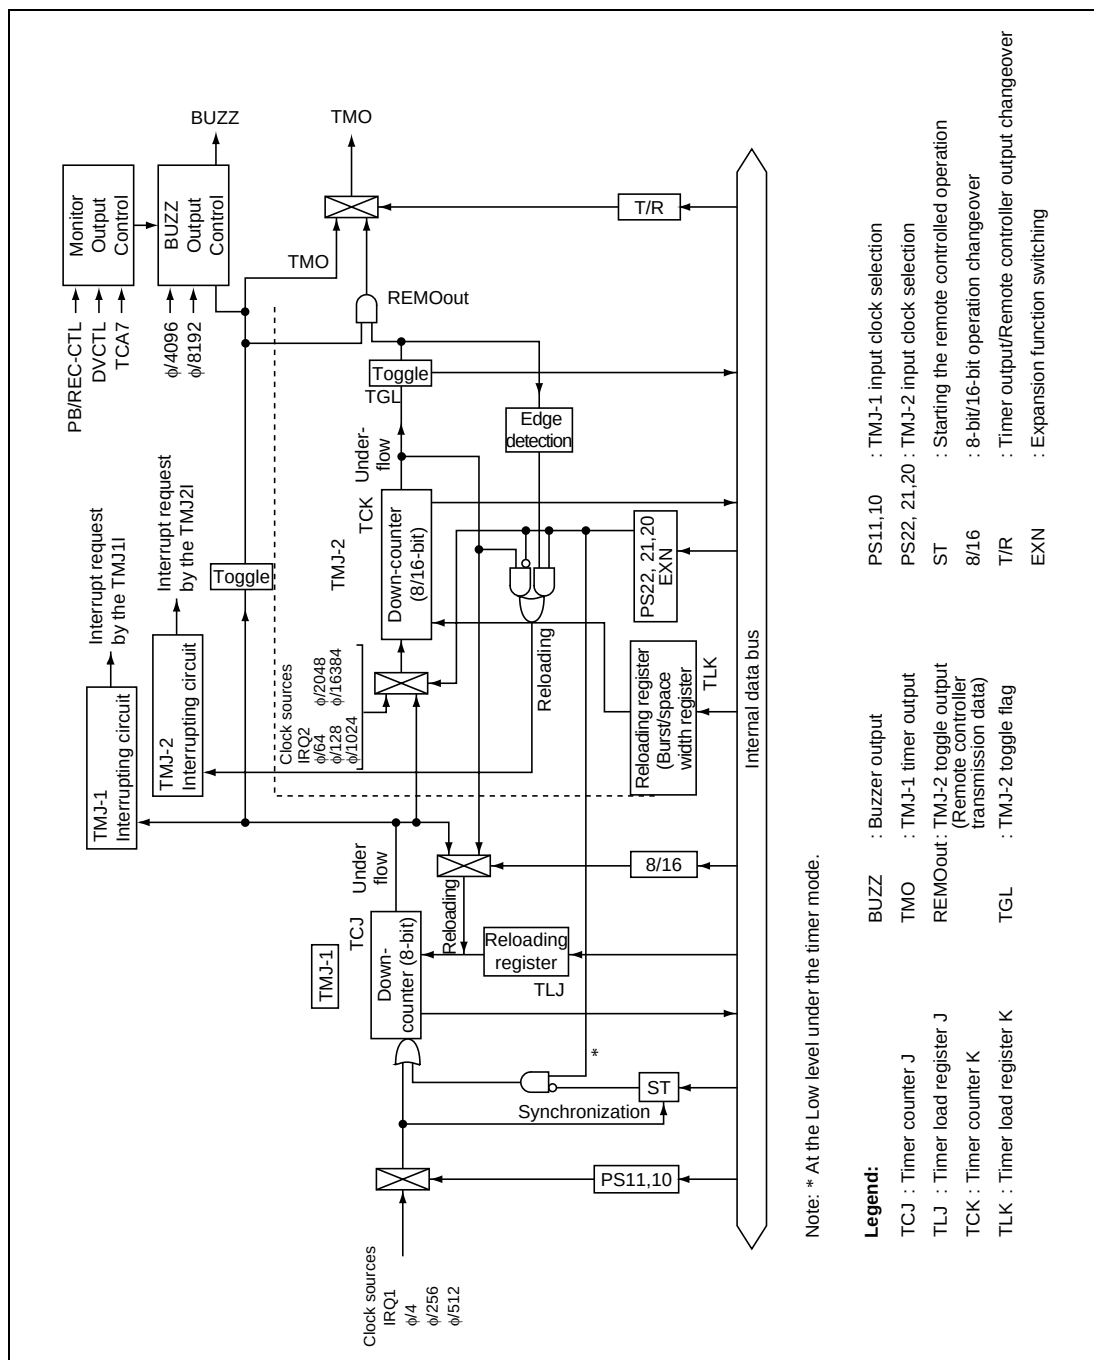


Figure 13.1 Block Diagram of timer J

### 13.1.3 Pin Configuration

Table 13.1 shows the pin configuration of timer J.

**Table 13.1 Pin Configuration**

| Name            | Abbrev.                  | I/O   | Function                  |
|-----------------|--------------------------|-------|---------------------------|
| Event input pin | $\overline{\text{IRQ1}}$ | Input | Event inputs to the TMJ-1 |
| Event input pin | $\overline{\text{IRQ2}}$ | Input | Event inputs to the TMJ-2 |

### 13.1.4 Register Configuration

Table 13.2 shows the register configuration of timer J.

The TCJ and TLJ or the TCK and TLK are being allocated to the same address respectively.

Reading or writing determines the accessing register.

**Table 13.2 Register Configuration**

| Name                     | Abbrev. | R/W                 | Size | Initial Value | Address* <sup>2</sup> |
|--------------------------|---------|---------------------|------|---------------|-----------------------|
| Timer mode register J    | TMJ     | R/W                 | Byte | H'00          | H'D13A                |
| Timer J control register | TMJC    | R/W                 | Byte | H'09          | H'D13B                |
| Timer J status register  | TMJS    | R/(W)* <sup>1</sup> | Byte | H'3F          | H'D13C                |
| Timer counter J          | TCJ     | R                   | Byte | H'FF          | H'D139                |
| Timer counter K          | TCK     | R                   | Byte | H'FF          | H'D138                |
| Timer load register J    | TLJ     | W                   | Byte | H'FF          | H'D139                |
| Timer load register K    | TLK     | W                   | Byte | H'FF          | H'D138                |

Notes: 1. Only 0 can be written to clear the flag.

2. Lower 16 bits of the address.

# 13.2 Register Descriptions

## 13.2.1 Timer Mode Register J (TMJ)

|                 |      |      |     |      |      |      |     |     |
|-----------------|------|------|-----|------|------|------|-----|-----|
| Bit :           | 7    | 6    | 5   | 4    | 3    | 2    | 1   | 0   |
|                 | PS11 | PS10 | ST  | 8/16 | PS21 | PS20 | TGL | T/R |
| Initial value : | 0    | 0    | 0   | 0    | 0    | 0    | 0   | 0   |
| R/W :           | R/W  | R/W  | R/W | R/W  | R/W  | R/W  | R   | R/W |

The timer mode register J (TMJ) works to select the inputting clock for the TMJ-1 and TMJ-2 and to set the operation mode.

The TMJ is an 8-bit register and bit 1 is for read only. All the remaining bits are applicable to read/write.

When reset, the TMJ is initialized to H'00.

Under all other modes than the remote controlling mode, writing into the TMJ works to initialize the counters (TCJ and TCK) to H'FF.

**Bits 7 and 6—Selecting the Inputting Clock to the TMJ-1 (PS11, PS10):** These bits work to select the clock to input to the TMJ-1. When the external clock is selected, the counted edge (rising or falling) can also be selected.

| Bit 7 | Bit 6 | Description                                                                          |
|-------|-------|--------------------------------------------------------------------------------------|
| PS11  | PS10  |                                                                                      |
| 0     | 0     | Counting by the PSS, $\phi/512$ (Initial value)                                      |
|       | 1     | Counting by the PSS, $\phi/256$                                                      |
| 1     | 0     | Counting by the PSS, $\phi/4$                                                        |
|       | 1     | Counting at the rising edge or the falling edge of the external clock inputs (IRQ1)* |

Note: \* The edge selection for the external clock inputs is made by setting the IRQ edge select register (IEGR). See section 6.2.4, IRQ Edge Select Register (IEGR) for more information. When using an external clock under the remote controlling mode, set the opposite edge with the IRQ1 and the IRQ2 when using an external clock under the remote controlling mode. (When IRQ1 falling, select IRQ2 rising and when IRQ1 rising, select IRQ2 falling)



**Bit 5—Starting the Remote Controlled Operation (ST):** This bit works to start the remote controlled operations.

When this bit is set to 1, clock signal is supplied to the TMJ-1 to start signal transmissions.

When this bit is cleared to 0, clock supply stops to discontinue the operation. The ST bit will be valid under the remote controlling mode, namely, when bit 0 (T/R bit) is 1 and bit 4 (8/16 bit) is 0. Under other modes than the remote controlling mode, it will be fixed to 0. When a shift to the low power consumption mode is made during remote controlled operation, the ST bit will be cleared to 0. When resuming operation after returning to the active mode, write 1.

#### Bit 5

| ST | Description                                                                                         |
|----|-----------------------------------------------------------------------------------------------------|
| 0  | Works to stop clock signal supply to the TMJ-1 under the remote controlling mode<br>(Initial value) |
| 1  | Works to supply clock signal to the TMJ-1 under the remote controlling mode                         |

**Bit 4—Switching Over Between 8-bit/16-bit Operations (8/16):** This bit works to choose if using timer J as two units of 8-bit timer/counter or if using it as a single unit of 16-bit timer/counter. Even under 16-bit operations, TMJ1I interrupt requests from the TMJ-1 will be valid.

#### Bit 4

| 8/16 | Description                                                          |
|------|----------------------------------------------------------------------|
| 0    | Makes the TMJ-1 and TMJ-2 operate separately<br>(Initial value)      |
| 1    | Makes the TMJ-1 and TMJ-2 operate altogether as 16-bit timer/counter |

**Bits 3 and 2—Selecting the Inputting Clock for the TMJ-2 (PS21, PS20):** These bits, together with the PS22 bit in the timer J control register (TMJC), work to select the clock for the TMJ-2. When the external clock is selected, the counted edge (rising or falling) can also be selected. For details, refer to section 13.2.2, Timer J Control Register (TMJC).

**Bit 1—TMJ-2 Toggle Flag (TGL):** This flag indicates the toggled status of the underflowing with the TMJ-2. Reading only is workable.  
It will be cleared to 0 under the low power consumption mode.

#### Bit 1

| TGL | Description                                            |
|-----|--------------------------------------------------------|
| 0   | The toggle output of the TMJ-2 is 0<br>(Initial value) |
| 1   | The toggle output of the TMJ-2 is 1                    |

**Bit 0—Switching Over Between Timer Output/Remote Controlling Output (T/R):** This bit works to select if using the timer outputs from the TMJ-1 as the output signal through the TMO pin or if using the toggle outputs (remote controlled transmission data) from the TMJ-2 as the output signal through the TMO pin.

#### Bit 0

| T/R | Description                                                         |
|-----|---------------------------------------------------------------------|
| 0   | Timer outputs from the TMJ-1 (Initial value)                        |
| 1   | Toggle outputs from the TMJ-2 (remote controlled transmission data) |

### Selecting the Operation Mode

The operating mode of timer J is determined by bit 3 (EXN) of the timer J control register (TMJC) and bits 4 (8/16) and 0 (T/R) of the timer mode register J (TMJ).

| TMJC  |       | TMJ   |                                                         |
|-------|-------|-------|---------------------------------------------------------|
| Bit 3 | Bit 4 | Bit 0 |                                                         |
| EXN   | 8/16  | T/R   | Description                                             |
| 0     | 0     | 0     | 8-bit timer + 16-bit timer                              |
|       |       | 1     | Remote-controlling mode (TMJ-2 works as a 16-bit timer) |
|       | 1     | *     | 24-bit timer                                            |
| 1     | 0     | 0     | Two 8-bit timers (Initial value)                        |
|       |       | 1     | Remote-controlling mode (TMJ-2 works as an 8-bit timer) |
|       | 1     | *     | 16-bit timer                                            |

Note: \* Don't care

Writing to the TMJ in timer mode initializes the counters (TCJ and TCK) (H'FF). Consequently, write to the reloading registers (TLJ and TLK) after finishing settings with the TMJ.

Under the remote controlling mode, although the TLJ and the TLK will not be initialized even when writing is made into the TMJ, follow the sequence listed below when starting a remote controlling operation:

1. Make setting to the remote controlling mode with the TMJ.
2. Write the data into the TLJ and TLK.
3. Start the remote controlled operation by use of the TMJ. (ST bit = 1).

Even under 16-bit operations, TMJ1I interrupt requests from the TMJ-1 will be valid.

13.2.2 Timer J Control Register (TMJC)

|                 |       |       |      |      |     |        |        |      |
|-----------------|-------|-------|------|------|-----|--------|--------|------|
| Bit :           | 7     | 6     | 5    | 4    | 3   | 2      | 1      | 0    |
|                 | BUZZ1 | BUZZ0 | MON1 | MON0 | EXN | TMJ2IE | TMJ1IE | PS22 |
| Initial value : | 0     | 0     | 0    | 0    | 1   | 0      | 0      | 1    |
| R/W :           | R/W   | R/W   | R/W  | R/W  | R/W | R/W    | R/W    | R/W  |

The timer J control register (TMJC) works to select the buzzer output frequency and to control permission/prohibition of interrupts.  
The TMJC is an 8-bit read/write register.  
When reset, the TMJC is initialized to H'09.

**Bits 7 and 6—Selecting the Buzzer Output (BUZZ1, BUZZ0):** These bits work to select if using the buzzer outputs as the output signal through the BUZZ pin or if using the monitor signals as the output signal through the BUZZ pin.  
When setting is made to the monitor signals, choose the monitor signal using the MON1 bit and MON0 bit.

| Bit 7 | Bit 6 |                                           |                 | Frequency when $\phi = 10\text{ MHz}$ |
|-------|-------|-------------------------------------------|-----------------|---------------------------------------|
| BUZZ1 | BUZZ0 | Description                               |                 |                                       |
| 0     | 0     | $\phi/4096$                               | (Initial value) | 2.44 kHz                              |
|       | 1     | $\phi/8192$                               |                 | 1.22 kHz                              |
| 1     | 0     | Works to output monitor signals           |                 |                                       |
|       | 1     | Works to output BUZZ signals from timer J |                 |                                       |

**Bits 5 and 4—Selecting the Monitor Signals (MON1, MON0):** These bits work to select the type of signals being output through the BUZZ pin for monitoring purpose. These settings are valid only when the BUZZ1 and BUZZ0 bits are being set to 10.

When PB-CTL or REC-CTL is chosen, signal duties will be output as they are.

In case of DVCTL signals, signals from the CTL dividing circuit will be toggled before being output. Signal waveforms divided by the CTL dividing circuit into n-divisions will further be divided into halves. (Namely, 2n divisions, 50% duty waveform).

In case of TCA7, Bit 7 of the counter of the Timer A will be output. (50% duty)

When prescaler W is being used with the Timer A, 1 Hz outputs are available.

| Bit 5 | Bit 4 |                               |
|-------|-------|-------------------------------|
| MON1  | MON0  | Description                   |
| 0     | 0     | PB or REC-CTL (Initial value) |
|       | 1     | DVCTL                         |
| 1     | *     | Outputs TCA7                  |

Note: \*Don't care.

**Bit 3—Expansion Function Control Bit (EXN):** This bit enables or disables the expansion function of TMJ-2. When the expansion function is enabled, TMJ-2 works as a 16-bit counter, and further input clock sources and types can be selected.

| Bit 3 |                                                       |
|-------|-------------------------------------------------------|
| EXN   | Description                                           |
| 0     | Enables the TMJ-2 expansion function                  |
| 1     | Disables the TMJ-2 expansion function (Initial value) |

**Bit 2—Enabling Interrupt of the TMJ2I (TMJ2IE):** This bit works to permit/prohibit occurrence of TMJ2I interrupt of the TMJS in 1-set of the TMJ2I.

| Bit 2  |                                                         |
|--------|---------------------------------------------------------|
| TMJ2IE | Description                                             |
| 0      | Prohibits occurrence of TMJ2I interrupt (Initial value) |
| 1      | Permits occurrence of TMJ2I interrupt                   |

**Bit 1—Enabling Interrupt of the TMJ1I (TMJ1IE):** This bit works to permit/prohibit occurrence of TMJ1I interrupt of the TMJS in 1-set of the TMJ1I.

#### Bit 1

| TMJ1IE | Description                                             |
|--------|---------------------------------------------------------|
| 0      | Prohibits occurrence of TMJ1I interrupt (Initial value) |
| 1      | Permits occurrence of TMJ1I interrupt                   |

**Bit 0—TMJ-2 Input Clock Selection (PS22):** This bit, together with the PS21 and PS20 bits of the timer mode register J (TMJ), selects the TMJ-2 input clock source.

| TMJC  |       | TMJ   |       | Description                                                          |
|-------|-------|-------|-------|----------------------------------------------------------------------|
| Bit 3 | Bit 0 | Bit 3 | Bit 2 |                                                                      |
| EXN   | PS22  | PS21  | PS20  |                                                                      |
| 0     | 1     | 0     | 0     | PSS; count at $\phi/128$                                             |
|       |       |       | 1     | PSS; count at $\phi/64$                                              |
|       |       | 1     | 0     | Count at TMJ-1 underflow                                             |
|       |       |       | 1     | External clock (IRQ2); count at rising or falling edge <sup>*1</sup> |
|       |       | 0     | *     | Reserved                                                             |
| 1     | 1     | 0     | 0     | PSS; count at $\phi/16384$ (Initial value)                           |
|       |       |       | 1     | PSS; count at $\phi/2048$                                            |
|       |       | 1     | 0     | Count at TMJ-1 underflow                                             |
|       |       |       | 1     | External clock (IRQ2); count at rising or falling edge <sup>*1</sup> |
|       | 0     | 0     | 0     | PSS; count at $\phi/1024$                                            |
|       |       |       | 1     | PSS; count at $\phi/1024$                                            |
|       |       | 1     | 0     | Count at TMJ-1 underflow                                             |
|       |       |       | 1     | External clock (IRQ2); count at rising or falling edge <sup>*1</sup> |

Notes: \* Don't care

1. The external clock edge can be selected by the IRQ edge select register (IEGR). For details, refer to section 6.2.4, IRQ Edge Select Registers (IEGR).

### 13.2.3 Timer J Status Register (TMJS)

|                 |        |        |   |   |   |   |   |   |
|-----------------|--------|--------|---|---|---|---|---|---|
| Bit :           | 7      | 6      | 5 | 4 | 3 | 2 | 1 | 0 |
|                 | TMJ2I  | TMJ1I  | — | — | — | — | — | — |
| Initial value : | 0      | 0      | 1 | 1 | 1 | 1 | 1 | 1 |
| R/W :           | R/(W)* | R/(W)* | — | — | — | — | — | — |

Note: \* Only 0 can be written to clear the flag.

The timer J status register (TMJS) works to indicate issuance of the interrupt request of timer J. The TMJS is an 8-bit read/write register. When reset, the TMJS is initialized to H'3F.

**Bit 7—TMJ2I Interrupt Requesting Flag (TMJ2I):** This is the TMJ2I interrupt requesting flag. This flag is set out when the TMJ-2 underflows.

#### Bit 7

| TMJ2I | Description                                                                |
|-------|----------------------------------------------------------------------------|
| 0     | [Clearing conditions]<br>When 0 is written after reading 1 (Initial value) |
| 1     | [Setting conditions]<br>When the TMJ-2 underflows                          |

**Bit 6—TMJ1I Interrupt Requesting Flag (TMJ1I):** This is the TMJ1I interrupt requesting flag. This flag is set out when the TMJ-1 underflows. TMJ1I interrupt requests will also be made under a 16-bit operation.

#### Bit 6

| TMJ1I | Description                                                                |
|-------|----------------------------------------------------------------------------|
| 0     | [Clearing conditions]<br>When 0 is written after reading 1 (Initial value) |
| 1     | [Setting conditions]<br>When the TMJ-1 underflows                          |

**Bits 5 to 0—Reserved:** These bits cannot be modified and are always read as 1.

### 13.2.4 Timer Counter J (TCJ)

|                 |       |       |       |       |       |       |       |       |
|-----------------|-------|-------|-------|-------|-------|-------|-------|-------|
| Bit :           | 7     | 6     | 5     | 4     | 3     | 2     | 1     | 0     |
|                 | TDR17 | TDR16 | TDR15 | TDR14 | TDR13 | TDR12 | TDR11 | TDR10 |
| Initial value : | 1     | 1     | 1     | 1     | 1     | 1     | 1     | 1     |
| R/W :           | R     | R     | R     | R     | R     | R     | R     | R     |

The timer counter J (TCJ) is an 8-bit readable down-counter which works to count down by the internal clock inputs or external clock inputs. The inputting clock can be selected by the PS11 and PS10 bits of the TMJ. TCJ values can be readout always. Nonetheless, when the EXN bit in TMJC and the 8/16 bit in TMJ are both set to 1, (means when setting is made to 16-bit operation), reading is possible under the word command only.

At this time, the TCK of the TMJ-2 can be read by the upper 8 bits and the TCJ can be read by the lower 8 bits. When the EXN bit in TMJC is 0, TCJ can be read only in byte units.

When the TCJ underflows (H'00 → Reloading value), regardless of the operation mode setting of the 8/16 bit, the TMJ1I bit of the TMJS will be set to 1 bit. The TCJ and TLJ are being allocated to the same address.

When reset, the TCJ is initialized to H'FF.

### 13.2.5 Timer Counter K (TCK)

|                 |       |       |       |       |       |       |       |       |
|-----------------|-------|-------|-------|-------|-------|-------|-------|-------|
| Bit :           | 7     | 6     | 5     | 4     | 3     | 2     | 1     | 0     |
|                 | TDR27 | TDR26 | TDR25 | TDR24 | TDR23 | TDR22 | TDR21 | TDR20 |
| Initial value : | 1     | 1     | 1     | 1     | 1     | 1     | 1     | 1     |
| R/W :           | R     | R     | R     | R     | R     | R     | R     | R     |

The timer counter K (TCK) is an 8-bit or a 16-bit readable down-counter which works to count down by the internal clock inputs or external clock inputs. The inputting clock can be selected by the EXN and PS2 bits of the TMIC, and the PS21 and PS20 bits of the TMJ. TCK values can be readout always. Nonetheless, when the EXN bit in TMJC and the 8/16 bit in TMJ are both set to 1, (means when setting is made to 16-bit operation), reading is possible under the word command only.

At this time, the TCK can be read by the upper 8 bits and the TCJ of the TMJ-1 can be read by the lower 8 bits. When the EXN bit in TMJC is 0, TCK works as a 16-bit counter and can be read only in word units.

When the TCK underflows (H'00 → Reloading value), the TMJ2I bit of the TMJS will be set to 1. The TCK and TLK are being allocated to the same address.

When reset, the TCK is initialized to H'FF.

### 13.2.6 Timer Load Register J (TLJ)

|                 |       |       |       |       |       |       |       |       |
|-----------------|-------|-------|-------|-------|-------|-------|-------|-------|
| Bit :           | 7     | 6     | 5     | 4     | 3     | 2     | 1     | 0     |
|                 | TLR17 | TLR16 | TLR15 | TLR14 | TLR13 | TLR12 | TLR11 | TLR10 |
| Initial value : | 1     | 1     | 1     | 1     | 1     | 1     | 1     | 1     |
| R/W :           | W     | W     | W     | W     | W     | W     | W     | W     |

The timer load register J (TLJ) is an 8-bit write only register which works to set the reloading value of the TCJ.

When the reloading value is set to the TLJ, the value will be simultaneously loaded to the TCJ and the TCJ starts counting down from the set value. Also, during an auto reloading operation, when the TCJ underflows, the value of the TLJ will be loaded to the TCJ. Consequently, the underflowing cycle can be set within the range of 1 to 256 input clocks. Nonetheless, when the EXN bit in TMJC and the 8/16 bit in TMJ are both set to 1, (means when setting is made to 16-bit operation), writing is possible under the word command only.

At this time, the upper 8 bits can be written into the TLK of the TMJ-2 and the lower 8 bits can be written into the TLJ. When the EXN bit in TMJC is 0, TLJ can be written to only in byte units; an 8-bit reload value is written to TLJ.

The TLJ and TCJ are being allocated to the same address.

When reset, the TLJ is initialized to H'FF.

### 13.2.7 Timer Load Register K (TLK)

|                 |       |       |       |       |       |       |       |       |
|-----------------|-------|-------|-------|-------|-------|-------|-------|-------|
| Bit :           | 7     | 6     | 5     | 4     | 3     | 2     | 1     | 0     |
|                 | TLR27 | TLR26 | TLR25 | TLR24 | TLR23 | TLR22 | TLR21 | TLR20 |
| Initial value : | 1     | 1     | 1     | 1     | 1     | 1     | 1     | 1     |
| R/W :           | W     | W     | W     | W     | W     | W     | W     | W     |


The timer load register K (TLK) is an 8-bit or a 16-bit write only register which works to set the reloading value of the TCK.

When the reloading value is set to the TLK, the value will be simultaneously loaded to the TCK and the TCK starts counting down from the set value. Also, during an auto reloading operation, when the TCK underflows, the value of the TLK will be loaded to the TCK. Consequently, the underflowing cycle can be set within the range of 1 to 256 input clocks. Nonetheless, when the EXN bit in TMJC and the 8/16 bit in TMJ are both set to 1, (means when setting is made to 16-bit operation), writing is possible under the word command only. At this time, the upper 8 bits can be written into the TLK and the lower 8 bits can be written into the TLJ of the TMJ-1. When the EXN bit in TMJC is 0, TLK can be written to only in word units; a 16-bit reload value is written to TLK. The TLK and TCK are being allocated to the same address.

When reset, the TLK is initialized to H'FF.



13.2.8 Module Stop Control Register (MSTPCR)

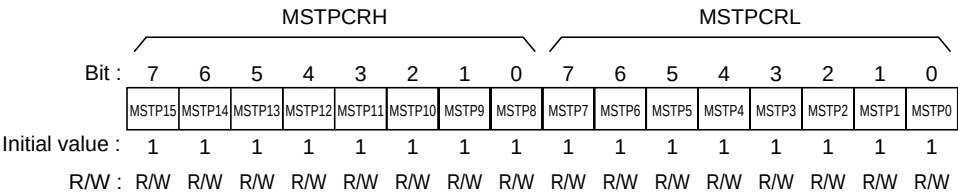

The MSTPCR are 8-bit read/write twin registers which work to control the module stop mode. When the MSTP13 bit is set to 1, timer J stops its operation at the ending point of the bus cycle to shift to the module stop mode. For more information, see section 4.5, Module Stop Mode. When reset, the MSTPCR is initialized to H'FFFF.

**Bit 5—Module Stop (MSTP13):** This bit works to designate the module stop mode for the Timer J.

MSTPCRH

Bit 5

| MSTP13 | Description                                          |
|--------|------------------------------------------------------|
| 0      | Cancels the module stop mode of timer J              |
| 1      | Sets the module stop mode of timer J (Initial value) |

## 13.3 Operation

### 13.3.1 8-bit Reload Timer (TMJ-1)

The TMJ-1 is an 8-bit reload timer. As the clock source, dividing clock or edge signals through the  $\overline{\text{IRQ1}}$  pin are being used. By selecting the edge signals through the  $\overline{\text{IRQ1}}$  pin, it can also be used as an event counter. While it is working as an event counter, its reloading function is workable simultaneously. When data are written into the reloading register, these data will be written into the counters (event counter, timer counter) simultaneously. Also, when the event counter underflows, the event counter value is reset to the reload register value, and a TMJ1I interrupt request occurs. Every time the counter underflows, the output level toggles. This output can be used as a buzzer or the carrier frequency at remote-controlled transmission by selecting an appropriate divided clock.

The TMJ-1 and TMJ-2, in combination, can be used as a 16-bit or a 24-bit reload timer. Nonetheless, when they are being used, in combination, as a 16-bit timer, word command only is valid and the TCK works as the down counter for the upper 8 bits and the TCJ works as the down counter for the lower 8 bits, means a reloading register of total 16 bits.

When data are written into a 16-bit reloading register, the same data will be written into the 16-bit down counter.

Also, when the 16-bit down counter underflow signals, the data of the 16-bit reloading register will be reloaded into the down counter. When the EXN bit of TMJC is set to 0, the expansion function of TMJ-2 is enabled, that is, TMJ-2 works as a 16-bit reloading timer, and it can be connected to TMJ-1 to be a 24-bit reloading timer. In this case, TCK works as the upper 16-bit part and TCJ works as the lower 8-bit part of a 24-bit down counter, and TLK works as the upper 16-bit part and TLJ works as the lower 8-bit part of a 24-bit reloading register.

Even when they are making a 16-bit or a 24-bit operation, the TMJ1I interrupt requests of the TMJ-1 and BUZZER outputs are effective. In case these functions are not necessary, make them invalid by programming.

The TMJ-1 and TMJ-2, in combination, can be used for remote controlled data transmission.

Regarding the remote controlled data transmission, see section 13.3.3, Remote Controlled Data Transmission.

### 13.3.2 8-bit Reload Timer (TMJ-2)

The TMJ-2 is an 8-bit or a 16-bit down-counting reload timer. As the clock source, dividing clock, edge signals through the  $\overline{\text{IRQ2}}$  pin or the underflow signals from the TMJ-1 are being used. By selecting the edge signals through the  $\overline{\text{IRQ2}}$  pin, it can also be used as an event counter. While it is working as an event counter, its reloading function is workable simultaneously.

When data are written into the reloading register, these data will be written into the counter simultaneously. Also, when the counter underflows, reloading will be made to the data counter of the reloading register.

When the counter underflows, TMJ2I interrupt requests will be issued.

The TMJ-2 and TMJ-1, in combination, can be used as a 16-bit or a 24-bit reload timer. For more Rev. 1.0, 02/01, page 278 of 1184

information on the 16-bit or 24-bit reload timer, see section 13.3.1, 8-bit Reload Timer (TMJ-1). The TMJ-2 and TMJ-1, in combination, can be operated by remote controlled data transmission. Regarding the remote controlled data transmission, see section 13.3.3, Remote Controlled Data Transmission.

### 13.3.3 Remote Controlled Data Transmission

The Timer J is capable of making remote controlled data transmission. The carrier frequencies for the remote controlled data transmission can be generated by the TMJ-1 and the burst width duration and the space width duration can be setup by the TMJ-2.

The data having been written into the reloading register TMJ-1 and into the burst/space duration register (TLK) of the TMJ-2 will be loaded to the counter at the same time as the remote controlled data transmission starts. (Remote controlled data transmission starting bit (ST)  $\leftarrow$  1) While remote controlled data transmission is being made, the contents of the burst/space duration register will be loaded to the counter only while reloading is being made by underflow signals. Even when a writing is made to the burst/space duration register while remote controlled data transmission is being made, reloading operation will not be made until an underflow signal is issued. The TMJ-2 issues TMJ2I interrupt requests by the underflow signals. The TMJ-1 performs normal reloading operation (including the TMJ1I interrupt requests).

Figure 13.2 shows the output waveform for the remote controlled data transmission function.

When a shift to the low power consumption mode is effected while remote controlled data transmission is being made, the ST bit will be cleared to 0. When resuming the remote controlled data transmission after returning to the active mode, write 1.

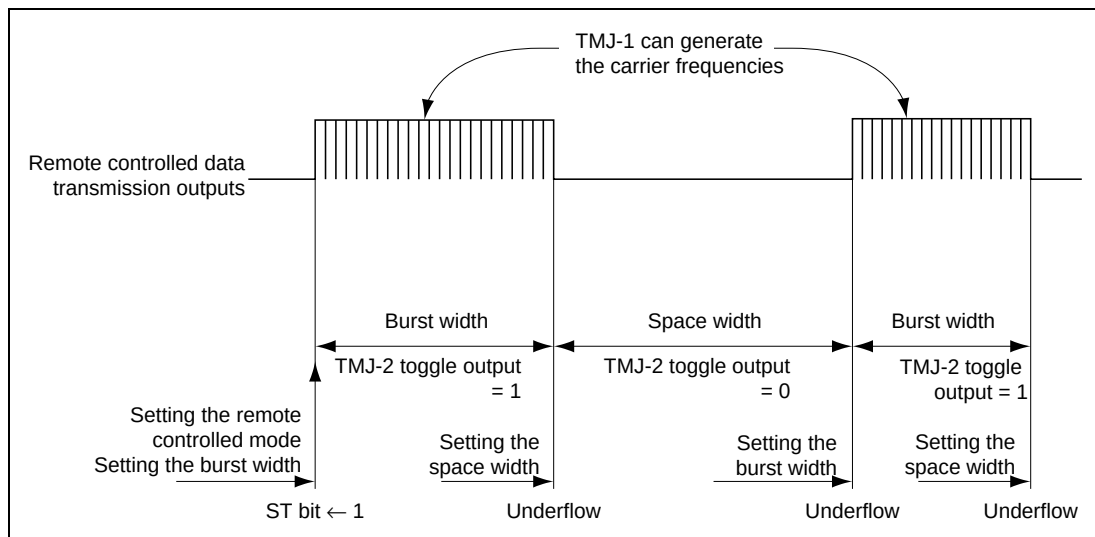


**Figure 13.2 Remote Controlled Data Transmission Output Waveform**

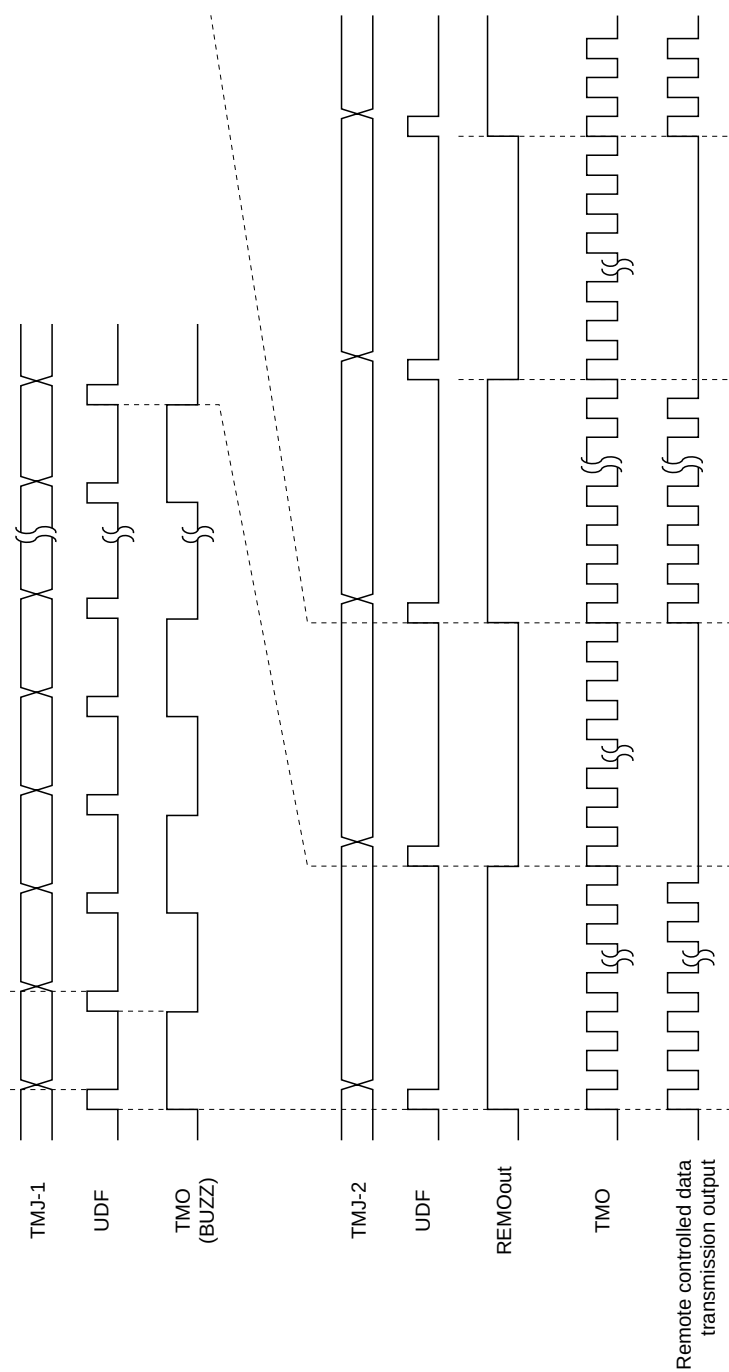


**Figure 13.3 Timer Output Timing**

When the Timer J is set to the remote controlled operation mode, since the start bit (ST) is being set or cleared in synchronization with the inputting clock to the TMJ-2, a delay upto a cycle of the inputting clock at the maximum occurs, namely, after the ST bit has been set to 1 until the remote controlled data transmission starts. Consequently, when the TLK is updated during the period after setting the ST bit to 1 until the next cycle of the inputting clock comes, the initial burst width will be changed as shown in figure 13.4.

Therefore, when making remote controlled data transmission, determine 1/0 of the TGL bit at the time of the first burst width control operation without fail. (Or, set the space width to the TLK after waiting for a cycle of the inputting clock.)

After that, operations can be continued by interrupts.

Similarly, pay attention to the control works when ending remote controlled data transmission.

Example:

- 1) Set the burst width with the TLK.
- 2) ST bit  $\leftarrow$  1.
- 3) Execute the procedure 4) if the TGL flag = 1.
- 4) Set the space width with the TLK under the status where the TGL flag = 1.
- 5) Make TMJ-2 interrupt.
- 6) Set the burst width with the TLK.
- :
- n) After making TMJ-2 interrupt, make setting of the ST  $\leftarrow$  0 under the status where the TGL flag = 0.

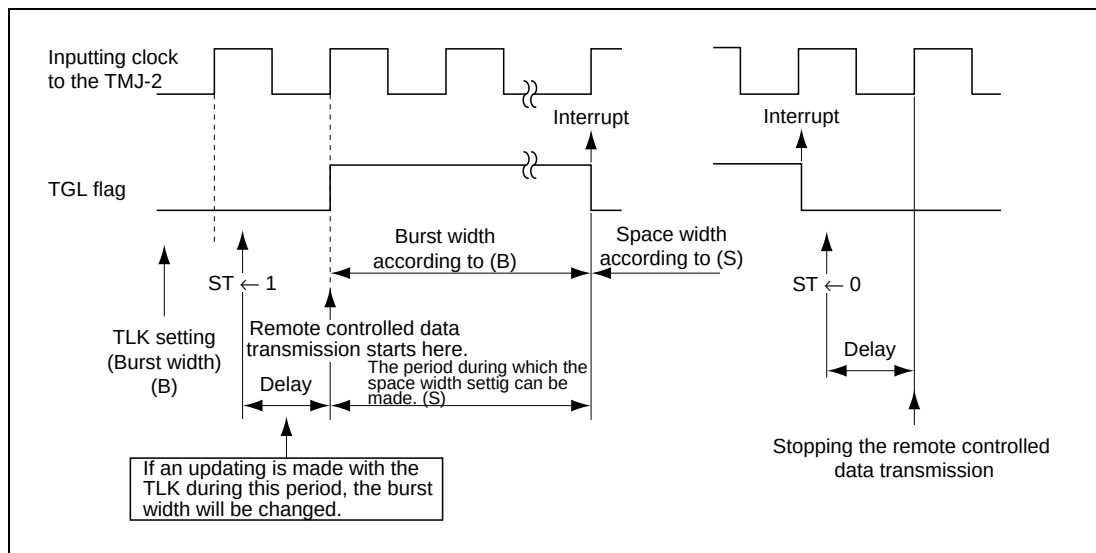


**Figure 13.4 Controls of the Remote Controlled Data Transmission**

### 13.3.4 TMJ-2 Expansion Function

The TMJ-2 expansion function is enabled by setting the EXN bit in the timer J control register (TMJC) to 0. This function makes TMJ-2, which usually works as an 8-bit counter, work as a 16-bit counter. When this function is selected, timer counter K (TCK) and timer load register K (TLK) must be accessed as follows:

**TCK Read:** To read TCK, use the word-length MOV instruction. In this case, the upper 8 bits of TCK are read out to the lower byte of the on-chip data bus, and the lower 8 bits are read out to the upper byte of the on-chip data bus. That is, when MOV.W @TCK, Rn is executed, the lower 8 bits of TCK are stored in RnH and the upper 8 bits are stored in RnL.

**TLK Write:** To write to TLK, use the word-length MOV instruction. In this case, the upper 8 bits are written to the lower byte of TLK, and the lower 8 bits are written to the upper byte of TLK. That is, when MOV.W Rn, @TLK is executed, the RnH data is written to the lower byte of TLK, and the RnL data is written to the upper byte of TLK.

# Section 14 Timer L

## 14.1 Overview

Timer L is an 8-bit up/down counter using the control pulses or the CFG division signals as the clock source.

### 14.1.1 Features

Features of timer L are as follows:

- Two types of internal clocks ( $\phi/128$  and  $\phi/64$ ), DVCFG2 (CFG division signal 2), PB and REC-CTL (control pulses) are available for your selection.
  - When the PB-CTL is not available, such as when reproducing un-recorded tapes, tape count can be made by the DVCFG2.
  - Selection of the rising edge or the falling edge is workable with the CTL pulse counting.
- Interrupts occur when the counter overflows or underflows and at occurrences of compare match clear.
- Capable to switch over between the up-counting and down-counting functions with the counter.

## 14.1.2 Block Diagram

Figure 14.1 shows a block diagram of timer L.

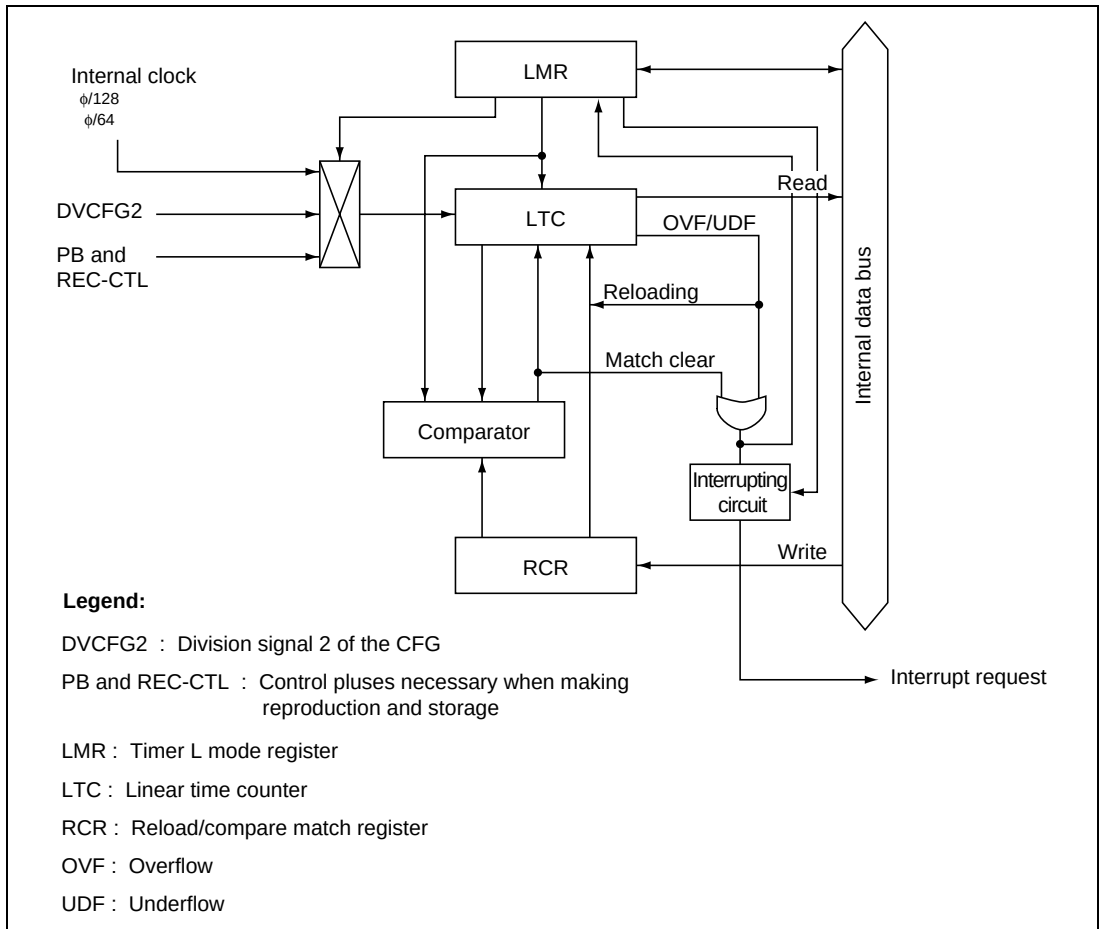


**Figure 14.1 Block Diagram of Timer L**



### 14.1.3 Register Configuration

Table 14.1 shows the register configuration of timer L. The linear time counter (LTC) and the reload compare patch register (RCR) are being allocated to the same address. Reading or writing determines the accessing register.

**Table 14.1 Register Configuration**

| Name                          | Abbrev. | R/W | Size | Initial Value | Address* |
|-------------------------------|---------|-----|------|---------------|----------|
| Timer L mode register         | LMR     | R/W | Byte | H'30          | H'D112   |
| Linear time counter           | LTC     | R   | Byte | H'00          | H'D113   |
| Reload/compare match register | RCR     | W   | Byte | H'00          | H'D113   |

Note: \* Lower 16 bits of the address.

## 14.2 Register Descriptions

### 14.2.1 Timer L Mode Register (LMR)

|                 |        |      |   |   |      |      |      |      |
|-----------------|--------|------|---|---|------|------|------|------|
| Bit :           | 7      | 6    | 5 | 4 | 3    | 2    | 1    | 0    |
|                 | LMIF   | LMIE | — | — | LMR3 | LMR2 | LMR1 | LMR0 |
| Initial value : | 0      | 0    | 1 | 1 | 0    | 0    | 0    | 0    |
| R/W :           | R/(W)* | R/W  | — | — | R/W  | R/W  | R/W  | R/W  |

Note: \* Only 0 can be written to clear the flag.

The timer L mode register A (LMR) is an 8-bit read/write register which works to control the interrupts, to select between up-counting and down-counting and to select the clock source. When reset, the LMR is initialized to H'30.

**Bit 7—Timer L Interrupt Requesting Flag (LMIF):** This is the Timer L interrupt requesting flag. It indicates occurrence of overflow or underflow of the LTC or occurrence of compare match clear.

#### Bit 7

| LMIF | Description                                                                                         |
|------|-----------------------------------------------------------------------------------------------------|
| 0    | [Clearing conditions]<br>When 0 is written after reading 1 (Initial value)                          |
| 1    | [Setting conditions]<br>When the LTC overflows, underflows or when compare match clear has occurred |

**Bit 6—Enabling Interrupt of the Timer L (LMIE):** When the LTC overflows, underflows or when compare match clear has occurred, then LMIF is set to 1, this bit works to permit/prohibit the occurrence of an interrupt of timer L.

#### Bit 6

| LMIE | Description                                                  |
|------|--------------------------------------------------------------|
| 0    | Prohibits occurrence of interrupt of Timer L (Initial value) |
| 1    | Permits occurrence of interrupt of Timer L                   |

**Bits 5 and 4—Reserved:** These bits cannot be modified and are always read as 1.

**Bit 3—Up-Count/Down-Count Control (LMR3):** This bit is for selection if timer L is to be controlled to the up-counting function or down-counting function.

### 1. When Controlled to the Up-Counting Function

- When any other values than H'00 are input to the RCR, the LTC will be cleared to H'00 before starting counting up. When the LTC value and the RCR value match, the LTC will be cleared to H'00. Also, interrupt requests will be issued by the match signal. (Compare match clear function)
- When H'00 is set to the RCR, the counter makes 8-bit interval timer operation to issue a interrupt request when overflowing occurs. (Interval timer function)

### 2. When Controlled to the Down-Counting Function

- When a value is set to the RCR, the set value is reloaded to the LTC and counting down starts from that value. When the LTC underflows, the value of the RCR will be reloaded to the LTC. Also, when the LTC underflows, a interrupt request will be issued. (Auto reload timer function)

#### Bit 3

| LMR3 | Description                                             |
|------|---------------------------------------------------------|
| 0    | Controlling to the up-counting function (Initial value) |
| 1    | Controlling to the down-counting function               |

**Bits 2 to 0—Clock Selection (LMR2 to LMR0):** The bits LMR2 to LMR0 work to select the clock to input to timer L. Selection of the leading edge or the trailing edge is workable for counting by the PB and the REC-CTL.

| Bit 2 | Bit 1 | Bit 0 | Description                                                     |
|-------|-------|-------|-----------------------------------------------------------------|
| LMR2  | LMR1  | LMR0  |                                                                 |
| 0     | 0     | 0     | Counts at the rising edge of the PB and REC-CTL (Initial value) |
|       |       | 1     | Counts at the falling edge of the PB and REC-CTL                |
|       | 1     | *     | Counts the DVCFG2                                               |
| 1     | 0     | *     | Counts at $\phi/128$ of the internal clock                      |
|       | 1     | *     | Counts at $\phi/64$ of the internal clock                       |

Note: \* Don't care.

### 14.2.2 Linear Time Counter (LTC)

|                 |      |      |      |      |      |      |      |      |
|-----------------|------|------|------|------|------|------|------|------|
| Bit :           | 7    | 6    | 5    | 4    | 3    | 2    | 1    | 0    |
|                 | LTC7 | LTC6 | LTC5 | LTC4 | LTC3 | LTC2 | LTC1 | LTC0 |
| Initial value : | 0    | 0    | 0    | 0    | 0    | 0    | 0    | 0    |
| R/W :           | R    | R    | R    | R    | R    | R    | R    | R    |

The linear time counter (LTC) is a readable 8-bit up/down-counter. The inputting clock can be selected by the LMR2 to LMR0 bits of the LMR.

When reset, the LTC is initialized to H'00.

### 14.2.3 Reload/Compare Match Register (RCR)

|                 |      |      |      |      |      |      |      |      |
|-----------------|------|------|------|------|------|------|------|------|
| Bit :           | 7    | 6    | 5    | 4    | 3    | 2    | 1    | 0    |
|                 | RCR7 | RCR6 | RCR5 | RCR4 | RCR3 | RCR2 | RCR1 | RCR0 |
| Initial value : | 0    | 0    | 0    | 0    | 0    | 0    | 0    | 0    |
| R/W :           | W    | W    | W    | W    | W    | W    | W    | W    |


The reload/compare match register (RCR) is an 8-bit write only register.

When timer L is being controlled to the up-counting function, when a compare match value is set to the RCR, the LTC will be cleared at the same time and the LTC will then start counting up from the initial value (H'00).

While, when the Timer L is being controlled to the down-counting function, when a reloading value is set to the RCR, the same value will be loaded to the LTC at the same time and the LTC will then start counting up from said value. Also, when the LTC underflows, the value of the RCR will be reloaded to the LTC.

When reset, the RCR is initialized to H'00.

14.2.4 Module Stop Control Register (MSTPCR)

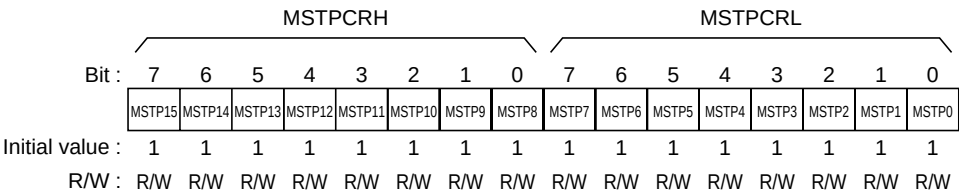

The MSTPCR are 8-bit read/write twin registers which work to control the module stop mode. When the MSTP12 bit is set to 1, timer L stops its operation at the ending point of the bus cycle to shift to the module stop mode. For more information, see section 4.5, Module Stop Mode. When reset, the MSTPCR is initialized to H'FFFF.

**Bit 4—Module Stop (MSTP12):** This bit works to designate the module stop mode for timer L.

MSTPCRH

Bit 4

| MSTP12 | Description                                          |
|--------|------------------------------------------------------|
| 0      | Cancels the module stop mode of timer L              |
| 1      | Sets the module stop mode of timer L (Initial value) |

## 14.3 Operation

Timer L is an 8-bit up/down counter.

The inputting clock for Timer L can be selected by the LMR2 to LMR0 bits of the LMR from the choices of the internal clock ( $\phi/128$  and  $\phi/64$ ), DVCDG2, PB and REC-CTL.

Timer L is provided with three different types of operation modes, namely, the compare match clear mode when controlled to the up-counting function, the auto reloading mode when controlled to the down-counting function and the interval timer mode.

Respective operation modes and operation methods will be explained below.

### 14.3.1 Compare Match Clear Operation

When the LMR3 bit of the LMR is cleared to 0, timer L will be controlled to the up-counting function.

When any other values than H'00 are written into the RCR, the LTC will be cleared to H'00 simultaneously before starting counting up.

Figure 14.2 shows RCR writing and LTC clearing timing. When the LTC value and the RCR value match (compare match), the LTC readings will be cleared to H'00 to resume counting from H'00.

Figure 14.3 indicated on the next page shows the compare match clear timing.

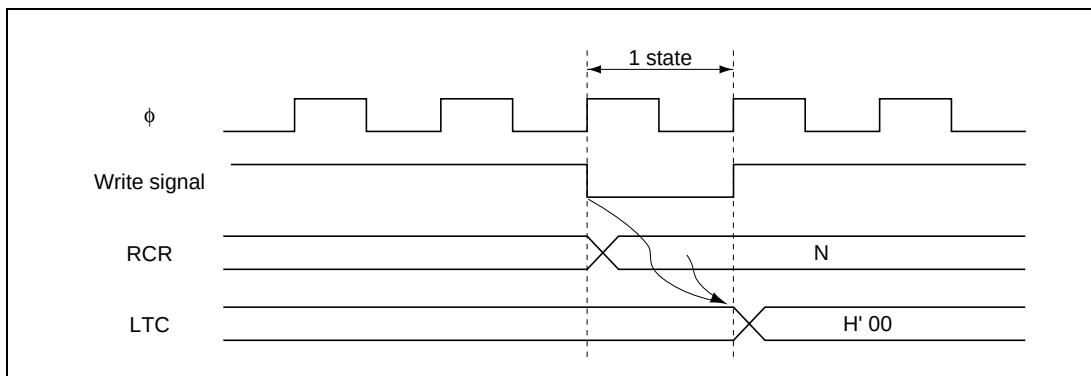


**Figure 14.2 RCR Writing and LTC Clearing Timing Chart**

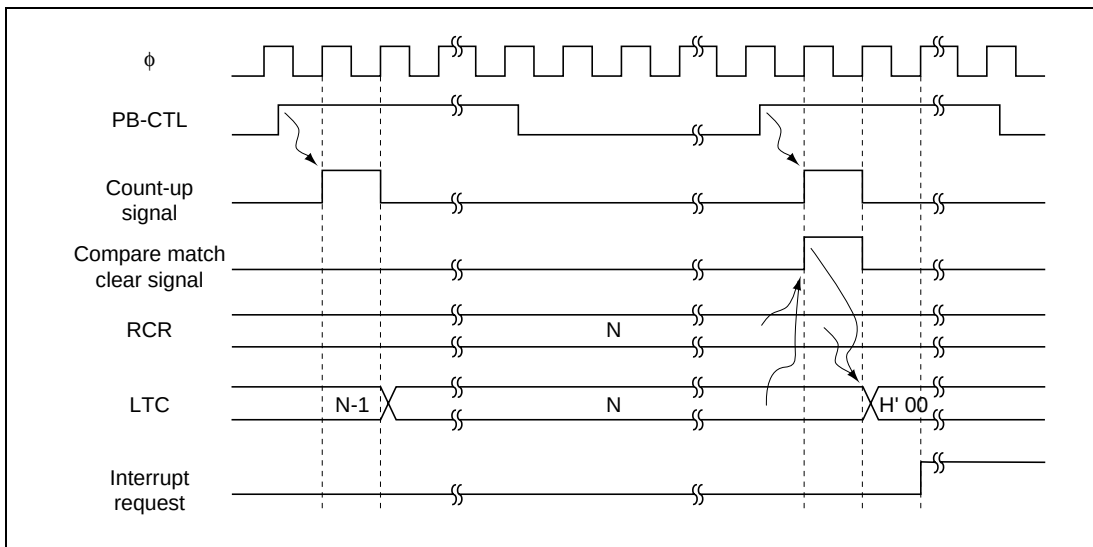


**Figure 14.3 Compare Match Clearing Timing Chart**  
(In case the rising edge of the PB-CTL is selected)

### 14.3.2 Auto-Reload Operation

When 1 is written in bit LMR3 of LMR, LTC enters down-counting control mode.

When a reload value is written in RCR, LTC is reloaded with the same value and starts counting down from that value. Figure 14-4 shows the timing of the writing and reloading of RCR.

At underflow, LTC is reloaded with the RCR value. Figure 14-5 shows the reload timing.

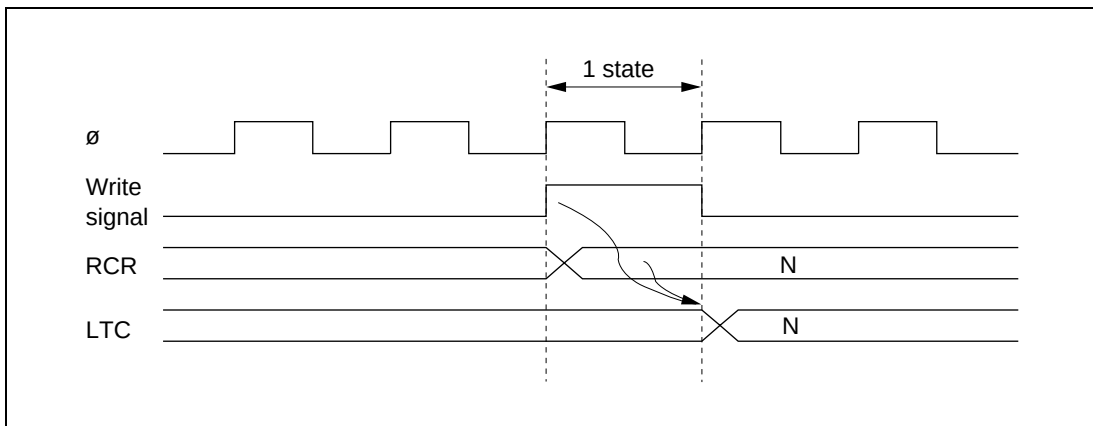


**Figure 14-4 Timing of Writing and Reloading of RCR**

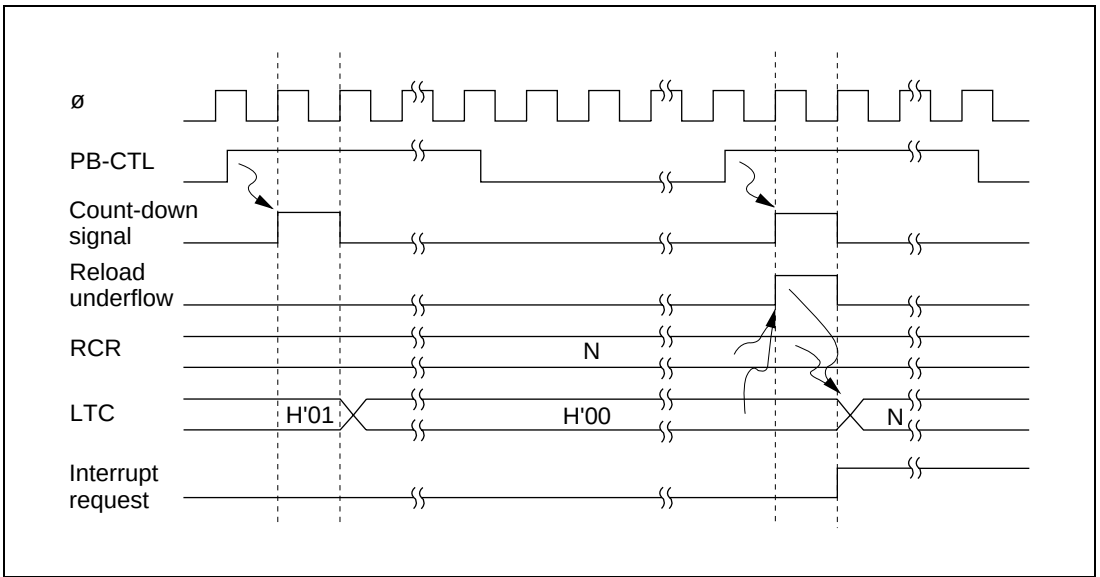


**Figure 14-5 Reload Timing (Rising Edge of PB-CTL Selected)**

### 14.3.3 Interval Timer Operation

When bit LMR3 is cleared to 0 in LMR, the timer L enters up-counting control mode.

If H'00 is written in RCR, compare-match operations are not carried out. The counter functions as an interval timer (up-counter).

### 14.3.4 Interrupt Request

The timer L generates an interrupt request when any of the following occurs:

- Compare-match clear under up-counting control
- Underflow under down-counting control
- Overflow or underflow when the reload/compare-match register (RCR) value is H'00



## 14.4 Typical Usage

Figure 14-6 shows a typical usage of the timer L.

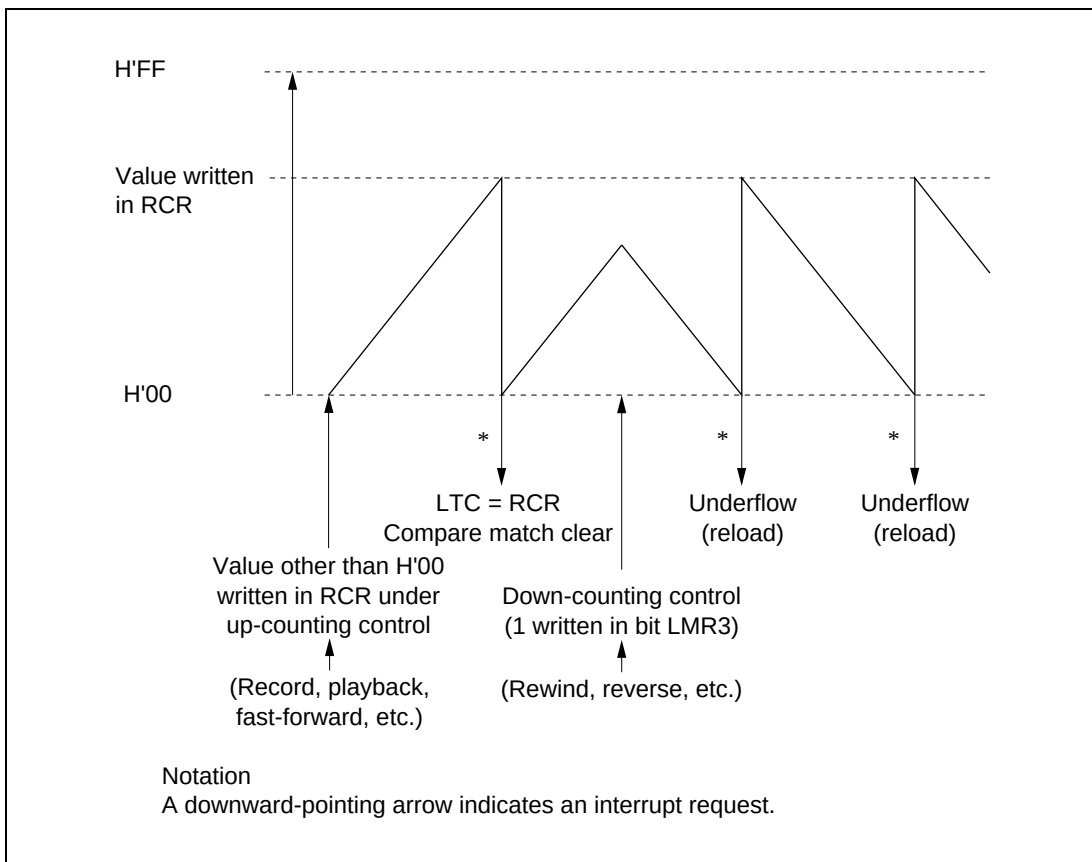


**Figure 14-6 Typical Usage of Linear Time Counter**

## 14.5 Reload Timer Interrupt Request Signal

The timer counters with reload registers generate an underflow or overflow in the last cycle before being decremented or incremented. The underflow or overflow generates a reload signal and an interrupt request signal.

If the value in the reload register is rewritten at the same time as the underflow or overflow (at the reload timing), an interrupt request is generated and the counter is reloaded at the same time. When rewriting the reload value in order to avoid an interrupt, leave an ample timing margin around the write to the reload register.

Figure 14-7 shows a sample timing diagram of contention between an underflow and the rewriting of the reload register.

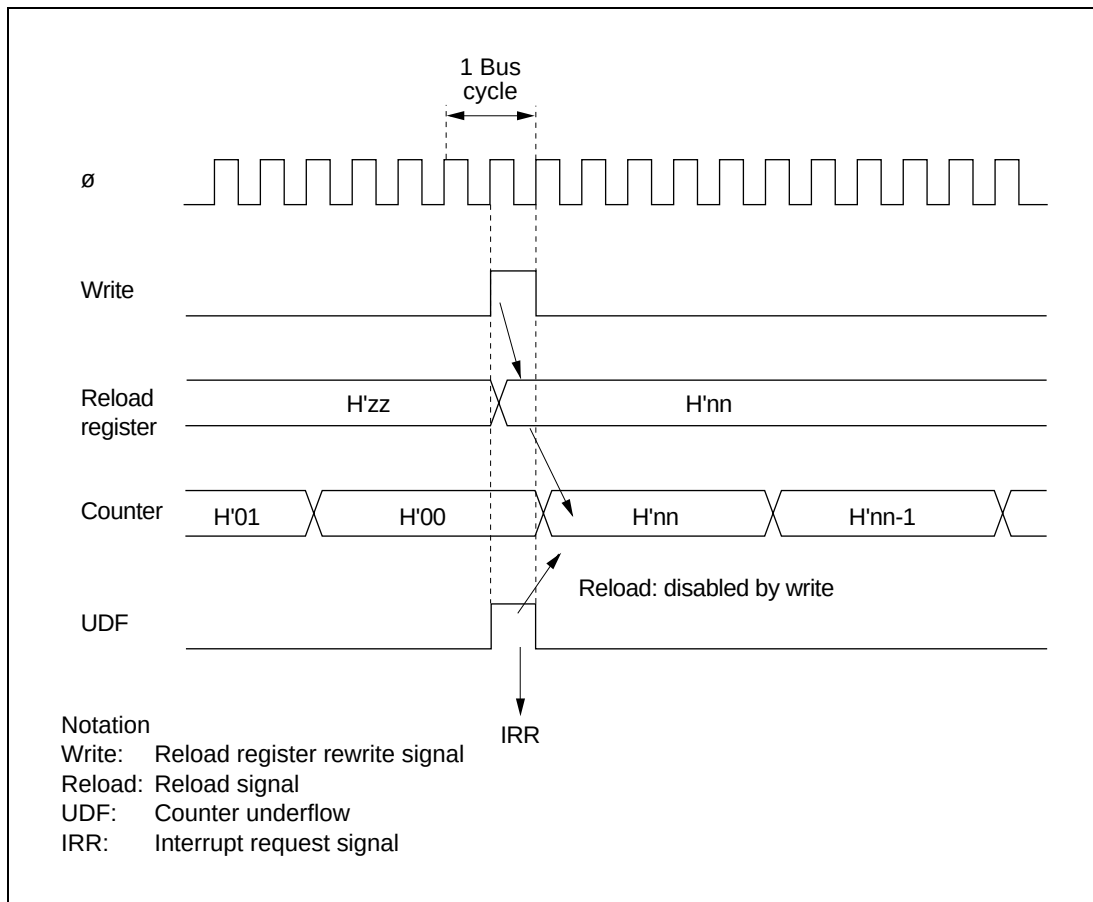


**Figure 14-7 Contention between Reload Timer Underflow and Rewriting of Reload Register**

# Section 15 Timer R

## 15.1 Overview

Timer R consists of triple 8-bit down-counters. It carries VCR mode identification function and slow tracking function in addition to the reloading function and event counter function.

### 15.1.1 Features

The Timer R consists of triple 8-bit reloading timers. By combining the functions of three units of reloading timers/counters and by combining three units of timers, it can be used for the following applications:

- Applications making use of the functions of three units of reloading timers.
- For identification of the VCR mode.
- For reel controls.
- For acceleration and braking of the capstan motor when being applied to intermittent movements.
- Slow tracking mono-multi applications.

### 15.1.2 Block Diagram

Timer R consists of three units of reload timer counters, namely, two units of reload timer counters equipped with capturing function (TMRU-1 and TMRU-2) and a unit of reload timer counter (TMRU-3).

Figure 15.1 is a block diagram of timer R.



### 15.1.3 Pin Configuration

Table 15.1 shows the pin configuration of timer R.

**Table 15.1 Pin Configuration**

| Name                        | Abbrev. | I/O   | Function                                |
|-----------------------------|---------|-------|-----------------------------------------|
| Input capture inputting pin | IRQ3    | Input | Input capture inputting for the Timer R |

### 15.1.4 Register Configuration

Table 15.2 shows the register configuration of timer R.

**Table 15.2 Register Configuration**

| Name                            | Abbrev. | R/W | Size | Initial Value | Address |
|---------------------------------|---------|-----|------|---------------|---------|
| Timer R mode register 1         | TMRM1   | R/W | Byte | H'00          | H'D118  |
| Timer R mode register 2         | TMRM2   | R/W | Byte | H'00          | H'D119  |
| Timer R control/status register | TM RCS  | R/W | Byte | H'03          | H'D11F  |
| Timer R capture register 1      | TM RCP1 | R   | Byte | H'FF          | H'D11A  |
| Timer R capture register 2      | TM RCP2 | R   | Byte | H'FF          | H'D11B  |
| Timer R load register 1         | TM RL1  | W   | Byte | H'FF          | H'D11C  |
| Timer R load register 2         | TM RL2  | W   | Byte | H'FF          | H'D11D  |
| Timer R load register 3         | TM RL3  | W   | Byte | H'FF          | H'D11E  |

Note: Memories of respective registers will be preserved even under the low power consumption mode. Nonetheless, the CAPF flag and SLW flag of the TMRM2 will be cleared to 0.

## 15.2 Register Descriptions

### 15.2.1 Timer R Mode Register 1 (TMRM1)

|                 |      |       |     |      |      |      |         |     |
|-----------------|------|-------|-----|------|------|------|---------|-----|
| Bit :           | 7    | 6     | 5   | 4    | 3    | 2    | 1       | 0   |
|                 | CLR2 | AC/BR | RLD | RLCK | PS21 | PS20 | RLD/CAP | CPS |
| Initial value : | 0    | 0     | 0   | 0    | 0    | 0    | 0       | 0   |
| R/W :           | R/W  | R/W   | R/W | R/W  | R/W  | R/W  | R/W     | R/W |

The timer R mode register 1 (TMRM1) works to control the acceleration and braking processes and to select the inputting clock for the TMRU-2. This is an 8-bit read/write register. When reset, the TMRM1 is initialized to H'00.

**Bit 7—Selecting Clearing/Not Clearing of TMRU-2 (CLR2):** This bit is used for selecting if the TMRU-2 counter reading is to be cleared or not as it is captured.

#### Bit 7

| CLR2 | Description                                                                            |
|------|----------------------------------------------------------------------------------------|
| 0    | TMRU-2 counter reading is not to be cleared as soon as it is captured. (Initial value) |
| 1    | TMRU-2 counter reading is to be cleared as soon as it is captured                      |

**Bit 6—Acceleration/Braking Processing (AC/BR):** This bit works to control occurrences of interrupt requests to detect completion of acceleration or braking while the capstan motor is making intermittent revolutions.

For more information, see section 15.3.6, Acceleration and Braking Processes of the Capstan Motor.

#### Bit 6

| AC/BR | Description             |
|-------|-------------------------|
| 0     | Braking (Initial value) |
| 1     | Acceleration            |

**Bit 5—Using/Not Using the TMRU-2 for Reloading (RLD):** This bit is used for selecting if the TMRU-2 reload function is to be turned on or not.

#### Bit 5

| RLD | Description                                              |
|-----|----------------------------------------------------------|
| 0   | Not using the TMRU-2 as the reload timer (Initial value) |
| 1   | Using the TMRU-2 as the reload timer                     |

**Bit 4—Reloading Timing for the TMRU-2 (RLCK):** This bit works to select if the TMRU-2 is reloading by the CFG or by underflowing of the TMRU-2 counter. This choice is valid only when the bit 5 (RLD) is being set to 1.

#### Bit 4

| RLCK | Description                                             |
|------|---------------------------------------------------------|
| 0    | Reloading at the rising edge of the CFG (Initial value) |
| 1    | Reloading by underflowing of the TMRU-2                 |

**Bits 3 and 2—Clock Source for the TMRU-2 (PS21, PS20):** These bits work to select the inputting clock to the TMRU-2.

| Bit 3 | Bit 2 | Description                                            |
|-------|-------|--------------------------------------------------------|
| PS21  | PS20  |                                                        |
| 0     | 0     | Counting by underflowing of the TMRU-1 (Initial value) |
|       | 1     | Counting by the PSS, $\phi/256$                        |
| 1     | 0     | Counting by the PSS, $\phi/128$                        |
|       | 1     | Counting by the PSS, $\phi/64$                         |

**Bit 1—Operation Mode of the TMRU-1 (RLD/CAP):** This bit works to select if the operation mode of the TMRU-1 is reload timer mode or capture timer mode.

Under the capture timer mode, reloading operation will not be made. Also, the counter reading will be cleared as soon as capture has been made.

#### Bit 1

| RLD/CAP | Description                                             |
|---------|---------------------------------------------------------|
| 0       | The TMRU-1 works as the reloading timer (Initial value) |
| 1       | The TMRU-1 works as the capture timer                   |

**Bit 0—Capture Signals of the TMRU-1 (CPS):** In combination with the LAT bit (Bit 7) of the TMR2, this bit works to select the capture signals of the TMRU-1. This bit becomes valid when the LAT bit is being set to 1. It will also become valid when the RLD/CAP bit (Bit 1) is being set to 1. Nonetheless, it will be invalid when the RLD/CAP bit (Bit 1) is being set to 0.

#### Bit 0

| CPS | Description                                                   |
|-----|---------------------------------------------------------------|
| 0   | Capture signals at the rising edge of the CFG (Initial value) |
| 1   | Capture signals at the edge of the IRQ3                       |

### 15.2.2 Timer R Mode Register 2 (TMRM2)

|                 |     |      |      |      |      |        |        |        |
|-----------------|-----|------|------|------|------|--------|--------|--------|
| Bit :           | 7   | 6    | 5    | 4    | 3    | 2      | 1      | 0      |
|                 | LAT | PS11 | PS10 | PS31 | PS30 | CP/SLM | CAPF   | SLW    |
| Initial value : | 0   | 0    | 0    | 0    | 0    | 0      | 0      | 0      |
| R/W :           | R/W | R/W  | R/W  | R/W  | R/W  | R/W    | R/(W)* | R/(W)* |

The timer R mode register 2 (TMRM2) is an 8-bit read/write register which works to identify the operation mode and to control the slow tracking processing.

When reset, the TMRM2 is initialized to H'00.

Note: \* The CAPF bit and the SLW bit, respectively, works to latch the interrupt causes and writing 0 only is valid. Consequently, when these bits are being set to 1, respective interrupt requests will not be issued. Therefore, it is necessary to check these bits during the course of the interrupt processing routine to have them cleared.

Also, priority is given to the set and, when an interrupt cause occur while the a clearing command (BCLR, MOV, etc.) is being executed, the CAPF bit and the SLW bit will not be cleared respectively and it thus becomes necessary to pay attention to the clearing timing.



**Bit 7—Capture Signals of the TMRU-2 (LAT):** In combination with the CPS bit (Bit 0) of the TMRM1, this bit works to select the capture signals of the TMRU-2.

| TMRM2 | TMRM1 |                                                     |
|-------|-------|-----------------------------------------------------|
| Bit 7 | Bit 0 |                                                     |
| LAT   | CPS   | Description                                         |
| 0     | *     | Captures when the TMRU-3 underflows (Initial value) |
| 1     | 0     | Captures at the rising edge of the CFG              |
|       | 1     | Captures at the edge of the IRQ3                    |

Note: \* Don't care.

**Bits 6 and 5—Clock Source for the TMRU-1 (PS11, PS10):** These bits work to select the inputting clock to the TMRU-1.

| Bit 6 | Bit 5 |                                                        |
|-------|-------|--------------------------------------------------------|
| PS11  | PS10  | Description                                            |
| 0     | 0     | Counting at the rising edge of the CFG (Initial value) |
|       | 1     | Counting by the PSS, $\phi/4$                          |
| 1     | 0     | Counting by the PSS, $\phi/256$                        |
|       | 1     | Counting by the PSS, $\phi/512$                        |

**Bits 4 and 3—Clock Source for the TMRU-3 (PS31, PS30):** These bits work to select the inputting clock to the TMRU-3.

| Bit 4 | Bit 3 |                                                                                     |
|-------|-------|-------------------------------------------------------------------------------------|
| PS31  | PS30  | Description                                                                         |
| 0     | 0     | Counting at the rising edge of the DVCTL from the dividing circuit. (Initial value) |
|       | 1     | Counting by the PSS, $\phi/4096$                                                    |
| 1     | 0     | Counting by the PSS, $\phi/2048$                                                    |
|       | 1     | Counting by the PSS, $\phi/1024$                                                    |

**Bit 2—Interrupt Causes (CP/SLM):** This bit works to select the interrupt causes for the TMRI3.

#### Bit 2

| CP/SLM | Description                                                                           |
|--------|---------------------------------------------------------------------------------------|
| 0      | Makes interrupt requests upon the capture signals of the TMRU-2 valid (Initial value) |
| 1      | Makes interrupt requests upon ending of the slow tracking mono-multi valid            |

**Bit 1—Capture Signal Flag (CAPF):** This is a flag being set out by the capture signal of the TMRU-2. Although both reading/writing are possible, 0 only is valid for writing. Also, priority is being given to the set and, when the capture signal and writing 0 occur simultaneously, this flag bit remains being set to 1 and the interrupt request will not be issued and it is necessary to be attentive about this fact.

When the CP/SLM bit (bit 2) is being set to 1, this CAPF bit should always be set to 0. The CAPF flag is cleared to 0 under the low power consumption mode.

#### Bit 1

| CAPF | Description                                                                                           |
|------|-------------------------------------------------------------------------------------------------------|
| 0    | [Clearing conditions]<br>When 0 is written after reading 1 (Initial value)                            |
| 1    | [Setting conditions]<br>At occurrences of the TMRU-2 capture signals while the CP/SLM bit is set to 0 |

**Bit 0—Slow Tracking Mono-multi Flag (SLW):** This is a flag being set out when the slow tracking mono-multi processing ends. Although both reading/writing are possible, 0 only is valid for writing.

Also, priority is being given to the set and, when ending of the slow tracking mono-multi processing and writing 0 occur simultaneously, this flag bit remains being set to 1 and the interrupt request will not be issued and it is necessary to be attentive about this fact.

When the CP/SLM bit (bit 2) is being set to 0, this SLW bit should always be set to 0. The SLW flag is cleared to 0 under the low power consumption mode.

#### Bit 0

| SLW | Description                                                                                                |
|-----|------------------------------------------------------------------------------------------------------------|
| 0   | [Clearing conditions]<br>When 0 is written after reading 1 (Initial value)                                 |
| 1   | [Setting conditions]<br>When the slow tracking mono-multi processing ends while the CP/SLM bit is set to 1 |

### 15.2.3 Timer R Control/Status Register (TM RCS)

|                 |        |        |        |        |        |        |   |   |
|-----------------|--------|--------|--------|--------|--------|--------|---|---|
| Bit :           | 7      | 6      | 5      | 4      | 3      | 2      | 1 | 0 |
|                 | TMRI3E | TMRI2E | TMRI1E | TMRI3  | TMRI2  | TMRI1  | — | — |
| Initial value : | 0      | 0      | 0      | 0      | 0      | 0      | 1 | 1 |
| R/W :           | R/W    | R/W    | R/W    | R/(W)* | R/(W)* | R/(W)* | — | — |

Note: \* Only 0 can be written to clear the flag.

The timer R control/status register (TM RCS) works to control the interrupts of timer R. The TM RCS is an 8-bit read/write register. When reset, the TM RCS is initialized to H'03.

**Bit 7—Enabling the TMRI3 Interrupt (TMRI3E):** This bit works to permit/prohibit occurrence of the TMRI3 interrupt when an interrupt cause being selected by the CP/SLM bit of the TMRM2 has occurred, such as occurrences of the TMRU-2 capture signals or when the slow tracking mono-multi processing ends, and the TMRI3 has been set to 1.

#### Bit 7

| TMRI3E | Description                                               |
|--------|-----------------------------------------------------------|
| 0      | Prohibits occurrences of TMRI3 interrupts (Initial value) |
| 1      | Permits occurrences of TMRI3 interrupts                   |

**Bit 6—Enabling the TMRI2 Interrupt (TMRI2E):** This bit works to permit/prohibit occurrence of the TMRI2 interrupt when the TMRI2 has been set to 1 by issuance of the underflow signal of the TMRU-2 or by ending of the slow tracking mono-multi processing.

#### Bit 6

| TMRI2E | Description                                               |
|--------|-----------------------------------------------------------|
| 0      | Prohibits occurrences of TMRI2 interrupts (Initial value) |
| 1      | Permits occurrences of TMRI2 interrupts                   |

**Bit 5—Enabling the TMRI1 Interrupt (TMRI1E):** This bit works to permit/prohibit occurrence of the TMRI1 interrupt when the TMRI1 has been set to 1 by issuance of the underflow signal of the TMRU-1.

#### Bit 5

| TMRI1E | Description                                               |
|--------|-----------------------------------------------------------|
| 0      | Prohibits occurrences of TMRI1 interrupts (Initial value) |
| 1      | Permits occurrences of TMRI1 interrupts                   |

**Bit 4—TMRI3 Interrupt Requesting Flag (TMRI3):** This is the TMRI3 interrupt requesting flag.

It indicates occurrence of an interrupt cause being selected by the CP/SLM bit of the TMRM2, such as occurrences of the TMRU-2 capture signals or ending of the slow tracking mono-multi processing.

#### Bit 4

| TMRI3 | Description                                                                                                |
|-------|------------------------------------------------------------------------------------------------------------|
| 0     | [Clearing conditions]<br>When 0 is written after reading 1 (Initial value)                                 |
| 1     | [Setting conditions]<br>At occurrence of the interrupt cause being selected by the CP/SLM bit of the TMRM2 |

**Bit 3—TMRI2 Interrupt Requesting Flag (TMRI2):** This is the TMRI2 interrupt requesting flag.

It indicates occurrences of the TMRU-2 underflow signals or ending of the acceleration/braking processing of the capstan motor.

#### Bit 3

| TMRI2 | Description                                                                                                                                   |
|-------|-----------------------------------------------------------------------------------------------------------------------------------------------|
| 0     | [Clearing conditions]<br>When 0 is written after reading 1 (Initial value)                                                                    |
| 1     | [Setting conditions]<br>At occurrences of the TMRU-2 underflow signals or ending of the acceleration /braking processing of the capstan motor |

**Bit 2—TMRI1 Interrupt Requesting Flag (TMRI1):** This is the TMRI1 interrupt requesting flag.

It indicates occurrences of the TMRU-1 underflow signals.

## Bit 2

| TMRI1 | Description                                                                 |
|-------|-----------------------------------------------------------------------------|
| 0     | [Clearing conditions]<br>When 0 is written after reading 1. (Initial value) |
| 1     | [Setting conditions]<br>When the TMRU-1 underflows.                         |

**Bits 1 and 0—Reserved:** These bits cannot be modified and are always read as 1.

## 15.2.4 Timer R Capture Register 1 (TMRC1)

|                 |        |        |        |        |        |        |        |        |
|-----------------|--------|--------|--------|--------|--------|--------|--------|--------|
| Bit :           | 7      | 6      | 5      | 4      | 3      | 2      | 1      | 0      |
|                 | TMRC17 | TMRC16 | TMRC15 | TMRC14 | TMRC13 | TMRC12 | TMRC11 | TMRC10 |
| Initial value : | 1      | 1      | 1      | 1      | 1      | 1      | 1      | 1      |
| R/W :           | R      | R      | R      | R      | R      | R      | R      | R      |

The timer R capture register 1 (TMRC1) works to store the captured data of the TMRU-1. During the course of the capturing operation, the TMRU-1 counter readings are captured by the TMRC1 at the CFG edge or the IRQ3 edge. The capturing operation of the TMRU-1 is performed using 16 bits, in combination with the capturing operation of the TMRU-2. The TMRC1 is an 8-bit read only register. When reset, the TMRC1 is initialized to H'FF.

- Notes:
1. When the TMRC1 is readout while the capture signal is being received, the reading data become unstable. Pay attention to the timing for reading out.
  2. When a shift to the low power consumption mode is made while the capturing operation is in progress, the counter reading becomes unstable. After returning to the active mode, always write H'FF into the TMRL1 to initialize the counter.

### 15.2.5 Timer R Capture Register 2 (TMRC2P2)

|                 |        |        |        |        |        |        |        |        |
|-----------------|--------|--------|--------|--------|--------|--------|--------|--------|
| Bit :           | 7      | 6      | 5      | 4      | 3      | 2      | 1      | 0      |
|                 | TMRC27 | TMRC26 | TMRC25 | TMRC24 | TMRC23 | TMRC22 | TMRC21 | TMRC20 |
| Initial value : | 1      | 1      | 1      | 1      | 1      | 1      | 1      | 1      |
| R/W :           | R      | R      | R      | R      | R      | R      | R      | R      |

The timer R capture register 2 (TMRC2P2) works to store the capture data of the TMRU-2. At each CFG edge, IRQ3 edge, or at occurrence of underflow of the TMRU-3, the TMRU-2 counter readings are captured by the TMRC2P2.

The TMRC2P2 is an 8-bit read only register. When reset, the TMRC2P2 will be initialized into H'FF.

- Notes:
1. When the TMRC2P2 is readout while the capture signal is being received, the reading data become unstable. Pay attention to the timing for reading out.
  2. When a shift to the low power consumption mode is made, the counter reading becomes unstable. After returning to the active mode, always write H'FF into the TMRL2 to initialize the counter.

### 15.2.6 Timer R Load Register 1 (TMRL1)

|                 |       |       |       |       |       |       |       |       |
|-----------------|-------|-------|-------|-------|-------|-------|-------|-------|
| Bit :           | 7     | 6     | 5     | 4     | 3     | 2     | 1     | 0     |
|                 | TMRL7 | TMRL6 | TMRL5 | TMRL4 | TMRL3 | TMRL2 | TMRL1 | TMRL0 |
| Initial value : | 1     | 1     | 1     | 1     | 1     | 1     | 1     | 1     |
| R/W :           | W     | W     | W     | W     | W     | W     | W     | W     |

The timer R load register 1 (TMRL1) is an 8-bit write-only register which works to set the load value of the TMRU-1.

When a load value is set to the TMRL1, the same value will be set to the TMRU-1 counter simultaneously and the counter starts counting down from the set value. Also, when the counter underflows during the course of the reload timer operation, the TMRL1 value will be set to the counter.

When reset, the TMRL1 is initialized to H'FF.

### 15.2.7 Timer R Load Register 2 (TMRL2)

|                 |       |       |       |       |       |       |       |       |
|-----------------|-------|-------|-------|-------|-------|-------|-------|-------|
| Bit :           | 7     | 6     | 5     | 4     | 3     | 2     | 1     | 0     |
|                 | TMR27 | TMR26 | TMR25 | TMR24 | TMR23 | TMR22 | TMR21 | TMR20 |
| Initial value : | 1     | 1     | 1     | 1     | 1     | 1     | 1     | 1     |
| R/W :           | W     | W     | W     | W     | W     | W     | W     | W     |

The timer R load register 2 (TMRL2) is an 8-bit write only register which works to set the load value of the TMRU-2.

When a load value is set to the TMRL2, the same value will be set to the TMRU-2 counter simultaneously and the counter starts counting down from the set value. Also, when the counter underflows or a CFG edge is detected during the course of the reload timer operation, the TMRL2 value will be set to the counter.

When reset, the TMRL2 is initialized to H'FF.

### 15.2.8 Timer R Load Register 3 (TMRL3)


|                 |       |       |       |       |       |       |       |       |
|-----------------|-------|-------|-------|-------|-------|-------|-------|-------|
| Bit :           | 7     | 6     | 5     | 4     | 3     | 2     | 1     | 0     |
|                 | TMR37 | TMR36 | TMR35 | TMR34 | TMR33 | TMR32 | TMR31 | TMR30 |
| Initial value : | 1     | 1     | 1     | 1     | 1     | 1     | 1     | 1     |
| R/W :           | W     | W     | W     | W     | W     | W     | W     | W     |

The timer R load register 3 (TMRL3) is an 8-bit write only register which works to set the load value of the TMRU-3.

When a load value is set to the TMRL3, the same value will be set to the TMRU-3 counter simultaneously and the counter starts counting down from the set value. Also, when the counter underflows or a DVCTL edge is detected, the TMRL2 value will be set to the counter. (Reloading will be made by the underflowing signals when the DVCTL signal is selected as the clock source, and reloading will be made by the DVCTL signals when the dividing clock is selected as the clock source.)

When reset, the TMRL3 is initialized to H'FF.

15.2.9 Module Stop Control Register (MSTPCR)

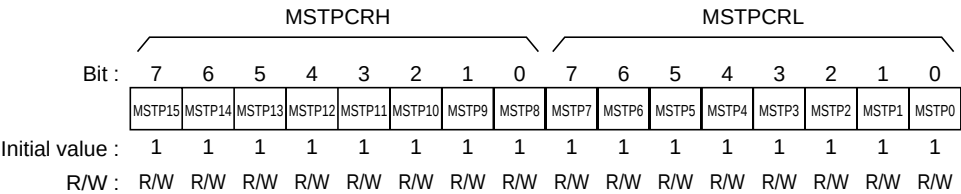

The MSTPCR are 8-bit read/write twin registers which work to control the module stop mode. When the MSTP11 bit is set to 1, timer R stops its operation at the ending point of the bus cycle to shift to the module stop mode. For more information, see section 4.5, Module Stop Mode. When reset, the MSTPCR is initialized to H'FFFF.

**Bit 3—Module Stop (MSTP11):** This bit works to designate the module stop mode for the Timer R.

MSTPCRH

Bit 3

| MSTP11 | Description                                          |
|--------|------------------------------------------------------|
| 0      | Cancels the module stop mode of timer R              |
| 1      | Sets the module stop mode of timer R (Initial value) |



## 15.3 Operation

### 15.3.1 Reload Timer Counter Equipped with Capturing Function TMRU-1

TMRU-1 is a reload timer counter equipped with capturing function. It consists of an 8-bit down-counter, a reloading register and a capture register.

The clock source can be selected from among the leading edge of the CFG signals and three types of dividing clocks. It is also selectable whether using it as a reload counter or as a capture counter. Even when the capturing function is selected, the counter readings can be updated by writing the values into the reloading register.

When the counter underflows, the TMRI1 interrupt request will be issued.

The initial values of the TMRU-1 counter, reloading register and capturing register are all H'FF.

- Operation of the Reload Timer

When a value is written into the reloading register, the same value will be written into the counter simultaneously. Also, when the counter underflows, the reloading register value will be reloaded to the counter. The TMRU-1 is a dividing circuit for the CFG. In combination with the TMRU-2 and TMRU-3, it can also be used for the mode identification purpose.

- Capturing Operation

Capturing operation is carried out in combination with the TMRU-2 using the combined 16 bits. It can be so programmed that the counter may be cleared by the capture signal. The CFG edges or IRQ3 edges are used as the capture signals. It is possible to issue the TMRI3 interrupt request by the capture signal.

In addition to the capturing function being worked out in combination with the TMRU-2, the TMRU-1 can be used as a 16-bit CFG counter. Selecting the  $\overline{\text{IRQ3}}$  as the capture signal, the CFG within the duration of the reel pulse being input into the  $\overline{\text{IRQ3}}$  pin can be counted by the TMRU-1.

### 15.3.2 Reload Timer Counter Equipped with Capturing Function TMRU-2

TMRU-2 is a reload timer counter equipped with capturing function. It consists of an 8-bit down-counter, a reloading register and a capture register.

The clock source can be selected from among the underflowing signal of the TMRU-1 and three types of dividing clocks. Also, although the reloading function is workable during its capturing operation, equipping or not of the reloading function is selectable. Even when without-reloading-function is chosen, the counter reading can be updated by writing the values to the reloading register.

When the counter underflows, the TMRI2 interrupt request will be issued.

The initial values of the TMRU-2 counter, reloading register and capturing register are all H'FF.

- Operation of the Reload Timer

When a value is written into to the reloading register, the same value will be written into the counter, simultaneously. Also, when the counter underflows or when a CFG edge is detected, the reloading register value will be reloaded to the counter.

The TMRU-2 can make acceleration and braking work for the capstan motor using the reload timer operation.

- Capturing Operation

Using the capture signals, the counter reading can be latched into the capturing register. As the capture signal, you can choose from among edges of the CFG, edges of the IRQ3 or the underflow signals of the TMRU-3. It is possible to issue the TMRI3 interrupt request by the capture signal.

The capturing function (stopping the reloading function) of the TMRU-2, in combination with the TMRU-1 and TMRU-3, can also be used for the mode identification purpose.

### 15.3.3 Reload Counter Timer TMRU-3

The reload counter timer TMRU-3 consists of an 8-bit down-counter and a reloading register. Its clock source can be selected from between the underflowing signal of the counter and the edges of the DVCTL signals. (When the DVCTL signal is selected as the clock source, reloading will be effected by the underflowing signals and when the dividing clock is selected as the clock source, reloading will be effected by the DVCTL signals.) The reloading signal works to reload the reloading register value into the counter. Also, when a value is written into to the reloading register, the same value will be written into the counter, simultaneously.

The initial values of the counter and the reloading register are H'FF.

The underflowing signals can be used as the capturing signal for the TMRU-2.

The TMRU-3 can also be used as a dividing circuit for the DVCTL. Also, in combination with the TMRU-1 and TMRU-2 (capturing function), the TMRU-3 can be used for the mode identification purpose. Since the divided signals of the DVCTL are being used as the clock source, CTL signals (DVCTL) conforming to the double speed can be input when making

searches. These DVCTL signals can also be used for phase controls of the capstan motor. Also, by selecting the dividing clock as the clock source, it is possible to make a delay with the edges of the DVCTL to provide the slow tracking mono-multi function.

#### **15.3.4 Mode Identification**

When making mode identification (2/4/6 identification) of the SP/LP/EP modes of reproducing tapes, the TMRU-1 (CFG dividing circuit), TMRU-2 (capturing function/without reloading function) and TMRU-3 (DVCTL dividing circuit) of timer R should be used.

Timer R will become to the aforementioned status after a reset.

Under the aforementioned status, the divided CFG should be written into the reloading register of the TMRU-1 and divided DVCTL should be written into the reloading register of the TMRU-3.

When the TMRU-3 underflows, the counter value of the TMRU-2 is captured. Such capturing register value represents the number of the CFG within the DVCTL cycle.

As aforementioned, the Timer R can work to count the number of the CFG corresponding to n times of DVCTL's or to identify the mode being searched.

For register settings, see section 15.5.1, Mode Identification.

#### **15.3.5 Reeling Controls**

CFG counts can be captured by making 16-bit capturing operation combining the TMRU-1 and TMRU-2. Choosing the IRQ3 as the capture signal and counting the CFG within the duration of the reel pulse being input through the  $\overline{\text{IRQ3}}$  pin affect reeling controls. For register settings, see section 15.5.2, Reeling Controls.

#### **15.3.6 Acceleration and Braking Processes of the Capstan Motor**

When making intermittent movements such as those for slow reproductions or for still reproductions, it is necessary to conduct quick accelerations and abrupt stoppings of the capstan motor. The acceleration and braking processes functions to check if the revolution of a capstan motor has reached the prescribed rate when accelerated or braked. For this purpose, the TMRU-2 (reloading function) should be used.

When making accelerations:

- Set the AC/BR bit of the TMRM1 to acceleration (set to 1). Also, use the rising edge of the CFG as the reloading signal.
- Set the prescribed time on the CFG frequency to determine if the acceleration has been finished, into the reloading register.
- The TMRU-2 will work to down-count the reloading data.
- In case the acceleration has not been finished (in case the CFG signal is not input even when the prescribed time has elapsed = underflowing of down-counting has occurred), such

underflowing works to set to CFG mask F/F (masking movement) and the reload timer will be cleared by the CFG.

- When the acceleration has been finished (when the CFG signal is input before the prescribed time has elapsed = reloading movement has been made before the down counter underflows), an interrupt request will be issued because of the CFG.

When making braking:

- Set the AC/BR bit of the TMRM1 to braking (clear to 0). Also, use the rising edge of the CFG as the reloading signal.
- Set the prescribed time on the CFG frequency to determine if the braking has been finished, into the reloading register.
- The TMRU-2 will work to down-count the reloading data.
- If the braking has not finished (when the CFG signal is input before the prescribed time has elapsed and reloading movement has been made before the down counter underflows), the reload timer movement will continue.
- When the acceleration has finished (when the CFG signal is not input even when the prescribed time has elapsed and underflowing of down-counting has occurred), interrupt request will be issued because of the underflowing signal.

The acceleration and braking processes should be employed when making special reproductions, in combination with the slow tracking mono-multi function outlined in section 15.3.7.

For register settings, see section 15.5.4, Acceleration and Braking Processes of the Capstan Motor.

### 15.3.7 Slow Tracking Mono-Multi Function

When performing slow reproductions or still reproductions, the braking timing for the capstan motor is determined by use of the edge of the DVCTL signal. The slow tracking mono-multi function works to measure the time from the rising edge of the DVCTL signal down to the desired point to issue the interrupt request. In actual programming, this interrupt should be used to activate the brake of the capstan motor. The TMRU-3 should be used to perform time measurements for the slow tracking mono-multi function. Also, the braking process can be made using the TMRU-2. Figure 15.2 shows the time series movements when a slow reproduction is being performed.

For register settings, see section 15.5.3, Slow Tracking Mono-Multi Function.

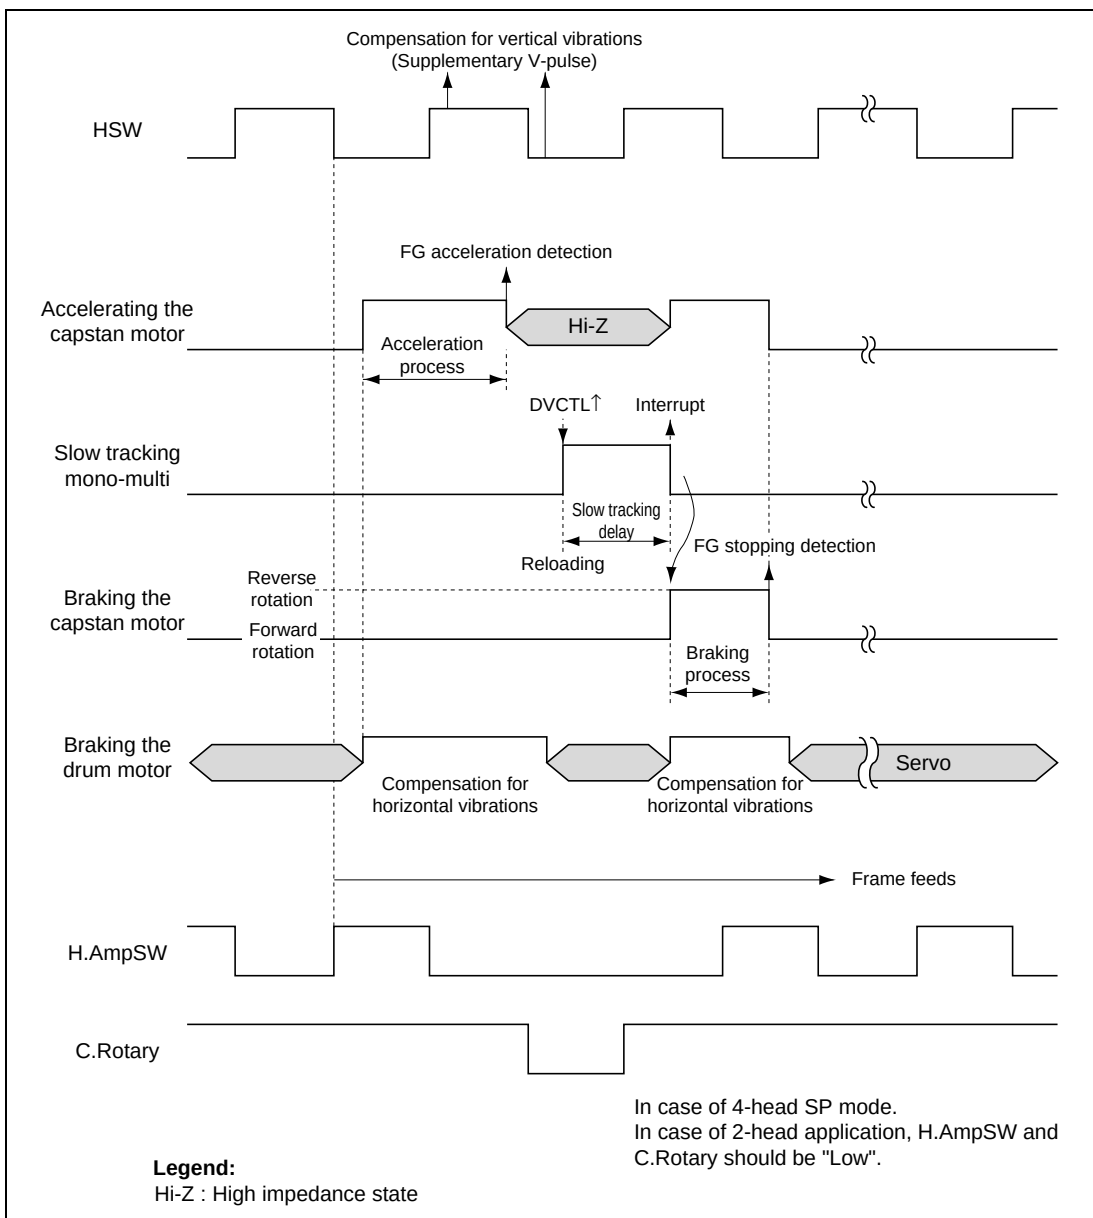


**Figure 15.2 Time Series Movements when a Slow Reproduction Is Being Performed**

## 15.4 Interrupt Cause

In timer R, bits TMRI1 to TMRI3 of the timer R control/status register cause interrupts. The following are descriptions of the interrupts.

1. Interrupts caused by the underflowing of the TMRU-1 (TMRI1)  
These interrupts will constitute the timing for reloading with the TMRU-1.
2. Interrupts caused by the underflowing of the TMRU-2 or by an end of the acceleration or braking process (TMRI2)

When interrupts occur at the reload timing of the TMRU-2, clear the AC/BR (acceleration/braking) bit of the timer R mode register 1 (TMRM1) to 0.

3. Interrupts caused by the capture signals of the TMRU-2 and by ending the slow tracking mono-multi process (TMRI3)

Since these two interrupt causes are constituting the OR, it becomes necessary to determine which interrupt cause is occurring using the software.

Respective interrupt causes are being set to the CAPF flag or the SLW flag of the timer R mode register 2 (TMRM2), have the software determine which.

Since the CAPF flag and the SLW flag will not be cleared automatically, program the software to clear them. (Writing 0 only is valid for these flags.) Unless these flags are cleared, detection of the next cause becomes unworkable. Also, if the CP/SLM bit is changed leaving these flags uncleared as they are, these flags will get cleared.

## 15.5 Settings for Respective Functions

### 15.5.1 Mode Identification

When making mode identification (2/4/6 identification) of the SP/LP/EP modes of reproducing tapes, the TMRU-1 (CFG dividing circuit), TMRU-2 (capturing function/without reloading function) and TMRU-3 (DVCTL dividing circuit) of the timer R should be used.

Timer R will be initialized to this mode identification status after a reset.

Under this status, the divided CFG should be written into the reloading register of the TMRU-1 and divided DVCTL should be written into the reloading register of the TMRU-3. When the TMRU-3 underflows, the counter value of the TMRU-2 is captured. Such capturing register value represents the number of the CFG within the DVCTL cycle.

Thus, timer R can work to count the number of the CFG corresponding to  $n$  times of DVCTL's or to identify the mode being searched.

#### Settings

- Setting the timer R mode register 1 (TMRM1)
  - CLR2 bit (bit 7) = 1: Works to clear after making the TMRU-2 capture.
  - RLD bit (bit 5) = 0: Sets the TMRU-3 without reloading function.
  - PS21 and PS20 (bits 3 and 2) = (0 and 0): The underflowing signals of the TMRU-1 are to be used as the clock source for the TMRU-2.
  - RLD/CAP bit (bit 1) = 0: The TMRU-1 has been set to make the reload timer operation.
- Setting the timer R mode register 2 (TMRM2)
  - LAT bit (bit 7) = 0: The underflowing signals of the TMRU-3 are to be used as the capture signal for the TMRU-2.
  - PS11 and PS10 (bits 6 and 5) = (0 and 0): The leading edge of the CFG signal is to be used as the clock source for the TMRU-1.
  - PS31 and PS30 (bits 4 and 3) = (0 and 0): The leading edge of the DVCTL signal is to be used as the clock source for the TMRU-3.
  - CP/SLM bit (bit 2) = 0: The capture signal is to work to issue the TMRI3 interrupt request.
- Setting the timer R load register 1 (TMRL1)
  - Set the dividing value for the CFG. The set value should become  $(n - 1)$  when divided by  $n$ .
- Setting the timer R load register 3 (TMRL3)
  - Set the dividing value for the DVCTL. The set value should become  $(n - 1)$  when divided by  $n$ .

## 15.5.2 Reeling Controls

CFG counts can be captured by making 16-bit capturing operation combining the TMRU-1 and TMRU-2. By choosing the IRQ3 as the capture signal, and by counting the CFG within the duration of the reel pulse being input through the  $\overline{\text{IRQ3}}$  pin, reeling controls, etc. can be effected.

### Settings

- Setting P13/ $\overline{\text{IRQ3}}$  pin as the  $\overline{\text{IRQ3}}$  pin
  - Set the PMR13 bit (bit 3) of the port mode register 1 (PMR1) to 1. See section 10.3.2, Port Mode Register (PMR1).
- Setting the timer R mode register 1 (TMRM1)
  - CLR2 bit (bit 7) = 1: Works to clear after making the TMRU-2 capture.
  - PS21 and PS20 (bits 3 and 2) = (0 and 0): The underflowing signals of the TMRU-1 are to be used as the clock source for the TMRU-2.
  - RLD/CAP bit (bit 1) = 1: The TMRU-1 has been set to make the capturing operation.
  - CPS bit (bit 0) = 1: The edge of the IRQ3 signal is to be used as the capture signal for the TMRU-1 and TMRU-2.
- Setting the timer R mode register 2 (TMRM2)
  - LAT bit (bit 7) = 1: The edge of the IRQ3 signal is to be used as the capture signal for the TMRU-1 and TMRU-2.
  - PS11 and PS10 (bits 6 and 5) = (0 and 0): The rising edge of the CFG signal is to be used as the clock source for the TMRU-1.
  - CP/SLM bit (bit 2) = 0: The capture signal is to work to issue the TMRI3 interrupt request.

## 15.5.3 Slow Tracking Mono-Multi Function

When performing slow reproductions or still reproductions, the braking timing for the capstan motor is determined by use of the edge of the DVCTL signal. The slow tracking mono-multi function works to measure the time from the leading edge of the DVCTL signal down to the desired point to issue the interrupt request. In actual programming, this interrupt should be used to activate the brake of the capstan motor. The TMRU-3 should be used to perform time measurements for the slow tracking mono-multi function. Also, the braking process can be made using the TMRU-2.



## Settings

- Setting the timer R mode register 2 (TMRM2)
  - PS31 and PS30 (bits 4 and 3) = Other than (0, 0): The dividing clock is to be used as the clock source for the TMRU-3.
  - CP/SLM bit (bit 2) = 1: The slow tracking delay signal is to work to issue the TMRI3 interrupt request.
- Setting the timer R load register 3 (TMRL3)
  - Set the slow tracking delay value. When the delay count is  $n$ , the set value should be  $(n - 1)$ .
  - Regarding the delaying duration, see figure 15.2.

### 15.5.4 Acceleration and Braking Processes of the Capstan Motor

When making intermittent movements such as those for slow reproductions or for still reproductions, it is necessary to conduct quick accelerations and abrupt stoppings of the capstan motor. The acceleration and braking processes will function to check if the revolution of a capstan motor has reached the prescribed rate when accelerated or braked. For this purpose, the TMRU-2 (reloading function) should be used.

The acceleration and braking processes should be employed when making special reproductions, in combination with the slow tracking mono-multi function.

#### Settings for the acceleration process

- Setting the timer R mode register 1 (TMRM1)
  - AC/BR bit (bit 6) = 1: Acceleration process
  - RLD bit (bit 5) = 1: The TMRU-2 is to be used as the reload timer.
  - RLCK bit (bit 4) = 0: The TMRU-2 is to reload at the rising edge of the CFG.
  - PS21 and PS20 (bits 3 and 2) = Other than (0, 0): The dividing clock is to be used as the clock source for the TMRU-2.
- Setting the timer R load register 2 (TMRL2)
  - Set the count reading for the duration until the acceleration process finishes. When the count is  $n$ , the set value should be  $(n - 1)$ .
  - Regarding the duration until the acceleration process finishes, see figure 15.2.

#### Settings for the braking process

- Setting the timer R mode register 1 (TMRM1)
  - AC/BR bit (bit 6) = 0: Braking process
  - RLD bit (bit 5) = 1: The TMRU-2 is to be used as the reload timer.
  - RLCK bit (bit 4) = 0: The TMRU-2 is to reload at the rising edge of the CFG.

- PS21 and PS20 (bits 3 and 2) = Other than (0, 0): The dividing clock is to be used as the clock source for the TMRU-2.
- Setting the timer R load register 2 (TMRL2)
  - Set the count reading for the duration until the braking process finishes. When the count is  $n$ , the set value should be  $(n - 1)$ .
  - Regarding the duration until the braking process finishes, see figure 15.2.

# Section 16 Timer X1

Note: The Timer X1 is not (incorporated in) provided for the H8S/2197S and H8S/2196S.

## 16.1 Overview

Timer X1 is capable of outputting two different types of independent waveforms using a 16-bit free running counter (FRC) as the basic means and it is also applicable to measurements of the durations of input pulses and the cycles external clocks.

### 16.1.1 Features

Timer X1 has the following features:

- Four different types of counter inputting clocks.  
Three different types of internal clocks ( $\phi/4$ ,  $\phi/16$  and  $\phi/64$ ) and the DVCFG.
- Two independent output comparing functions  
Capable of outputting two different types of independent waveforms.
- Four independent input capturing functions  
The rising edge or falling edge can be selected for use. The buffer operation can also be designated.
- Counter clearing designation is workable.  
The counter readings can be cleared by compare match A.
- Seven types of interrupt causes  
Comparing match  $\times 2$  causes, input capture  $\times 4$  causes and overflow  $\times 1$  cause are available for use and they can make respective interrupt requests independently.

## 16.1.2 Block Diagram

Figure 16.1 shows a block diagram of the Timer X1.

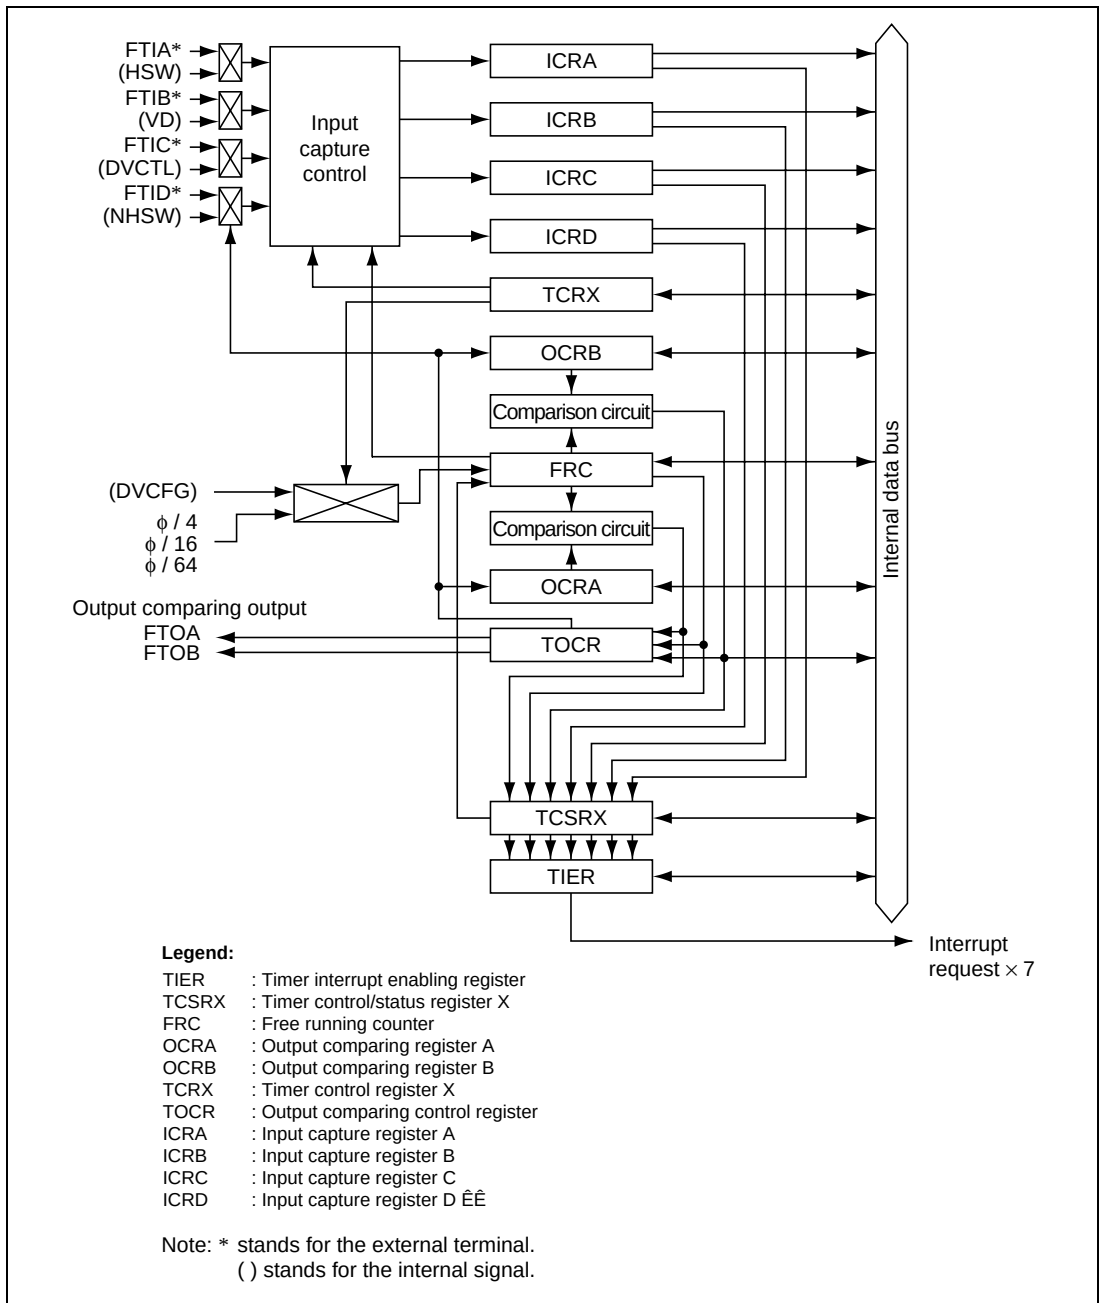


**Figure 16.1 Block Diagram of Timer X1**

### 16.1.3 Pin Configuration

Table 16.1 shows the pin configuration of timer X1.

**Table 16.1 Pin Configuration**

| Name                          | Abbrev. | I/O    | Function                              |
|-------------------------------|---------|--------|---------------------------------------|
| Output comparing A output-pin | FTOA    | Output | Output pin for the output comparing A |
| Output comparing B output-pin | FTOB    | Output | Output pin for the output comparing B |
| Input capture A input-pin     | FTIA    | Input  | Input-pin for the input capture A     |
| Input capture B input-pin     | FTIB    | Input  | Input-pin for the input capture B     |
| Input capture C input-pin     | FTIC    | Input  | Input-pin for the input capture C     |
| Input capture D input-pin     | FTID    | Input  | Input-pin for the input capture D     |

### 16.1.4 Register Configuration

Table 16.2 shows the register configuration of timer X1.

**Table 16.2 Register Configuration**

| Name                                    | Abbrev. | R/W                  | Initial Value | Address* <sup>3</sup> |
|-----------------------------------------|---------|----------------------|---------------|-----------------------|
| Timer interrupt enabling register       | TIER    | R/W                  | H'00          | H'D100                |
| Timer control/status register X         | TCSRX   | R/ (W)* <sup>1</sup> | H'00          | H'D101                |
| Free running counter H                  | FRCH    | R/W                  | H'00          | H'D102                |
| Free running counter L                  | FRCL    | R/W                  | H'00          | H'D103                |
| Output comparing register AH            | OCRAH   | R/W                  | H'FF          | H'D104* <sup>2</sup>  |
| Output comparing register AL            | OCRAL   | R/W                  | H'FF          | H'D105* <sup>2</sup>  |
| Output comparing register BH            | OCRBH   | R/W                  | H'FF          | H'D104* <sup>2</sup>  |
| Output comparing register BL            | OCRBL   | R/W                  | H'FF          | H'D105* <sup>2</sup>  |
| Timer control register X                | TCRX    | R/W                  | H'00          | H'D106                |
| Timer output comparing control register | TOCR    | R/W                  | H'00          | H'D107                |
| Input capture register AH               | ICRAH   | R                    | H'00          | H'D108                |
| Input capture register AL               | ICRAL   | R                    | H'00          | H'D109                |
| Input capture register BH               | ICRBH   | R                    | H'00          | H'D10A                |
| Input capture register BL               | ICRBL   | R                    | H'00          | H'D10B                |
| Input capture register CH               | ICRCH   | R                    | H'00          | H'D10C                |
| Input capture register CL               | ICRCL   | R                    | H'00          | H'D10D                |
| Input capture register DH               | ICRDH   | R                    | H'00          | H'D10E                |
| Input capture register DL               | ICRDL   | R                    | H'00          | H'D10F                |


- Notes: 1. Only 0 can be written to clear the flag for Bits 7 to 1. Bit 0 is readable/writable.  
2. The addresses of the OCRA and OCRB are the same. Changeover between them are to be made by use of the TOCR bit and OCRS bit.  
3. Lower 16 bits of the address.

# 16.2 Register Descriptions

## 16.2.1 Free Running Counter (FRC)

Free running counter H (FRCH)

Free running counter L (FRCL)

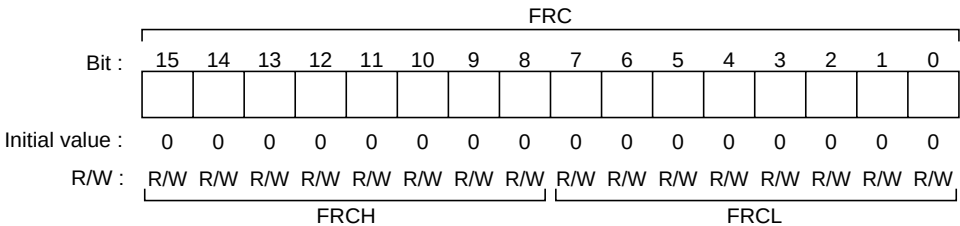


The FRC is a 16-bit read/write up-counter which counts up by the inputting internal clock/external clock. The inputting clock is to be selected from the CKS1 and CKS0 of the TCRX. By the setting of the CCLRA bit of the TCSRX, the FRC can be cleared by comparing match A. When the FRC overflows (H'FFFF → H'0000), the OVF of the TCSRX will be set to 1. At this time, when the OVIE of the TIER is being set to 1, an interrupt request will be issued to the CPU.

Reading/writing can be made from and to the FRC through the CPU at 8-bit or 16-bit. The FRC is initialized to H'0000 when reset or under the standby mode, watch mode, subsleep mode, module stop mode or subactive mode.

## 16.2.2 Output Comparing Registers A and B (OCRA and OCRB)

Output comparing register AH and BH (OCRAH and OCRBH)

Output comparing register AL and BL (OCRAL and OCRBL)

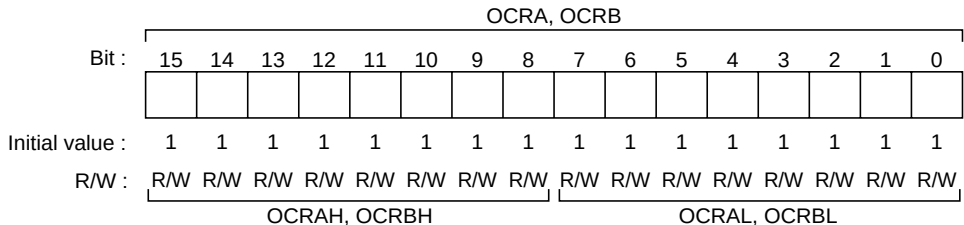

The OCR consists of twin 16-bit read/write registers (OCRA and OCRB). The contents of the OCR are always being compared with the FRC and, when the value of these two match, the OCFA and OCRB of the TCSR<sub>X</sub> will be set to 1. At this time, if the OCIAE and OCIB of the TIER are being set to 1, an interrupt request will be issued to the CPU.

When performing compare matching, if the OEA and OEB of the TOCR are set to 1, the level value set to the OLVLA and OLVLB of the TOCR will be output through the FTOA and FTOB pins. After resetting, 0 will be output through the FTOA and FTOB pins until the first compare matching occurs.

Reading/writing can be made from and to the OCR through the CPU at 8-bit or 16-bit.


The OCR is cleared to H'FFFF when reset or under the standby mode, watch mode, subsleep mode, module stop mode or subactive mode.



## 16.2.3 Input Capture Registers A through D (ICRA through ICRD)

Input capture register AH to DH (ICRAH to ICRDH)

Input capture register AL to DL (ICRAL to ICRDL)

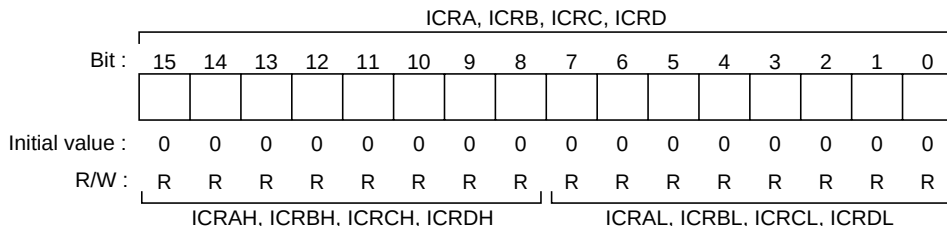

The ICR consists of four 16-bit read-only registers (ICRA through ICRD).

When the falling edge of the input capture input signal is detected, the value is transferred to the ICRA through ICRD. The ICFA through ICFD of the TCSR<sub>X</sub> are set to 1 simultaneously. If the IDIAE through IDIDE of the TCR<sub>X</sub> are all set to 1, an interrupt request will be issued to the CPU. The edge of the input signal can be selected by setting the IEDGA through IEDGD of the TCR<sub>X</sub>. The ICRC and ICRD can also be used as the buffer register, of the ICRA and ICRB, respectively by setting the BUFEA and BUFEB of the TCR<sub>X</sub> to perform buffer operations. Figure 16.2 shows the connections necessary when using the ICRC as the buffer register of the ICRA. (BUFEA = 1) When the ICRC is used as the buffer of the ICRA, by setting IEDGA ≠ IEDGC, both of the rising and falling edges can be designated for use. In case of IEDGA = IEDGC, either one of the rising edge or the falling edge only is usable. Regarding selection of the input signal edge, see table 16.3.

Note: Transference from the FRC to the ICR will be performed regardless of the value of the ICF.

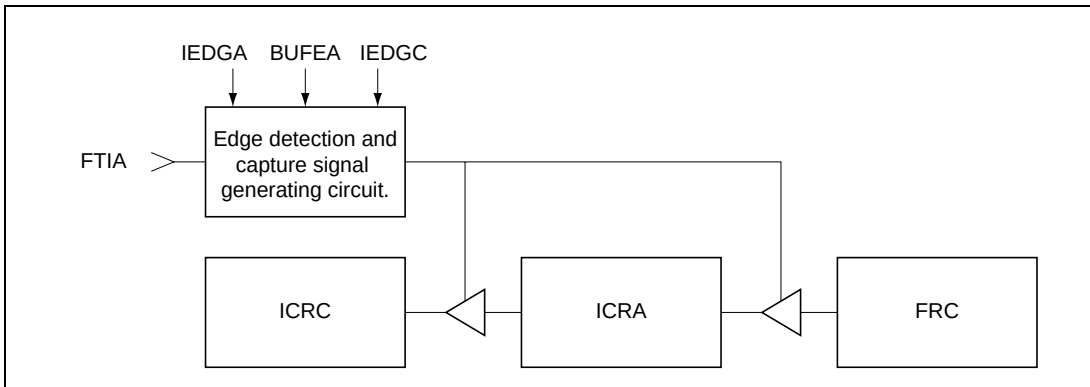


**Figure 16.2 Buffer Operation (Example)**

**Table 16.3 Input Signal Edge Selection when Making Buffer Operation**

| IEDGA | IEDGC | Selection of the Input Signal Edge                                        |
|-------|-------|---------------------------------------------------------------------------|
| 0     | 0     | Captures at the falling edge of the input capture input A (Initial value) |
|       | 1     | Captures at both rising and falling edges of the input capture input A    |
| 1     | 0     |                                                                           |
|       | 1     | Captures at the rising edge of the input capture input A                  |

Reading can be made from the ICR through the CPU at 8-bit or 16-bit.

For stable input capturing operation, maintain the pulse duration of the input capture input signals at 1.5 system clock ( $\phi$ ) or more in case of single edge capturing and at 2.5 system clock ( $\phi$ ) or more in case of both edge capturing.

The ICR is initialized to H'0000 when reset or under the standby mode, watch mode, subsleep mode, module stop mode or subactive mode.

## 16.2.4 Timer Interrupt Enabling Register (TIER)

|                 |       |       |       |       |       |       |      |      |
|-----------------|-------|-------|-------|-------|-------|-------|------|------|
| Bit :           | 7     | 6     | 5     | 4     | 3     | 2     | 1    | 0    |
|                 | ICIAE | ICIBE | ICICE | ICIDE | OCIAE | OCIBE | OVIE | ICSA |
| Initial value : | 0     | 0     | 0     | 0     | 0     | 0     | 0    | 0    |
| R/W :           | R/W   | R/W   | R/W   | R/W   | R/W   | R/W   | R/W  | R/W  |

The TIER is an 8-bit read/write register that controls permission/prohibition of interrupt requests. The TIER is initialized to H'00 when reset or under the standby mode, watch mode, subsleep mode, module stop mode or subactive mode.

**Bit 7—Enabling the Input Capture Interrupt A (ICIAE):** This bit works to permit/prohibit interrupt requests (ICIA) by the ICFA when the ICFA of the TCSRX is being set to 1.

### Bit 7

| ICIAE | Description                                                     |
|-------|-----------------------------------------------------------------|
| 0     | Prohibits interrupt requests (ICIA) by the ICFA (Initial value) |
| 1     | Permits interrupt requests (ICIA) by the ICFA                   |

**Bit 6—Enabling the Input Capture Interrupt B (ICIBE):** This bit works to permit/prohibit interrupt requests (ICIB) by the ICFB when the ICFB of the TCSRX is being set to 1.

### Bit 6

| ICIBE | Description                                                     |
|-------|-----------------------------------------------------------------|
| 0     | Prohibits interrupt requests (ICIB) by the ICFB (Initial value) |
| 1     | Permits interrupt requests (ICIB) by the ICFB                   |

**Bit 5—Enabling the Input Capture Interrupt C (ICICE):** This bit works to permit/prohibit interrupt requests (ICIC) by the ICFC when the ICFC of the TCSRX is being set to 1.

### Bit 5

| ICICE | Description                                                     |
|-------|-----------------------------------------------------------------|
| 0     | Prohibits interrupt requests (ICIC) by the ICFC (Initial value) |
| 1     | Permits interrupt requests (ICIC) by the ICFC                   |

**Bit 4—Enabling the Input Capture Interrupt D (ICIDE):** This bit works to permit/prohibit interrupt requests (ICID) by the ICFD when the ICFD of the TCSR\_X is being set to 1.

**Bit 4**

| ICIDE | Description                                                     |
|-------|-----------------------------------------------------------------|
| 0     | Prohibits interrupt requests (ICID) by the ICFD (Initial value) |
| 1     | Permits interrupt requests (ICID) by the ICFD                   |

**Bit 3—Enabling the Output Comparing Interrupt A (OCIAE):** This bit works to permit/prohibit interrupt requests (OCIA) by the OCFA when the OCFA of the TCSR\_X is being set to 1.

**Bit 3**

| OCIAE | Description                                                     |
|-------|-----------------------------------------------------------------|
| 0     | Prohibits interrupt requests (OCIA) by the OCFA (Initial value) |
| 1     | Permits interrupt requests (OCIA) by the OCFA                   |

**Bit 2—Enabling the Output Comparing Interrupt B (OCIBE):** This bit works to permit/prohibit interrupt requests (OCIB) by the OCFB when the OCFB of the TCSR\_X is being set to 1.

**Bit 2**

| OCIBE | Description                                                     |
|-------|-----------------------------------------------------------------|
| 0     | Prohibits interrupt requests (OCIB) by the OCFB (Initial value) |
| 1     | Permits interrupt requests (OCIB) by the OCFB                   |

**Bit 1—Enabling the Timer Overflow Interrupt (OVIE):** This bit works to permit/prohibit interrupt requests (FOVI) by the OVF when the OVF of the TCSR\_X is being set to 1.

**Bit 1**

| OVIE | Description                                                    |
|------|----------------------------------------------------------------|
| 0    | Prohibits interrupt requests (FOVI) by the OVF (Initial value) |
| 1    | Permits interrupt requests (FOVI) by the OVF                   |

**Bit 0—Selecting the Input Capture A Signals (ICSA):** This bit works to select the input capture A signals.

**Bit 0**

| ICSA | Description                                                                       |
|------|-----------------------------------------------------------------------------------|
| 0    | Selects the FTIA pin for inputting of the input capture A signals (Initial value) |
| 1    | Selects the HSW for inputting of the input capture A signals                      |

## 16.2.5 Timer Control/Status Register X (TCSR\_X)

|                 |        |        |        |        |        |        |        |       |
|-----------------|--------|--------|--------|--------|--------|--------|--------|-------|
| Bit :           | 7      | 6      | 5      | 4      | 3      | 2      | 1      | 0     |
|                 | ICFA   | ICFB   | ICFC   | ICFD   | OCFA   | OCFB   | OVF    | CCLRA |
| Initial value : | 0      | 0      | 0      | 0      | 0      | 0      | 0      | 0     |
| R/W :           | R/(W)* | R/(W)* | R/(W)* | R/(W)* | R/(W)* | R/(W)* | R/(W)* | R/W   |

Note: \* Only 0 can be written to clear the flag for Bits 7 to 1.

The TCSR\_X is an 8-bit register which works to select counter clearing timing and to control respective interrupt requesting signals. The TCSR\_X is initialized to H'00 when reset or under the standby mode, watch mode, subsleep mode, module stop mode or subactive mode.

Meanwhile, as for the timing, see section 16.3, Operation.

The FTIA through FTID pins are for fixed inputs inside the LSI under the low power consumption mode excluding the sleep mode. Consequently, when such shifts as active mode → low power consumption mode → active mode are made, wrong edges may be detected depending on the pin status or on the type of the detecting edge.

To avoid such error, clear the interrupt requesting flag once immediately after shifting to the active mode from the low power consumption mode.

**Bit 7—Input Capture Flag A (ICFA):** This is a status flag indicating the fact that the value of the FRC has been transferred to the ICRA by the input capture signals.

When the BUFEA of the TCR\_X is being set to 1, the ICFA indicates the status that the FRC value has been transferred to the ICRA by the input capture signals and that the ICRA value before being updated has been transferred to the ICRC.

This flag should be cleared by use of the software. Such setting should only be made by use of the hardware. It is not possible to make this setting using a software.

### Bit 7

| ICFA | Description                                                                                                                   |
|------|-------------------------------------------------------------------------------------------------------------------------------|
| 0    | [Clearing conditions] (Initial value)<br>When 0 is written into the ICFA after reading the ICFA under the setting of ICFA = 1 |
| 1    | [Setting conditions]<br>When the value of the FRC has been transferred to the ICRA by the input capture signals               |

**Bit 6—Input Capture Flag B (ICFB):** This status flag indicates the fact that the value of the FRC has been transferred to the ICRB by the input capture signals.

When the BUFEB of the TCRX is being set to 1, the ICFB indicates the status that the FRC value has been transferred to the ICRB by the input capture signals and that the ICRB value before being updated has been transferred to the ICRC.

This flag should be cleared by use of the software. Such setting should only be made by use of the hardware. It is not possible to make this setting using a software.

#### Bit 6

| ICFB | Description                                                                                                                   |
|------|-------------------------------------------------------------------------------------------------------------------------------|
| 0    | [Clearing conditions] (Initial value)<br>When 0 is written into the ICFB after reading the ICFB under the setting of ICFB = 1 |
| 1    | [Setting conditions]<br>When the value of the FRC has been transferred to the ICRB by the input capture signals               |

**Bit 5—Input Capture Flag C (ICFC):** This status flag indicates the fact that the value of the FRC has been transferred to the ICRC by the input capture signals.

When an input capture signal occurs while the BUFEA of the TCRX is being set to 1, although the ICFC will be set out, data transference to the ICRC will not be performed.

Therefore, in buffer operation, the ICFC can be used as an external interrupt by setting the ICICE bit to 1.

This flag should be cleared by use of the software. Such setting should only be made by use of the hardware. It is not possible to make this setting using a software.

#### Bit 5

| ICFC | Description                                                                                                                   |
|------|-------------------------------------------------------------------------------------------------------------------------------|
| 0    | [Clearing conditions] (Initial value)<br>When 0 is written into the ICFC after reading the ICFC under the setting of ICFC = 1 |
| 1    | [Setting conditions]<br>When the input capture signal has occurred                                                            |

**Bit 4—Input Capture Flag D (ICFD):** This status flag indicates the fact that the value of the FRC has been transferred to the ICRD by the input capture signals.

When an input capture signal occurs while the BUFEB of the TCRX is being set to 1, although the ICFD will be set out, data transference to the ICRD will not be performed.

Therefore, in buffer operation, the ICFD can be used as an external interrupt by setting the ICIDE bit to 1.

This flag should be cleared by use of the software. Such setting should only be made by use of the hardware. It is not possible to make this setting using a software.

#### Bit 4

| ICFD | Description                                                                                                                   |
|------|-------------------------------------------------------------------------------------------------------------------------------|
| 0    | [Clearing conditions] (Initial value)<br>When 0 is written into the ICFD after reading the ICFD under the setting of ICFD = 1 |
| 1    | [Setting conditions]<br>When the input capture signal has occurred                                                            |

**Bit 3—Output Comparing Flag A (OCFA):** This status flag indicates the fact that the FRC and the OCRA have come to a comparing match.

This flag should be cleared by use of the software. Such setting should only be made by use of the hardware. It is not possible to make this setting using a software.

#### Bit 3

| OCFA | Description                                                                                                                   |
|------|-------------------------------------------------------------------------------------------------------------------------------|
| 0    | [Clearing conditions] (Initial value)<br>When 0 is written into the OCFA after reading the OCFA under the setting of OCFA = 1 |
| 1    | [Setting conditions]<br>When the FRC and the OCRA have come to the comparing match                                            |



**Bit 2—Output Comparing Flag B (OCFB):** This status flag indicates the fact that the FRC and the OCRB have come to a comparing match.

This flag should be cleared by use of the software. Such setting should only be made by use of the hardware. It is not possible to make this setting using a software.

#### Bit 2

| OCFB | Description                                                                                                                   |
|------|-------------------------------------------------------------------------------------------------------------------------------|
| 0    | [Clearing conditions] (Initial value)<br>When 0 is written into the OCFB after reading the OCFB under the setting of OCFB = 1 |
| 1    | [Setting conditions]<br>When the FRC and the OCRB have come to the comparing match                                            |

**Bit 1—Timer Over Flow (OVF):** This is a status flag indicating the fact that the FRC overflowed. (H'FFFF → H'0000).

This flag should be cleared by use of the software. Such setting should only be made by use of the hardware. It is not possible to make this setting using a software.

#### Bit 1

| OVF | Description                                                                                                                |
|-----|----------------------------------------------------------------------------------------------------------------------------|
| 0   | [Clearing conditions] (Initial value)<br>When 0 is written into the OVF after reading the OVF under the setting of OVF = 1 |
| 1   | [Setting conditions]<br>When the FRC value has become H'FFFF → H'0000                                                      |

**Bit 0—Counter Clearing (CCLRA):** This bit works to select if or not to clear the FRC by occurrence of comparing match A (matching signal of the FRC and OCRA).

#### Bit 0

| CCLRA | Description                                                                      |
|-------|----------------------------------------------------------------------------------|
| 0     | Prohibits clearing of the FRC by occurrence of comparing match A (Initial value) |
| 1     | Permits clearing of the FRC by occurrence of comparing match A                   |

## 16.2.6 Timer Control Register X (TCRX)

|                 |       |       |       |       |       |       |      |      |
|-----------------|-------|-------|-------|-------|-------|-------|------|------|
| Bit :           | 7     | 6     | 5     | 4     | 3     | 2     | 1    | 0    |
|                 | IEDGA | IEDGB | IEDGC | IEDGD | BUFEA | BUFEB | CKS1 | CKS0 |
| Initial value : | 0     | 0     | 0     | 0     | 0     | 0     | 0    | 0    |
| R/W :           | R/W   | R/W   | R/W   | R/W   | R/W   | R/W   | R/W  | R/W  |

The TCRX is an 8-bit read/write register that selects the input capture signal edge, designates the buffer operation, and selects the inputting clock for the FRC.

The TCRX is initialized to H'00 when reset or under the standby mode, watch mode, subsleep mode, module stop mode or subactive mode.

**Bit 7—Input Capture Signal Edge Selection A (IEDGA):** This bit works to select the rising edge or falling edge of the input capture signal A (FTIA).

### Bit 7

| IEDGA | Description                                                             |
|-------|-------------------------------------------------------------------------|
| 0     | Captures the falling edge of the input capture signal A (Initial value) |
| 1     | Captures the rising edge of the input capture signal A                  |

**Bit 6—Input Capture Signal Edge Selection B (IEDGB):** This bit works to select the rising edge or falling edge of the input capture signal B (FTIB).

### Bit 6

| IEDGB | Description                                                             |
|-------|-------------------------------------------------------------------------|
| 0     | Captures the falling edge of the input capture signal B (Initial value) |
| 1     | Captures the rising edge of the input capture signal B                  |

**Bit 5—Input Capture Signal Edge Selection C (IEDGC):** This bit works to select the rising edge or falling edge of the input capture signal C (FTIC). However, when the DVCTL has been selected as the signal for the input capture signal edge selection C, this bit will not influence the operation.

### Bit 5

| IEDGC | Description                                                             |
|-------|-------------------------------------------------------------------------|
| 0     | Captures the falling edge of the input capture signal C (Initial value) |
| 1     | Captures the rising edge of the input capture signal C                  |

**Bit 4—Input Capture Signal Edge Selection D (IEDGD):** This bit works to select the rising edge or falling edge of the input capture signal D (FTID).

**Bit 4**

| IEDGD | Description                                                             |
|-------|-------------------------------------------------------------------------|
| 0     | Captures the falling edge of the input capture signal D (Initial value) |
| 1     | Captures the rising edge of the input capture signal D                  |

**Bit 3—Buffer Enabling A (BUFEA):** This bit works to select whether or not to use the ICRC as the buffer register for the ICRA.

**Bit 3**

| BUFEA | Description                                                            |
|-------|------------------------------------------------------------------------|
| 0     | Not using the ICRC as the buffer register for the ICRA (Initial value) |
| 1     | Using the ICRC as the buffer register for the ICRA                     |

**Bit 2—Buffer Enabling B (BUFEB):** This bit works to select whether or not to use the ICRD as the buffer register for the ICRB.

**Bit 2**

| BUFEB | Description                                                            |
|-------|------------------------------------------------------------------------|
| 0     | Not using the ICRD as the buffer register for the ICRB (Initial value) |
| 1     | Using the ICRD as the buffer register for the ICRB                     |

**Bits 1 and 0—Clock Select (CKS1, CKS0):** These bits work to select the inputting clock to the FRC from among three types of internal clocks and the DVCFG. The DVCFG is the edge detecting pulse selected by the CFG dividing timer.

| Bit 1 | Bit 0 | Description                                                        |
|-------|-------|--------------------------------------------------------------------|
| CKS1  | CKS0  |                                                                    |
| 0     | 0     | Internal clock: Counts at $\phi/4$ (Initial value)                 |
| 0     | 1     | Internal clock: Counts at $\phi/16$                                |
| 1     | 0     | Internal clock: Counts at $\phi/64$                                |
| 1     | 1     | DVCFG: The edge detecting pulse selected by the CFG dividing timer |

## 16.2.7 Timer Output Comparing Control Register (TOCR)

|                 |      |      |      |      |     |     |       |       |
|-----------------|------|------|------|------|-----|-----|-------|-------|
| Bit :           | 7    | 6    | 5    | 4    | 3   | 2   | 1     | 0     |
|                 | ICSB | ICSC | ICSD | OCRS | OEA | OEB | OLVLA | OLVLB |
| Initial value : | 0    | 0    | 0    | 0    | 0   | 0   | 0     | 0     |
| R/W :           | R/W  | R/W  | R/W  | R/W  | R/W | R/W | R/W   | R/W   |

The TOCR is an 8-bit read/write register that select input capture signals and output comparing output level, permits output comparing outputs, and controls switching over of the access of the OCRA and OCRB. See section 16.2.4, Timer Interrupt Enabling Register (TIER) regarding the input capture inputs A.

The TOCR is initialized to H'00 when reset or under the standby mode, watch mode, subsleep mode, module stop mode or subactive mode.

**Bit 7—Selecting the Input Capture B Signals (ICSB):** This bit works to select the input capture B signals.

### Bit 7

| ICSB | Description                                                                       |
|------|-----------------------------------------------------------------------------------|
| 0    | Selects the FTIB pin for inputting of the input capture B signals (Initial value) |
| 1    | Selects the VD as the input capture B signals                                     |

**Bit 6—Selecting the Input Capture C Signals (ICSC):** This bit works to select the input capture C signals. The DVCTL is the edge detecting pulse selected by the CTL dividing timer.

### Bit 6

| ICSC | Description                                                                       |
|------|-----------------------------------------------------------------------------------|
| 0    | Selects the FTIC pin for inputting of the input capture C signals (Initial value) |
| 1    | Selects the DVCTL as the input capture C signals                                  |

**Bit 5—Selecting the Input Capture D Signals (ICSD):** This bit works to select the input capture D signals.

### Bit 5

| ICSD | Description                                                                       |
|------|-----------------------------------------------------------------------------------|
| 0    | Selects the FTID pin for inputting of the input capture D signals (Initial value) |
| 1    | Selects the NHSW as the input capture D signals                                   |

**Bit 4—Selecting the Output Comparing Register (OCRS):** The addresses of the OCRA and OCRB are the same. The OCRS works to control which register to choose when reading/writing this address. The choice will not influence the operation of the OCRA and OCRB.

**Bit 4**

| OCRS | Description                               |
|------|-------------------------------------------|
| 0    | Selects the OCRA register (Initial value) |
| 1    | Selects the OCRB register                 |

**Bit 3—Enabling the Output A (OEA):** This bit works to control the output comparing A signals.

**Bit 3**

| OEA | Description                                                     |
|-----|-----------------------------------------------------------------|
| 0   | Prohibits the output comparing A signal outputs (Initial value) |
| 1   | Permits the output comparing A signal outputs                   |

**Bit 2—Enabling the Output B (OEB):** This bit works to control the output comparing B signals.

**Bit 2**

| OEB | Description                                                     |
|-----|-----------------------------------------------------------------|
| 0   | Prohibits the output comparing B signal outputs (Initial value) |
| 1   | Permits the output comparing B signal outputs                   |

**Bit 1—Output Level A (OLVLA):** This bit works to select the output level to output through the FTOA pin by use of the comparing match A (matching signal between the FRC and OCRA).

**Bit 1**


| OLVLA | Description               |
|-------|---------------------------|
| 0     | Low level (Initial value) |
| 1     | High level                |

**Bit 0—Output Level B (OLVLB):** This bit works to select the output level to output through the FTOB pin by use of the comparing match B (matching signal between the FRC and OCRB).

**Bit 0**

| OLVLB | Description               |
|-------|---------------------------|
| 0     | Low level (Initial value) |
| 1     | High level                |

**16.2.8 Module Stop Control Register (MSTPCR)**

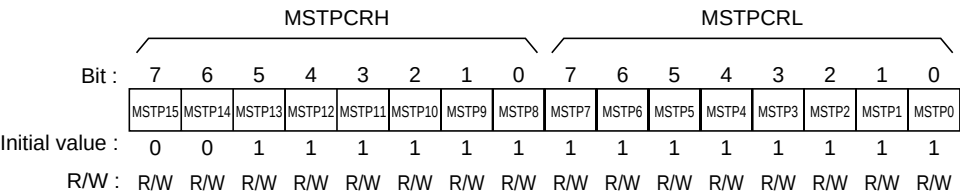

The MSTPCR consists of twin 8-bit read/write registers that control the module stop mode. When the MSTP10 bit is set to 1, the Timer X1 stops its operation at the ending point of the bus cycle to shift to the module stop mode. For more information, see section 4.5, Module Stop Mode.

When reset, the MSTPCR is initialized to H'FFFF.

**Bit 2—Module Stop (MSTP10):** This bit works to designate the module stop mode for timer X1.

**MSTPCRH**

**Bit 2**

| MSTP10 | Description                                               |
|--------|-----------------------------------------------------------|
| 0      | Cancels the module stop mode of the Timer X1              |
| 1      | Sets the module stop mode of the Timer X1 (Initial value) |

## 16.3 Operation

### 16.3.1 Operation of Timer X1

- Output Comparing Operation

Right after resetting, the FRC is initialized to H'0000 to start counting up. The inputting clock can be selected from among three different types of internal clocks or the external clock by setting the CKS1 and CKS0 of the TCRX.

The contents of the FRC are always being compared with the OCRA and OCRB and, when the value of these two match, the level set by the OLVLA and OLVLB of the TOCR is output through the FTOA pin and FTOB pin.

After resetting, 0 will be output through the FTOA and FTOB pins until the first compare matching occurs.

Also, when the CCLRA of the TCSRX is being set to 1, the FRC will be cleared to H'0000 when the comparing match A occurs.

- Input Capturing Operation

Right after resetting, the FRC is initialized to H'0000 to start counting up. The inputting clock can be selected from among three different types of internal clocks or the external clock by setting the CKS1 and CKS0 of the TCRX.

The inputs are transferred to the IEDGA through IEDGD of the TCRX through the FTIA through FTID pins and, at the same time, the ICFA through ICFD of the TCSRX are set to 1. At this time, if the ICIAE through ICIED of the TIER are being set to 1, due interrupt request will be issued to the CPU.

When the BUFEA and BUFEB of the TCRX are set to 1, the ICRC and ICRD work as the buffer register, respectively, of the ICRA and ICRB. When the edge selected by setting the IEDGA through IEDGD of the TCRX is input through the FTIA and FTIB pins, the value at the time of the FRC is transferred to the ICRA and ICRB and, at the same time, the values of the ICRA and ICRB before updating are transferred to the ICRC and ICRD. At this time, when the ICFA and ICFB are being set to 1 and if the ICIAE and ICIBE of the TIER are being set to 1, due interrupt request will be issued to the CPU.

### 16.3.2 Counting Timing of the FRC

The FRC is counted up by the inputting clock. By setting the CKS1 and CKS0 of the TCRX, the inputting clock can be selected from among three different types of clocks ( $\phi/4$ ,  $\phi/16$  and  $\phi/64$ ) and the DVCFG.

- Internal Clock Operation

By setting the CKS1 and CKS0 bits of the TCRX, three types of internal clocks ( $\phi/4$ ,  $\phi/16$  and  $\phi/64$ ), generated by dividing the system clock ( $\phi$ ) can be selected. Figure 16.3 shows the timing chart.

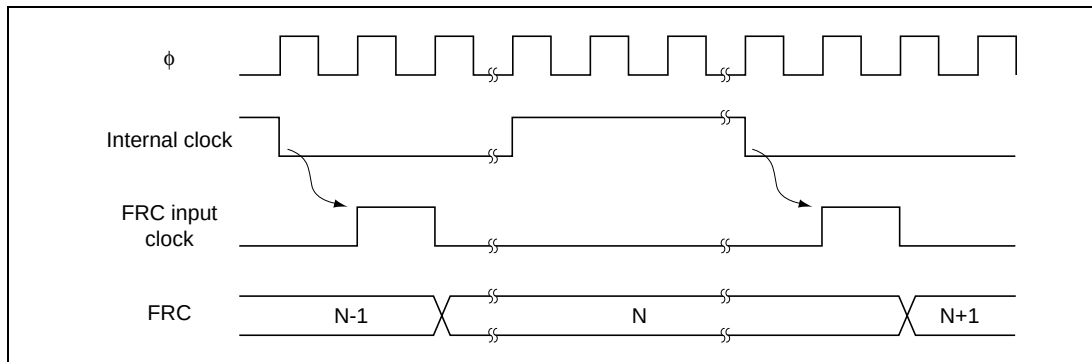


**Figure 16.3 Count Timing for Internal Clock Operation**

- DVCFG Clock Operation

By setting the CKS1 and CKS0 bits of the TCRX to 1, DVCFG clock input can be selected. The DVCFG clock makes counting by use of the edge detecting pulse being selected by the CFG dividing timer.

Figure 16.4 shows the timing chart.

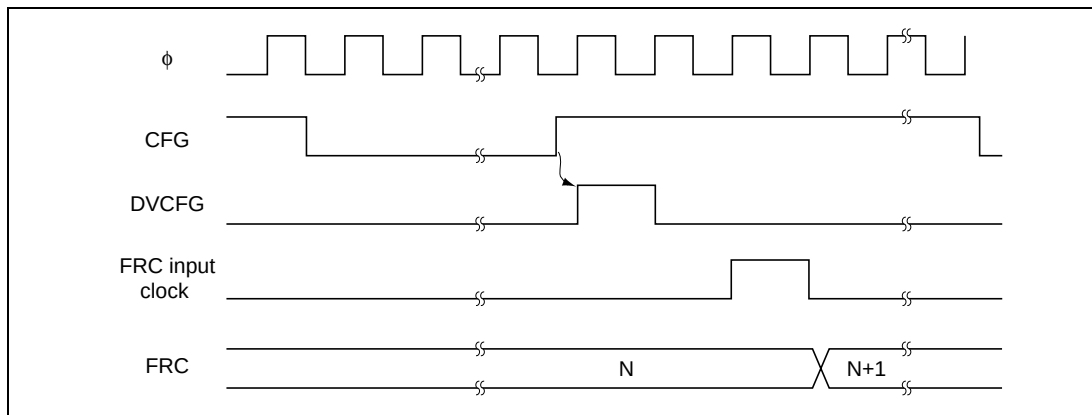


**Figure 16.4 Count Timing for CFG Clock Operation**



### 16.3.3 Output Comparing Signal Outputting Timing

When a comparing match occurs, the output level having been set by the OLVL of the TOCR is output through the output comparing signal outputting pins (FTOA and FTOB).  
Figure 16.5 shows the timing chart for the output comparing signal outputting A.

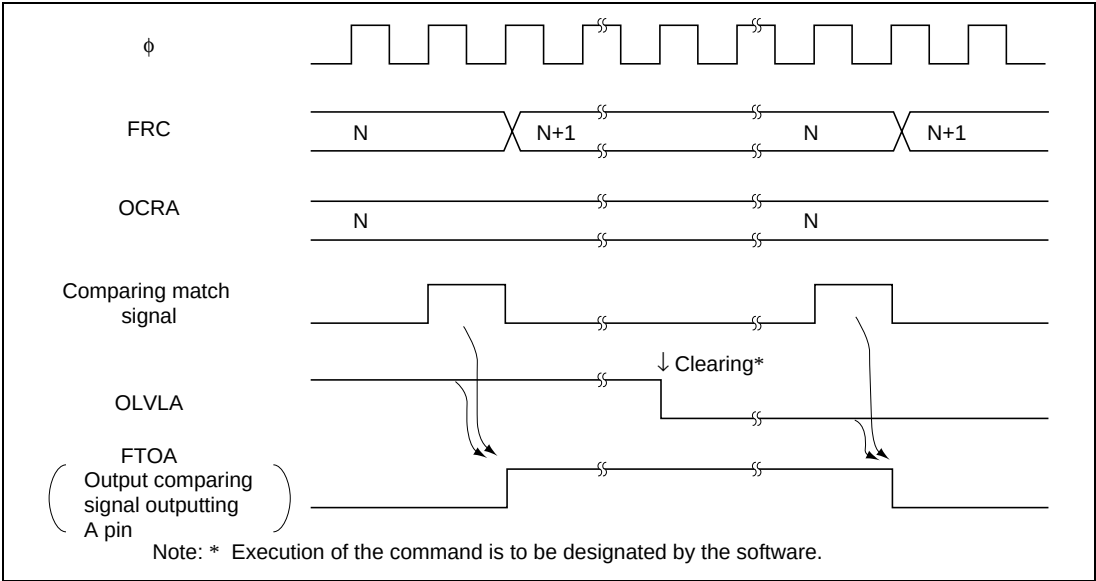


Figure 16.5 Output Comparing Signal Outputting A Timing

### 16.3.4 FRC Clearing Timing

The FRC can be cleared when the comparing match A occurs. Figure 16.6 shows the timing chart.

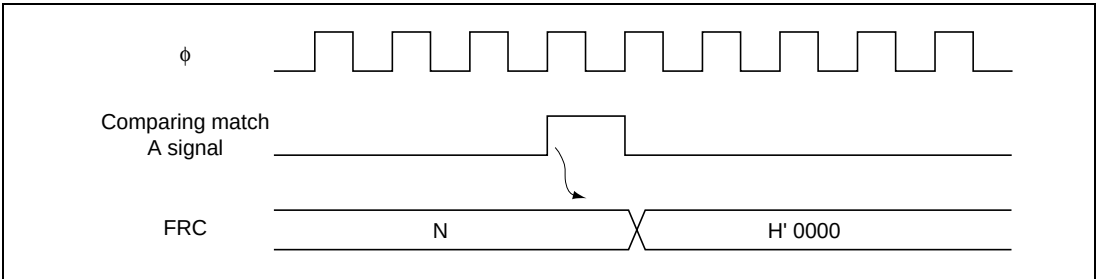


Figure 16.6 Clearing Timing by Occurrence of the Comparing Match A

### 16.3.5 Input Capture Signal Inputting Timing

- Input Capture Signal Inputting Timing

As for the input capture signal inputting, rising or falling edge is selected by settings of the IEDGA through IEDGD bits of the TCRX.

Figure 16.7 shows the timing chart when the rising edge is selected (IEDGA through IEDGD = 1).

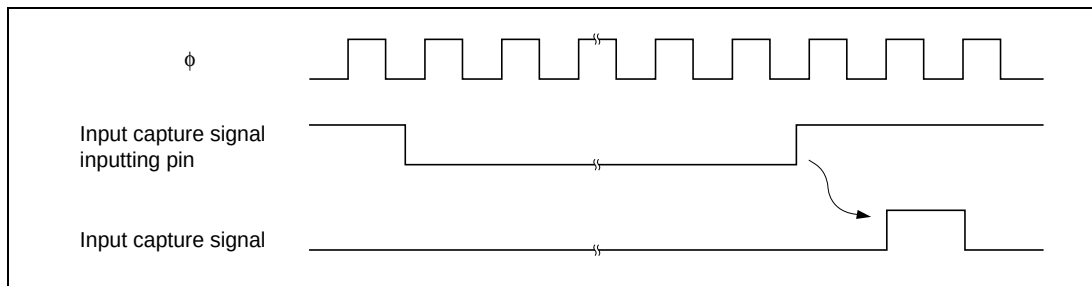


**Figure 16.7 Input Capture Signal Inputting Timing (under normal state)**

- Input Capture Signal Inputting Timing when Making Buffer Operation

Buffer operation can be made using the ICRA or ICRD as the buffer of the ICRA or ICRB.

Figure 16.8 shows the input capture signal inputting timing chart in case both of the rising and falling edges are designated (IEDGA = 1 and IEDGC = 0, or IEDGA = 0 and IEDGC = 1), using the ICRC as the buffer register for the ICRA (BUFEA = 1).

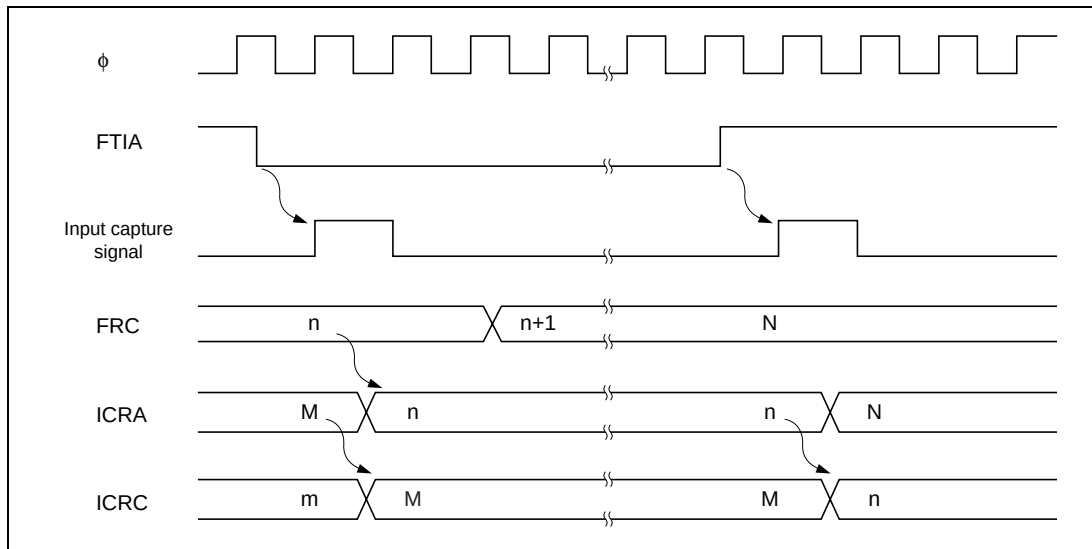


**Figure 16.8 Input Capture Signal Inputting Timing Chart Under the Buffer Mode (under normal state)**

Even when the ICRC or ICRD is used as the buffer register, the input capture flag will be set up corresponding to the designated edge change of respective input capture signals. For example, when using the ICRC as the buffer register for the ICRA, when an edge change having been designated by the IEDGC bit is detected with the input capture signals C and if the ICIEC bit is duly set, an interrupt request will be issued. However, in this case, the FRC value will not be transferred to the ICRC.

### 16.3.6 Input Capture Flag (ICFA through ICFD) Setting Up Timing

The input capture signal works to set the ICFA through ICFD to 1 and, simultaneously, the FRC value is transferred to the corresponding ICRA through ICRD. Figure 16.9 shows the timing chart.

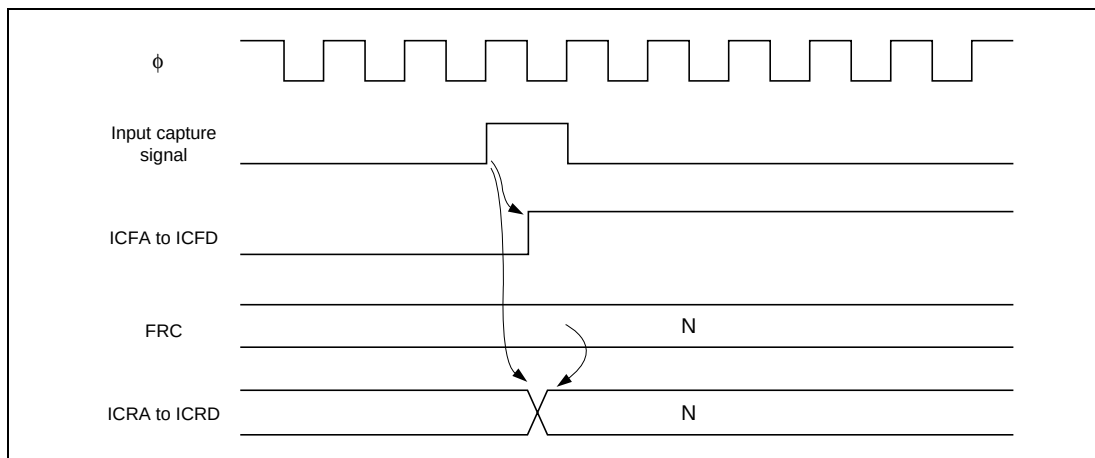


**Figure 16.9 ICFA through ICFD Setting Up Timing**

16.3.7 Output Comparing Flag (OCFA and OCFB) Setting Up Timing

The OCFA and OCFB are being set to 1 by the comparing match signal being output when the values of the OCRA, OCFB and FRC match. The comparing match signal is generated at the last state of the value match (the timing of the FRC's updating the matching count reading). After the values of the OCRA, OCFB and FRC match, up until the count up clock signal is generated, the comparing match signal will not be issued. Figure 16.10 shows the OCFA and OCFB setting timing chart.

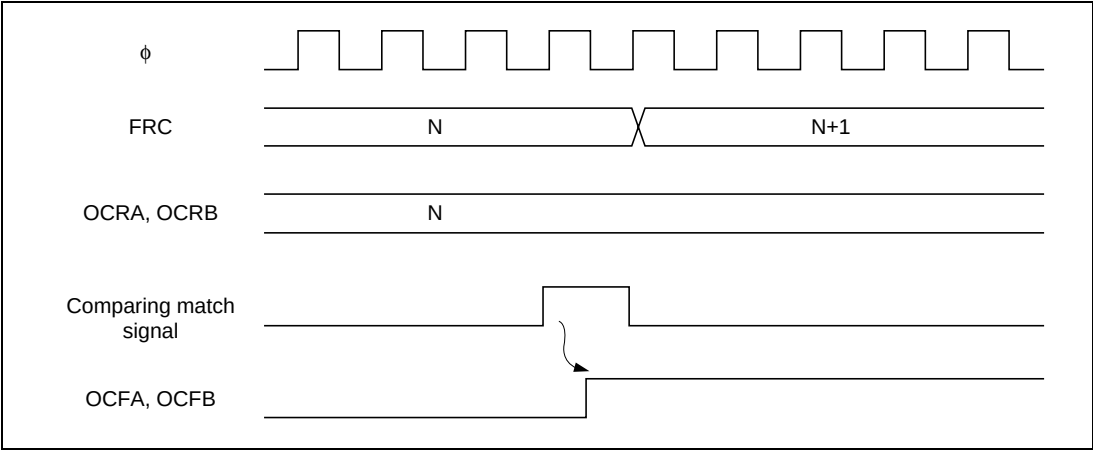


Figure 16.10 OCF Setting Up Timing

16.3.8 Overflow Flag (CVF) Setting Up Timing

The OVF is set to when the FRC overflows (H'FFFF → H'0000). Figure 16.11 shows the timing chart.

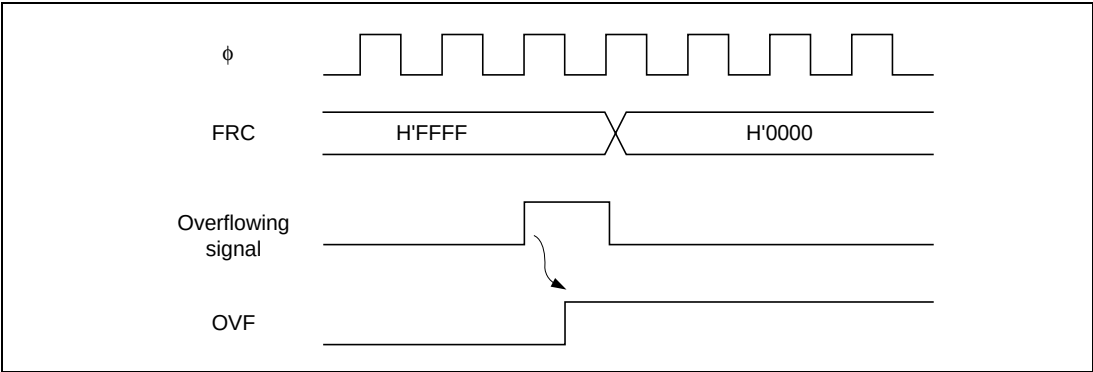


Figure 16.11 OVF Setting Up Timing

## 16.4 Operation Mode of Timer X1

Table 16.4 indicated below shows the operation mode of Timer X1.

**Table 16.4 Operation Mode of Timer X1**

| Operation Mode | Reset | Active    | Sleep     | Watch | Subactive | Standby | Subsleep | Module Stop |
|----------------|-------|-----------|-----------|-------|-----------|---------|----------|-------------|
| FRC            | Reset | Functions | Functions | Reset | Reset     | Reset   | Reset    | Reset       |
| OCRA, OCRB     | Reset | Functions | Functions | Reset | Reset     | Reset   | Reset    | Reset       |
| ICRA to ICRD   | Reset | Functions | Functions | Reset | Reset     | Reset   | Reset    | Reset       |
| TIER           | Reset | Functions | Functions | Reset | Reset     | Reset   | Reset    | Reset       |
| TCRX           | Reset | Functions | Functions | Reset | Reset     | Reset   | Reset    | Reset       |
| TOCR           | Reset | Functions | Functions | Reset | Reset     | Reset   | Reset    | Reset       |
| TCSRX          | Reset | Functions | Functions | Reset | Reset     | Reset   | Reset    | Reset       |

## 16.5 Interrupt Causes

Total seven interrupt causes exist with Timer X1, namely, ICIA through ICID, OCIA, OCIB and FOVI. Table 16.5 lists the contents of interrupt causes. Interrupt requests can be permitted or prohibited by setting interrupt enabling bits of the TIER. Also, independent vector addresses are allocated to respective interrupt causes.

**Table 16.5 Interrupt Causes of Timer X1**

| Abbreviations of the Interrupt Causes | Priority Degree               | Contents                                                                                   |
|---------------------------------------|-------------------------------|--------------------------------------------------------------------------------------------|
| ICIA                                  | Interrupt request by the ICFA | <br>High |
| ICIB                                  | Interrupt request by the ICFB |                                                                                            |
| ICIC                                  | Interrupt request by the ICFC |                                                                                            |
| ICID                                  | Interrupt request by the ICFD |                                                                                            |
| OCIA                                  | Interrupt request by the OCFA |                                                                                            |
| OCIB                                  | Interrupt request by the OCFB |                                                                                            |
| FOVI                                  | Interrupt request by the OVF  |                                                                                            |
|                                       |                               | Low                                                                                        |

## 16.6 Exemplary Uses of Timer X1

Figure 16.12 shows an example of outputting at optional phase difference of the pulses of the 50% duty. For this setting, follow the procedures listed below.

1. Set the CCLRA bit of the TCSR<sub>X</sub> to 1.
2. Each time a comparing match occurs, the OL<sub>VIA</sub> bit and the OL<sub>VLB</sub> bit are reversed by use of the software.

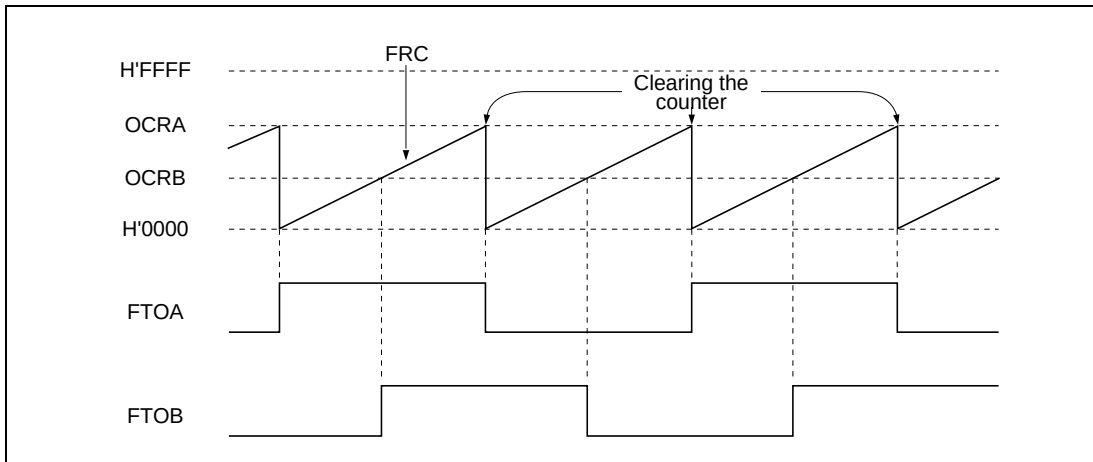


**Figure 16.12 Pulse Outputting Example**

## 16.7 Precautions when Using Timer X1

Pay great attention to the fact that the following competitions and operations occur during operation of timer X1.

### 16.7.1 Competition between Writing and Clearing with the FRC

When a counter clearing signal is issued under the T2 state where the FRC is under the writing cycle, writing into the FRC will not be effected and the priority will be given to clearing of the FRC.

Figure 16.13 shows the timing chart.

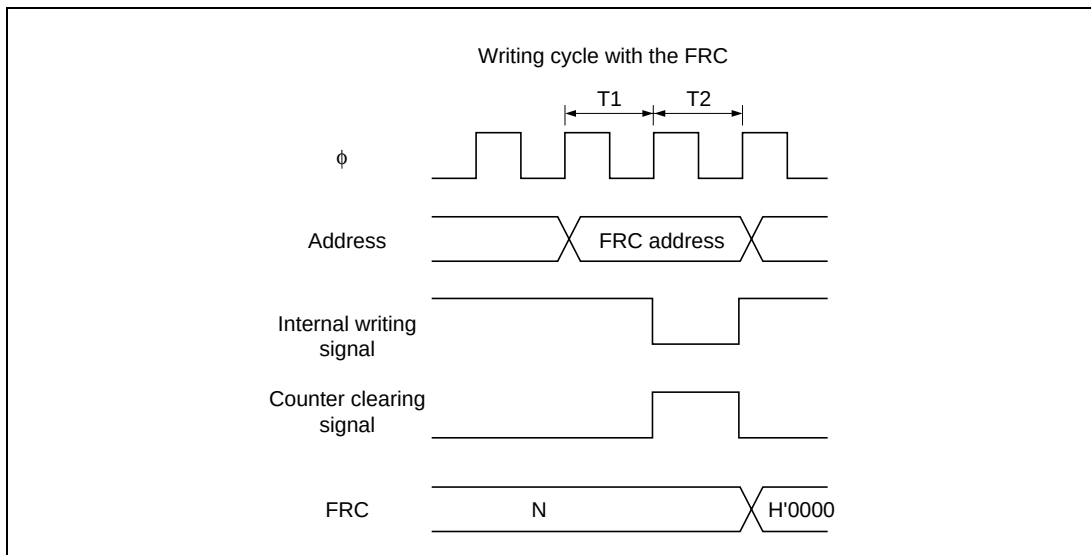


**Figure 16.13 Competition between Writing and Clearing with the FRC**



## 16.7.2 Competition between Writing and Counting Up with the FRC

When a counting up cause occurs under the T2 state where the FRC is under the writing cycle, the counting up will not be effected and the priority will be given to count writing.

Figure 16.14 shows the timing chart.

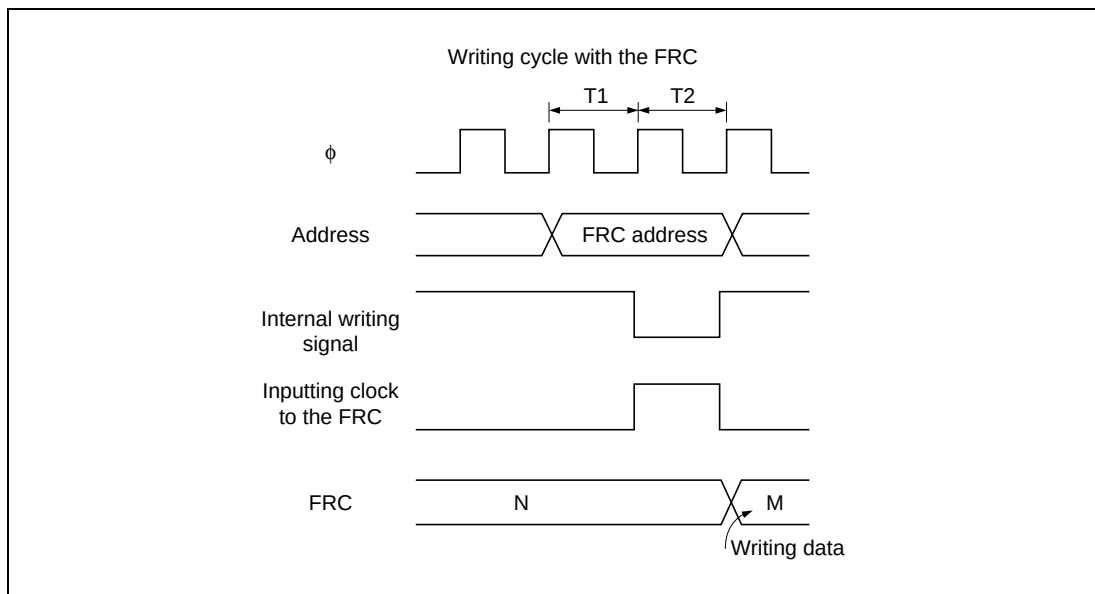


**Figure 16.14 Competition between Writing and Counting Up with the FRC**

### 16.7.3 Competition between Writing and Comparing Match with the OCR

When a comparing match occurs under the T2 state where the OCRA and OCRB are under the writing cycle, the priority will be given to writing of the OCR and the comparing match signal will be prohibited.

Figure 16.15 shows the timing chart.

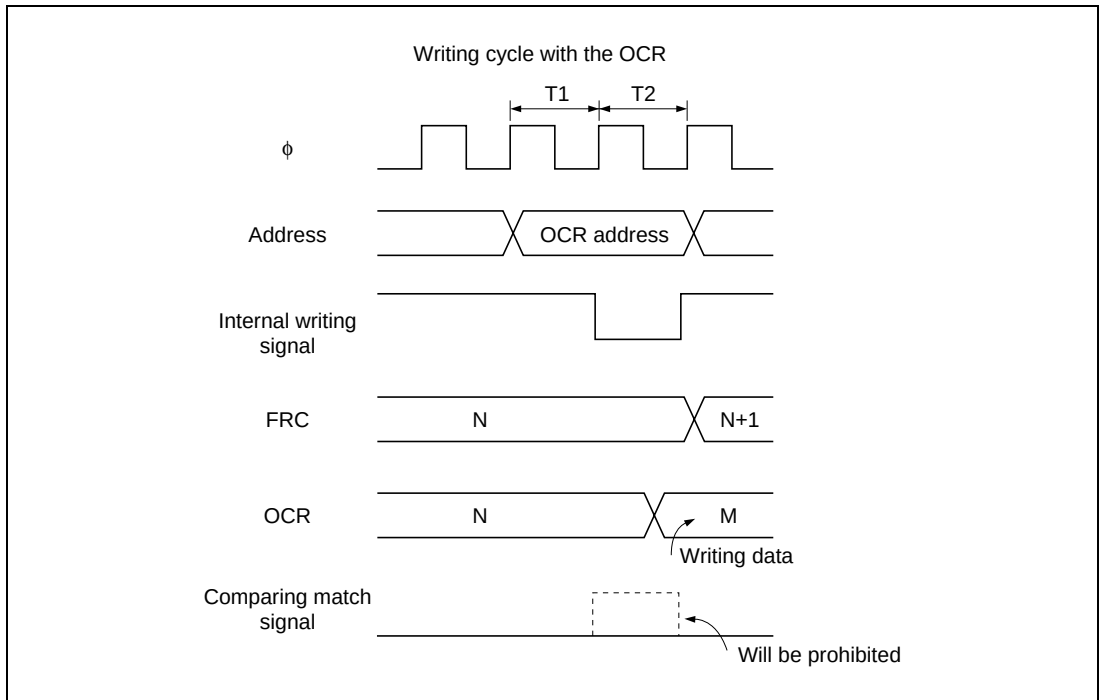


**Figure 16.15 Competition between Writing and Comparing Match with the OCR**


16.7.4 Changing Over the Internal Clocks and Counter Operations

Depending on the timing of changing over the internal clocks, the FRC may count up. Table 16.6 shows the relations between the timing of changing over the internal clocks (Re-writing of the CKS1 and CKS0) and the FRC operations.


When using an internal clock, the counting clock is being generated detecting the falling edge of the internal clock dividing the system clock ( $\phi$ ). For this reason, like Item No. 3 of table 16.6, count clock signals are issued deeming the timing before the changeover as the falling edge to have the FRC to count up.

Also, when changing over between an internal clock and the external clock, the FRC may count up.


Table 16.6 Changing Over the Internal Clocks and the FRC Operation

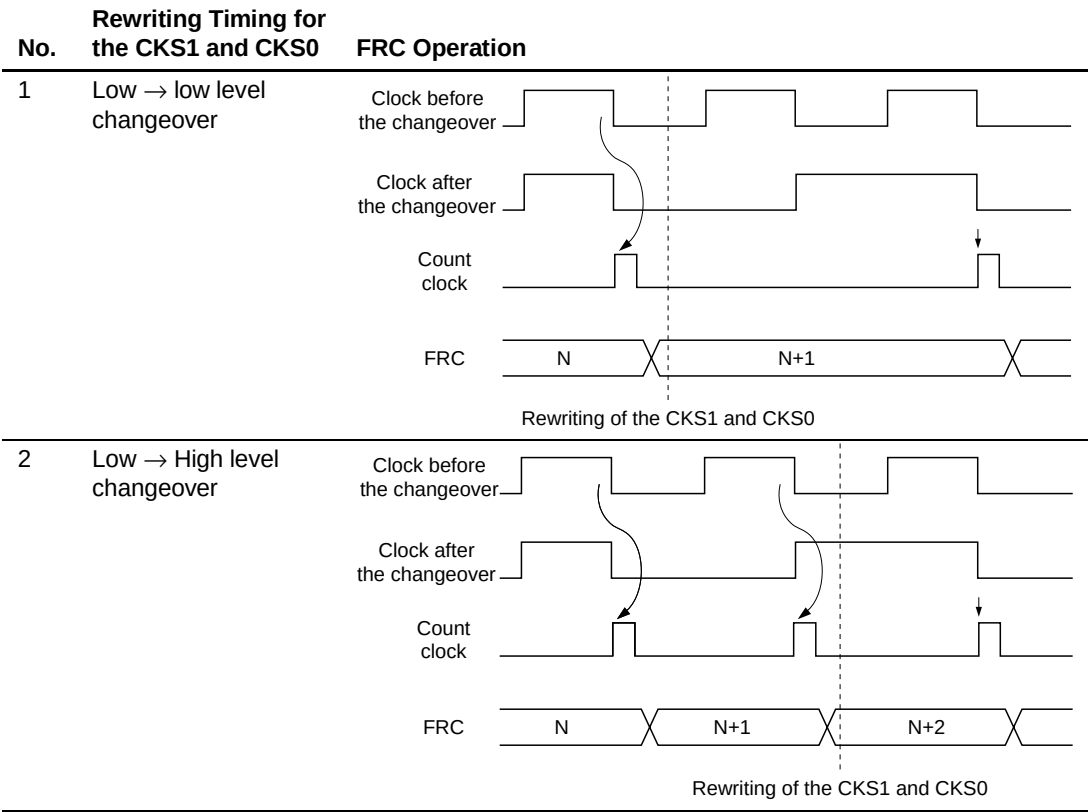

| No. | Rewriting Timing for the CKS1 and CKS0 | FRC Operation |
|-----|----------------------------------------|---------------|
|-----|----------------------------------------|---------------|

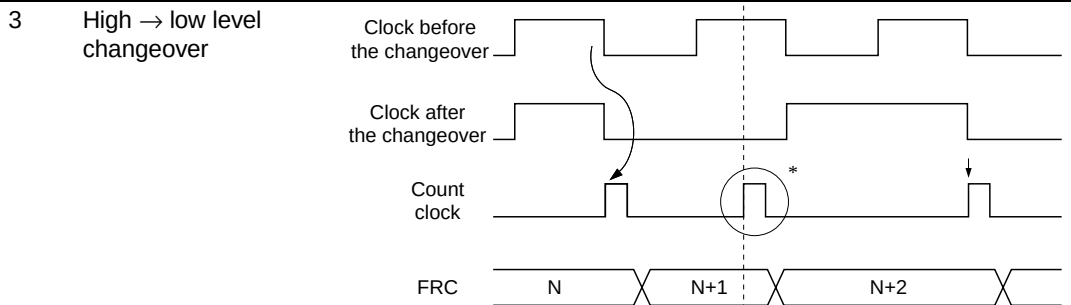

Rewriting of the CKS1 and CKS0

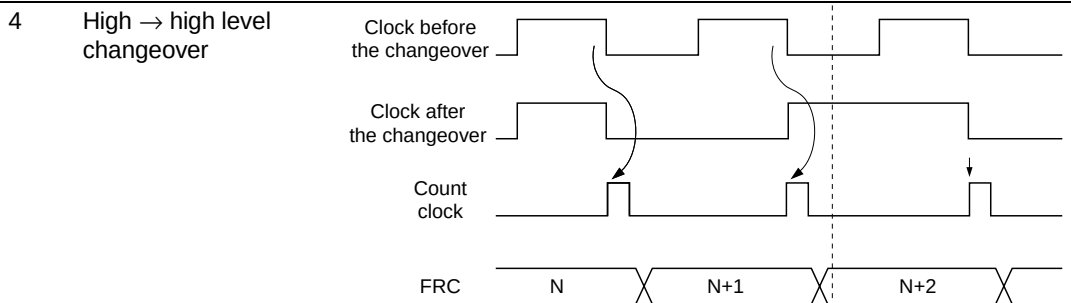

Rewriting of the CKS1 and CKS0

Note: \*The count clock signals are issued determining the changeover timing as the falling edge to have the FRC to count up.

# Section 17 Watchdog Timer (WDT)

## 17.1 Overview

This LSI has an on-chip watchdog timer with one channel (WDT) for monitoring system operation. The WDT outputs an overflow signal if a system crash prevents the CPU from writing to the timer counter, allowing it to overflow. At the same time, the WDT can also generate an internal reset signal or internal NMI interrupt signal.

When this watchdog function is not needed, the WDT can be used as an interval timer. In interval timer mode, an interval timer interrupt is generated each time the counter overflows.

### 17.1.1 Features

WDT features are listed below.

- Switchable between watchdog timer mode and interval timer mode
  - WOVI interrupt generation in interval timer mode
- Internal reset or internal interrupt generated when the timer counter overflows
  - Choice of internal reset or NMI interrupt generation in watchdog timer mode
- Choice of 8 counter input clocks
  - Maximum WDT interval: system clock period  $\times 131072 \times 256$

### 17.1.2 Block Diagram

Figure 17.1 shows block diagram of WDT.

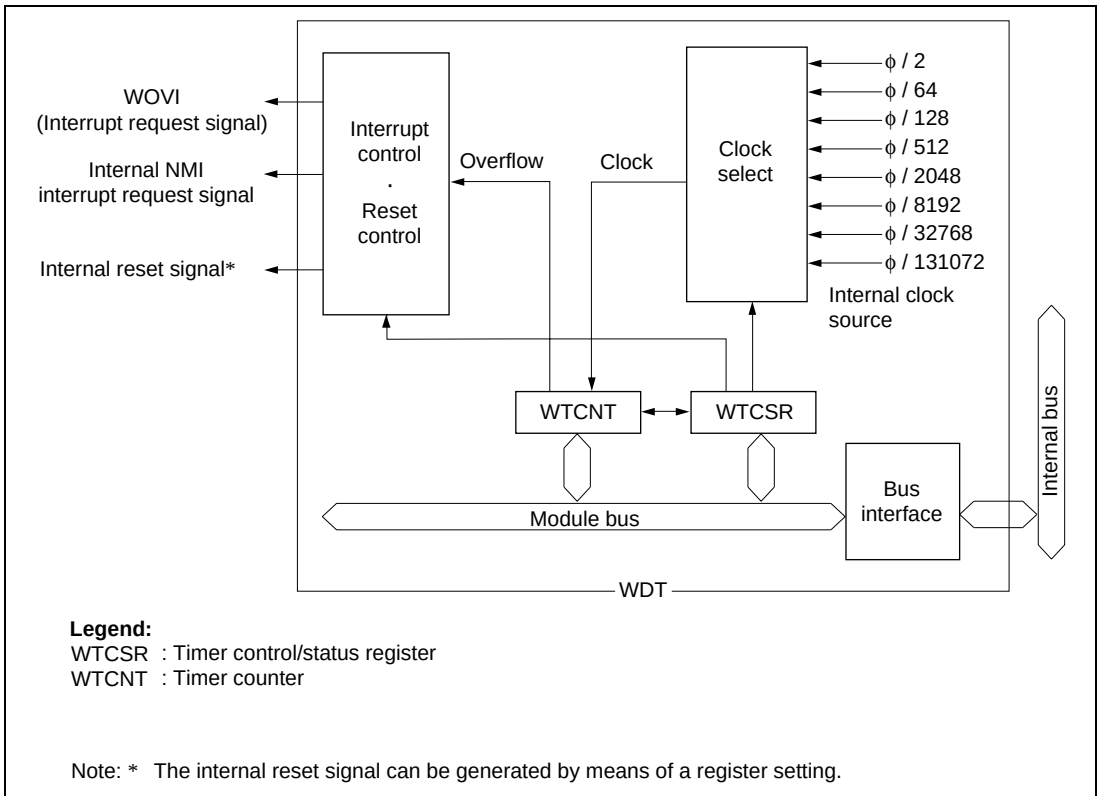


**Figure 17.1 Block Diagram of WDT**

### 17.1.3 Register Configuration

The WDT has two registers, as described in table 17.1. These registers control clock selection, WDT mode switching, the reset signal, etc.

**Table 17.1 WDT Registers**

| Name                                   | Abbrev. | R/W                  | Initial Value | Address* <sup>1</sup> |        |
|----------------------------------------|---------|----------------------|---------------|-----------------------|--------|
|                                        |         |                      |               | Write* <sup>2</sup>   | Read   |
| Watchdog timer control/status register | WTCSR   | R/ (W)* <sup>3</sup> | H'00          | H'FFBC                | H'FFBC |
| Watchdog timer counter                 | WTCNT   | R/W                  | H'00          | H'FFBC                | H'FFBD |
| System control register                | SYSCR   | R/W                  | H'09          | H'FFE8                | H'FFE8 |

- Notes:
1. Lower 16 bits of the address.
  2. For details of write operations, see section 17.2.4, Notes on Register Access.
  3. Only 0 can be written in bit 7, to clear the flag.

## 17.2 Register Descriptions

### 17.2.1 Watchdog Timer Counter (WTCNT)

|                 |     |     |     |     |     |     |     |     |
|-----------------|-----|-----|-----|-----|-----|-----|-----|-----|
| Bit :           | 7   | 6   | 5   | 4   | 3   | 2   | 1   | 0   |
|                 |     |     |     |     |     |     |     |     |
| Initial value : | 0   | 0   | 0   | 0   | 0   | 0   | 0   | 0   |
| R/W :           | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |

TCNT is an 8-bit readable/writable\* up-counter.

When the TME bit is set to 1 in WTCSR, WTCNT starts counting pulses generated from the internal clock source selected by bits CKS2 to CKS0 in WTCSR. When the count overflows (changes from H'FF to H'00), the OVF flag in WTCSR is set to 1.

WTCNT is initialized to H'00 by a reset, or when the TME bit is cleared to 0.

Note: \* WTCNT is write-protected by a password to prevent accidental overwriting. For details see section 17.2.4, Notes on Register Access.

### 17.2.2 Watchdog Timer Control/Status Register (WTCSR)

|                 |        |                            |     |   |                              |      |      |      |
|-----------------|--------|----------------------------|-----|---|------------------------------|------|------|------|
| Bit :           | 7      | 6                          | 5   | 4 | 3                            | 2    | 1    | 0    |
|                 | OVF    | WT/ $\overline{\text{IT}}$ | TME | — | RST/ $\overline{\text{NMI}}$ | CKS2 | CKS1 | CKS0 |
| Initial value : | 0      | 0                          | 0   | 0 | 0                            | 0    | 0    | 0    |
| R/W :           | R/(W)* | R/W                        | R/W | — | R/W                          | R/W  | R/W  | R/W  |

Note: \* Only 0 can be written to clear the flag.

WTCSR is an 8-bit readable/writable\* register. Its functions include selecting the clock source to be input to WTCNT, and the timer mode.

WTCSR is initialized to H'00 by a reset.

Note: \* WTCSR is write-protected by a password to prevent accidental overwriting. For details see section 17.2.4, Notes on Register Access.



**Bit 7—Overflow Flag (OVF):** A status flag that indicates that WTCNT has overflowed from H'FF to H'00.

#### Bit 7

| OVF | Description                                                                                                                                                                                              |
|-----|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 0   | [Clearing conditions] (Initial value)<br>1. Write 0 in the TME bit<br>2. Read WTCNT when OVF = 1*, then write 0 in OVF                                                                                   |
| 1   | [Setting condition]<br>When WTCNT overflows (changes from H'FF to H'00)<br>When internal reset request generation is selected in watchdog timer mode, OVF is cleared automatically by the internal reset |

Note: \* When OVF is polled and the interval timer interrupt is disabled, OVF=1 must be read at least twice.

**Bit 6—Timer Mode Select (WT/IT):** Selects whether the WDT is used as a watchdog timer or interval timer. If used as an interval timer, the WDT generates an interval timer interrupt request (WOVI) when TCNT overflows. If used as a watchdog timer, the WDT generates a reset or NMI interrupt when TCNT overflows.

#### Bit 6

| WT/IT | Description                                                                                                        |
|-------|--------------------------------------------------------------------------------------------------------------------|
| 0     | Interval timer mode: Sends the CPU an interval timer interrupt request (WOVI) when WTCNT overflows (Initial value) |
| 1     | Watchdog timer mode: Sends the CPU a reset or NMI interrupt request when WTCNT overflows                           |

**Bit 5—Timer Enable (TME):** Selects whether WTCNT runs or is halted.

#### Bit 5

| TME | Description                                             |
|-----|---------------------------------------------------------|
| 0   | WTCNT is initialized to H'00 and halted (Initial value) |
| 1   | WTCNT counts                                            |

**Bit 4—Reserved:** This bit should not be set to 1.

**Bit 3—Reset or NMI (RST/NMI):** Specifies whether an internal reset or NMI interrupt is requested on WTCNT overflow in watchdog timer mode.

### Bit 3

| RST/NMI | Description                                           |
|---------|-------------------------------------------------------|
| 0       | An NMI interrupt request is generated (Initial value) |
| 1       | An internal reset request is generated                |

**Bits 2 to 0—Clock Select 2 to 0 (CKS2 to CKS0):** These bits select an internal clock source, obtained by dividing the system clock ( $\phi$ ) for input to WTCNT.

### WDT Input Clock Selection

| Bit 2 | Bit 1 | Bit 0 | Description              |                                         |
|-------|-------|-------|--------------------------|-----------------------------------------|
| CSK2  | CSK1  | CSK0  | Clock                    | Overflow Period* (when $\phi$ = 10 MHz) |
| 0     | 0     | 0     | $\phi/2$ (Initial value) | 51.2 $\mu$ s                            |
|       |       | 1     | $\phi/64$                | 1.6 ms                                  |
|       | 1     | 0     | $\phi/128$               | 3.3 ms                                  |
|       |       | 1     | $\phi/512$               | 13.1 ms                                 |
| 1     | 0     | 0     | $\phi/2048$              | 52.4 ms                                 |
|       |       | 1     | $\phi/8192$              | 209.7 ms                                |
|       | 1     | 0     | $\phi/32768$             | 838.9 ms                                |
|       |       | 1     | $\phi/131072$            | 3.36 s                                  |

Note: \* The overflow period is the time from when WTCNT starts counting up from H'00 until overflow occurs.

17.2.3 System Control Register (SYSCR)

|                 |   |   |       |       |      |   |   |   |
|-----------------|---|---|-------|-------|------|---|---|---|
| Bit :           | 7 | 6 | 5     | 4     | 3    | 2 | 1 | 0 |
|                 | — | — | INTM1 | INTM0 | XRST | — | — | — |
| Initial value : | 0 | 0 | 0     | 0     | 1    | 0 | 0 | 1 |
| R/W :           | — | — | R     | R/W   | R    | — | — | — |

Only bit 3 is described here. For details on functions not related to the watchdog timer, see sections 3.2.2 and 6.2.1, System Control Register (SYSCR), and the descriptions of the relevant modules.

**Bit 3—External Reset (XRST):** Indicates the reset source. When the watchdog timer is used, a reset can be generated by watchdog timer overflow in addition to external reset input. XRST is a read-only bit. It is set to 1 by an external reset, and cleared to 0 by watchdog timer overflow.

Bit 3

| XRST | Description                                                |
|------|------------------------------------------------------------|
| 0    | Reset is generated by watchdog timer overflow              |
| 1    | Reset is generated by external reset input (Initial value) |

## 17.2.4 Notes on Register Access

The watchdog timer's WTCNT and WTCR registers differ from other registers in being more difficult to write to. The procedures for writing to and reading these registers are given below.

- Writing to WTCNT and WTCR

These registers must be written to by a word transfer instruction. They cannot be written to with byte transfer instructions.

Figure 17.2 shows the format of data written to WTCNT and WTCR. WTCNT and WTCR both have the same write address. For a write to WTCNT, the upper byte of the written word must contain H'5A and the lower byte must contain the write data. For a write to WTCR, the upper byte of the written word must contain H'A5 and the lower byte must contain the write data. This transfers the write data from the lower byte to WTCNT or WTCR.

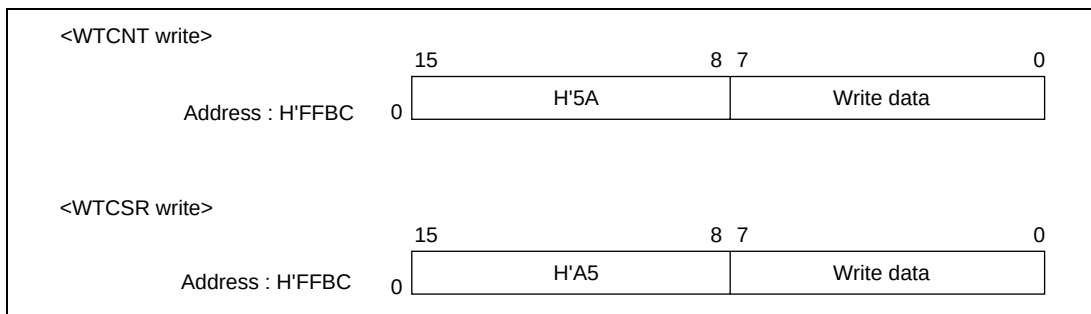


**Figure 17.2 Format of Data Written to WTCNT and WTCR**

- Reading WTCNT and WTCR

These registers are read in the same way as other registers. The read addresses are H'FFBC for WTCR, and H'FFBD for WTCNT.

## 17.3 Operation

### 17.3.1 Watchdog Timer Operation

To use the WDT as a watchdog timer, set the  $WT/\overline{IT}$  and TME bits in WTCSR to 1. Software must prevent WTCNT overflows by rewriting the WTCNT value (normally by writing H'00) before overflow occurs. This ensures that WTCNT does not overflow while the system is operating normally. If WTCNT overflows without being rewritten because of a system crash or other error, the chip is reset, or an NMI interrupt is generated, for 518 system clock periods (518  $\phi$ ). This is illustrated in figure 17.3.

An internal reset request from the watchdog timer and reset input from the  $\overline{RES}$  pin are handled via the same vector. The reset source can be identified from the value of the XRST bit in SYSCR. If a reset caused by an input signal from the  $\overline{RES}$  pin and a reset caused by WDT overflow occur simultaneously, the  $\overline{RES}$  pin reset has priority, and the XRST bit in SYSCR is set to 1.

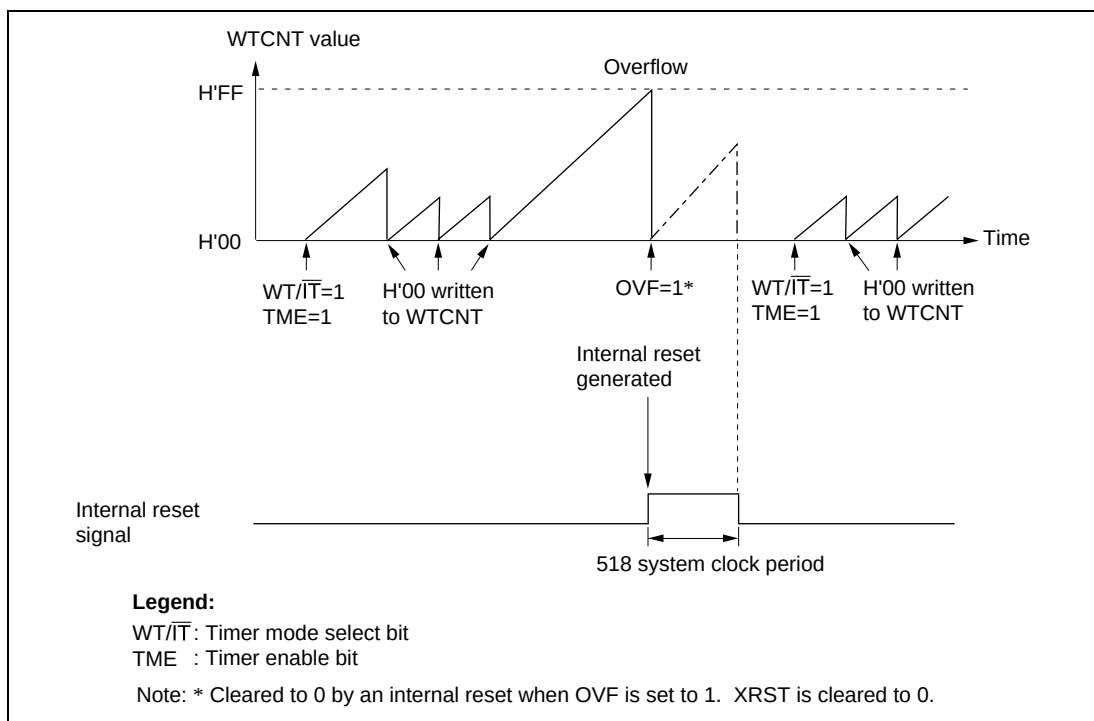


**Figure 17.3 Operation in Watchdog Timer Mode (when Reset)**

### 17.3.2 Interval Timer Operation

To use the WDT as an interval timer, clear the  $WT/\overline{IT}$  bit in WTCSR to 0 and set the TME bit to 1. An interval timer interrupt (WOVI) is generated each time WTCNT overflows, provided that the WDT is operating as an interval timer, as shown in figure 17.4. This function can be used to generate interrupt requests at regular intervals.

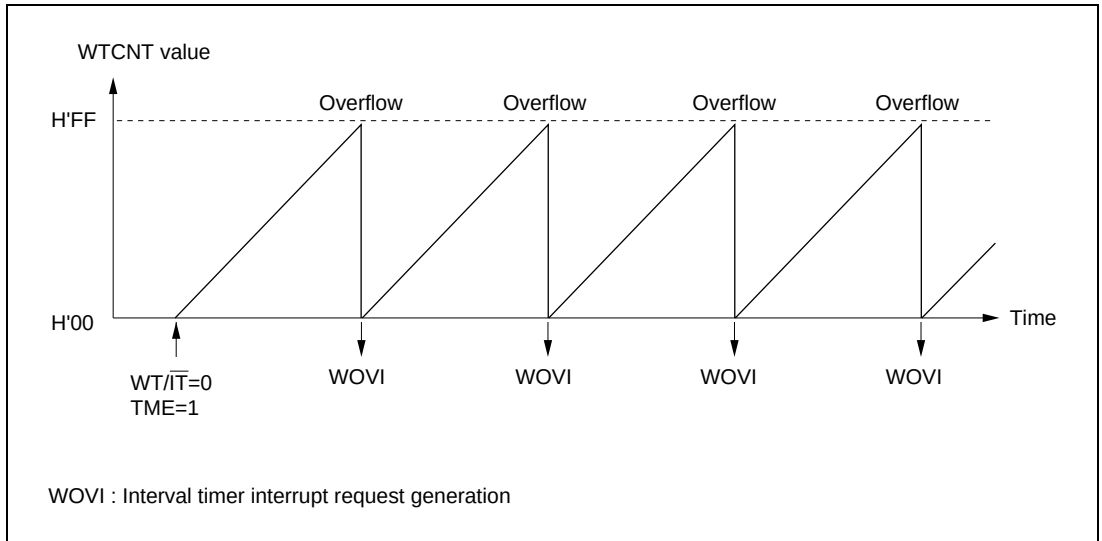


**Figure 17.4 Operation in Interval Timer Mode**

### 17.3.3 Timing of Setting of Overflow Flag (OVF)

The OVF bit in WTCSR is set to 1 if WTCNT overflows during interval timer operation. At the same time, an interval timer interrupt (WOVI) is requested. This timing is shown in figure 17.5. If NMI request generation is selected in watchdog timer mode, when WTCNT overflows the OVF bit in WTCSR is set to 1 and at the same time an NMI interrupt is requested.

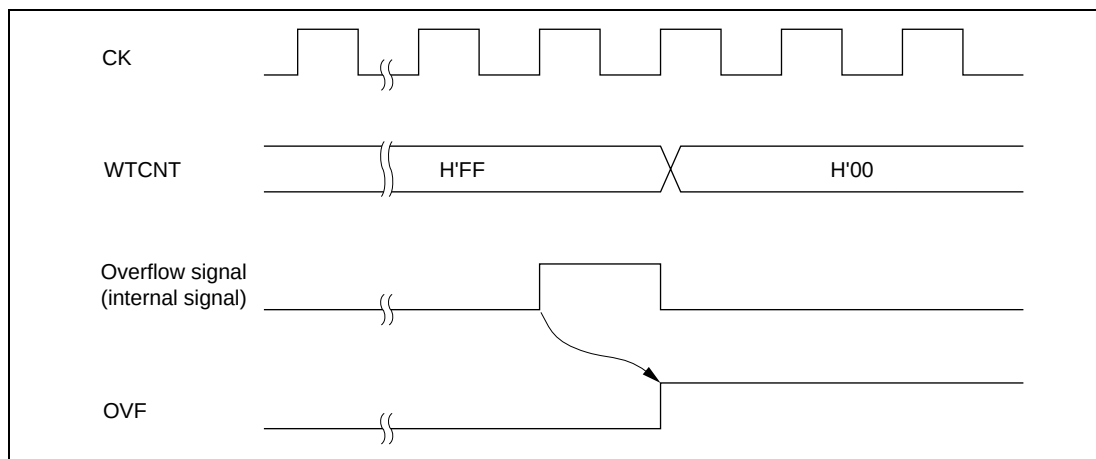


**Figure 17.5 Timing of OVF Setting**

## 17.4 Interrupts

During interval timer mode operation, an overflow generates an interval timer interrupt (WOVI). The interval timer interrupt is requested whenever the OVF flag is set to 1 in WTCSR. OVF must be cleared to 0 in the interrupt handling routine. When NMI interrupt request generation is selected in watchdog timer mode, an overflow generates an NMI interrupt request.

## 17.5 Usage Notes

### 17.5.1 Contention between Watchdog Timer Counter (WTCNT) Write and Increment

If a timer counter clock pulse is generated during the T2 state of a WTCNT write cycle, the write takes priority and the timer counter is not incremented. Figure 17.6 shows this operation.

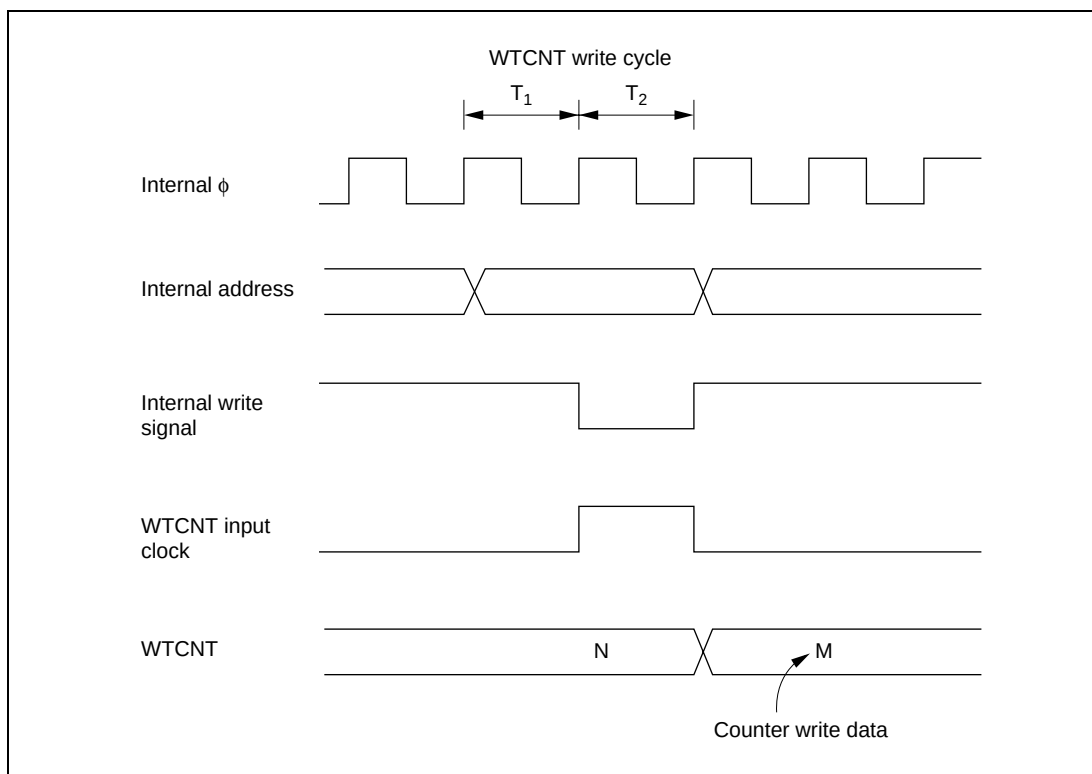


**Figure 17.6 Contention between WTCNT Write and Increment**



### **17.5.2 Changing Value of CKS2 to CKS0**

If bits CKS2 to CKS0 in WTCSR are written to while the WDT is operating, errors could occur in the incrementation. Software must stop the watchdog timer (by clearing the TME bit to 0) before changing the value of bits CKS2 to CKS0.

### **17.5.3 Switching between Watchdog Timer Mode and Interval Timer Mode**

If the mode is switched from watchdog timer to interval timer, or vice versa, while the WDT is operating, correct operation cannot be guaranteed. Software must stop the watchdog timer (by clearing the TME bit to 0) before switching the mode.



# Section 18 8-Bit PWM

## 18.1 Overview

The 8-bit PWM incorporates 4 channels of the duty control method (H8S/2197S and H8S/2196S: 2 channels). Its outputs can be used to control a reel motor or loading motor.

### 18.1.1 Features

- Conversion period: 256-state
- Duty control method

### 18.1.2 Block Diagram

Figure 18.1 shows a block diagram of the 8-bit PWM (1 channel).

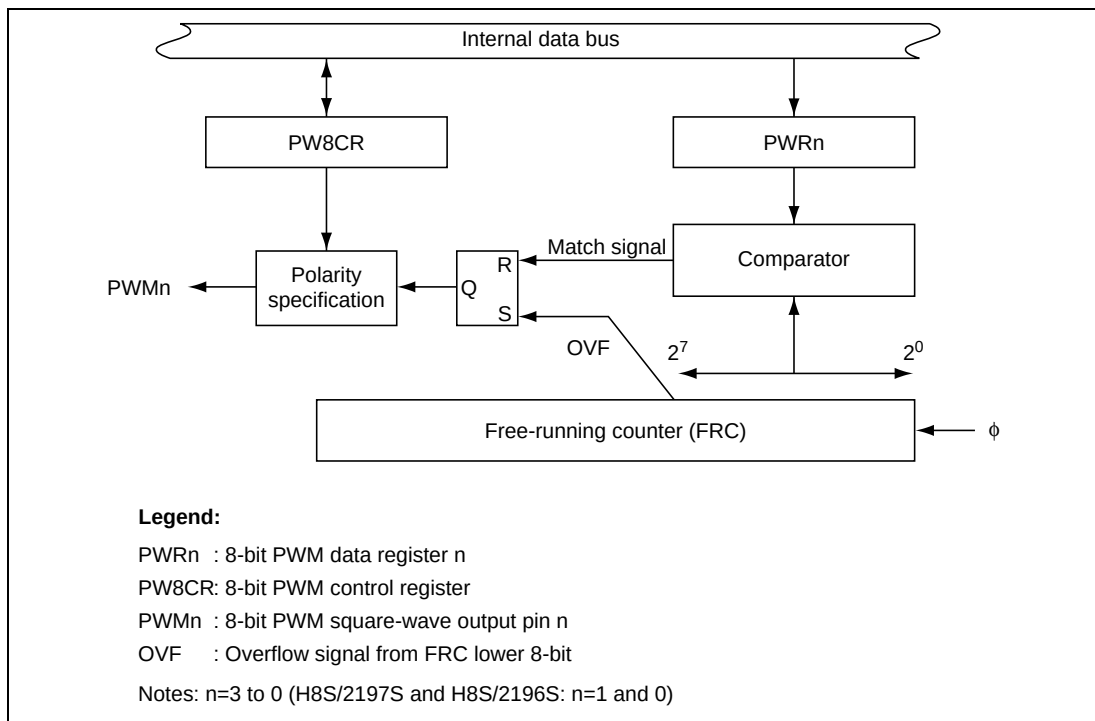


**Figure 18.1 Block Diagram of 8-Bit PWM (1 channel)**

### 18.1.3 Pin Configuration

Table 18.1 shows the 8-bit PWM pin configuration.

**Table 18.1 Pin Configuration**

| Name                               | Abbrev. | I/O    | Function                       |
|------------------------------------|---------|--------|--------------------------------|
| 8-bit PWM square-wave output pin 0 | PWM0    | Output | 8-bit PWM square-wave output 0 |
| 8-bit PWM square-wave output pin 1 | PWM1    | Output | 8-bit PWM square-wave output 1 |
| 8-bit PWM square-wave output pin 2 | PWM2    | Output | 8-bit PWM square-wave output 2 |
| 8-bit PWM square-wave output pin 3 | PWM3    | Output | 8-bit PWM square-wave output 3 |

### 18.1.4 Register Configuration

Table 18.2 shows the 8-bit PWM register configuration.

**Table 18.2 8-Bit PWM Registers**

| Name                       | Abbrev. | R/W | Size | Initial Value | Address* |
|----------------------------|---------|-----|------|---------------|----------|
| 8-bit PWM data register 0  | PWR0    | W   | Byte | H'00          | H'D126   |
| 8-bit PWM data register 1  | PWR1    | W   | Byte | H'00          | H'D127   |
| 8-bit PWM data register 2  | PWR2    | W   | Byte | H'00          | H'D128   |
| 8-bit PWM data register 3  | PWR3    | W   | Byte | H'00          | H'D129   |
| 8-bit PWM control register | PW8CR   | R/W | Byte | H'F0          | H'D12A   |
| Port mode register 3       | PMR3    | R/W | Byte | H'00          | H'FFD0   |

Note: \* Lower 16 bits of the address.

## 18.2 Register Descriptions

### 18.2.1 8-bit PWM Data Registers 0, 1, 2 and 3 (PWR0, PWR1, PWR2, PWR3)

#### PWR0

|                 |      |      |      |      |      |      |      |      |
|-----------------|------|------|------|------|------|------|------|------|
| Bit :           | 7    | 6    | 5    | 4    | 3    | 2    | 1    | 0    |
|                 | PW07 | PW06 | PW05 | PW04 | PW03 | PW02 | PW01 | PW00 |
| Initial value : | 0    | 0    | 0    | 0    | 0    | 0    | 0    | 0    |
| R/W :           | W    | W    | W    | W    | W    | W    | W    | W    |

#### PWR1

|                 |      |      |      |      |      |      |      |      |
|-----------------|------|------|------|------|------|------|------|------|
| Bit :           | 7    | 6    | 5    | 4    | 3    | 2    | 1    | 0    |
|                 | PW17 | PW16 | PW15 | PW14 | PW13 | PW12 | PW11 | PW10 |
| Initial value : | 0    | 0    | 0    | 0    | 0    | 0    | 0    | 0    |
| R/W :           | W    | W    | W    | W    | W    | W    | W    | W    |

#### PWR2

|                 |      |      |      |      |      |      |      |      |
|-----------------|------|------|------|------|------|------|------|------|
| Bit :           | 7    | 6    | 5    | 4    | 3    | 2    | 1    | 0    |
|                 | PW27 | PW26 | PW25 | PW24 | PW23 | PW22 | PW21 | PW20 |
| Initial value : | 0    | 0    | 0    | 0    | 0    | 0    | 0    | 0    |
| R/W :           | W    | W    | W    | W    | W    | W    | W    | W    |

#### PWR3

|                 |      |      |      |      |      |      |      |      |
|-----------------|------|------|------|------|------|------|------|------|
| Bit :           | 7    | 6    | 5    | 4    | 3    | 2    | 1    | 0    |
|                 | PW37 | PW36 | PW35 | PW34 | PW33 | PW32 | PW31 | PW30 |
| Initial value : | 0    | 0    | 0    | 0    | 0    | 0    | 0    | 0    |
| R/W :           | W    | W    | W    | W    | W    | W    | W    | W    |

8-bit PWM data registers 0, 1, 2 and 3 (PWR0, PWR1, PWR2, PWR3) control the duty cycle at 8-bit PWM pins. The data written in PWR0, PWR1, PWR2 and PWR3 correspond to the high-level width of one PWM output waveform cycle (256 states).

When data is set in PWR0, PWR1, PWR2 and PWR3, the contents of the data are latched in the PWM waveform generators, updating the PWM waveform generation data.

PWR0, PWR1, PWR2 and PWR3 are 8-bit write-only registers. When read, all bits are always read as 1.

PWR0, PWR1, PWR2 and PWR3 are initialized to H'00 by a reset.

Note: The H8S/2197S and H8S/2196S do not have PWR2 and PWR3.

18.2.2 8-bit PWM Control Register (PW8CR)

|                 |   |   |   |   |      |      |      |      |
|-----------------|---|---|---|---|------|------|------|------|
| Bit :           | 7 | 6 | 5 | 4 | 3    | 2    | 1    | 0    |
|                 | — | — | — | — | PWC3 | PWC2 | PWC1 | PWC0 |
| Initial value : | 1 | 1 | 1 | 1 | 0    | 0    | 0    | 0    |
| R/W :           | — | — | — | — | R/W  | R/W  | R/W  | R/W  |

The 8-bit PWM control register (PW8CR) is an 8-bit readable/writable register that controls PWM functions. PW8CR is initialized to H'00 by a reset.

**Bits 7 to 4—Reserved:** These bits cannot be modified and are always read as 1.

**Bits 3 to 0—Output Polarity Select (PWC3 to PWC0):** These bits select the output polarity of PWMn pin between positive or negative (reverse).

Bit n

| PWCn | Description                                           |
|------|-------------------------------------------------------|
| 0    | PWMn pin output has positive polarity (Initial value) |
| 1    | PWMn pin output has negative polarity                 |

Notes: n=3 to 0 (H8S/2197S and H8S/2196S: n=1 and 0).

18.2.3 Port Mode Register 3 (PMR3)

|                 |       |       |       |       |       |       |       |       |
|-----------------|-------|-------|-------|-------|-------|-------|-------|-------|
| Bit :           | 7     | 6     | 5     | 4     | 3     | 2     | 1     | 0     |
|                 | PMR37 | PMR36 | PMR35 | PMR34 | PMR33 | PMR32 | PMR31 | PMR30 |
| Initial value : | 0     | 0     | 0     | 0     | 0     | 0     | 0     | 0     |
| R/W :           | R/W   | R/W   | R/W   | R/W   | R/W   | R/W   | R/W   | R/W   |

The port mode register 3 (PMR3) controls function switching of each pin in the port 3. Switching is specified for each bit.

The PMR3 is a 8-bit readable/writable register and is initialized to H'00 by a reset.

For bits other than 5 to 2, see section 10.5, Port 3.


**Bits 5 to 2—P35/PWM3 to P32/PWM0 Pin Switching (PMR35 to PMR32):** These bits set whether the P3n/PWMn pin is used as I/O pin or it is used as 8-bit PWM output PWMm pin.

Bit n

| PMR3n | Description                                           |
|-------|-------------------------------------------------------|
| 0     | P3n/PWMm pin functions as P3n I/O pin (Initial value) |
| 1     | P3n/PWMm pin functions as PWMm output pin             |

Notes: n=5 to 2, m=3 to 0. The H8S/2197S and H8S/2196S do not have PWM2 and PWM3 pin functions.

18.2.4 Module Stop Control Register (MSTPCR)

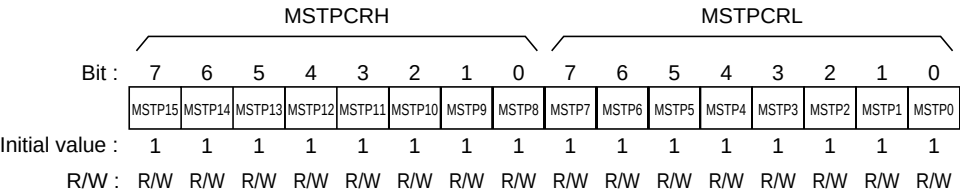

The MSTPCR consists of two 8-bit readable/writable registers that control module stop mode. When MSTP4 bit is set to 1, the 8-bit PWM stops its operation upon completion of the bus cycle and transits to the module stop mode. For details, see section 4.5, Module Stop Mode. The MSTPCR is initialized to H'FFFF by a reset.

**Bit 4—Module Stop (MSTP4):** This bit sets the module stop mode of the 8-bit PWM.

MSTPCRL

Bit 4

MSTP4

Description

|   |                                                   |
|---|---------------------------------------------------|
| 0 | 8-bit PWM module stop mode is released            |
| 1 | 8-bit PWM module stop mode is set (Initial value) |



## 18.3 8-Bit PWM Operation

The 8-bit PWM outputs PWM pulses having a cycle length of 256 states and a pulse width determined by the data registers (PWR).

The output PWM pulse can be converted to a DC voltage through integration in a low-pass filter.

Figure 18.2 shows the output waveform example of 8-bit PWM. The pulse width (Twidth) can be obtained by the following expression:

$$Twidth = (1/\phi) \times (PWR \text{ setting value})$$

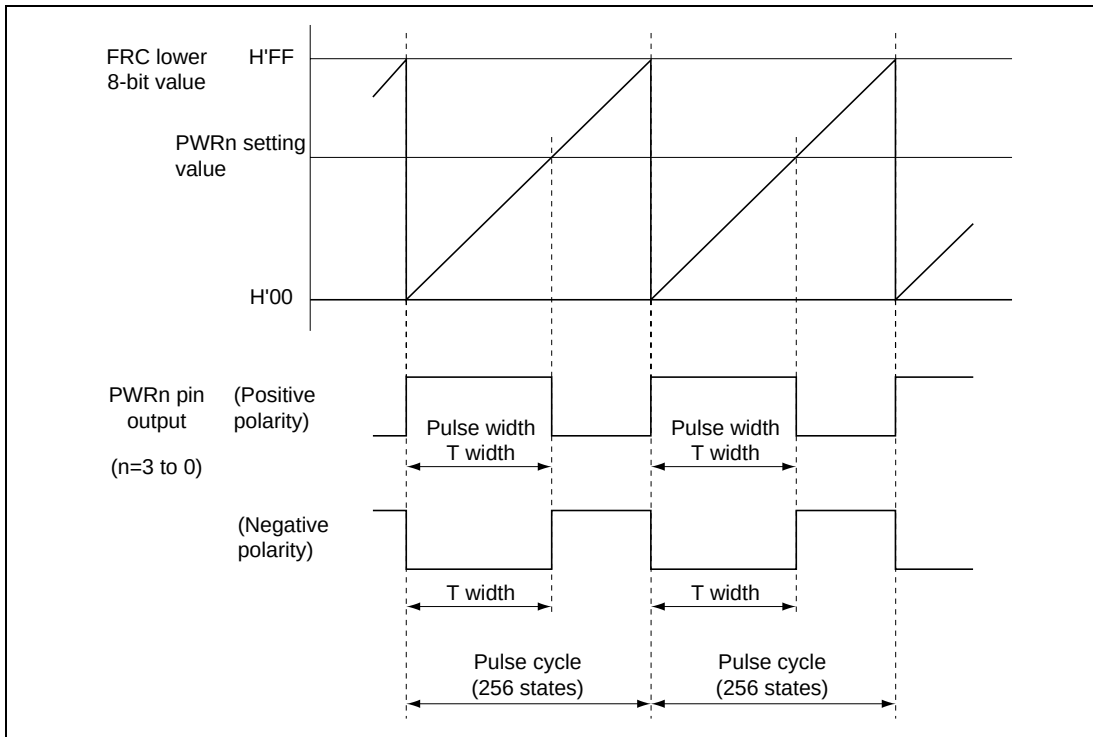


**Figure 18.2 8-bit PWM Output Waveform (Example)**



## Section 19 12-Bit PWM

### 19.1 Overview

The 12-bit PWM incorporates 2 channels of the pulse pitch control method and functions as the drum and capstan motor controller.

#### 19.1.1 Features

Two on-chip 12-bit PWM signal generators are provided to control motors. These PWMs use the pulse-pitch control method (periodically overriding part of the output). This reduces low-frequency components in the pulse output, enabling a quick response without increasing the clock frequency. The pitch of the PWM signal is modified in response to error data (representing lead or lag in relation to a preset speed and phase).

## 19.1.2 Block Diagram

Figure 19.1 shows a block diagram of the 12-bit PWM (1 channel). The PWM signal is generated by combining quantizing pulses from a 12-bit pulse generator with quantizing pulses derived from the contents of a data register. Low-frequency components are reduced because the two quantizing pulses have different frequencies. The error data is represented by an unsigned 12-bit binary number.

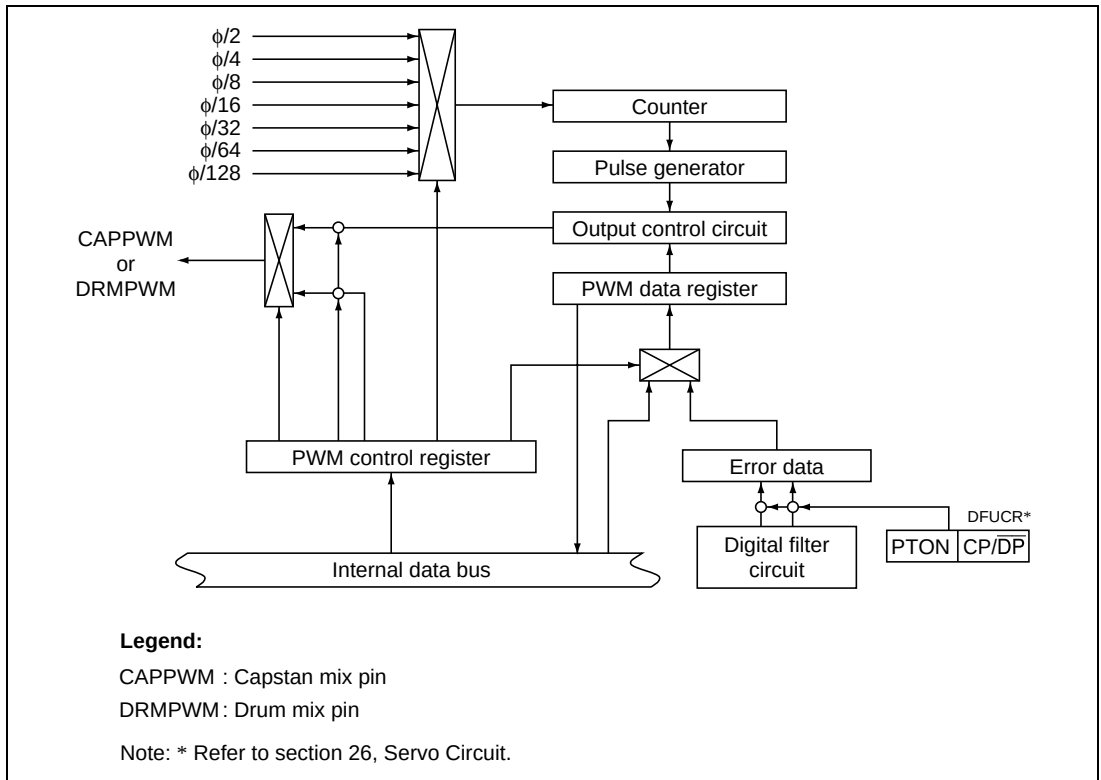


**Figure 19.1 Block Diagram of 12-Bit PWM (1 channel)**

### 19.1.3 Pin Configuration

Table 19.1 shows the 12-bit PWM pin configuration.

**Table 19.1 Pin Configuration**

| Name        | Abbrev. | I/O    | Function                      |
|-------------|---------|--------|-------------------------------|
| Capstan mix | CAPPWM  | Output | 12-bit PWM square-wave output |
| Drum mix    | DRMPWM  |        |                               |

### 19.1.4 Register Configuration

Table 19.2 shows the 12-bit PWM register configuration.

**Table 19.2 12-Bit PWM Registers**

| Name                        | Abbrev. | R/W | Size | Initial Value | Address* |
|-----------------------------|---------|-----|------|---------------|----------|
| 12-bit PWM control register | CPWCR   | W   | Byte | H'42          | H'D07B   |
|                             | DPWCR   | W   | Byte | H'42          | H'D07A   |
| 12-bit PWM data register    | CPWDR   | R/W | Word | H'F000        | H'D07C   |
|                             | DPWDR   | R/W | Word | H'F000        | H'D078   |

Note: \* Lower 16 bits of the address.

# 19.2 Register Descriptions

## 19.2.1 12-Bit PWM Control Registers (CPWCR, DPWCR)

### CPWCR

|                 |      |     |      |      |        |      |      |      |
|-----------------|------|-----|------|------|--------|------|------|------|
| Bit :           | 7    | 6   | 5    | 4    | 3      | 2    | 1    | 0    |
|                 | CPOL | CDC | CHiZ | CH/L | CSF/DF | CCK2 | CCK1 | CCK0 |
| Initial value : | 0    | 1   | 0    | 0    | 0      | 0    | 1    | 0    |
| R/W :           | W    | W   | W    | W    | W      | W    | W    | W    |

### DPWCR

|                 |      |     |      |      |        |      |      |      |
|-----------------|------|-----|------|------|--------|------|------|------|
| Bit :           | 7    | 6   | 5    | 4    | 3      | 2    | 1    | 0    |
|                 | DPOL | DDC | DHiZ | DH/L | DSF/DF | DCK2 | DCK1 | DCK0 |
| Initial value : | 0    | 1   | 0    | 0    | 0      | 0    | 1    | 0    |
| R/W :           | W    | W   | W    | W    | W      | W    | W    | W    |

CPWCR is the PWM output control register for the capstan motor. DPWCR is the PWM output control register for the drum motor. Both are 8-bit writable registers. CPWCR and DPWCR are initialized to H'42 by a reset, or when in a power-down state except for active medium-speed mode.

**Bit 7—Polarity Invert (POL):** This bit can invert the polarity of the modulated PWM signal for noise suppression and other purposes. This bit is invalid when fixed output is selected (when bit DC is set to 1).

#### Bit 7

| POL | Description                                   |
|-----|-----------------------------------------------|
| 0   | Output with positive polarity (Initial value) |
| 1   | Output with inverted polarity                 |

**Bit 6—Output Select (DC):** Selects either PWM modulated output, or fixed output controlled by the pin output bits (bits 5 and 4).

**Bits 5 and 4—PWM Pin Output (HiZ, H/L):** When bit DC is set to 1, the 12-bit PWM output pins (CAPPWM, DRMPWM) output a value determined by the HiZ and H/L bits. The output is not affected by bit POL.

In power-down modes, the 12-bit PWM circuit and pin statuses are retained. Before making a transition to a power-down mode, first set bits 6 (DC), 5 (HiZ), and 4 (H/L) of the 12-bit PWM control registers (CPWCR and DPWCR) to select a fixed output level. Choose one of the following settings:

| Bit 6 | Bit 5 | Bit 4 |                          |                 |
|-------|-------|-------|--------------------------|-----------------|
| DC    | HiZ   | H/L   | Output state             |                 |
| 1     | 0     | 0     | Low output               | (Initial value) |
|       |       | 1     | High output              |                 |
|       | 1     | *     | High-impedance           |                 |
| 0     | *     | *     | Modulation signal output |                 |

Note: \* Don't care

**Bit 3—Output Data Select (SF/DF):** Selects whether the data to be converted to PWM output is taken from the data register or from the digital filter circuit.

| Bit 3 |                                                                          |
|-------|--------------------------------------------------------------------------|
| SF/DF | Description                                                              |
| 0     | Modulation by error data from the digital filter circuit (Initial value) |
| 1     | Modulation by error data written in the data register                    |

Note: When PWMs output data from the digital filter circuit, the data consisting of the speed and phase filtering results are modulated by PWMs and output from the CAPPWM and DRMPWM pins. However, it is possible to output only drum phase filter results from CAPPWM pin and only capstan phase filter result from DRMPWM pin, by DFUCR settings of the digital filter circuit. See section 26.11, Digital Filters.

**Bits 2 to 0—Carrier Frequency Select (CK2 to CK0):** Selects the carrier frequency of the PWM modulated signal. Do not set them to 111.

| Bit 2 | Bit 1 | Bit 0 | Description              |
|-------|-------|-------|--------------------------|
| CK2   | CK1   | CK0   |                          |
| 0     | 0     | 0     | $\phi 2$                 |
|       |       | 1     | $\phi 4$                 |
|       | 1     | 0     | $\phi 8$ (Initial value) |
|       |       | 1     | $\phi 16$                |
| 1     | 0     | 0     | $\phi 32$                |
|       |       | 1     | $\phi 64$                |
|       | 1     | 0     | $\phi 128$               |
|       |       | 1     | (Do not set)             |



## 19.2.2 12-Bit PWM Data Registers (DPWDR, CPWDR)

### CPWDR

|                 |    |    |    |    |         |         |        |        |        |        |        |        |        |        |        |        |
|-----------------|----|----|----|----|---------|---------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|
| Bit :           | 15 | 14 | 13 | 12 | 11      | 10      | 9      | 8      | 7      | 6      | 5      | 4      | 3      | 2      | 1      | 0      |
|                 | —  | —  | —  | —  | CPWDR11 | CPWDR10 | CPWDR9 | CPWDR8 | CPWDR7 | CPWDR6 | CPWDR5 | CPWDR4 | CPWDR3 | CPWDR2 | CPWDR1 | CPWDR0 |
| Initial value : | 1  | 1  | 1  | 1  | 0       | 0       | 0      | 0      | 0      | 0      | 0      | 0      | 0      | 0      | 0      | 0      |
| R/W :           | —  | —  | —  | —  | R/W     | R/W     | R/W    | R/W    | R/W    | R/W    | R/W    | R/W    | R/W    | R/W    | R/W    | R/W    |

### DPWDR

|                 |    |    |    |    |         |         |        |        |        |        |        |        |        |        |        |        |
|-----------------|----|----|----|----|---------|---------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|
| Bit :           | 15 | 14 | 13 | 12 | 11      | 10      | 9      | 8      | 7      | 6      | 5      | 4      | 3      | 2      | 1      | 0      |
|                 | —  | —  | —  | —  | DPWDR11 | DPWDR10 | DPWDR9 | DPWDR8 | DPWDR7 | DPWDR6 | DPWDR5 | DPWDR4 | DPWDR3 | DPWDR2 | DPWDR1 | DPWDR0 |
| Initial value : | 1  | 1  | 1  | 1  | 0       | 0       | 0      | 0      | 0      | 0      | 0      | 0      | 0      | 0      | 0      | 0      |
| R/W :           | —  | —  | —  | —  | R/W     | R/W     | R/W    | R/W    | R/W    | R/W    | R/W    | R/W    | R/W    | R/W    | R/W    | R/W    |


The 12-bit PWM data registers (DPWDR and CPWDR) are 12-bit readable/writable registers in which the data to be converted to PWM output is written.

The data in these registers is converted to PWM output only when bit SF/DF of the corresponding control register is set to 1. When the SF/DF bit is 0, the error data from the digital filter circuit is written in the data register, and then modulated by PWM. At this time, the error data from the digital filter circuit can be monitored by reading the data register.

These registers can be accessed by word only, and cannot be accessed by byte. Byte access gives unassured results.

Both registers are initialized to H'F000 by a reset or in a power-down state except for active medium speed mode.

19.2.3 Module Stop Control Register (MSTPCR)

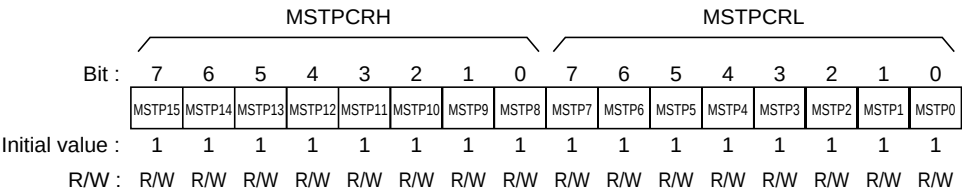

The MSTPCR consists of two 8-bit readable/writable registers that control module stop mode. When MSTP1 bit is set to 1, the 12-bit PWM stops its operation upon completion of the bus cycle and transits to the module stop mode. For details, see section 4.5, Module Stop Mode. The MSTPCR is initialized to H'FFFF by a reset.

**Bit 1—Module Stop (MSTP1):** This bit sets the module stop mode of the 12-bit PWM.

MSTPCRL

Bit 1

| MSTP1 | Description                                                          |
|-------|----------------------------------------------------------------------|
| 0     | 12-bit PWM and servo circuit module stop mode is released            |
| 1     | 12-bit PWM and servo circuit module stop mode is set (Initial value) |

## 19.3 Operation

### 19.3.1 Output Waveform

The PWM signal generator combines the error data with the output from an internal pulse generator to produce a pulse-width modulated signal.

When  $V_{cc}/2$  is set as the reference value, the following conditions apply:

1. When the motor is running at the correct speed and phase, the PWM signal is output with a 50% duty cycle.
2. When the motor is running behind the correct speed or phase, it is corrected by periodically holding part of the PWM signal low. The part held low depends on the size of the error.
3. When the motor is running ahead of the correct speed or phase, it is corrected by periodically holding part of the PWM signal high. The part held high depends on the size of the error.

When the motor is running at the correct speed and phase, the error data is a 12-bit value representing  $1/2$  (1000 0000 0000), and the PWM output has the same frequency as the selected division clock.

After the error data has been converted into a PWM signal, the PWM signal can be smoothed into a DC voltage by an external low-pass filter (LPF). The smoothed error data can be used to control the motor.

Figure 19.2 shows sample waveform outputs.

The 12-bit PWM pin outputs a low-level signal upon reset, in power-down mode or at module-stop.

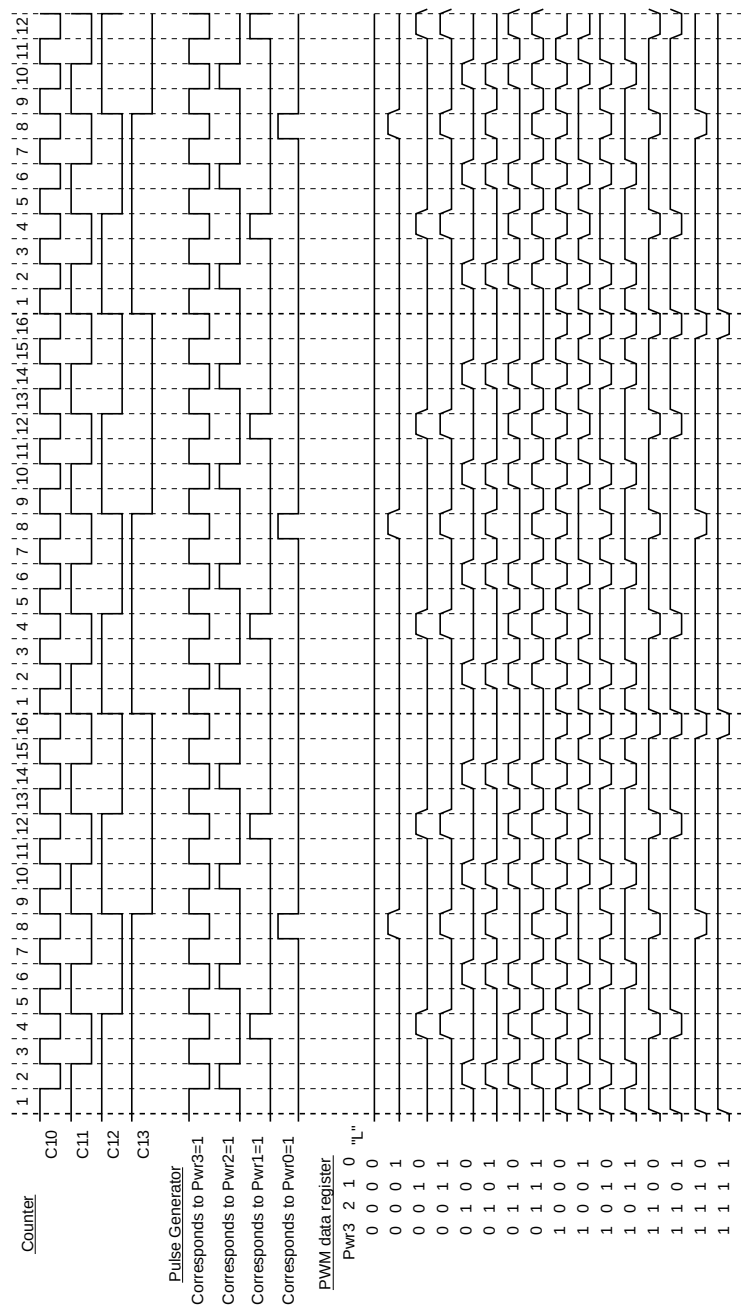


**Figure 19.2 Sample Waveform Output by 12-Bit PWM (4 Bits)**

## Section 20 14-Bit PWM

Note: The 14-Bit PWM is not (incorporated in) provided for the H8S/2197S and H8S/2196S.

### 20.1 Overview

The 14-bit PWM is a pulse division type PWM that can be used for electronic tuner control, etc.

#### 20.1.1 Features

Features of the 14-bit PWM are given below:

- Choice of two conversion periods  
A conversion period of  $32768/\phi$  with a minimum modulation width of  $2/\phi$ , or a conversion period of  $16384/\phi$  with a minimum modulation width of  $1/\phi$ , can be selected.
- Pulse division method for less ripple

20.1.2 Block Diagram

Figure 20.1 shows a block diagram of the 14-bit PWM.

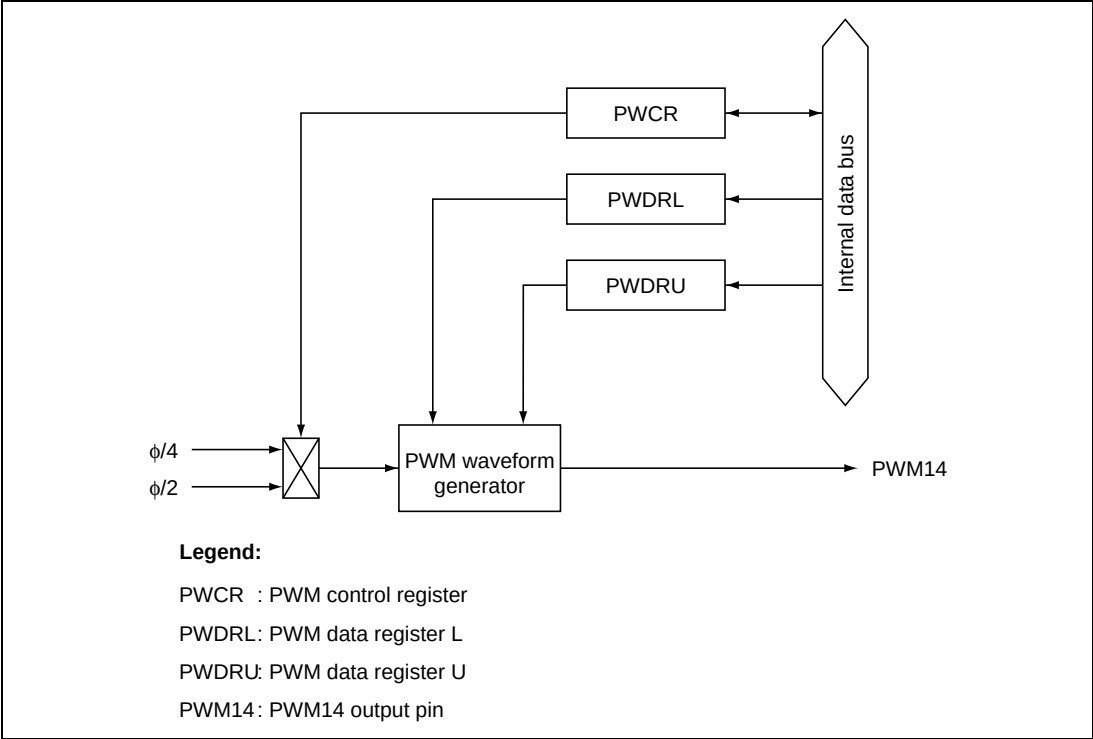


Figure 20.1 Block Diagram of 14-Bit PWM

20.1.3 Pin Configuration

Table 20.1 shows the 14-bit PWM pin configuration.

Table 20.1 Pin Configuration

| Name                              | Abbrev. | I/O    | Function                      |
|-----------------------------------|---------|--------|-------------------------------|
| PWM 14-bit square-wave output pin | PWM14*  | Output | 14-bit PWM square-wave output |

Note: \* This pin also functions as P40 general I/O pin. When using this pin, set the pin function by the port mode register 4 (PMR4). For details, see section 10.6, Port 4.

## 20.1.4 Register Configuration

Table 20.2 shows the 14-bit PWM register configuration.

**Table 20.2 14-Bit PWM Registers**

| Name                 | Abbrev. | R/W | Size | Initial Value | Address* |
|----------------------|---------|-----|------|---------------|----------|
| PWM control register | PWCR    | R/W | Byte | H'FE          | H'D122   |
| PWM data register U  | PWDRU   | W   | Byte | H'C0          | H'D121   |
| PWM data register L  | PWDRL   | W   | Byte | H'00          | H'D120   |

Note: \* Lower 16 bits of the address.

# 20.2 Register Descriptions

## 20.2.1 PWM Control Register (PWCR)

|                 |   |   |   |   |   |   |   |       |
|-----------------|---|---|---|---|---|---|---|-------|
| Bit :           | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0     |
|                 | — | — | — | — | — | — | — | PWCR0 |
| Initial value : | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 0     |
| R/W :           | — | — | — | — | — | — | — | R/W   |

The PWM control register (PWCR) is an 8-bit read/write register that controls the 14-bit PWM functions. PWCR is initialized to H'FE by a reset.

**Bits 7 to 1—Reserved:** These bits cannot be modified and are always read as 1.

**Bit 0—Clock Select (PWCR0):** Selects the clock supplied to the 14-bit PWM.

### Bit 0

| PWCR0 | Description                                                                                                                                             |
|-------|---------------------------------------------------------------------------------------------------------------------------------------------------------|
| 0     | The input clock is $\phi/2$ ( $t\phi = 2/\phi$ ) (Initial value)<br>The conversion period is $16384/\phi$ , with a minimum modulation width of $1/\phi$ |
| 1     | The input clock is $\phi/4$ ( $t\phi = 4/\phi$ )<br>The conversion period is $32768/\phi$ , with a minimum modulation width of $2/\phi$                 |

Note:  $t\phi$ : Period of PWM clock input



## 20.2.2 PWM Data Registers U and L (PWDRU, PWDRL)

### PWDRU

|                 |   |   |        |        |        |        |        |        |
|-----------------|---|---|--------|--------|--------|--------|--------|--------|
| Bit :           | 7 | 6 | 5      | 4      | 3      | 2      | 1      | 0      |
|                 | — | — | PWDRU5 | PWDRU4 | PWDRU3 | PWDRU2 | PWDRU1 | PWDRU0 |
| Initial value : | 1 | 1 | 0      | 0      | 0      | 0      | 0      | 0      |
| R/W :           | — | — | W      | W      | W      | W      | W      | W      |

### PWDRL

|                 |        |        |        |        |        |        |        |        |
|-----------------|--------|--------|--------|--------|--------|--------|--------|--------|
| Bit :           | 7      | 6      | 5      | 4      | 3      | 2      | 1      | 0      |
|                 | PWDRL7 | PWDRL6 | PWDRL5 | PWDRL4 | PWDRL3 | PWDRL2 | PWDRL1 | PWDRL0 |
| Initial value : | 0      | 0      | 0      | 0      | 0      | 0      | 0      | 0      |
| R/W :           | W      | W      | W      | W      | W      | W      | W      | W      |

PWM data registers U and L (PWDRU and PWDRL) indicate high level width in one PWN waveform cycle.

PWDRU and PWDRL form a 14-bit write-only register, with the upper 6 bits assigned to PWDRU and the lower 8 bits to PWDRL. The value written in PWDRU and PWDRL gives the total high-level width of one PWM waveform cycle. Both PWDRU and PWDRL are accessible by byte access only. Word access gives unassured results.

When 14-bit data is written in PWDRU and PWDRL, the contents are latched in the PWM waveform generator and the PWM waveform generation data is updated. When writing the 14-bit data, follow these steps:


1. Write the lower 8 bits to PWDRL.
2. Write the upper 6 bits to PWDRU.

Write the data first to PWDRL and then to PWDRU.

PWDRU and PWDRL are write-only registers. When read, all bits always read 1.

PWDRU and PWDRL are initialized to H'C000 by a reset.

20.2.3 Module Stop Control Register (MSTPCR)

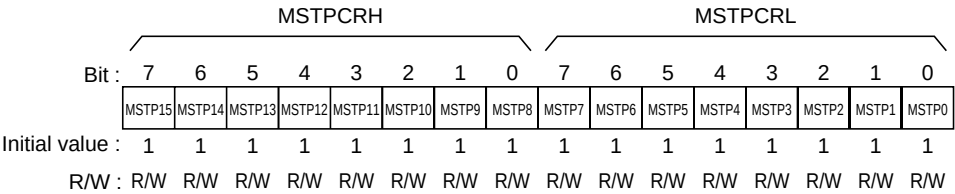

The module stop control register (MSTPCR) consists of two 8-bit readable/writable registers that control the module stop mode functions.

When the MSTP5 bit is set to 1, the 14-bit PWM operation stops at the end of the bus cycle and a transition is made to module stop mode. For details, see section 4.5, Module Stop Mode.

MSTPCR is initialized to H'FFFF by a reset.

**Bit 5—Module Stop (MSTP5):** Specifies the module stop mode of the 14-bit PWM.

MSTPCRL

Bit 5

| MSTP5 | Description                                        |
|-------|----------------------------------------------------|
| 0     | 14-bit PWM module stop mode is released            |
| 1     | 14-bit PWM module stop mode is set (Initial value) |

## 20.3 14-Bit PWM Operation

When using the 14-bit PWM, set the registers in this sequence:

1. Set bit PWM40 to 1 in port mode register 4 (PMR4) so that pin P40/PWM14 is designated for PWM output.
2. Set bit PWCR0 in the PWM control register (PWCR) to select a conversion period of either  $32768/\phi$  (PWCR0 = 1) or  $16384/\phi$  (PWCR0 = 0).
3. Set the output waveform data in PWM data registers U and L (PWDRU, PWDRL). Be sure to write byte data first to PWDRL and then to PWDRU. When the data is written in PWDRU, the contents of these registers are latched in the PWM waveform generator, and the PWM waveform generation data is updated in synchronization with internal signals.

One conversion period consists of 64 pulses, as shown in figure 20.2. The total high-level width during this period ( $T_H$ ) corresponds to the data in PWDRU and PWDRL. This relation can be expressed as follows:

$$T_H = (\text{data value in PWDRU and PWDRL} + 64) \times t\phi/2$$

where  $t\phi$  is the period of PWM clock input:  $2/\phi$  (bit PWCR0 = 0) or  $4/\phi$  (bit PWCR0 = 1).

If the data value in PWDRU and PWDRL is from H'3FC0 to H'3FFF, the PWM output stays high. When the data value is H'0000,  $T_H$  is calculated as follows:

$$T_H = 64 \times t\phi/2 = 32 \cdot t\phi$$

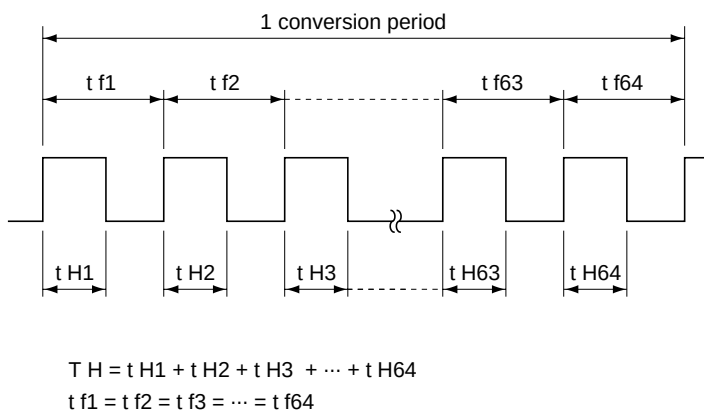


**Figure 20.2 Waveform Output by 14-Bit PWM**



# Section 21 Prescaler Unit

## 21.1 Overview

The prescaler unit (PSU) has a 18-bit free running counter (FRC) that uses  $\phi$  as a clock source and a 5-bit counter that uses  $\phi W$  as a clock source.

### 21.1.1 Features

- Prescalar S (PSS)  
Generates frequency division clocks that are input to peripheral functions.
- Prescalar W (PSW)  
When a timer A is used as a clock time base, the PSW frequency-divides subclocks and generates input clocks.
- Stable oscillation wait time count  
During the return from the low power consumption mode excluding the sleep mode, the FRC counts the stable oscillation wait time.
- 8-bit PWM  
The lower 8 bits of the FRC is used as 8-bit PWM cycle and duty cycle generation counters. (Conversion cycle: 256 states)
- 8-bit input capture by  $\overline{IC}$  pins  
Catches the 8 bits of  $2^{15}$  to  $2^8$  of the FRC according to the edge of the  $\overline{IC}$  pin for remote control receiving.
- Frequency division clock output  
Can output the frequency division clock for the system clock or the frequency division clock for the subclock from the frequency division clock output pin (TMOW).

### 21.1.2 Block Diagram

Figure 21.1 shows a block diagram of the prescaler unit.

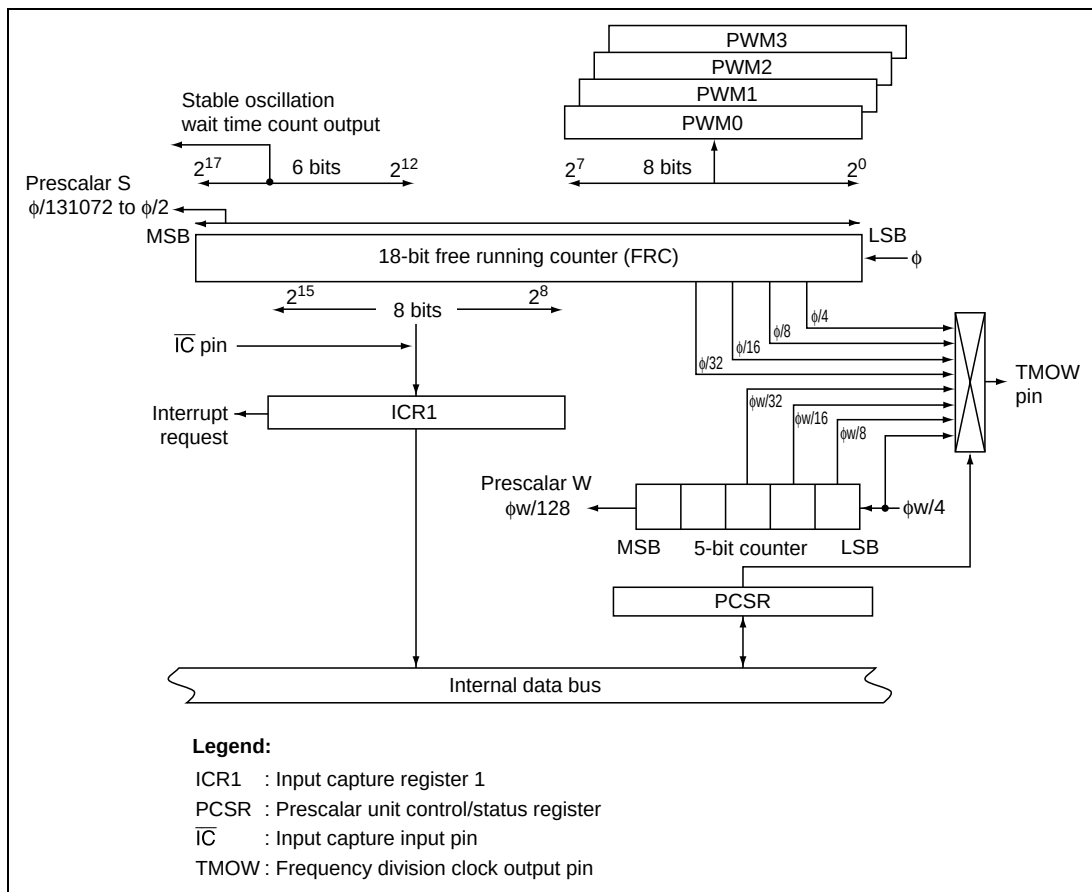


**Figure 21.1 Block Diagram of Prescaler Unit**

### 21.1.3 Pin Configuration

Table 21.1 shows the pin configuration of the prescalar unit.

**Table 21.1 Pin Configuration**

| Name                            | Abbrev.         | I/O    | Function                                           |
|---------------------------------|-----------------|--------|----------------------------------------------------|
| Input capture input             | $\overline{IC}$ | Input  | Prescalar unit input capture input pin             |
| Frequency division clock output | TMOW            | Output | Prescalar unit frequency division clock output pin |

### 21.1.4 Register Configuration

Table 21.2 shows the register configuration of the prescalar unit.

**Table 21.2 Register Configuration**

| Name                                   | Abbrev. | R/W | Size | Initial Value | Address* |
|----------------------------------------|---------|-----|------|---------------|----------|
| Input capture register 1               | ICR1    | R   | Byte | H'00          | H'D12C   |
| Prescalar unit control/status register | PCSR    | R/W | Byte | H'08          | H'D12D   |

Note: \* Lower 16 bits of the address.

# 21.2 Registers

## 21.2.1 Input Capture Register 1 (ICR1)

|                 |       |       |       |       |       |       |       |       |
|-----------------|-------|-------|-------|-------|-------|-------|-------|-------|
| Bit :           | 7     | 6     | 5     | 4     | 3     | 2     | 1     | 0     |
|                 | ICR17 | ICR16 | ICR15 | ICR14 | ICR13 | ICR12 | ICR11 | ICR10 |
| Initial value : | 0     | 0     | 0     | 0     | 0     | 0     | 0     | 0     |
| R/W :           | R     | R     | R     | R     | R     | R     | R     | R     |

Input capture register 1 (ICR1) captures 8-bit data of  $2^{15}$  to  $2^8$  of the FRC according to the edge of the  $\overline{IC}$  pin.

ICR1 is an 8-bit read-only register. The write operation becomes invalid. The ICR1 values are undefined until the first capture is generated after the mode has been set to the standby mode, watch mode, subactive mode, and subsleeve mode. When reset, ICR1 is initialized to H'00.

## 21.2.2 Prescaler Unit Control/Status Register (PCSR)

|                 |        |      |      |          |   |      |      |      |
|-----------------|--------|------|------|----------|---|------|------|------|
| Bit :           | 7      | 6    | 5    | 4        | 3 | 2    | 1    | 0    |
|                 | ICIF   | ICIE | ICEG | NCon/off | — | DCS2 | DCS1 | DCS0 |
| Initial value : | 0      | 0    | 0    | 0        | 1 | 0    | 0    | 0    |
| R/W :           | R/(W)* | R/W  | R/W  | R/W      | — | R/W  | R/W  | R/W  |

Note: \* Only 0 can be written to clear the flag.

The prescaler unit control/status register (PCSR) controls the input capture function and selects the frequency division clock that is output from the TMOW pin.

PCSR is an 8-bit read/write enable register. When reset, PCSR is initialized to H'08.

**Bit 7—Input Capture Interrupt Flag (ICIF):** Input capture interrupt request flag. This indicates that the input capture was performed according to the edge of the  $\overline{IC}$  pin.

### Bit 7

| ICIF | Description                                                                                              |
|------|----------------------------------------------------------------------------------------------------------|
| 0    | [Clear condition] (Initial value)<br>When 0 is written after 1 has been read                             |
| 1    | [Set condition]<br>When the input capture was performed according to the edge of the $\overline{IC}$ pin |



**Bit 6—Input Capture Interrupt Enable (ICIE):** When ICIF was set to 1 by the input capture according to the edge of the  $\overline{IC}$  pin, ICIE enables and disables the generation of an input capture interrupt.

**Bit 6**

| ICIE | Description                                                           |
|------|-----------------------------------------------------------------------|
| 0    | Disables the generation of an input capture interrupt (Initial value) |
| 1    | Enables the generation of an input capture interrupt                  |

**Bit 5— $\overline{IC}$  Pin Edge Select (ICEG):** ICEG selects the input edge sense of the  $\overline{IC}$  pin.

**Bit 5**

| ICEG | Description                                                               |
|------|---------------------------------------------------------------------------|
| 0    | Detects the falling edge of the $\overline{IC}$ pin input (Initial value) |
| 1    | Detects the rising edge of the $\overline{IC}$ pin input                  |

**Bit 4—Noise Cancel ON/OFF (NCon/off):** NCon/off selects enable/disable of the noise cancel function of the  $\overline{IC}$  pin. For the noise cancel function, see section 21.3, Noise Cancel Circuit.

**Bit 4**

| NCon/off | Description                                                                   |
|----------|-------------------------------------------------------------------------------|
| 0        | Disables the noise cancel function of the $\overline{IC}$ pin (Initial value) |
| 1        | Enables the noise cancel function of the $\overline{IC}$ pin                  |

**Bit 3—Reserved:** This bit cannot be modified and is always read as 1.

**Bits 2 to 0—Frequency Division Clock Output Select (DCS2 to DCS0):** DCS2 to DCS0 select eight types of frequency division clocks that are output from the TMOW pin.

| Bit 2 | Bit 1 | Bit 0 | Description                            |
|-------|-------|-------|----------------------------------------|
| DCS2  | DCS1  | DCS0  |                                        |
| 0     | 0     | 0     | Outputs PSS, $\phi/32$ (Initial value) |
|       |       | 1     | Outputs PSS, $\phi/16$                 |
|       | 1     | 0     | Outputs PSS, $\phi/8$                  |
|       |       | 1     | Outputs PSS, $\phi/4$                  |
| 1     | 0     | 0     | Outputs PSW, $\phi W/32$               |
|       |       | 1     | Outputs PSW, $\phi W/16$               |
|       | 1     | 0     | Outputs PSW, $\phi W/8$                |
|       |       | 1     | Outputs PSW, $\phi W/4$                |

21.2.3 Port Mode Register 1 (PMR1)

|                 |       |       |       |       |       |       |       |       |
|-----------------|-------|-------|-------|-------|-------|-------|-------|-------|
| Bit :           | 7     | 6     | 5     | 4     | 3     | 2     | 1     | 0     |
|                 | PMR17 | PMR16 | PMR15 | PMR14 | PMR13 | PMR12 | PMR11 | PMR10 |
| Initial value : | 0     | 0     | 0     | 0     | 0     | 0     | 0     | 0     |
| R/W :           | R/W   | R/W   | R/W   | R/W   | R/W   | R/W   | R/W   | R/W   |

The port mode register 1 (PMR1) controls switching of each pin function of port 1. The switching is specified in a unit of bit.  
PMR1 is an 8-bit read/write enable register. When reset, PMR1 is initialized to H'00. For details, refer to Port Mode Register 1 in section 10.3.2 Register Configuration.

**Bit 7—P17/TMOW Pin Switching (PMR17):** PMR17 sets whether the P17/TMOW pin is used as a P17 I/O pin or a TMOW pin for division clock output.

Bit 7

| PMR17 | Description                                                 |
|-------|-------------------------------------------------------------|
| 0     | The P17/TMOW pin functions as a P17 I/O pin (Initial value) |
| 1     | The P17/TMOW pin functions as a TMOW output function        |

**Bit 6—P16/ $\overline{IC}$  Pin Switching (PMR16):** PMR16 sets whether the P16/ $\overline{IC}$  pin is used as a P16 I/O pin or an  $\overline{IC}$  pin for the input capture input of the prescaler unit.

Bit 6

| PMR16 | Description                                                                 |
|-------|-----------------------------------------------------------------------------|
| 0     | The P16/ $\overline{IC}$ pin functions as a P16 I/O pin (Initial value)     |
| 1     | The P16/ $\overline{IC}$ pin functions as an $\overline{IC}$ input function |

## 21.3 Noise Cancel Circuit

The  $\overline{IC}$  pin has a built-in a noise cancel circuit. The circuit can be used for noise protection such as remote control receiving. The noise cancel circuit samples the input values of the  $\overline{IC}$  pin twice at an interval of 256 states. If the input values are different, they are assumed to be noise.

The  $\overline{IC}$  pin can specify enable/disable of the noise cancel function according to the bit 4 (NCon/off) of the prescalar unit control/status register (PCSR).

## 21.4 Operation

### 21.4.1 Prescalar S (PSS)

The PSS is a 17-bit counter that uses the system clock ( $\phi=f_{osc}$ ) as an input clock and generates the frequency division clocks ( $\phi/131072$  to  $\phi/2$ ) of the peripheral function. The low-order 17 bits of the 18-bit free running counter (FRC) correspond to the PSS. The FRC is incremented by one clock. The PSS output is shared by the timer and serial communication interface (SCI), and the frequency division ratio can independently be set by each built-in peripheral function.

When reset, the FRC is initialized to H'00000, and starts increment after reset has been released. Because the system clock oscillator is stopped in standby mode, watch mode, subactive mode, and subsleep mode, the PSS operation is also stopped. In this case, the FCR is also initialized to H'00000.

The FRC cannot be read and written from the CPU.

## 21.4.2 Prescaler W (PSW)

PSW is a counter that uses the subclock as an input clock. The PSW also generates the input clock of the timer A. In this case, the timer A functions as a clock time base.

When reset, the PSW is initialized to H'00, and starts increment after reset has been released.

Even if the mode has been shifted to the standby mode\*, watch mode\*, subactive mode\*, and subsleep mode\*, the PSW continues the operation as long as the clocks are supplied by the X1 and X2 pins.

The PSW can also be initialized to H'00 by setting the TMA3 and TMA2 bits of the timer mode register A (TMA) to 11.

Note: \* When the timer A is in module stop mode, the operation is stopped.

Figure 21.2 shows the supply of the clocks to the peripheral function by the PSS and PSW.

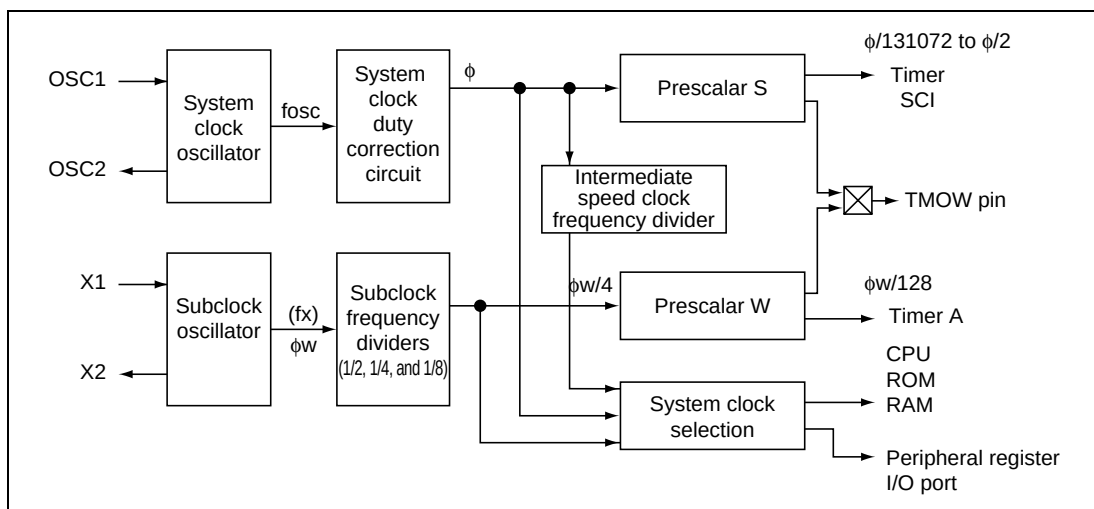


Figure 21.2 Clock Supply

## 21.4.3 Stable Oscillation Wait Time Count

For the count of the stable oscillation stable wait time during the return from the low power consumption mode excluding the sleep mode, see section 4, Power-Down State.

#### 21.4.4 8-bit PWM

This 8-bit PWM controls the duty control PWM signal in the conversion cycle 256 states. It counts the cycle and the duty cycle at  $2^7$  to  $2^0$  of the FRC. It can be used for controlling reel motors and loading motors. For details, see section 18, 8-Bit PWM.

#### 21.4.5 8-bit Input Capture Using $\overline{IC}$ Pin

This function catches the 8-bit data of  $2^{15}$  to  $2^8$  of the FRC according to the edge of the  $\overline{IC}$  pin. It can be used for remote control receiving.

For the edge of the  $\overline{IC}$  pin, the rising and falling edges can be selected.

The  $\overline{IC}$  pin has a built-in noise cancel circuit. See section 21.3, Noise Cancel Circuit.

An interrupt request is generated due to the input capture using the  $\overline{IC}$  pin.

**Note:** Rewriting the ICEG bit, NCon/off bit, or PMR16 bit is incorrectly recognized as edge detection according to the combinations between the state and detection edge of the  $\overline{IC}$  pin and the ICIF bit may be set after up to  $384\phi$  seconds.

#### 21.4.6 Frequency Division Clock Output

The frequency division clock can be output from the TMOW pin. For the frequency division clock, eight types of clocks can be selected according to the DCS2 to DCS0 bits in PCSR.

The clock in which the system clock was frequency-divided is output in active mode and sleep mode and the clock in which the subclock was frequency-divided is output in active mode\*, sleep mode\*, and subactive mode.

**Note:** \* When timer A is in module stop mode, no clock is output.

# Section 22 Serial Communication Interface 1 (SCI1)

## 22.1 Overview

The serial communication interface (SCI) can handle both asynchronous and clocked synchronous serial communication. A function is also provided for serial communication between processors (multiprocessor communication function).

### 22.1.1 Features

SCI1 features are listed below.

- Choice of asynchronous or synchronous serial communication mode
  - Asynchronous mode
    - Serial data communication is executed using an asynchronous system in which synchronization is achieved character by character  
Serial data communication can be carried out with standard asynchronous communication chips such as a Universal Asynchronous Receiver/Transmitter (UART) or Asynchronous Communication Interface Adapter (ACIA)
    - A multiprocessor communication function is provided that enables serial data communication with a number of processors
    - Choice of 12 serial data transfer formats  
Data length: 7 or 8 bits  
Stop bit length: 1 or 2 bits  
Parity: Even, odd, or none  
Multiprocessor bit: 1 or 0
    - Receive error detection: Parity, overrun, and framing errors
    - Break detection: Break can be detected by reading the SI1 pin level directly in case of a framing error
  - Clock synchronous mode
    - Serial data communication is synchronized with a clock  
Serial data communication can be carried out with other chips that have a synchronous communication function
    - One serial data transfer format  
Data length: 8 bits
    - Receive error detection: Overrun errors detected

- Full-duplex communication capability
  - The transmitter and receiver are mutually independent, enabling transmission and reception to be executed simultaneously
  - Double-buffering is used in both the transmitter and the receiver, enabling continuous transmission and continuous reception of serial data
- Built-in baud rate generator allows any bit rate to be selected
- Choice of serial clock source: internal clock from baud rate generator or external clock from SCK1 pin
- Four interrupt sources
  - Four interrupt sources (transmit-data-empty, transmit-end, receive-data-full, and receive error) that can issue requests independently



## 22.1.2 Block Diagram

Figure 22.1 shows a block diagram of the SCI.

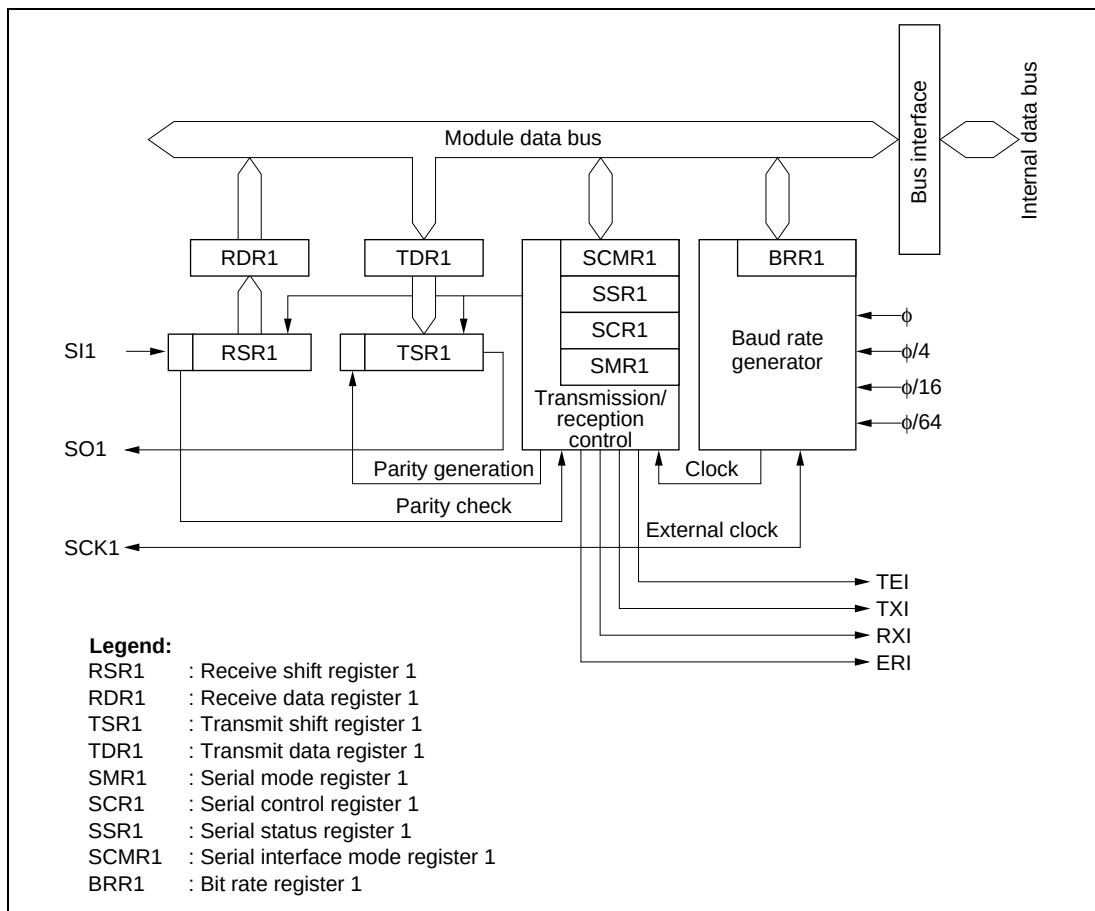


**Figure 22.1 Block Diagram of SCI**

### 22.1.3 Pin Configuration

Table 22.1 shows the serial pins used by the SCI.

**Table 22.1 SCI Pins**

| Channel | Pin Name            | Symbol | I/O    | Function                  |
|---------|---------------------|--------|--------|---------------------------|
| 1       | Serial clock pin 1  | SCK1   | I/O    | SCI1 clock input/output   |
|         | Receive data pin 1  | SI1    | Input  | SCI1 receive data input   |
|         | Transmit data pin 1 | SO1    | Output | SCI1 transmit data output |

### 22.1.4 Register Configuration

The SCI1 has the internal registers shown in table 22.2. These registers are used to specify asynchronous mode or synchronous mode, the data format, and the bit rate, and to control the transmitter/receiver.


**Table 22.2 SCI Registers**

| Channel | Name                             | Abbrev.             | R/W                 | Initial Value | Address* <sup>1</sup> |
|---------|----------------------------------|---------------------|---------------------|---------------|-----------------------|
| 1       | Serial mode register 1           | SMR1                | R/W                 | H'00          | H'D148                |
|         | Bit rate register 1              | BRR1                | R/W                 | H'FF          | H'D149                |
|         | Serial control register 1        | SCR1                | R/W                 | H'00          | H'D14A                |
|         | Transmit data register 1         | TDR1                | R/W                 | H'FF          | H'D14B                |
|         | Serial status register 1         | SSR1                | R/(W)* <sup>2</sup> | H'84          | H'D14C                |
|         | Receive data register 1          | RDR1                | R                   | H'00          | H'D14D                |
|         | Serial interface mode register 1 | SCMR1               | R/W                 | H'F2          | H'D14E                |
| Common  | Module stop control register     | MSTPCR <sup>H</sup> | R/W                 | H'FF          | H'FFEC                |
|         |                                  | MSTPCRL             | R/W                 | H'FF          | H'FFED                |

- Notes: 1. Lower 16 bits of the address.  
2. Only 0 can be written, to clear flags.


# 22.2 Register Descriptions

## 22.2.1 Receive Shift Register 1 (RSR1)




RSR1 is a register used to receive serial data.  
The SCI sets serial data input from the SI1 pin in RSR1 in the order received, starting with the LSB (bit 0), and converts it to parallel data. When one byte of data has been received, it is transferred to RDR automatically.  
RSR1 cannot be directly read or written to by the CPU.

## 22.2.2 Receive Data Register 1 (RDR1)

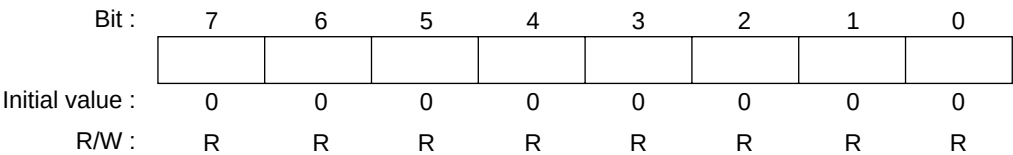

RDR1 is a register that stores received serial data.  
When the SCI has received one byte of serial data, it transfers the received serial data from RSR1 to RDR1 where it is stored, and completes the receive operation. After this, RSR1 is receive-enabled.  
Since RSR1 and RDR1 function as a double buffer in this way, continuous receive operations can be performed.  
RDR1 is a read-only register, and cannot be written to by the CPU.  
RDR1 is initialized to H'00 by a reset, and in standby mode, watch mode, subactive mode, subsleep mode, and module stop mode.

### 22.2.3 Transmit Shift Register 1 (TSR1)




TSR1 is a register used to transmit serial data.

To perform serial data transmission, the SCI first transfers transmit data from TDR1 to TSR1, then sends the data to the SO1 pin starting with the LSB (bit 0).

When transmission of one byte is completed, the next transmit data is transferred from TDR1 to TSR1, and transmission started, automatically. However, data transfer from TDR1 to TSR1 is not performed if the TDRE bit in SSR1 is set to 1.

TSR1 cannot be directly read or written to by the CPU.

### 22.2.4 Transmit Data Register 1 (TDR1)

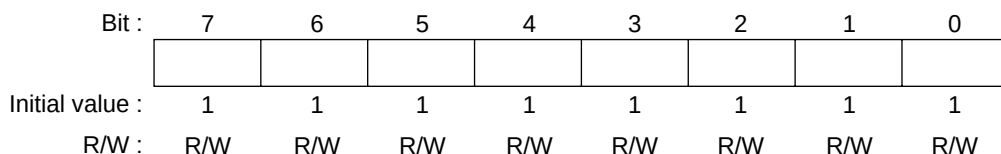

TDR1 is an 8-bit register that stores data for serial transmission.

When the SCI detects that TSR is empty, it transfers the transmit data written in TDR1 to TSR1 and starts serial transmission. Continuous serial transmission can be carried out by writing the next transmit data to TDR1 during serial transmission of the data in TSR1.

TDR1 can be read or written to by the CPU at all times.

TDR1 is initialized to H'FF by a reset, and in standby mode, watch mode, subactive mode, subsleep mode, and module stop mode.

22.2.5 Serial Mode Register 1 (SMR1)

|                 |              |     |     |              |      |     |      |      |
|-----------------|--------------|-----|-----|--------------|------|-----|------|------|
| Bit :           | 7            | 6   | 5   | 4            | 3    | 2   | 1    | 0    |
|                 | C/ $\bar{A}$ | CHR | PE  | O/ $\bar{E}$ | STOP | MP  | CKS1 | CKS0 |
| Initial value : | 0            | 0   | 0   | 0            | 0    | 0   | 0    | 0    |
| R/W :           | R/W          | R/W | R/W | R/W          | R/W  | R/W | R/W  | R/W  |

SMR1 is an 8-bit register used to set the SCI's serial transfer format and select the baud rate generator clock source.

SMR1 can be read or written to by the CPU at all times.

SMR1 is initialized to H'00 by a reset, and in standby mode, watch mode, subactive mode, subsleep mode, and module stop mode.

**Bit 7—Communication Mode (C/ $\bar{A}$ ):** Selects asynchronous mode or clock synchronous mode as the SCI operating mode.

Bit 7

| C/ $\bar{A}$ | Description                       |
|--------------|-----------------------------------|
| 0            | Asynchronous mode (Initial value) |
| 1            | Clock synchronous mode            |

**Bit 6—Character Length (CHR):** Selects 7 or 8 bits as the data length in asynchronous mode. In synchronous mode, a fixed data length of 8 bits is used regardless of the CHR setting.

Bit 6

| CHR | Description                |
|-----|----------------------------|
| 0   | 8-bit data (Initial value) |
| 1   | 7-bit data*                |

Note: \*When 7-bit data is selected, the MSB (bit 7) of TDR1 is not transmitted, and LSB-first/MSB-first selection is not available.

**Bit 5—Parity Enable (PE):** In asynchronous mode, selects whether or not parity bit addition is performed in transmission, and parity bit checking in reception. In synchronous mode, or when a multiprocessor format is used, parity bit addition and checking is not performed, regardless of the PE bit setting.

#### Bit 5

| PE | Description                                               |
|----|-----------------------------------------------------------|
| 0  | Parity bit addition and checking disabled (Initial value) |
| 1  | Parity bit addition and checking enabled*                 |

Note: \*When the PE bit is set to 1, the parity (even or odd) specified by the  $O/\bar{E}$  bit is added to transmit data before transmission. In reception, the parity bit is checked for the parity (even or odd) specified by the  $O/\bar{E}$  bit.

**Bit 4—Parity Mode ( $O/\bar{E}$ ):** Selects either even or odd parity for use in parity addition and checking.

The  $O/\bar{E}$  bit setting is only valid when the PE bit is set to 1, enabling parity bit addition and checking, in asynchronous mode. The  $O/\bar{E}$  bit setting is invalid in synchronous mode, when parity bit addition and checking is disabled in asynchronous mode, and when a multiprocessor format is used.

#### Bit 4

| $O/\bar{E}$ | Description                               |
|-------------|-------------------------------------------|
| 0           | Even parity* <sup>1</sup> (Initial value) |
| 1           | Odd parity* <sup>2</sup>                  |

Notes: 1. When even parity is set, parity bit addition is performed in transmission so that the total number of 1 bits in the transmit character plus the parity bit is even. In reception, a check is performed to see if the total number of 1 bits in the receive character plus the parity bit is even.

2. When odd parity is set, parity bit addition is performed in transmission so that the total number of 1 bits in the transmit character plus the parity bit is odd. In reception, a check is performed to see if the total number of 1 bits in the receive character plus the parity bit is odd.

**Bit 3—Stop Bit Length (STOP):** Selects 1 or 2 bits as the stop bit length in asynchronous mode. The STOP bit setting is only valid in asynchronous mode. If synchronous mode is set the STOP bit setting is invalid since stop bits are not added.

### Bit 3

| STOP | Description                              |
|------|------------------------------------------|
| 0    | 1 stop bit* <sup>1</sup> (Initial value) |
| 1    | 2 stop bits* <sup>2</sup>                |

Notes: 1. In transmission, a single 1 bit (stop bit) is added to the end of a transmit character before it is sent.  
 2. In transmission, two 1 bits (stop bits) are added to the end of a transmit character before it is sent.

In reception, only the first stop bit is checked, regardless of the STOP bit setting. If the second stop bit is 1, it is treated as a stop bit; if it is 0, it is treated as the start bit of the next transmit character.

**Bit 2—Multiprocessor Mode (MP):** Selects multiprocessor format. When multiprocessor format is selected, the PE bit and  $O/\bar{E}$  bit parity settings are invalid. The MP bit setting is only valid in asynchronous mode; it is invalid in synchronous mode.

For details of the multiprocessor communication function, see section 22.3.3, Multiprocessor Communication Function.

### Bit 2

| MP | Description                                      |
|----|--------------------------------------------------|
| 0  | Multiprocessor function disabled (Initial value) |
| 1  | Multiprocessor format selected                   |

**Bits 1 and 0—Clock Select 1 and 0 (CKS1, CKS0):** These bits select the clock source for the baud rate generator. The clock source can be selected from  $\phi$ ,  $\phi/4$ ,  $\phi/16$ , and  $\phi/64$ , according to the setting of bits CKS1 and CKS0.

For the relation between the clock source, the bit rate register setting, and the baud rate, see section 22.2.8, Bit Rate Register 1.

| Bit 1 | Bit 0 | Description                  |
|-------|-------|------------------------------|
| CKS1  | CKS0  |                              |
| 0     | 0     | $\phi$ clock (Initial value) |
|       | 1     | $\phi/4$ clock               |
| 1     | 0     | $\phi/16$ clock              |
|       | 1     | $\phi/64$ clock              |

## 22.2.6 Serial Control Register 1 (SCR1)

|                 |     |     |     |     |      |      |      |      |
|-----------------|-----|-----|-----|-----|------|------|------|------|
| Bit :           | 7   | 6   | 5   | 4   | 3    | 2    | 1    | 0    |
|                 | TIE | RIE | TE  | RE  | MPIE | TEIE | CKE1 | CKE0 |
| Initial value : | 0   | 0   | 0   | 0   | 0    | 0    | 0    | 0    |
| R/W :           | R/W | R/W | R/W | R/W | R/W  | R/W  | R/W  | R/W  |

SCR1 is a register that performs enabling or disabling of SCI transfer operations, serial clock output in asynchronous mode, and interrupt requests, and selection of the serial clock source. SCR1 can be read or written to by the CPU at all times.

SCR1 is initialized to H'00 by a reset, and in standby mode, watch mode, subactive mode, subsleep mode, and module stop mode.

**Bit 7—Transmit Interrupt Enable (TIE):** Enables or disables transmit-data-empty interrupt (TXI) request generation when serial transmit data is transferred from TDR1 to TSR1 and the TDRE flag in SSR1 is set to 1.

| Bit 7 | Description                                                           |
|-------|-----------------------------------------------------------------------|
| TIE   |                                                                       |
| 0     | Transmit-data-empty interrupt (TXI) request disabled* (Initial value) |
| 1     | Transmit-data-empty interrupt (TXI) request enabled                   |

Note: \*TXI interrupt request cancellation can be performed by reading 1 from the TDRE flag, then clearing it to 0, or clearing the TIE bit to 0.



**Bit 6—Receive Interrupt Enable (RIE):** Enables or disables receive-data-full interrupt (RXI) request and receive-error interrupt (ERI) request generation when serial receive data is transferred from RSR1 to RDR1 and the RDRF flag in SSR1 is set to 1.

#### Bit 6

| RIE | Description                                                                                                   |
|-----|---------------------------------------------------------------------------------------------------------------|
| 0   | Receive-data-full interrupt (RXI) request and receive-error interrupt (ERI) request disabled* (Initial value) |
| 1   | Receive-data-full interrupt (RXI) request and receive-error interrupt (ERI) request enabled                   |

Note: \*RXI and ERI interrupt request cancellation can be performed by reading 1 from the RDRF, FER, PER, or ORER flag, then clearing the flag to 0, or clearing the RIE bit to 0.

**Bit 5—Transmit Enable (TE):** Enables or disables the start of serial transmission by the SCI.

#### Bit 5

| TE | Description                                         |
|----|-----------------------------------------------------|
| 0  | Transmission disabled* <sup>1</sup> (Initial value) |
| 1  | Transmission enabled* <sup>2</sup>                  |

Notes: 1. The TDRE flag in SSR1 is fixed at 1.  
 2. In this state, serial transmission is started when transmit data is written to TDR1 and the TDRE flag in SSR1 is cleared to 0.  
 SMR1 setting must be performed to decide the transmission format before setting the TE bit to 1.

**Bit 4—Receive Enable (RE):** Enables or disables the start of serial reception by the SCI.

#### Bit 4

| RE | Description                                      |
|----|--------------------------------------------------|
| 0  | Reception disabled* <sup>1</sup> (Initial value) |
| 1  | Reception enabled* <sup>2</sup>                  |

Notes: 1. Clearing the RE bit to 0 does not affect the RDRF, FER, PER, and ORER flags, which retain their states.  
 2. Serial reception is started in this state when a start bit is detected in asynchronous mode or serial clock input is detected in synchronous mode.  
 SMR1 setting must be performed to decide the reception format before setting the RE bit to 1.

**Bit 3—Multiprocessor Interrupt Enable (MPIE):** Enables or disables multiprocessor interrupts.

The MPIE bit setting is only valid in asynchronous mode when receiving with the MP bit in SMR1 set to 1.

The MPIE bit setting is invalid in clock synchronous mode or when the MP bit is cleared to 0.

### Bit 3

| MPIE | Description                                                                                                                                                                                                                                    |
|------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 0    | Multiprocessor interrupts disabled (normal reception performed) (Initial value)<br>[Clearing conditions]<br>1. When the MPIE bit is cleared to 0<br>2. When data with MPB = 1 is received                                                      |
| 1    | Multiprocessor interrupts enabled*<br>Receive interrupt (RXI) requests, receive-error interrupt (ERI) requests, and setting of the RDRF, FER, and ORER flags in SSR1 are disabled until data with the multiprocessor bit set to 1 is received. |

Note: \*When receive data including MPB = 0 is received, receive data transfer from RSR1 to RDR1, receive error detection, and setting of the RDRF, FER, and ORER flags in SSR1, is not performed. When receive data with MPB = 1 is received, the MPB bit in SSR1 is set to 1, the MPIE bit is cleared to 0 automatically, and generation of RXI and ERI interrupts (when the TIE and RIE bits in SCR are set to 1) and FER and ORER flag setting is enabled.

**Bit 2—Transmit End Interrupt Enable (TEIE):** Enables or disables transmit-end interrupt (TEI) request generation if there is no valid transmit data in TDR when the MSB is transmitted.

### Bit 2

| TEIE | Description                                                    |
|------|----------------------------------------------------------------|
| 0    | Transmit-end interrupt (TEI) request disabled* (Initial value) |
| 1    | Transmit-end interrupt (TEI) request enabled*                  |

Note: \*TEI cancellation can be performed by reading 1 from the TDRE flag in SSR1, then clearing it to 0 and clearing the TEND flag to 0, or clearing the TEIE bit to 0.

**Bits 1 and 0—Clock Enable 1 and 0 (CKE1, CKE0):** These bits are used to select the SCI clock source and enable or disable clock output from the SCK pin. The combination of the CKE1 and CKE0 bits determines whether the SCK pin functions as an I/O port, the serial clock output pin, or the serial clock input pin.

The setting of the CKE0 bit, however, is only valid for internal clock operation (CKE1 = 0) in asynchronous mode. The CKE0 bit setting is invalid in synchronous mode, and in the case of external clock operation (CKE1 = 1). Note that the SCI's operating mode must be decided using SMR1 before setting the CKE1 and CKE0 bits.

For details of clock source selection, see table 22.9 in section 22.3, Operation.

| Bit 1 | Bit 0 |                        |                                                                        |
|-------|-------|------------------------|------------------------------------------------------------------------|
| CKE1  | CKE0  | Description            |                                                                        |
| 0     | 0     | Asynchronous mode      | Internal clock/SCK1 pin functions as I/O port* <sup>1</sup>            |
|       |       | Clock synchronous mode | Internal clock/SCK1 pin functions as serial clock output* <sup>1</sup> |
|       | 1     | Asynchronous mode      | Internal clock/SCK1 pin functions as clock output* <sup>2</sup>        |
|       |       | Clock synchronous mode | Internal clock/SCK1 pin functions as serial clock output               |
| 1     | 0     | Asynchronous mode      | External clock/SCK1 pin functions as clock input* <sup>3</sup>         |
|       |       | Clock synchronous mode | External clock/SCK1 pin functions as serial clock input                |
|       | 1     | Asynchronous mode      | External clock/SCK1 pin functions as clock input* <sup>3</sup>         |
|       |       | Clock synchronous mode | External clock/SCK1 pin functions as serial clock input                |

Notes: 1. Initial value.

2. Outputs a clock of the same frequency as the bit rate.

3. Inputs a clock with a frequency 16 times the bit rate.

22.2.7 Serial Status Register 1 (SSR1)

|                 |        |        |        |        |        |      |     |      |
|-----------------|--------|--------|--------|--------|--------|------|-----|------|
| Bit :           | 7      | 6      | 5      | 4      | 3      | 2    | 1   | 0    |
|                 | TDRE   | RDRF   | ORER   | FER    | PER    | TEND | MPB | MPBT |
| Initial value : | 1      | 0      | 0      | 0      | 0      | 1    | 0   | 0    |
| R/W :           | R/(W)* | R/(W)* | R/(W)* | R/(W)* | R/(W)* | R    | R   | R/W  |

Note: \* Only 0 can be written to clear the flag.

SSR1 is an 8-bit register containing status flags that indicate the operating status of the SCI, and multiprocessor bits.

SSR1 can be read or written to by the CPU at all times. However, 1 cannot be written to flags TDRE, RDRF, ORER, PER, and FER. Also note that in order to clear these flags they must be read as 1 beforehand. The TEND flag and MPB flag are read-only flags and cannot be modified. SSR1 is initialized to H'84 by a reset, and in standby mode, watch mode, subactive mode, subsleep mode, and module stop mode.

**Bit 7—Transmit Data Register Empty (TDRE):** Indicates that data has been transferred from TDR1 to TSR1 and the next serial data can be written to TDR1.

Bit 7

| TDRE | Description                                                                                                                                             |
|------|---------------------------------------------------------------------------------------------------------------------------------------------------------|
| 0    | [Clearing conditions]<br>When 0 is written in TDRE after reading TDRE = 1                                                                               |
| 1    | [Setting conditions] (Initial value)<br>1. When the TE bit in SCR is 0<br>2. When data is transferred from TDR1 to TSR1 and data can be written to TDR1 |

**Bit 6—Receive Data Register Full (RDRF):** Indicates that the received data is stored in RDR1.

Bit 6

| RDRF | Description                                                                                                 |
|------|-------------------------------------------------------------------------------------------------------------|
| 0    | [Clearing conditions] (Initial value)<br>When 0 is written in RDRF after reading RDRF = 1                   |
| 1    | [Setting conditions]<br>When serial reception ends normally and receive data is transferred from RSR to RDR |

Note: RDR1 and the RDRF flag are not affected and retain their previous values when an error is detected during reception or when the RE bit in SCR1 is cleared to 0. If reception of the next data is completed while the RDRF flag is still set to 1, an overrun error will occur and the receive data will be lost.

**Bit 5—Overrun Error (ORER):** Indicates that an overrun error occurred during reception, causing abnormal termination.

**Bit 5**

| ORER | Description                                                                                                            |
|------|------------------------------------------------------------------------------------------------------------------------|
| 0    | [Clearing conditions]<br>When 0 is written in ORER after reading ORER = 1* <sup>1</sup> (Initial value) * <sup>1</sup> |
| 1    | [Setting conditions]<br>When the next serial reception is completed while RDRF = 1* <sup>2</sup>                       |

- Notes:
1. The ORER flag is not affected and retains its previous state when the RE bit in SCR1 is cleared to 0.
  2. The receive data prior to the overrun error is retained in RDR1, and the data received subsequently is lost. Also, subsequent serial reception cannot be continued while the ORER flag is set to 1. In synchronous mode, serial transmission cannot be continued, either.

**Bit 4—Framing Error (FER):** Indicates that a framing error occurred during reception in asynchronous mode, causing abnormal termination.

**Bit 4**

| FER | Description                                                                                                                                      |
|-----|--------------------------------------------------------------------------------------------------------------------------------------------------|
| 0   | [Clearing conditions]<br>When 0 is written in FER after reading FER = 1* <sup>1</sup> (Initial value)                                            |
| 1   | [Setting conditions]<br>When the SCI checks the stop bit at the end of the receive data when reception ends, and the stop bit is 0* <sup>2</sup> |

- Notes:
1. The FER flag is not affected and retains its previous state when the RE bit in SCR1 is cleared to 0.
  2. In 2-stop-bit mode, only the first stop bit is checked for a value of 1; the second stop bit is not checked. If a framing error occurs, the receive data is transferred to RDR1 but the RDRF flag is not set. Also, subsequent serial reception cannot be continued while the FER flag is set to 1. In synchronous mode, serial transmission cannot be continued, either.

**Bit 3—Parity Error (PER):** Indicates that a parity error occurred during reception using parity addition in asynchronous mode, causing abnormal termination.

#### Bit 4

| PER | Description                                                                                                                                                                                             |
|-----|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 0   | [Clearing conditions]<br>When 0 is written in PER after reading PER = 1* <sup>1</sup> (Initial value)                                                                                                   |
| 1   | [Setting conditions]<br>When, in reception, the number of 1 bits in the receive data plus the parity bit does not match the parity setting (even or odd) specified by the O/E bit in SMR1* <sup>2</sup> |

- Notes: 1. The PER flag is not affected and retains its previous state when the RE bit in SCR1 is cleared to 0.
2. If a parity error occurs, the receive data is transferred to RDR1 but the RDRF flag is not set. Also, subsequent serial reception cannot be continued while the PER flag is set to 1. In synchronous mode, serial transmission cannot be continued, either.

**Bit 2—Transmit End (TEND):** Indicates that there is no valid data in TDR when the last bit of the transmit character is sent, and transmission has been ended.

The TEND flag is read-only and cannot be modified.

#### Bit 2

| TEND | Description                                                                                                                                                       |
|------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 0    | [Clearing conditions]<br>When 0 is written in TDRE after reading TDRE = 1                                                                                         |
| 1    | [Setting conditions] (Initial value)<br>1. When the TE bit in SCR1 is 0<br>2. When TDRE = 1 at transmission of the last bit of a 1-byte serial transmit character |

**Bit 1—Multiprocessor Bit (MPB):** When reception is performed using a multiprocessor format in asynchronous mode, MPB stores the multiprocessor bit in the receive data.

MPB is a read-only bit, and cannot be modified.

#### Bit 1

| MPB | Description                                                                                 |
|-----|---------------------------------------------------------------------------------------------|
| 0   | [Clearing conditions] (Initial value)*<br>When data with a 0 multiprocessor bit is received |
| 1   | [Setting conditions]<br>When data with a 1 multiprocessor bit is received                   |


Note: \*Retains its previous state when the RE bit in SCR1 is cleared to 0 with multiprocessor format.

**Bit 0—Multiprocessor Bit Transfer (MPBT):** When transmission is performed using a multiprocessor format in asynchronous mode, MPBT stores the multiprocessor bit to be added to the transmit data.  
 The MPBT bit setting is invalid when a multiprocessor format is not used, when not transmitting, and in synchronous mode.

**Bit 0**

| MPBT | Description                                                     |
|------|-----------------------------------------------------------------|
| 0    | Data with a 0 multiprocessor bit is transmitted (Initial value) |
| 1    | Data with a 1 multiprocessor bit is transmitted                 |

**22.2.8 Bit Rate Register 1 (BRR1)**

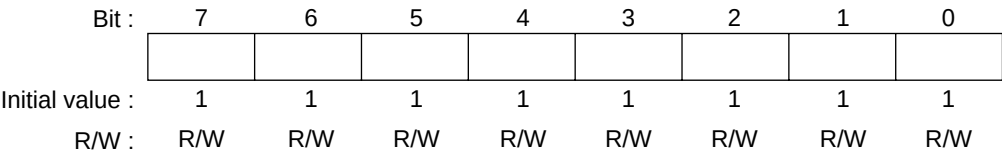

BRR1 is an 8-bit register that sets the serial transfer bit rate in accordance with the baud rate generator operating clock selected by bits CKS1 and CKS0 in SMR.  
 BRR1 can be read or written to by the CPU at all times.  
 BRR1 is initialized to H'FF by a reset, and in standby mode, watch mode, subactive mode, subsleep mode, and module stop mode.  
 Table 22.3 shows sample BRR1 settings in asynchronous mode, and table 22.4 shows sample BRR1 settings in synchronous mode.

**Table 22.3 BRR1 Settings for Various Bit Rates (Asynchronous Mode)**

| Operating Frequency $\phi$ (MHz) |   |     |           |          |     |           |        |     |           |   |     |           |
|----------------------------------|---|-----|-----------|----------|-----|-----------|--------|-----|-----------|---|-----|-----------|
| Bit Rate<br>(bits/s)             | 2 |     |           | 2.097152 |     |           | 2.4576 |     |           | 3 |     |           |
|                                  | n | N   | Error (%) | n        | N   | Error (%) | n      | N   | Error (%) | n | N   | Error (%) |
| 110                              | 1 | 141 | 0.03      | 1        | 148 | −0.04     | 1      | 174 | −0.26     | 1 | 212 | 0.03      |
| 150                              | 1 | 103 | 0.16      | 1        | 108 | 0.21      | 1      | 127 | 0.00      | 1 | 155 | 0.16      |
| 300                              | 0 | 207 | 0.16      | 0        | 217 | 0.21      | 0      | 255 | 0.00      | 1 | 77  | 0.16      |
| 600                              | 0 | 103 | 0.16      | 0        | 108 | 0.21      | 0      | 127 | 0.00      | 0 | 155 | 0.16      |
| 1200                             | 0 | 51  | 0.16      | 0        | 54  | −0.70     | 0      | 63  | 0.00      | 0 | 77  | 0.16      |
| 2400                             | 0 | 25  | 0.16      | 0        | 26  | 1.14      | 0      | 31  | 0.00      | 0 | 38  | 0.16      |
| 4800                             | 0 | 12  | 0.16      | 0        | 13  | −2.48     | 0      | 15  | 0.00      | 0 | 19  | −2.34     |
| 9600                             | — | —   | —         | 0        | 6   | −2.48     | 0      | 7   | 0.00      | 0 | 9   | −2.34     |
| 19200                            | — | —   | —         | —        | —   | —         | 0      | 3   | 0.00      | 0 | 4   | −2.34     |
| 31250                            | 0 | 1   | 0.00      | —        | —   | —         | 0      | —   | —         | 0 | 2   | 0.00      |
| 38400                            | — | —   | —         | —        | —   | —         | 0      | 1   | 0.00      | — | —   | —         |

| Operating Frequency $\phi$ (MHz) |        |     |           |   |     |           |        |     |           |   |     |           |
|----------------------------------|--------|-----|-----------|---|-----|-----------|--------|-----|-----------|---|-----|-----------|
| Bit Rate<br>(bits/s)             | 3.6864 |     |           | 4 |     |           | 4.9152 |     |           | 5 |     |           |
|                                  | n      | N   | Error (%) | n | N   | Error (%) | n      | N   | Error (%) | n | N   | Error (%) |
| 110                              | 2      | 64  | 0.70      | 2 | 70  | 0.03      | 2      | 86  | 0.31      | 2 | 88  | −0.25     |
| 150                              | 1      | 191 | 0.00      | 1 | 207 | 0.16      | 1      | 255 | 0.00      | 2 | 64  | 0.16      |
| 300                              | 1      | 95  | 0.00      | 1 | 103 | 0.16      | 1      | 127 | 0.00      | 1 | 129 | 0.16      |
| 600                              | 0      | 191 | 0.00      | 0 | 207 | 0.16      | 0      | 255 | 0.00      | 1 | 64  | 0.16      |
| 1200                             | 0      | 95  | 0.00      | 0 | 103 | 0.16      | 0      | 127 | 0.00      | 0 | 129 | 0.16      |
| 2400                             | 0      | 47  | 0.00      | 0 | 51  | 0.16      | 0      | 63  | 0.00      | 0 | 64  | 0.16      |
| 4800                             | 0      | 23  | 0.00      | 0 | 25  | 0.16      | 0      | 31  | 0.00      | 0 | 32  | −1.36     |
| 9600                             | 0      | 11  | 0.00      | 0 | 12  | 0.16      | 0      | 15  | 0.00      | 0 | 15  | 1.73      |
| 19200                            | 0      | 5   | 0.00      | — | —   | —         | 0      | 7   | 0.00      | 0 | 7   | 1.73      |
| 31250                            | —      | —   | —         | 0 | 3   | 0.00      | 0      | 4   | −1.70     | 0 | 4   | 0.00      |
| 38400                            | 0      | 2   | 0.00      | — | —   | —         | 0      | 3   | 0.00      | 0 | 3   | 1.73      |



### Operating Frequency $\phi$ (MHz)

| Bit Rate<br>(bits/s) | 6 |     |           | 6.144 |     |           | 7.3728 |     |           | 8 |     |           |
|----------------------|---|-----|-----------|-------|-----|-----------|--------|-----|-----------|---|-----|-----------|
|                      | n | N   | Error (%) | n     | N   | Error (%) | n      | N   | Error (%) | n | N   | Error (%) |
| 110                  | 2 | 106 | -0.44     | 2     | 108 | 0.08      | 2      | 130 | -0.07     | 2 | 141 | 0.03      |
| 150                  | 2 | 77  | 0.16      | 2     | 79  | 0.00      | 2      | 95  | 0.00      | 2 | 103 | 0.16      |
| 300                  | 1 | 155 | 0.16      | 1     | 159 | 0.00      | 1      | 191 | 0.00      | 1 | 207 | 0.16      |
| 600                  | 1 | 77  | 0.16      | 1     | 79  | 0.00      | 1      | 95  | 0.00      | 1 | 103 | 0.16      |
| 1200                 | 0 | 155 | 0.16      | 0     | 159 | 0.00      | 0      | 191 | 0.00      | 0 | 207 | 0.16      |
| 2400                 | 0 | 77  | 0.16      | 0     | 79  | 0.00      | 0      | 95  | 0.00      | 0 | 103 | 0.16      |
| 4800                 | 0 | 38  | 0.16      | 0     | 39  | 0.00      | 0      | 47  | 0.00      | 0 | 51  | 0.16      |
| 9600                 | 0 | 19  | -2.34     | 0     | 19  | 0.00      | 0      | 23  | 0.00      | 0 | 25  | 0.16      |
| 19200                | 0 | 9   | -2.34     | 0     | 9   | 0.00      | 0      | 11  | 0.00      | 0 | 12  | 0.16      |
| 31250                | 0 | 5   | 0.00      | 0     | 5   | 2.40      | —      | —   | —         | 0 | 7   | 0.00      |
| 38400                | 0 | 4   | -2.34     | 0     | 4   | 0.00      | 0      | 5   | 0.00      | — | —   | —         |

### Operating Frequency $\phi$ (MHz)

| Bit Rate<br>(bits/s) | 9.8304 |     |           | 10 |     |           |
|----------------------|--------|-----|-----------|----|-----|-----------|
|                      | n      | N   | Error (%) | n  | N   | Error (%) |
| 110                  | 2      | 174 | -0.26     | 2  | 177 | -0.25     |
| 150                  | 2      | 127 | 0.00      | 2  | 129 | 0.16      |
| 300                  | 1      | 255 | 0.00      | 2  | 64  | 0.16      |
| 600                  | 1      | 127 | 0.00      | 1  | 129 | 0.16      |
| 1200                 | 0      | 255 | 0.00      | 1  | 64  | 0.16      |
| 2400                 | 0      | 127 | 0.00      | 0  | 129 | 0.16      |
| 4800                 | 0      | 63  | 0.00      | 0  | 64  | 0.16      |
| 9600                 | 0      | 31  | 0.00      | 0  | 32  | -1.36     |
| 19200                | 0      | 15  | 0.00      | 0  | 15  | 1.73      |
| 31250                | 0      | 9   | -1.70     | 0  | 9   | 0.00      |
| 38400                | 0      | 7   | 0.00      | 0  | 7   | 1.73      |

**Table 22.4 BRR1 Settings for Various Bit Rates (Synchronous Mode)**

| Bit Rate<br>(bits/s) | Operating Frequency $\phi$ (MHz) |     |   |     |   |     |    |     |
|----------------------|----------------------------------|-----|---|-----|---|-----|----|-----|
|                      | 2                                |     | 4 |     | 8 |     | 10 |     |
|                      | n                                | N   | n | N   | n | N   | n  | N   |
| 110                  | 3                                | 70  | — | —   |   |     |    |     |
| 250                  | 2                                | 124 | 2 | 249 | 3 | 124 | —  | —   |
| 500                  | 1                                | 249 | 2 | 124 | 2 | 249 | —  | —   |
| 1 k                  | 1                                | 124 | 1 | 249 | 2 | 124 | —  | —   |
| 2.5 k                | 0                                | 199 | 1 | 99  | 1 | 199 | 1  | 249 |
| 5 k                  | 0                                | 99  | 0 | 199 | 1 | 99  | 1  | 124 |
| 10 k                 | 0                                | 49  | 0 | 99  | 0 | 199 | 0  | 249 |
| 25 k                 | 0                                | 19  | 0 | 39  | 0 | 79  | 0  | 99  |
| 50 k                 | 0                                | 9   | 0 | 19  | 0 | 39  | 0  | 49  |
| 100 k                | 0                                | 4   | 0 | 9   | 0 | 19  | 0  | 24  |
| 250 k                | 0                                | 1   | 0 | 3   | 0 | 7   | 0  | 9   |
| 500 k                | 0                                | 0*  | 0 | 1   | 0 | 3   | 0  | 4   |
| 1 M                  |                                  |     | 0 | 0*  | 0 | 1   |    |     |
| 2.5 M                |                                  |     |   |     |   |     | 0  | 0*  |
| 5 M                  |                                  |     |   |     |   |     |    |     |

Note: As far as possible, the setting should be made so that the error is no more than 1%.

**Legend:**

Blank: Cannot be set.

—: Can be set, but there will be a degree of error.

\*: Continuous transfer is not possible.

The BRR1 setting is found from the following equations.

- Asynchronous mode:

$$N = \frac{\phi}{64 \times 2^{2n-1} \times B} \times 10^6 - 1$$

- Synchronous mode:

$$N = \frac{\phi}{8 \times 2^{2n-1} \times B} \times 10^6 - 1$$

Where

B: Bit rate (bits/s)

N: BRR1 setting for baud rate generator ( $0 \leq N \leq 255$ )

$\phi$ : Operating frequency (MHz)

n: Baud rate generator input clock ( $n = 0$  to  $3$ )

(See the table below for the relation between n and the clock.)

| n | Clock     | SMR1 Setting |      |
|---|-----------|--------------|------|
|   |           | CKS1         | CKS0 |
| 0 | $\phi$    | 0            | 0    |
| 1 | $\phi/4$  | 0            | 1    |
| 2 | $\phi/16$ | 1            | 0    |
| 3 | $\phi/64$ | 1            | 1    |

The bit rate error in asynchronous mode is found from the following equation:

$$\text{Error (\%)} = \left\{ \frac{\phi \times 10^6}{(N + 1) \times B \times 64 \times 2^{2n-1}} - 1 \right\} \times 100$$

Table 22.5 shows the maximum bit rate for each frequency in asynchronous mode. Tables 22.6 and 22.7 show the maximum bit rates with external clock input.

**Table 22.5 Maximum Bit Rate for Each Frequency (Asynchronous Mode)**

| $\phi$ (MHz) | Maximum Bit Rate (bits/s) | n | N |
|--------------|---------------------------|---|---|
| 2            | 62500                     | 0 | 0 |
| 2.097152     | 65536                     | 0 | 0 |
| 2.4576       | 76800                     | 0 | 0 |
| 3            | 93750                     | 0 | 0 |
| 3.6864       | 115200                    | 0 | 0 |
| 4            | 125000                    | 0 | 0 |
| 4.9152       | 153600                    | 0 | 0 |
| 5            | 156250                    | 0 | 0 |
| 6            | 187500                    | 0 | 0 |
| 6.144        | 192000                    | 0 | 0 |
| 7.3728       | 230400                    | 0 | 0 |
| 8            | 250000                    | 0 | 0 |
| 9.8304       | 307200                    | 0 | 0 |
| 10           | 312500                    | 0 | 0 |

**Table 22.6 Maximum Bit Rate with External Clock Input (Asynchronous Mode)**

| $\phi$ (MHz) | External Input Clock (MHz) | Maximum Bit Rate (bits/s) |
|--------------|----------------------------|---------------------------|
| 2            | 0.5000                     | 31250                     |
| 2.097152     | 0.5243                     | 32768                     |
| 2.4576       | 0.6144                     | 38400                     |
| 3            | 0.7500                     | 46875                     |
| 3.6864       | 0.9216                     | 57600                     |
| 4            | 1.0000                     | 62500                     |
| 4.9152       | 1.2288                     | 76800                     |
| 5            | 1.2500                     | 78125                     |
| 6            | 1.5000                     | 93750                     |
| 6.144        | 1.5360                     | 96000                     |
| 7.3728       | 1.8432                     | 115200                    |
| 8            | 2.0000                     | 125000                    |
| 9.8304       | 2.4576                     | 153600                    |
| 10           | 2.5000                     | 156250                    |

**Table 22.7 Maximum Bit Rate with External Clock Input (Synchronous Mode)**

| $\phi$ (MHz) | External Input Clock (MHz) | Maximum Bit Rate (bits/s) |
|--------------|----------------------------|---------------------------|
| 2            | 0.3333                     | 333333.3                  |
| 4            | 0.6667                     | 666666.7                  |
| 6            | 1.0000                     | 1000000.0                 |
| 8            | 1.3333                     | 1333333.3                 |
| 10           | 1.6667                     | 1666666.7                 |

22.2.9 Serial Interface Mode Register 1 (SCMR1)

|                 |   |   |   |   |      |      |   |      |
|-----------------|---|---|---|---|------|------|---|------|
| Bit :           | 7 | 6 | 5 | 4 | 3    | 2    | 1 | 0    |
|                 | — | — | — | — | SDIR | SINV | — | SMIF |
| Initial value : | 1 | 1 | 1 | 1 | 0    | 0    | 1 | 0    |
| R/W :           | — | — | — | — | R/W  | R/W  | — | R/W  |

SCMR1 is an 8-bit readable/writable register used to select SCI functions.  
SCMR1 is initialized to H'F2 by a reset, and in standby mode, watch mode, subactive mode, subsleep mode, and module stop mode.

**Bits 7 to 4—Reserved:** These bits cannot be modified and are always read as 1.

**Bit 3—Data Transfer Direction (SDIR):** Selects the serial/parallel conversion format.

Bit 3

| SDIR | Description                                                                                        |
|------|----------------------------------------------------------------------------------------------------|
| 0    | TDR contents are transmitted LSB-first<br>Receive data is stored in RDR1 LSB-first (Initial value) |
| 1    | TDR contents are transmitted MSB-first<br>Receive data is stored in RDR1 MSB-first                 |

**Bit 2—Data Invert (SINV):** Specifies inversion of the data logic level. The SINV bit does not affect the logic level of the parity bit(s): parity bit inversion requires inversion of the O/E bit in SMR1.


Bit 2

| SINV | Description                                                                                                               |
|------|---------------------------------------------------------------------------------------------------------------------------|
| 0    | TDR1 contents are transmitted without modification<br>Receive data is stored in RDR1 without modification (Initial value) |
| 1    | TDR1 contents are inverted before being transmitted<br>Receive data is stored in RDR1 in inverted form                    |

**Bit 1—Reserved:** This bit cannot be modified and is always read as 1.

**Bit 0—Reserved:** 1 should not be written in this bit.

22.2.10 Module Stop Control Register (MSTPCR)

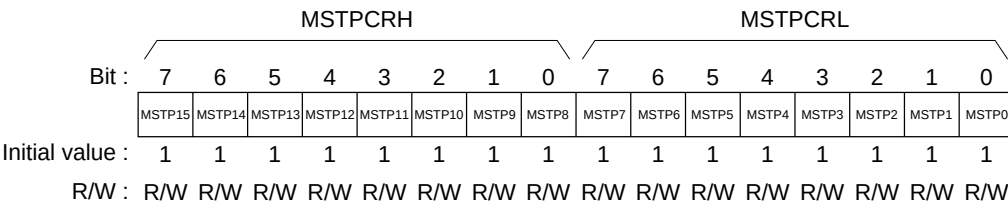

MSTPCR, comprising two 8-bit readable/writable registers, performs module stop mode control. When bit MSTP8 is set to 1, SCI1 operation stops at the end of the bus cycle and a transition is made to module stop mode. For details, see section 4.5, Module Stop Mode. MSTPCR is initialized to H'FFFF by a reset.

**Bit 0—Module Stop (MSTP8):** Specifies the SCI1 module stop mode.

MSTPCRH

Bit 0

| MSTP8 | Description                                  |
|-------|----------------------------------------------|
| 0     | SCI1 module stop mode is cleared             |
| 1     | SCI1 module stop mode is set (Initial value) |

## 22.3 Operation

### 22.3.1 Overview

The SCI can carry out serial communication in two modes: asynchronous mode in which synchronization is achieved character by character, and synchronous mode in which synchronization is achieved with clock pulses.

Selection of asynchronous or synchronous mode and the transmission format is made using SMR1 as shown in table 22.8. The SCI clock is determined by a combination of the C/A bit in SMR1 and the CKE1 and CKE0 bits in SCR1, as shown in table 22.9.

- Asynchronous Mode
  - Data length: Choice of 7 or 8 bits
  - Choice of parity addition, multiprocessor bit addition, and addition of 1 or 2 stop bits (the combination of these parameters determines the transfer format and character length)
  - Detection of framing, parity, and overrun errors, and breaks, during reception
  - Choice of internal or external clock as SCI clock source
    - When internal clock is selected:  
The SCI operates on the baud rate generator clock and a clock with the same frequency as the bit rate can be output
    - When external clock is selected:  
A clock with a frequency of 16 times the bit rate must be input (the built-in baud rate generator is not used)
- Clock Synchronous Mode
  - Transfer format: Fixed 8-bit data
  - Detection of overrun errors during reception
  - Choice of internal or external clock as SCI clock source
    - When internal clock is selected:  
The SCI operates on the baud rate generator clock and a serial clock is output off-chip
    - When external clock is selected:  
The built-in baud rate generator is not used, and the SCI operates on the input serial clock



**Table 22.8 SMR1 Settings and Serial Transfer Format Selection**

| SMR1 Settings |       |       |       |        |                                                           | SCI Transfer Format          |                         |               |               |        |        |  |  |
|---------------|-------|-------|-------|--------|-----------------------------------------------------------|------------------------------|-------------------------|---------------|---------------|--------|--------|--|--|
| Bit 7         | Bit 6 | Bit 2 | Bit 5 | Bit 3  | Mode                                                      | Data                         | Multiproc-<br>essor Bit | Parity        | Stop Bit      |        |        |  |  |
| C/ $\bar{A}$  | CHR   | MP    | PE    | STOP   |                                                           | Length                       |                         |               | Bit           | Length |        |  |  |
| 0             | 0     | 0     | 0     | 0      | Asynchro-<br>nous mode                                    | 8-bit<br>data                | No                      | No            | 1 bit         |        |        |  |  |
|               |       |       | 1     | 2 bits |                                                           |                              |                         |               |               |        |        |  |  |
|               |       |       | 1     | 0      |                                                           |                              |                         |               | Yes           | 1 bit  |        |  |  |
|               |       |       | 1     | 2 bits |                                                           |                              |                         |               |               |        |        |  |  |
|               |       |       | 1     | 0      |                                                           | 7-bit<br>data                |                         | No            | 1 bit         |        |        |  |  |
|               |       |       | 1     | 2 bits |                                                           |                              |                         |               |               |        |        |  |  |
|               |       |       | 1     | 0      |                                                           |                              |                         |               | Yes           | 1 bit  |        |  |  |
|               |       |       | 1     | 2 bits |                                                           |                              |                         |               |               |        |        |  |  |
|               | 1     | 1     | —     | 0      | Asynchro-<br>nous mode<br>(multi-<br>processor<br>format) | 8-bit<br>data                | Yes                     | No            | 1 bit         |        |        |  |  |
|               |       |       | —     | 1      |                                                           |                              |                         |               | 2 bits        |        |        |  |  |
|               |       |       | —     | 0      |                                                           |                              |                         |               | 7-bit<br>data |        | 1 bit  |  |  |
|               |       |       | —     | 1      |                                                           |                              |                         |               |               |        | 2 bits |  |  |
|               |       |       | 1     | —      |                                                           | Clock<br>synchronous<br>mode |                         | 8-bit<br>data |               |        | No     |  |  |
|               |       |       | —     | —      |                                                           |                              |                         |               |               |        |        |  |  |
|               |       |       | —     | —      |                                                           |                              |                         |               |               |        |        |  |  |
|               |       |       | —     | —      |                                                           |                              |                         |               |               |        |        |  |  |

**Table 22.9 SMR1 and SCR1 Settings and SCI Clock Source Selection**

| SMR1 SCR1 Setting |       |       | SCI Transfer Clock           |              |                                                         |
|-------------------|-------|-------|------------------------------|--------------|---------------------------------------------------------|
| Bit 7             | Bit 1 | Bit 0 | Mode                         | Clock Source | SCK Pin Function                                        |
| C/ $\bar{A}$      | CKE1  | CKE0  |                              |              |                                                         |
| 0                 | 0     | 0     | Asynchronous<br>mode         | Internal     | SCI does not use SCK pin                                |
|                   |       | 1     |                              |              | Outputs clock with same frequency<br>as bit rate        |
|                   | 1     | 0     |                              | External     | Inputs clock with frequency of 16<br>times the bit rate |
|                   |       | 1     |                              |              |                                                         |
| 1                 | 0     | 0     | Clock<br>synchronous<br>mode | Internal     | Outputs serial clock                                    |
|                   |       | 1     |                              |              |                                                         |
|                   | 1     | 0     |                              | External     | Inputs serial clock                                     |
|                   |       | 1     |                              |              |                                                         |

22.3.2    **Operation in Asynchronous Mode**

In asynchronous mode, characters are sent or received, each preceded by a start bit indicating the start of communication and followed by one or two stop bits indicating the end of communication. Serial communication is thus carried out with synchronization established on a character-by-character basis.

Inside the SCI, the transmitter and receiver are independent units, enabling full-duplex communication. Both the transmitter and the receiver also have a double-buffered structure, so that data can be read or written during transmission or reception, enabling continuous data transfer.

Figure 22.2 shows the general format for asynchronous serial communication. In asynchronous serial communication, the transmission line is usually held in the mark state (high level). The SCI monitors the transmission line, and when it goes to the space state (low level), recognizes a start bit and starts serial communication. One serial communication character consists of a start bit (low level), followed by data (in LSB-first order), a parity bit (high or low level), and finally one or two stop bits (high level). In asynchronous mode, the SCI performs synchronization at the falling edge of the start bit in reception. The SCI samples the data on the 8th pulse of a clock with a frequency of 16 times the length of one bit, so that the transfer data is latched at the center of each bit.

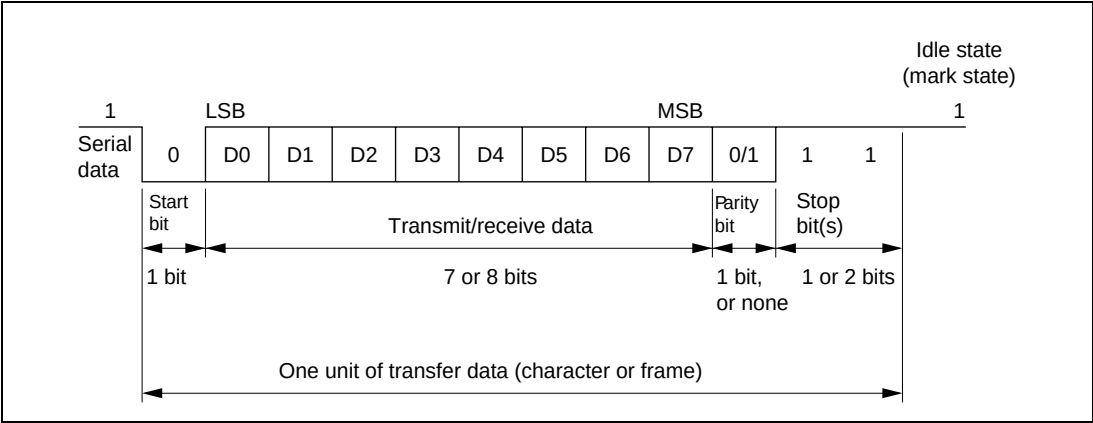


**Figure 22.2    Data Format in Asynchronous Communication**  
**(Example with 8-Bit Data, Parity, Two Stop Bits)**

- Data Transfer Format

Table 22.10 shows the data transfer formats that can be used in asynchronous mode. Any of 12 transfer formats can be selected by settings in SMR1.

**Table 22.10 Serial Transfer Formats (Asynchronous Mode)**

| SMR1 Settings |    |    |      | Serial Transfer Format and Frame Length |            |   |   |   |   |   |   |      |      |      |      |
|---------------|----|----|------|-----------------------------------------|------------|---|---|---|---|---|---|------|------|------|------|
| CHR           | PE | MP | STOP | 1                                       | 2          | 3 | 4 | 5 | 6 | 7 | 8 | 9    | 10   | 11   | 12   |
| 0             | 0  | 0  | 0    | S                                       | 8-bit data |   |   |   |   |   |   |      | STOP |      |      |
| 0             | 0  | 0  | 1    | S                                       | 8-bit data |   |   |   |   |   |   |      | STOP | STOP |      |
| 0             | 1  | 0  | 0    | S                                       | 8-bit data |   |   |   |   |   |   |      | P    | STOP |      |
| 0             | 1  | 0  | 1    | S                                       | 8-bit data |   |   |   |   |   |   |      | P    | STOP | STOP |
| 1             | 0  | 0  | 0    | S                                       | 7-bit data |   |   |   |   |   |   | STOP |      |      |      |
| 1             | 0  | 0  | 1    | S                                       | 7-bit data |   |   |   |   |   |   | STOP | STOP |      |      |
| 1             | 1  | 0  | 0    | S                                       | 7-bit data |   |   |   |   |   |   | P    | STOP |      |      |
| 1             | 1  | 0  | 1    | S                                       | 7-bit data |   |   |   |   |   |   | P    | STOP | STOP |      |
| 0             | —  | 1  | 0    | S                                       | 8-bit data |   |   |   |   |   |   |      | MPB  | STOP |      |
| 0             | —  | 1  | 1    | S                                       | 8-bit data |   |   |   |   |   |   |      | MPB  | STOP | STOP |
| 1             | —  | 1  | 0    | S                                       | 7-bit data |   |   |   |   |   |   | MPB  | STOP |      |      |
| 1             | —  | 1  | 1    | S                                       | 7-bit data |   |   |   |   |   |   | MPB  | STOP | STOP |      |

**Legend:**

S : Start bit

STOP : Stop bit

P : Parity bit

MPB : Multiprocessor bit

- Clock

Either an internal clock generated by the built-in baud rate generator or an external clock input at the SCK pin can be selected as the SCI's serial clock, according to the setting of the  $C/\overline{A}$  bit in SMR1 and the CKE1 and CKE0 bits in SCR1. For details of SCI clock source selection, see table 22.9.

When an external clock is input at the SCK pin, the clock frequency should be 16 times the bit rate used.

When the SCI is operated on an internal clock, the clock can be output from the SCK pin. The frequency of the clock output in this case is equal to the bit rate, and the phase is such that the rising edge of the clock is at the center of each transmit data bit, as shown in figure 22.3.

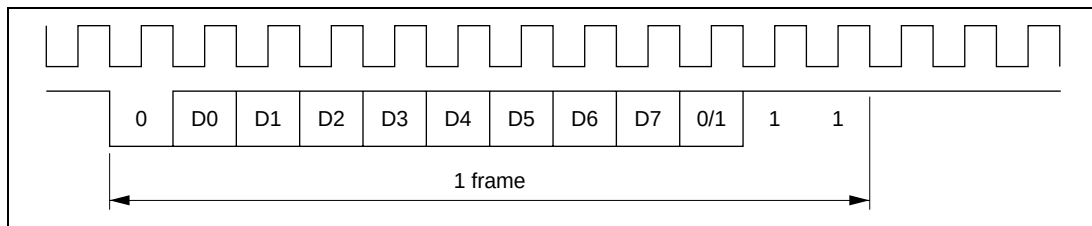


**Figure 22.3 Relation between Output Clock and Transfer Data Phase (Asynchronous Mode)**

- Data Transfer Operations

- SCI Initialization (Asynchronous Mode)

Before transmitting and receiving data, first clear the TE and RE bits in SCR1 to 0, then initialize the SCI as described below.

When the operating mode, transfer format, etc., is changed, the TE and RE bits must be cleared to 0 before making the change using the following procedure. When the TE bit is cleared to 0, the TDRE flag is set to 1 and TSR1 is initialized. Note that clearing the RE bit to 0 does not change the contents of the RDRF, PER, FER, and ORER flags, or the contents of RDR1.

When an external clock is used the clock should not be stopped during operation, including initialization, since operation is uncertain.

Figure 22.4 shows a sample SCI initialization flowchart.

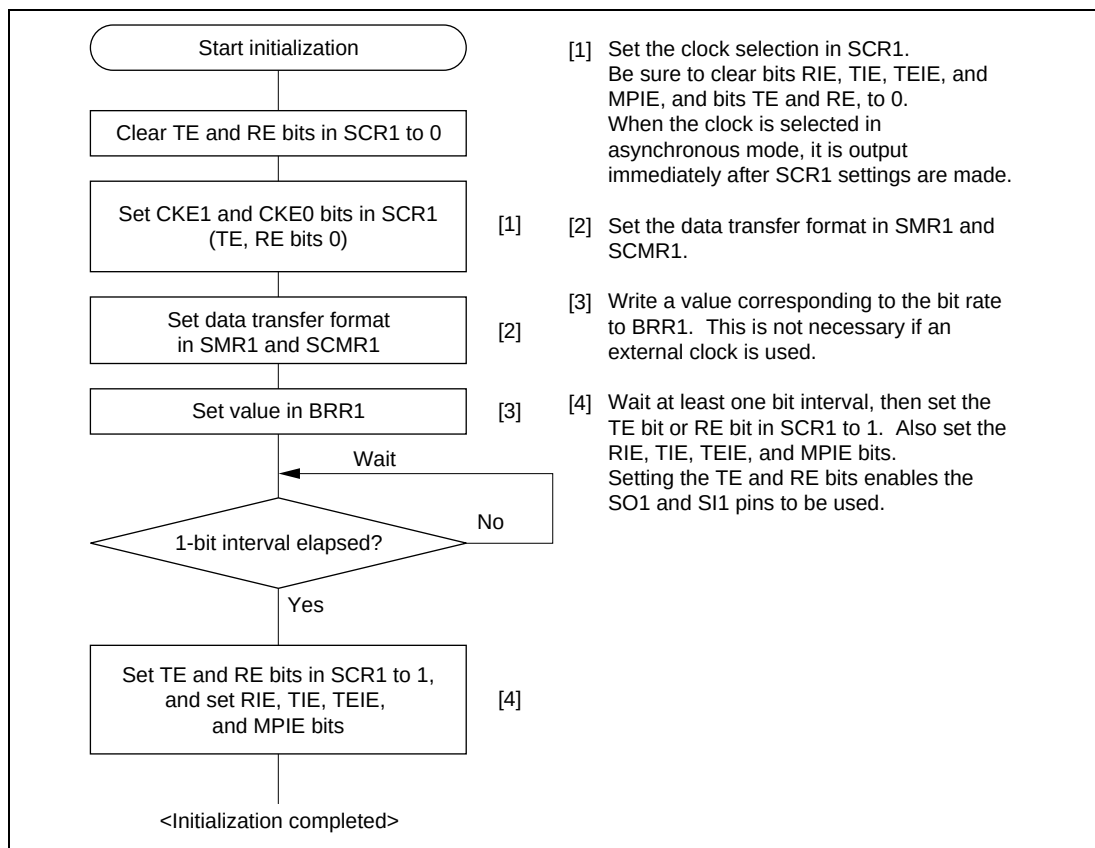


**Figure 22.4 Sample SCI Initialization Flowchart**

— Serial Data Transmission (Asynchronous Mode)

Figure 22.5 shows a sample flowchart for serial transmission.

The following procedure should be used for serial data transmission.

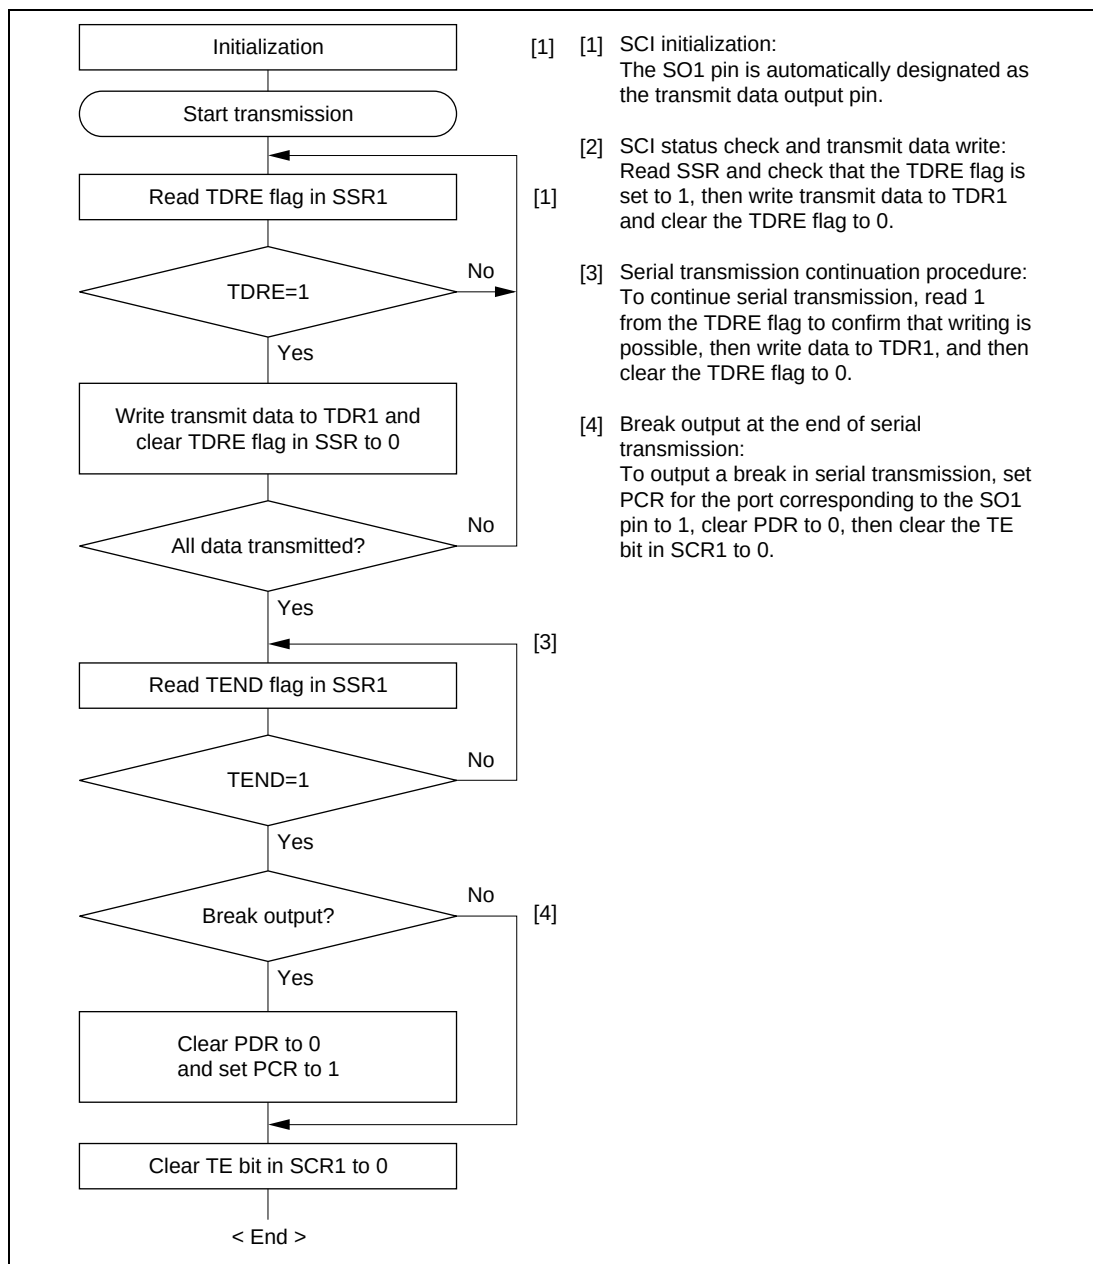


**Figure 22.5 Sample Serial Transmission Flowchart**

In serial transmission, the SCI operates as described below.

1. The SCI monitors the TDRE flag in SSR1, and if it is 0, recognizes that data has been written to TDR1, and transfers the data from TDR1 to TSR1.
2. After transferring data from TDR1 to TSR1, the SCI sets the TDRE flag to 1 and starts transmission.

If the TIE bit is set to 1 at this time, a transmit data empty interrupt (TXI) is generated. The serial transmit data is sent from the SO1 pin in the following order.

- a. Start bit:  
One 0-bit is output.
  - b. Transmit data:  
8-bit or 7-bit data is output in LSB-first order.
  - c. Parity bit or multiprocessor bit:  
One parity bit (even or odd parity), or one multiprocessor bit is output.  
A format in which neither a parity bit nor a multiprocessor bit is output can also be selected.
  - d. Stop bit(s):  
One or two 1-bits (stop bits) are output.
  - e. Mark state:  
1 is output continuously until the start bit that starts the next transmission is sent.
3. The SCI checks the TDRE flag at the timing for sending the stop bit.  
If the TDRE flag is cleared to 0, the data is transferred from TDR1 to TSR1, the stop bit is sent, and then serial transmission of the next frame is started.  
If the TDRE flag is set to 1, the TEND flag in SSR1 is set to 1, the stop bit is sent, and then the mark state is entered in which 1 is output continuously. If the TEIE bit in SCR1 is set to 1 at this time, a TEI interrupt request is generated.

Figure 22.6 shows an example of the operation for transmission in asynchronous mode.

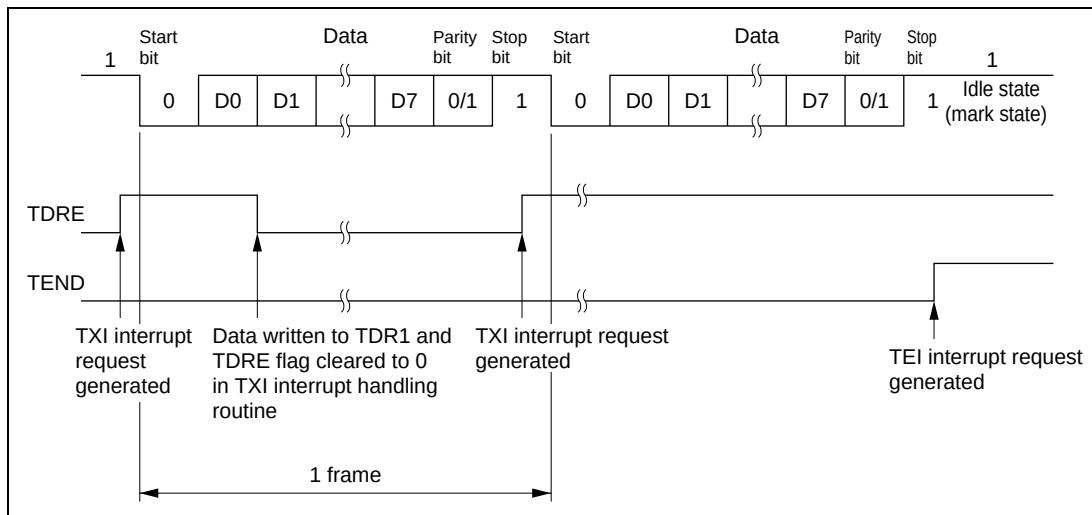


**Figure 22.6 Example of Operation in Transmission in Asynchronous Mode  
(Example with 8-Bit Data, Parity, One Stop Bit)**



— Serial Data Reception (Asynchronous Mode)

Figures 22.7 and 22.8 show sample flowcharts for serial reception.

The following procedure should be used for serial data reception.

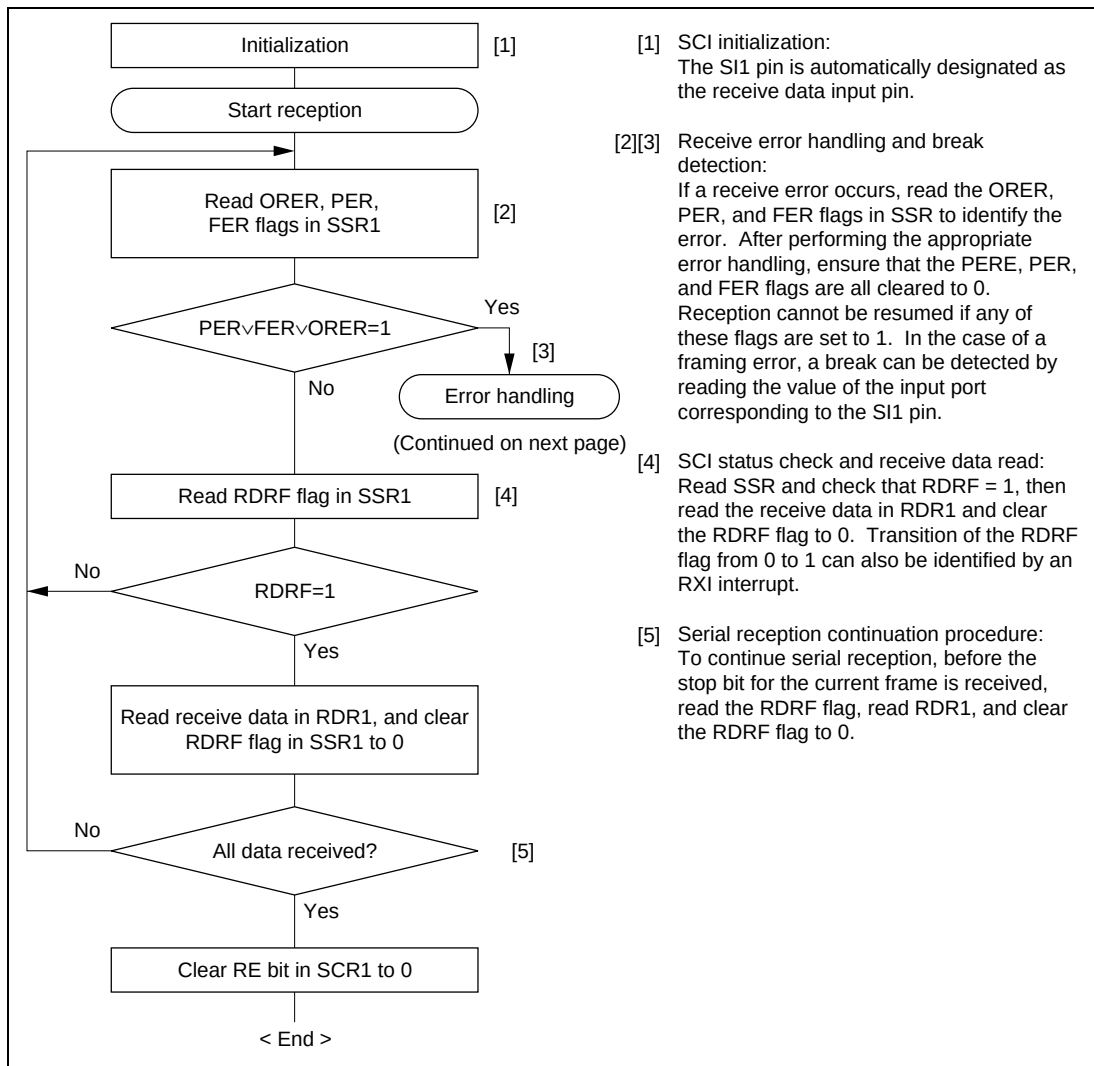


**Figure 22.7 Sample Serial Reception Data Flowchart (1)**

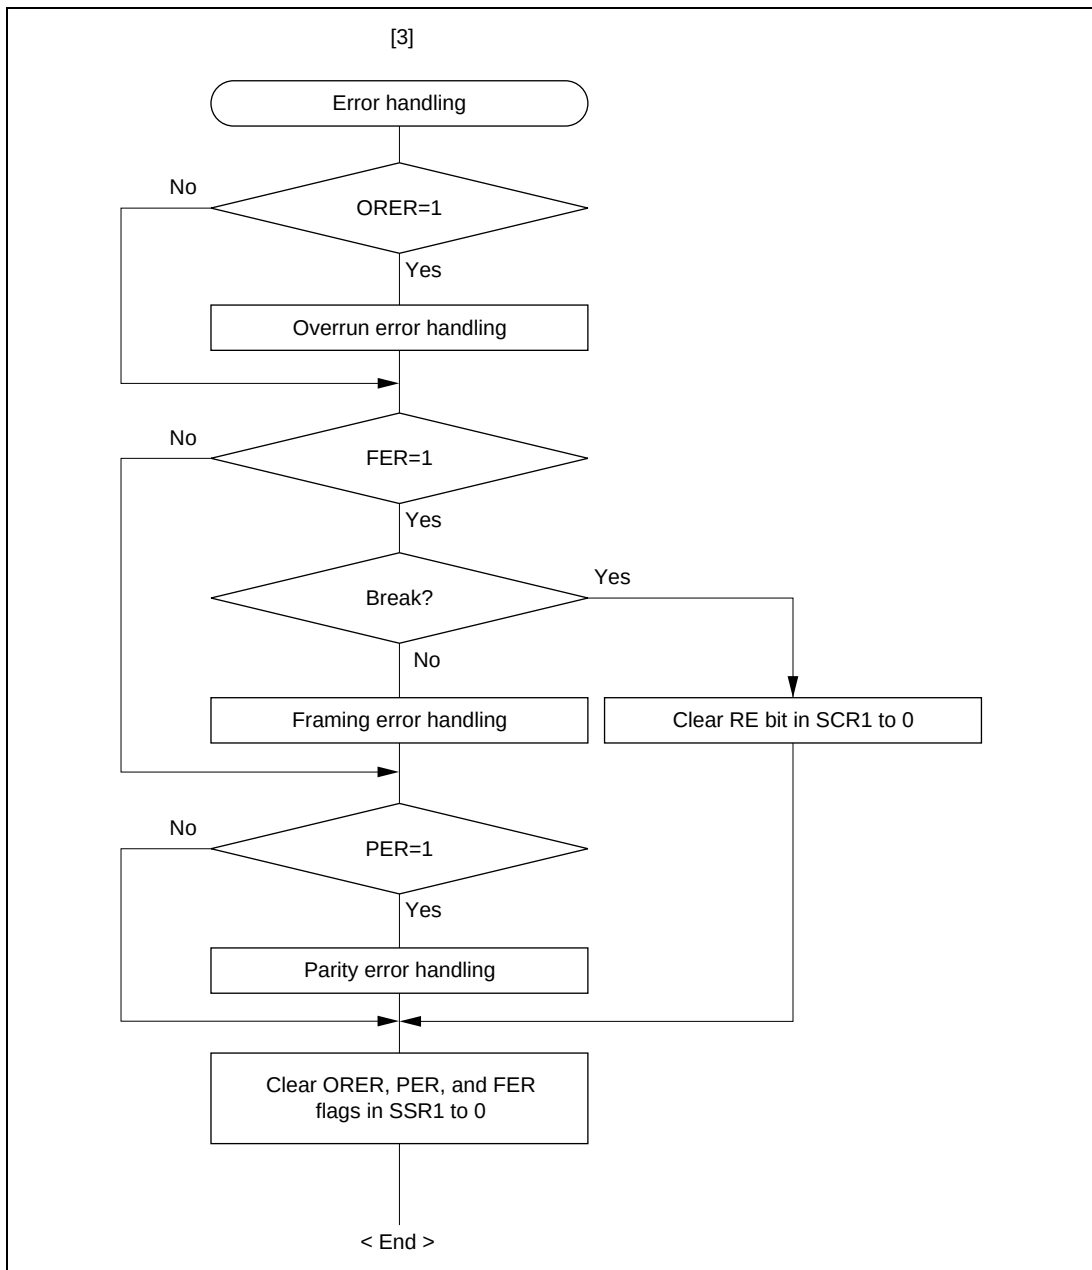


**Figure 22.8 Sample Serial Reception Data Flowchart (2)**

In serial reception, the SCI operates as described below.

1. The SCI monitors the transmission line, and if a 0 stop bit is detected, performs internal synchronization and starts reception.
2. The received data is stored in RSR1 in LSB-to-MSB order.
3. The parity bit and stop bit are received.

After receiving these bits, the SCI carries out the following checks.

a. Parity check:

The SCI checks whether the number of 1 bits in the receive data agrees with the parity (even or odd) set in the  $O/\overline{E}$  bit in SMR1.

b. Stop bit check:

The SCI checks whether the stop bit is 1.

If there are two stop bits, only the first is checked.

c. Status check:

The SCI checks whether the RDRF flag is 0, indicating that the receive data can be transferred from RSR1 to RDR1.

If all the above checks are passed, the RDRF flag is set to 1, and the receive data is stored in RDR1.

If a receive error\* is detected in the error check, the operation is as shown in table 22.11.

4. If the RIE bit in SCR1 is set to 1 when the RDRF flag changes to 1, a receive-data-full interrupt (RXI) request is generated.

Also, if the RIE bit in SCR1 is set to 1 when the ORER, PER, or FER flag changes to 1, a receive-error interrupt (ERI) request is generated.

Note: \* Subsequent receive operations cannot be performed when a receive error has occurred.

Also note that the RDRF flag is not set to 1 in reception, and so the error flags must be cleared to 0.

**Table 22.11 Receive Errors and Conditions for Occurrence**

| Receive Error | Abbrev. | Occurrence Condition                                                              | Data Transfer                                     |
|---------------|---------|-----------------------------------------------------------------------------------|---------------------------------------------------|
| Overrun error | ORER    | When the next data reception is completed while the RDRF flag in SSR1 is set to 1 | Receive data is not transferred from RSR1 to RDR1 |
| Framing error | FER     | When the stop bit is 0                                                            | Receive data is transferred from RSR1 to RDR1     |
| Parity error  | PER     | When the received data differs from the parity (even or odd) set in SMR1          | Receive data is transferred from RSR1 to RDR1     |

Figure 22.9 shows an example of the operation for reception in asynchronous mode.

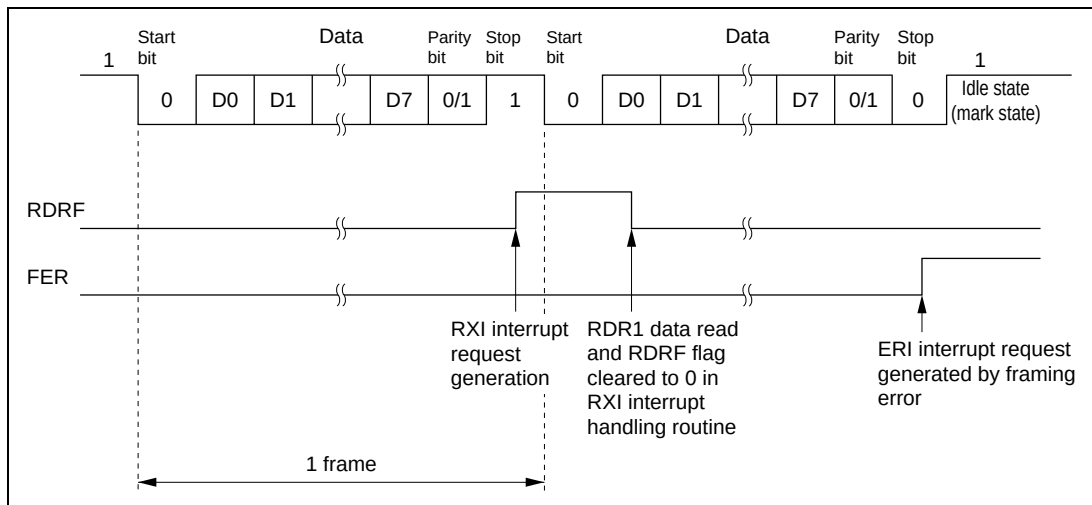


**Figure 22.9 Example of SCI Operation in Reception  
(Example with 8-Bit Data, Parity, One Stop Bit)**

### 22.3.3 Multiprocessor Communication Function

The multiprocessor communication function performs serial communication using a multiprocessor format, in which a multiprocessor bit is added to the transfer data, in asynchronous mode. Use of this function enables data transfer to be performed among a number of processors sharing transmission lines.

When multiprocessor communication is carried out, each receiving station is addressed by a unique ID code.

The serial communication cycle consists of two component cycles: an ID transmission cycle which specifies the receiving station, and a data transmission cycle. The multiprocessor bit is used to differentiate between the ID transmission cycle and the data transmission cycle.

The transmitting station first sends the ID of the receiving station with which it wants to perform serial communication as data with a 1 multiprocessor bit added. It then sends transmit data as data with a 0 multiprocessor bit added.

The receiving station skips the data until data with a 1 multiprocessor bit is sent.

When data with a 1 multiprocessor bit is received, the receiving station compares that data with its own ID. The station whose ID matches then receives the data sent next. Stations whose ID does not match continue to skip the data until data with a 1 multiprocessor bit is again received. In this way, data communication is carried out among a number of processors.

Figure 22.10 shows an example of inter-processor communication using a multiprocessor format.

### 1. Data Transfer Format

There are four data transfer formats.

When a multiprocessor format is specified, the parity bit specification is invalid.

For details, see table 22.10.

### 2. Clock

See the section on asynchronous mode.

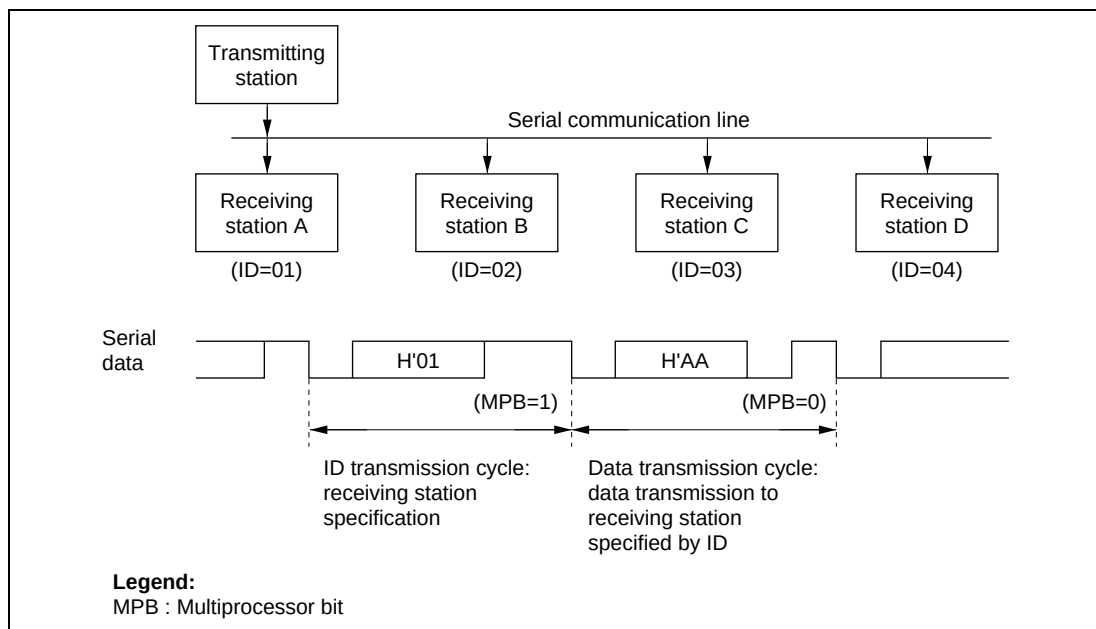


**Figure 22.10 Example of Inter-Processor Communication Using Multiprocessor Format (Transmission of Data H'AA to Receiving Station A)**

### 3. Data Transfer Operations

#### a. Multiprocessor Serial Data Transmission

Figure 22.11 shows a sample flowchart for multiprocessor serial data transmission.

The following procedure should be used for multiprocessor serial data transmission.

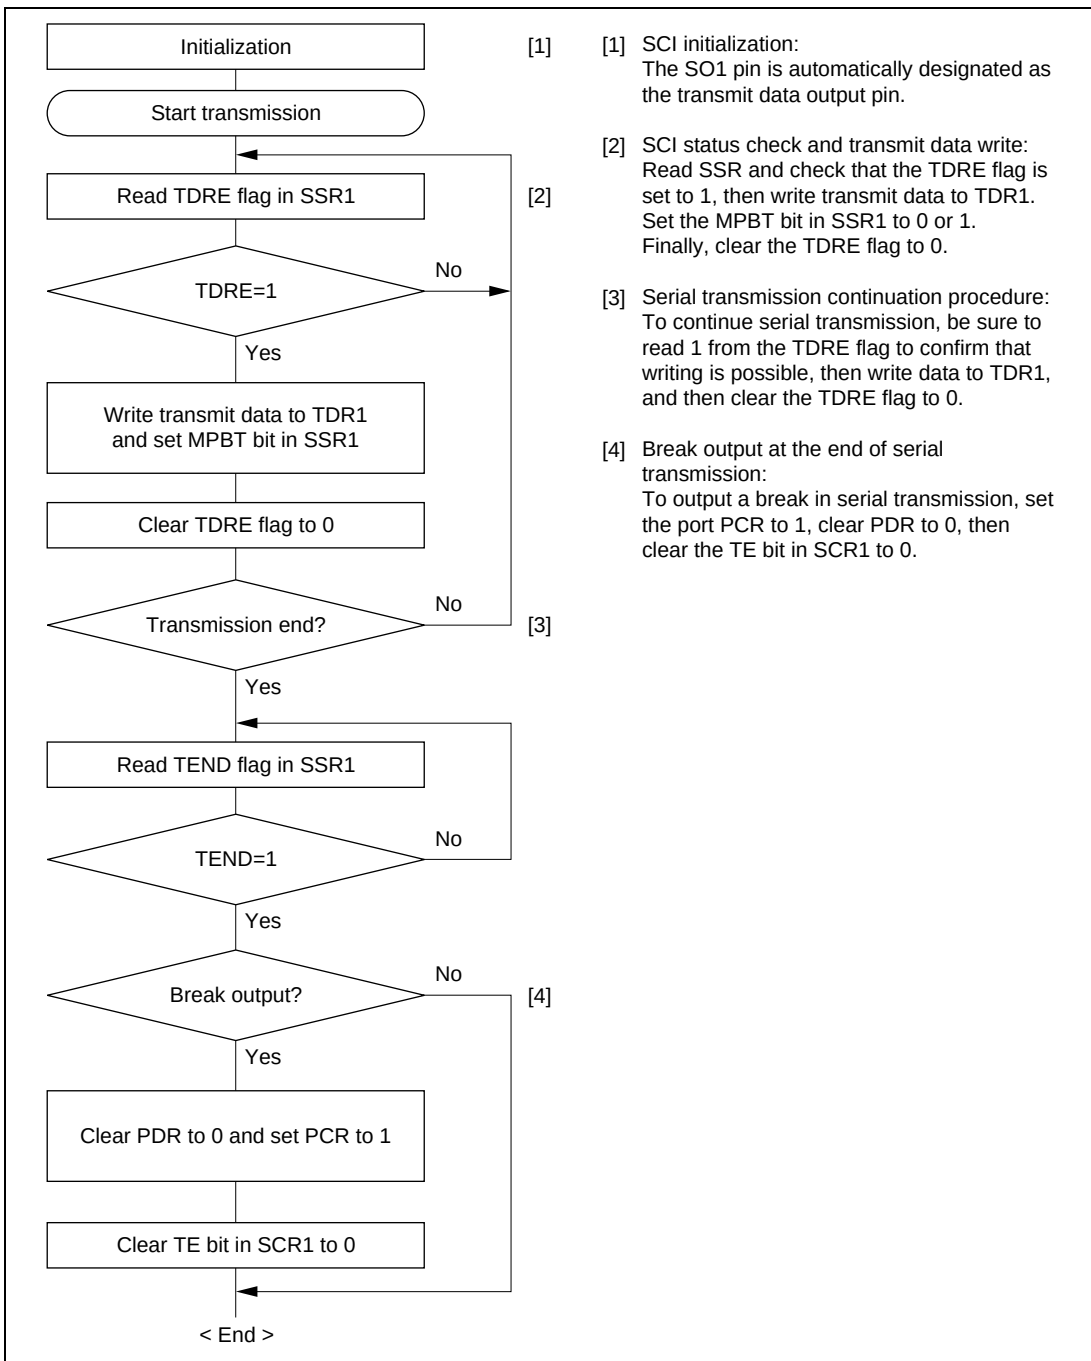


**Figure 22.11 Sample Multiprocessor Serial Transmission Flowchart**

In serial transmission, the SCI operates as described below.

1. The SCI monitors the TDRE flag in SSR1, and if it is 0, recognizes that data has been written to TDR1, and transfers the data from TDR1 to TSR1.
2. After transferring data from TDR1 to TSR1, the SCI sets the TDRE flag to 1 and starts transmission.

If the TIE bit is set to 1 at this time, a transmit-data-empty interrupt (TXI) is generated. The serial transmit data is sent from the SO2 pin in the following order.

- a. Start bit:  
One 0-bit is output.
  - b. Transmit data:  
8-bit or 7-bit data is output in LSB-first order.
  - c. Multiprocessor bit  
One multiprocessor bit (MPBT value) is output.
  - d. Stop bit(s):  
One or two 1-bits (stop bits) are output.
  - e. Mark state:  
1 is output continuously until the start bit that starts the next transmission is sent.
3. The SCI checks the TDRE flag at the timing for sending the stop bit.  
If the TDRE flag is cleared to 0, data is transferred from TDR1 to TSR1, the stop bit is sent, and then serial transmission of the next frame is started.  
If the TDRE flag is set to 1, the TEND flag in SSR1 is set to 1, the stop bit is sent, and then the mark state is entered in which 1 is output continuously. If the TEIE bit in SCR1 is set to 1 at this time, a transmit-end interrupt (TEI) request is generated.

Figure 22.12 shows an example of SCI operation for transmission using a multiprocessor format.


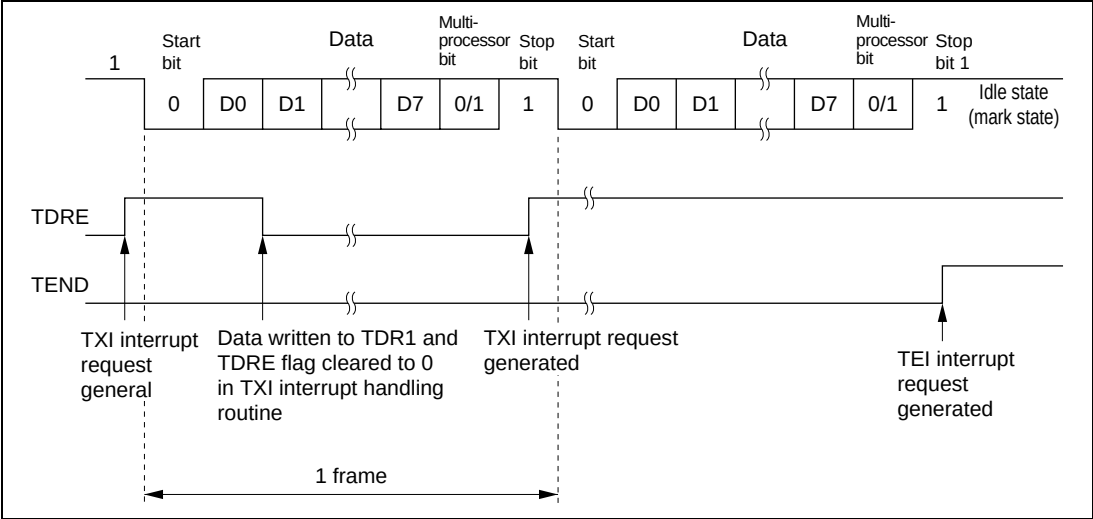


**Figure 22.12 Example of SCI Operation in Transmission  
(Example with 8-Bit Data, Multiprocessor Bit, One Stop Bit)**

b. Multiprocessor Serial Data Reception

Figure 22.13 shows sample flowcharts for multiprocessor serial reception.  
The following procedure should be used for multiprocessor serial data reception.



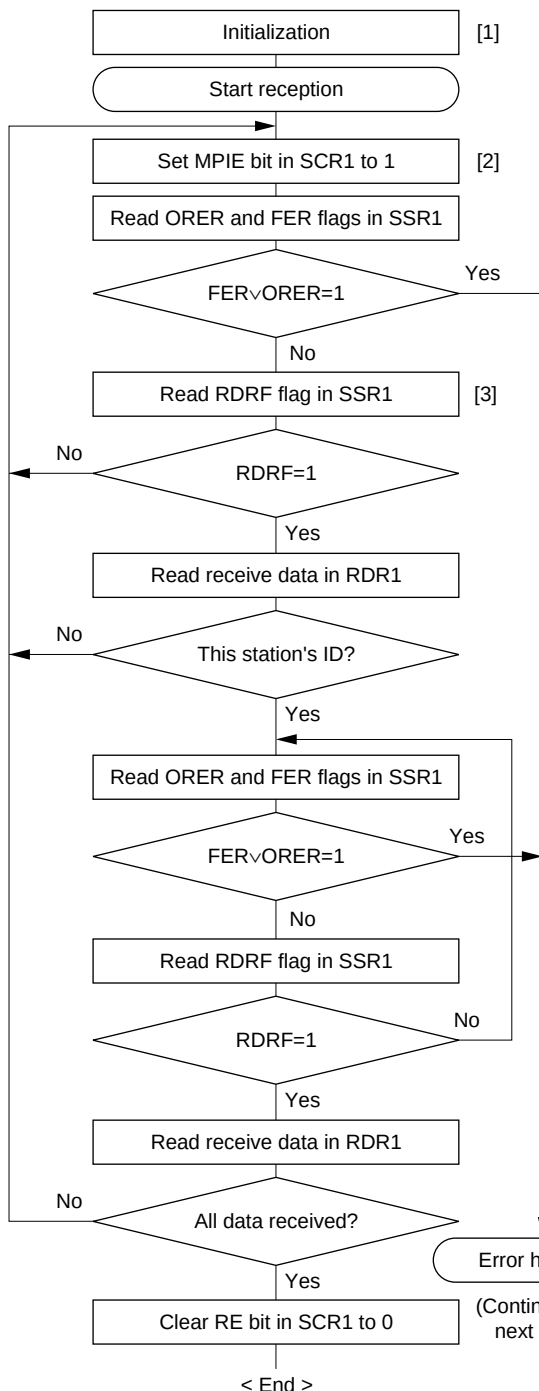

- [1] SCI initialization:  
The SI1 pin is automatically designated as the receive data input pin.
- [2] ID reception cycle:  
Set the MPIE bit in SCR1 to 1.
- [3] SCI status check, ID reception and comparison:  
Read SSR and check that the RDRF flag is set to 1, then read the receive data in RDR1 and compare it with this station's ID. If the data is not this station's ID, set the MPIE bit to 1 again, and clear the RDRF flag to 0. If the data is this station's ID, clear the RDRF flag to 0.
- [4] SCI status check and data reception:  
Read SSR1 and check that the RDRF flag is set to 1, then read the data in RDR1.
- [5] Receive error handling and break detection:  
If a receive error occurs, read the ORER and FER flags in SSR1 to identify the error. After performing the appropriate error handling, ensure that the ORER and FER flags are both cleared to 0. Reception cannot be resumed if either of these flags is set to 1. In the case of a framing error, a break can be detected by reading the SI1 in value.

[4]

[5]

Error handling

(Continued on next page)

< End >

Figure 22.13 Sample Multiprocessor Serial Reception Flowchart (1)

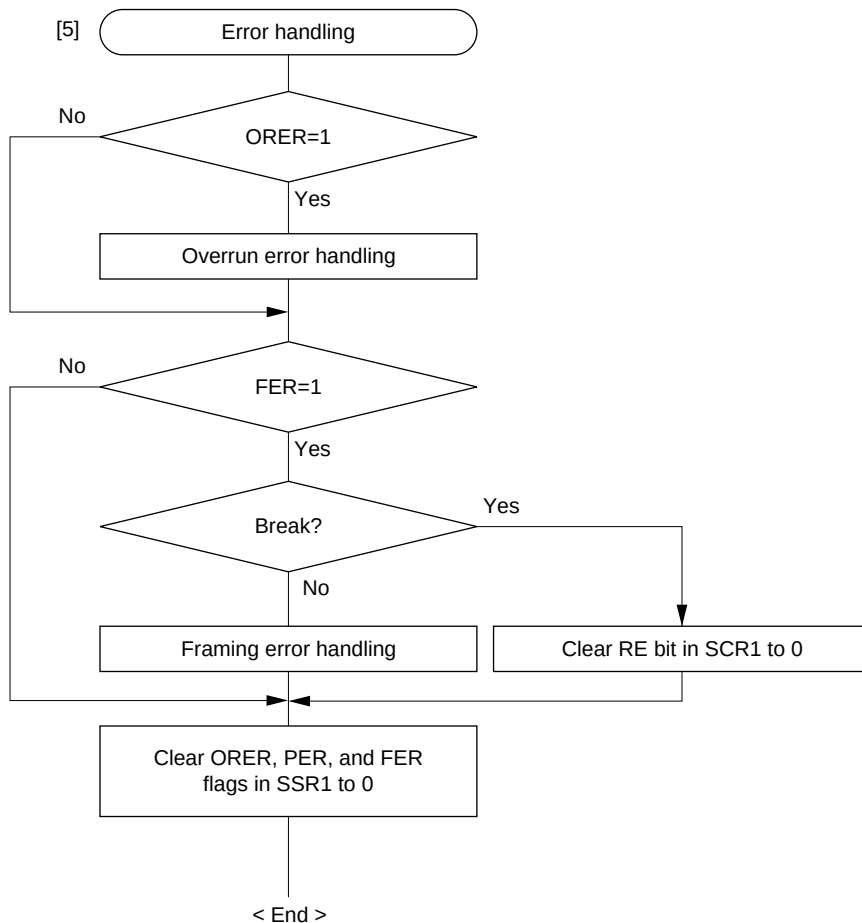


**Figure 22.14 Sample Multiprocessor Serial Reception Flowchart (2)**

Figure 22.15 shows an example of SCI operation for multiprocessor format reception.

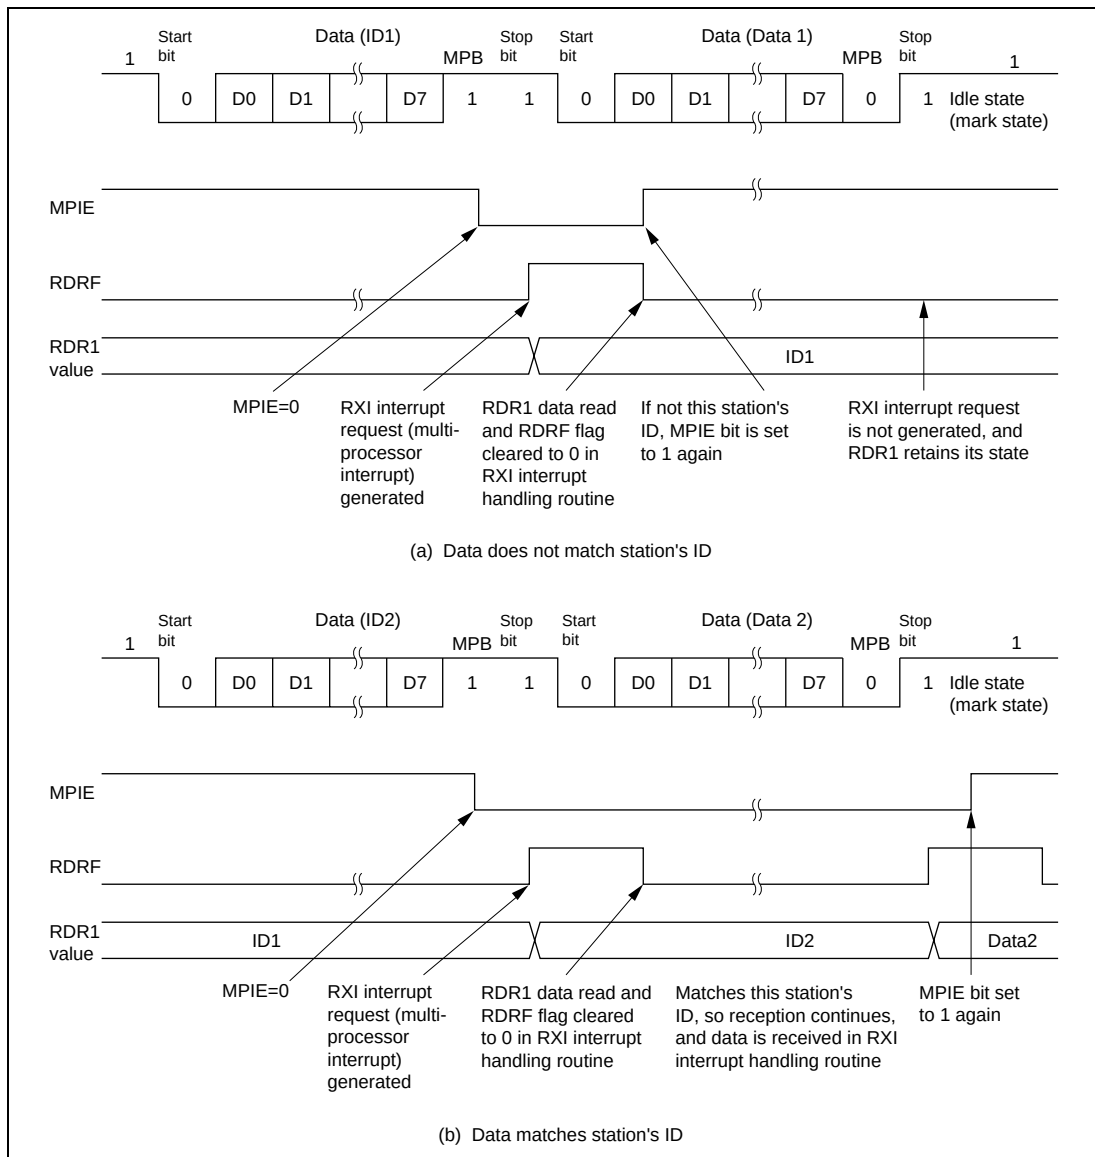


**Figure 22.15 Example of SCI Operation in Reception**  
(Example with 8-Bit Data, Multiprocessor Bit, One Stop Bit)

### 22.3.4 Operation in Synchronous Mode

In synchronous mode, data is transmitted or received in synchronization with clock pulses, making it suitable for high-speed serial communication.

Inside the SCI, the transmitter and receiver are independent units, enabling full-duplex communication by use of a common clock. Both the transmitter and the receiver also have a double-buffered structure, so that data can be read or written during transmission or reception, enabling continuous data transfer.

Figure 22.16 shows the general format for synchronous serial communication.

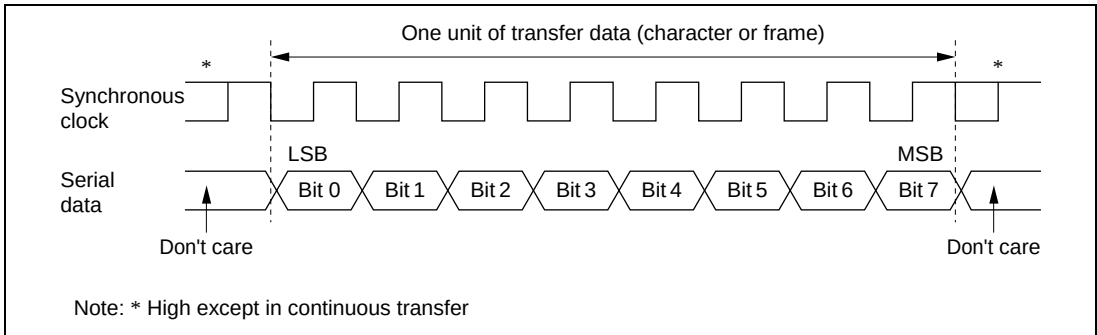


**Figure 22.16 Data Format in Synchronous Communication**

In synchronous serial communication, data on the transmission line is output from one falling edge of the serial clock to the next. Data is guaranteed valid at the rising edge of the serial clock.

In synchronous serial communication, one character consists of data output starting with the LSB and ending with the MSB. After the MSB is output, the transmission line holds the MSB state.

In synchronous mode, the SCI receives data in synchronization with the rising edge of the serial clock.

- Data Transfer Format

A fixed 8-bit data format is used.

No parity or multiprocessor bits are added.

- Clock

Either an internal clock generated by the built-in baud rate generator or an external serial clock input at the SCK pin can be selected, according to the setting of the C/ $\overline{A}$  bit in SMR1 and the CKE1 and CKE0 bits in SCR1. For details on SCI clock source selection, see table 22.9.

When the SCI is operated on an internal clock, the serial clock is output from the SCK pin.

Eight serial clock pulses are output in the transfer of one character, and when no transfer is performed the clock is fixed high. When only receive operations are performed, however, the serial clock is output until an overrun error occurs or the RE bit is cleared to 0. To perform receive operations in units of one character, select an external clock as the clock source.

- Data Transfer Operations

## — SCI Initialization (Synchronous Mode)

Before transmitting and receiving data, first clear the TE and RE bits in SCR1 to 0, then initialize the SCI as described below.

When the operating mode, transfer format, etc., is changed, the TE and RE bits must be cleared to 0 before making the change using the following procedure. When the TE bit is cleared to 0, the TDRE flag is set to 1 and TSR1 is initialized. Note that clearing the RE bit to 0 does not change the settings of the RDRF, PER, FER, and ORER flags, or the contents of RDR1.

Figure 22.17 shows a sample SCI initialization flowchart.

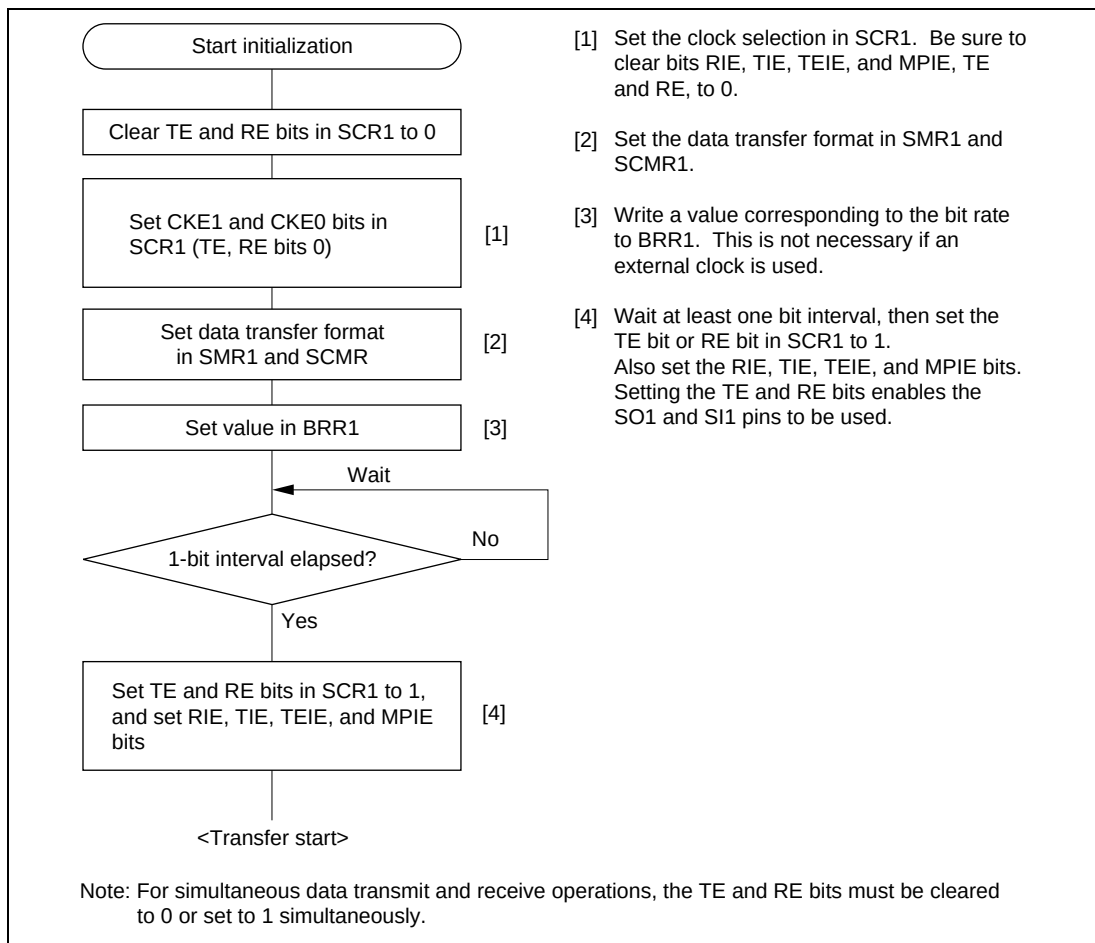


**Figure 22.17 Sample SCI Initialization Flowchart**

— Serial Data Transmission (Synchronous Mode)

Figure 22.18 shows a sample flowchart for serial transmission.

The following procedure should be used for serial data transmission.

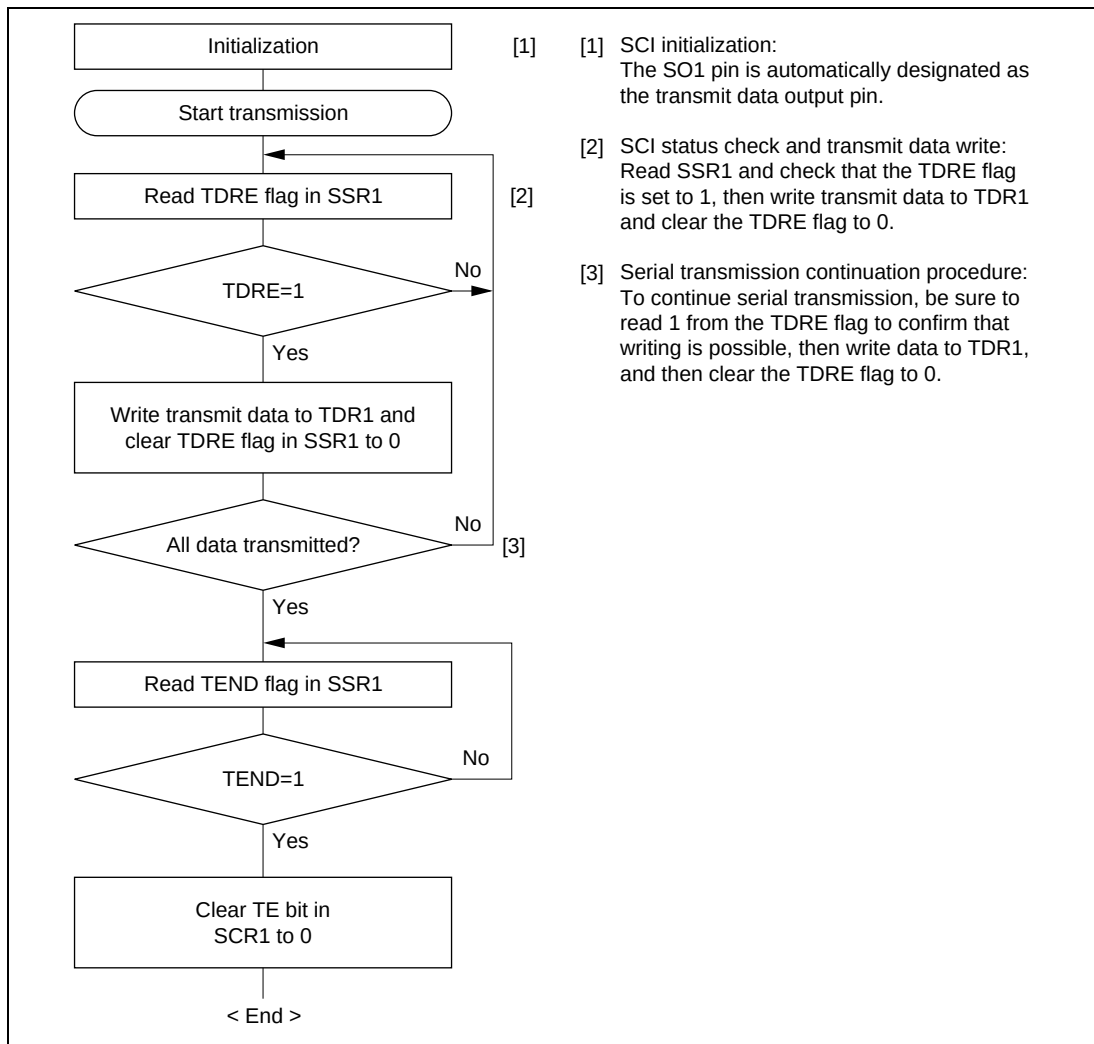


**Figure 22.18 Sample Serial Transmission Flowchart**

In serial transmission, the SCI operates as described below.

1. The SCI monitors the TDRE flag in SSR1, and if it is 0, recognizes that data has been written to TDR1, and transfers the data from TDR1 to TSR1.
2. After transferring data from TDR1 to TSR1, the SCI sets the TDRE flag to 1 and starts transmission. If the TIE bit is set to 1 at this time, a transmit-data-empty interrupt (TXI) is generated.

When clock output mode has been set, the SCI outputs 8 serial clock pulses. When use of an external clock has been specified, data is output synchronized with the input clock.

The serial transmit data is sent from the SO1 pin starting with the LSB (bit 0) and ending with the MSB (bit 7).

3. The SCI checks the TDRE flag at the timing for sending the MSB (bit 7).

If the TDRE flag is cleared to 0, data is transferred from TDR1 to TSR1, and serial transmission of the next frame is started.

If the TDRE flag is set to 1, the TEND flag in SSR1 is set to 1, the MSB (bit 7) is sent, and the SO1 pin maintains its state.

If the TEIE bit in SCR1 is set to 1 at this time, a transmit-end interrupt (TEI) request is generated.

4. After completion of serial transmission, the SCK pin is held in a constant state.

Figure 22.19 shows an example of SCI operation in transmission.

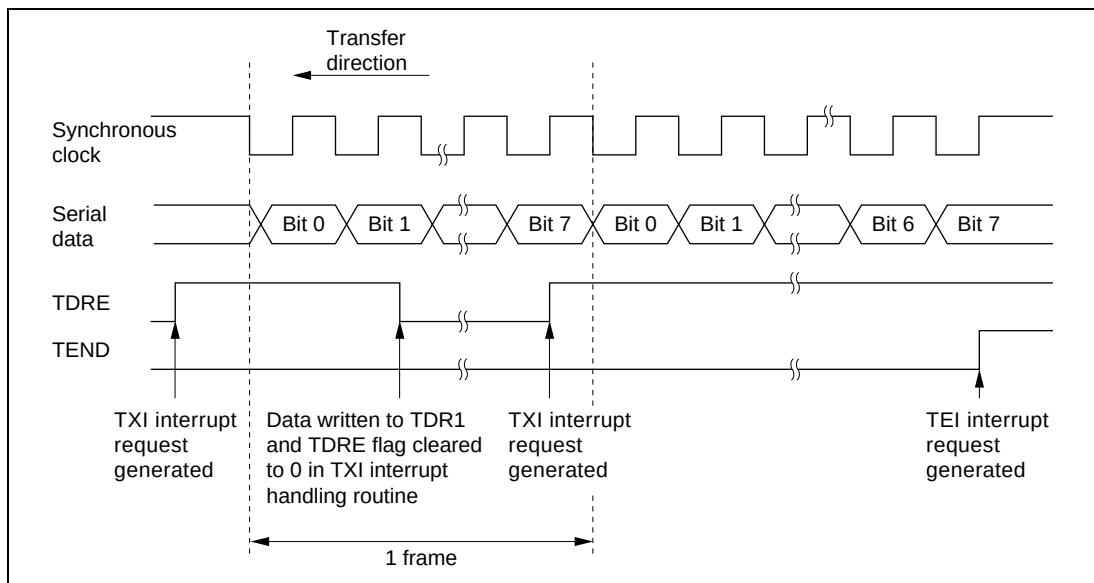


**Figure 22.19 Example of SCI Operation in Transmission**

— Serial Data Reception (Synchronous Mode)

Figure 22.20 shows a sample flowchart for serial reception.

The following procedure should be used for serial data reception.

When changing the operating mode from asynchronous to synchronous, be sure to check that the ORER, PER, and FER flags are all cleared to 0.

The RDRF flag will not be set if the FER or PER flag is set to 1, and neither transmit nor receive operations will be possible.



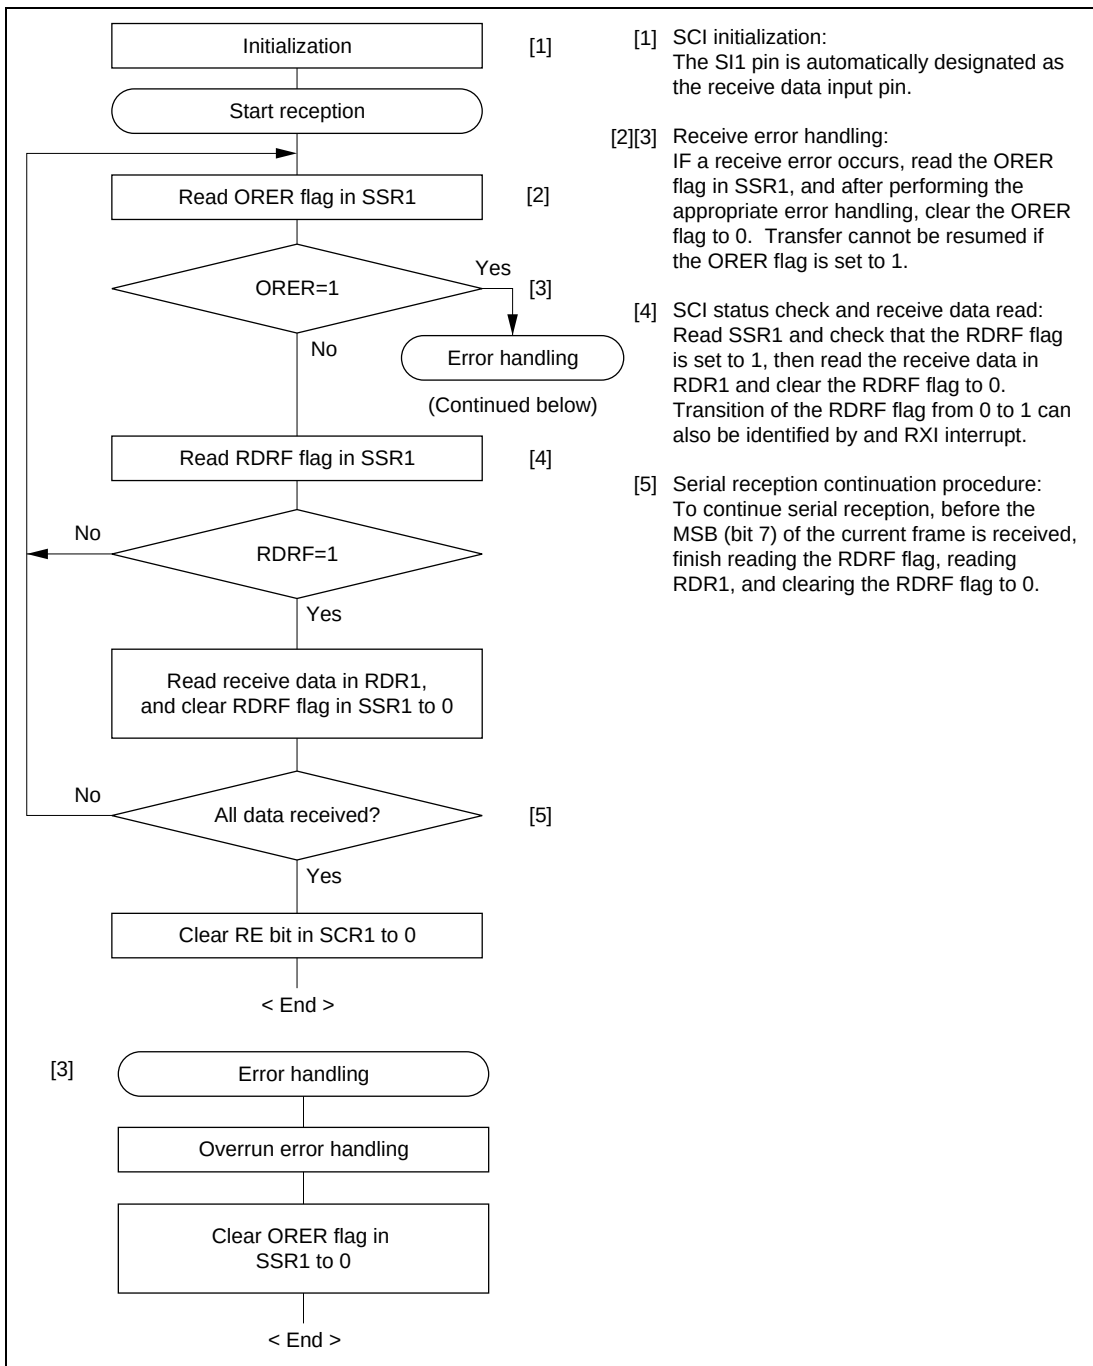


**Figure 22.20 Sample Serial Reception Flowchart**

In serial reception, the SCI operates as described below.

1. The SCI performs internal initialization in synchronization with serial clock input or output.
2. The received data is stored in RSR1 in LSB-to-MSB order.

After reception, the SCI checks whether the RDRF flag is 0 and the receive data can be transferred from RSR1 to RDR1.

If this check is passed, the RDRF flag is set to 1, and the receive data is stored in RDR1. If a receive error is detected in the error check, the operation is as shown in table 22.11.

Neither transmit nor receive operations can be performed subsequently when a receive error has been found in the error check.

3. If the RIE bit in SCR1 is set to 1 when the RDRF flag changes to 1, a receive-data-full interrupt (RXI) request is generated.

Also, if the RIE bit in SCR1 is set to 1 when the ORER flag changes to 1, a receive-error interrupt (ERI) request is generated.

Figure 22.21 shows an example of SCI operation in reception.


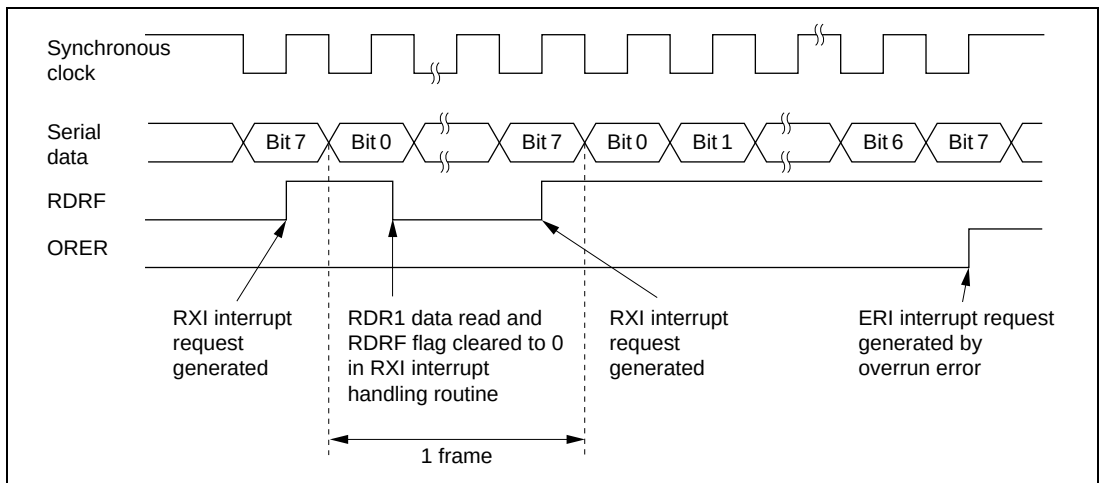


**Figure 22.21 Example of SCI Operation in Reception**

## — Simultaneous Serial Data Transmission and Reception (Synchronous Mode)

Figure 22.22 shows a sample flowchart for simultaneous serial transmit and receive operations.

The following procedure should be used for simultaneous serial data transmit and receive operations.

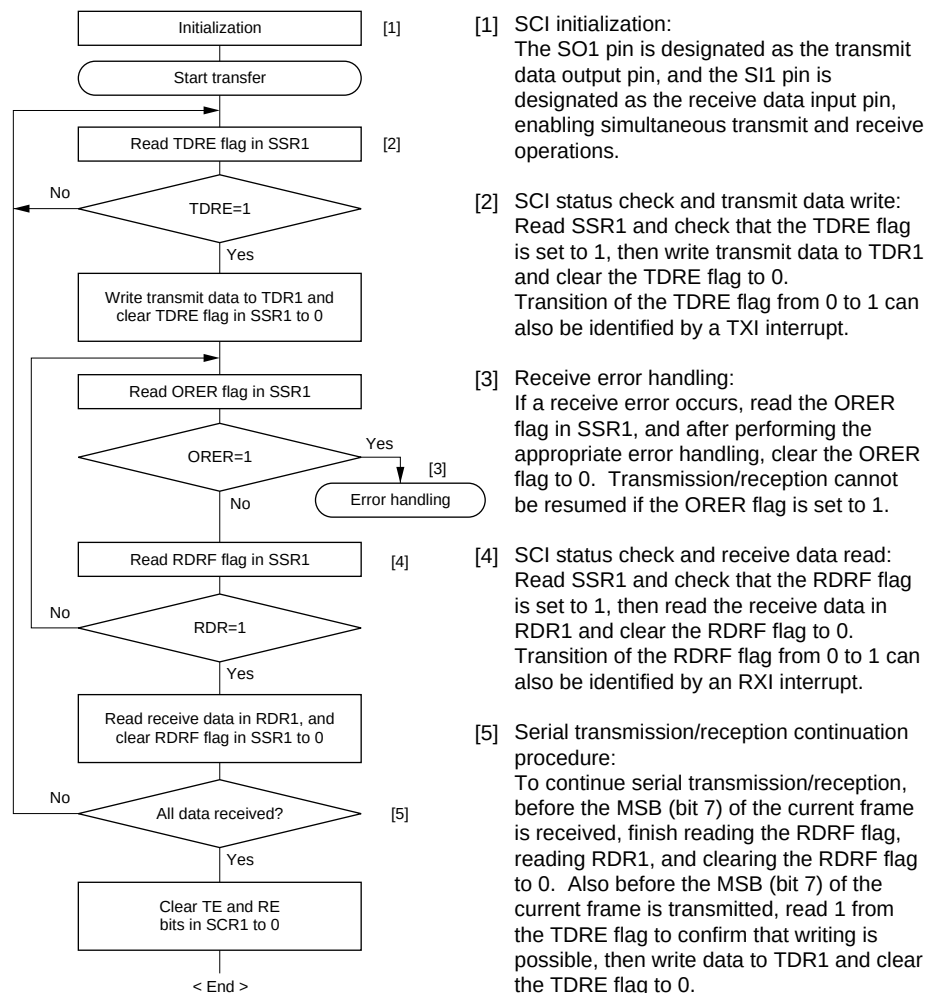

Note: When switching from transmit or receive operation to simultaneous transmit and receive operations, first clear the TE bit and RE bit to 0, then set both these bits to 1 simultaneously.

**Figure 22.22 Sample Flowchart of Simultaneous Serial Transmit and Receive Operations**

## 22.4 SCI Interrupts

The SCI has four interrupt sources: the transmit-end interrupt (TEI) request, receive-error interrupt (ERI) request, receive-data-full interrupt (RXI) request, and transmit-data-empty interrupt (TXI) request. Table 22.12 shows the interrupt sources and their relative priorities. Individual interrupt sources can be enabled or disabled with the TIE, RIE, and TEIE bits in SCR1. Each kind of interrupt request is sent to the interrupt controller independently.

When the TDRE flag in SSR1 is set to 1, a TXI interrupt request is generated. When the TEND flag in SSR1 is set to 1, a TEI interrupt request is generated.

When the RDRF flag in SSR1 is set to 1, an RXI interrupt request is generated. When the ORER, PER, or FER flag in SSR1 is set to 1, an ERI interrupt request is generated.

**Table 22.12 SCI Interrupt Sources**

| Channel | Interrupt Source | Description                                      | Priority                                                                           |
|---------|------------------|--------------------------------------------------|------------------------------------------------------------------------------------|
| 1       | ERI              | Interrupt by receive error (ORER, FER, or PER)   | High                                                                               |
|         | RXI              | Interrupt by receive data register full (RDRF)   |  |
|         | TXI              | Interrupt by transmit data register empty (TDRE) |                                                                                    |
|         | TEI              | Interrupt by transmit end (TEND)                 | Low                                                                                |

The TEI interrupt is requested when the TEND flag is set to 1 while the TEIE bit is set to 1. The TEND flag is cleared at the same time as the TDRE flag. Consequently, if a TEI interrupt and a TXI interrupt are requested simultaneously, the TXI interrupt will have priority for acceptance, and the TDRE flag and TEND flag may be cleared. Note that the TEI interrupt will not be accepted in this case.

## 22.5 Usage Notes

The following points should be noted when using the SCI.

- Relation between Writes to TDR1 and the TDRE Flag

The TDRE flag in SSR1 is a status flag that indicates that transmit data has been transferred from TDR1 to TSR1. When the SCI transfers data from TDR1 to TSR1, the TDRE flag is set to 1.

Data can be written to TDR1 regardless of the state of the TDRE flag. However, if new data is written to TDR1 when the TDRE flag is cleared to 0, the data stored in TDR1 will be lost since it has not yet been transferred to TSR1. It is therefore essential to check that the TDRE flag is set to 1 before writing transmit data to TDR1.

- Operation when Multiple Receive Errors Occur Simultaneously

If a number of receive errors occur at the same time, the state of the status flags in SSR1 is as shown in table 22.13. If there is an overrun error, data is not transferred from RSR1 to RDR1, and the receive data is lost.

**Table 22.13 State of SSR1 Status Flags and Transfer of Receive Data**

| SSR1 Status Flags |      |     |     | Receive Data Transfer |                                              |
|-------------------|------|-----|-----|-----------------------|----------------------------------------------|
| RDRF              | ORER | FER | PER | RSR1 to RDR1          | Receive Error Status                         |
| 1                 | 1    | 0   | 0   | X                     | Overrun error                                |
| 0                 | 0    | 1   | 0   | ○                     | Framing error                                |
| 0                 | 0    | 0   | 1   | ○                     | Parity error                                 |
| 1                 | 1    | 1   | 0   | X                     | Overrun error + framing error                |
| 1                 | 1    | 0   | 1   | X                     | Overrun error + parity error                 |
| 0                 | 0    | 1   | 1   | ○                     | Framing error + parity error                 |
| 1                 | 1    | 1   | 1   | X                     | Overrun error + framing error + parity error |

Notes: ○: Receive data is transferred from RSR1 to RDR1.

X: Receive data is not transferred from RSR1 to RDR1.

- Break Detection and Processing

When framing error (FER) detection is performed, a break can be detected by reading the SI1 pin value directly. In a break, the input from the SI1 pin becomes all 0s, and so the FER flag is set, and the parity error flag (PER) may also be set.

Note that, since the SCI continues the receive operation after receiving a break, even if the FER flag is cleared to 0, it will be set to 1 again.

- Sending a Break

The SO1 pin has a dual function as an I/O port whose direction (input or output) is determined by DR and DDR. This can be used to send a break.

Between serial transmission initialization and setting of the TE bit to 1, the mark state is replaced by the value of PDR (the pin does not function as the SO1 pin until the TE bit is set to 1). Consequently, PCR and PDR for the port corresponding to the SO1 pin are first set to 1.

To send a break during serial transmission, first clear PDR to 0, then clear the TE bit to 0.

When the TE bit is cleared to 0, the transmitter is initialized regardless of the current transmission state, the SO1 pin becomes an I/O port, and 0 is output from the SO1 pin.

- Receive Error Flags and Transmit Operations (Clocked Synchronous Mode Only)

Transmission cannot be started when a receive error flag (ORER, PER, or FER) is set to 1, even if the TDRE flag is cleared to 0. Be sure to clear the receive error flags to 0 before starting transmission.

Note also that receive error flags cannot be cleared to 0 even if the RE bit is cleared to 0.

- Receive Data Sampling Timing and Reception Margin in Asynchronous Mode

In asynchronous mode, the SCI operates on a basic clock with a frequency of 16 times the transfer rate.

In reception, the SCI samples the falling edge of the start bit using the basic clock, and performs internal synchronization. Receive data is latched internally at the rising edge of the 8th pulse of the basic clock. This is illustrated in figure 22.23.

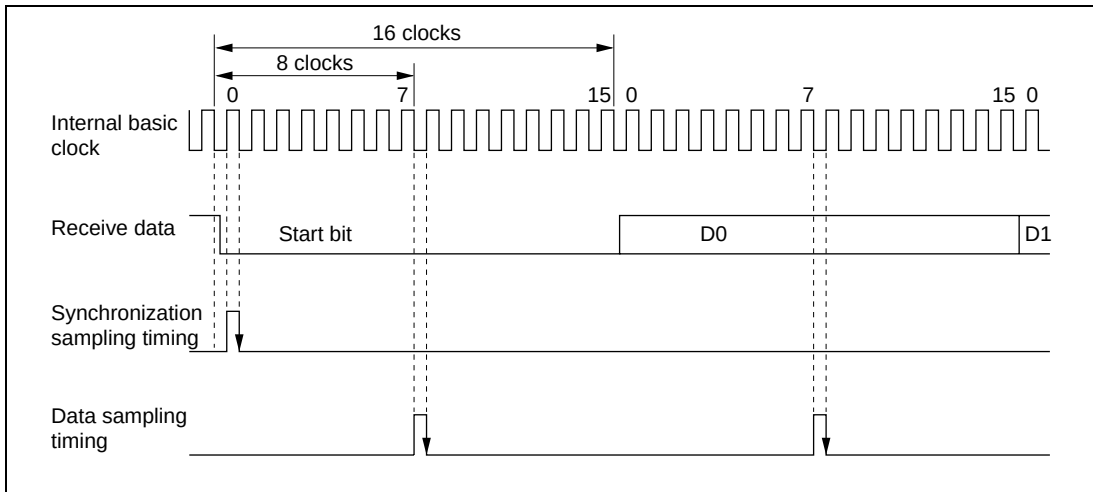


**Figure 22.23 Receive Data Sampling Timing in Asynchronous Mode**

Thus the reception margin in asynchronous mode is given by formula (1) below.

$$M = \left| \left( 0.5 - \frac{1}{2N} \right) - (L - 0.5) F - \frac{|D - 0.5|}{N} (1 + F) \right| \times 100\%$$

... Formula (1)

Where  $M$  : Reception margin (%)  
 $N$  : Ratio of bit rate to clock ( $N = 16$ )  
 $D$  : Clock duty ( $D = 0$  to  $1.0$ )  
 $L$  : Frame length ( $L = 9$  to  $12$ )  
 $F$  : Absolute value of clock rate deviation

Assuming values of  $F = 0$  and  $D = 0.5$  in formula (1), a reception margin of 46.875% is given by formula (2) below.

When  $D = 0.5$  and  $F = 0$ ,

$$M = \left( 0.5 - \frac{1}{2 \times 16} \right) \times 100\%$$

$$= 46.875\%$$

... Formula (2)

However, this is only the computed value, and a margin of 20% to 30% should be allowed in system design.

- Operation in Case of Mode Transition

- Transmission

Operation should be stopped (by clearing TE, TIE, and TEIE to 0) before making a module stop mode, standby mode, watch mode, subactive mode, or subsleep mode transition.


TSR1, TDR1, and SSR1 are reset. The output pin states in module stop mode, standby mode, watch mode, subactive mode, or subsleep mode depend on the port settings, and becomes high-level output after the relevant mode is cleared. If a transition is made during transmission, the data being transmitted will be undefined. When transmitting without changing the transmit mode after the relevant mode is cleared, transmission can be started by setting TE to 1 again, and performing the following sequence: SSR1 read → TDR1 write → TDRE clearance. To transmit with a different transmit mode after clearing the relevant mode, the procedure must be started again from initialization. Figure 22.24 shows a sample flowchart for mode transition during transmission. Port pin states are shown in figures 22.25 and 22.26.

- Reception

Receive operation should be stopped (by clearing RE to 0) before making a module stop mode, standby mode, watch mode, subactive mode, or subsleep mode transition. RSR1, RDR1, and SSR1 are reset. If a transition is made without stopping operation, the data being received will be invalid. To continue receiving without changing the reception mode after the relevant mode is cleared, set RE to 1 before starting reception. To receive with a different receive mode, the procedure must be started again from initialization.

Figure 22.27 shows a sample flowchart for mode transition during reception.



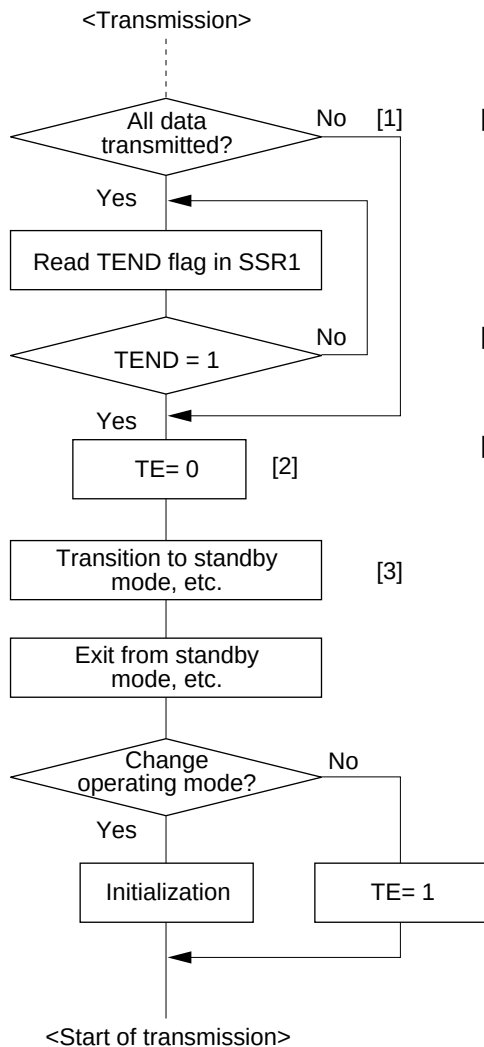

- [1] Data being transmitted is interrupted. After exiting software standby mode, etc., normal CPU transmission is possible by setting TE to 1, reading SSR1, writing TDR1, and clearing TDRE to 0.
- [2] If TIE and TEIE are set to 1, clear them to 0 in the same way.
- [3] Includes module stop mode, watch mode, subactive mode, and subsleep mode.

**Figure 22.24 Sample Flowchart for Mode Transition during Transmission**

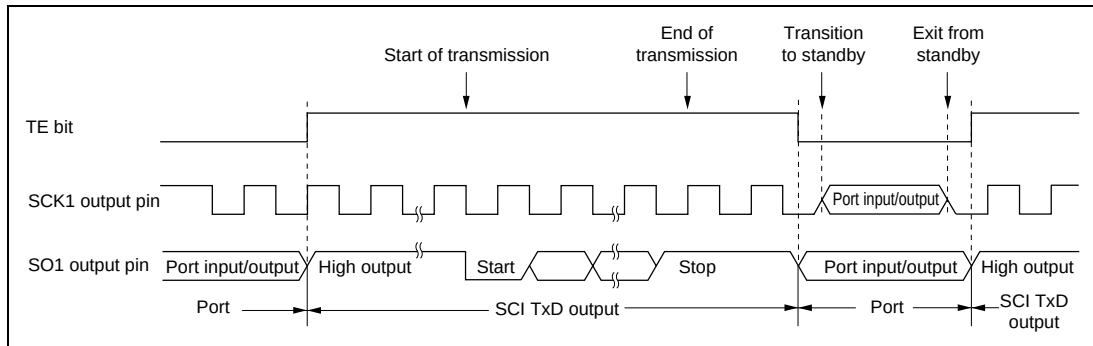


**Figure 22.25 Asynchronous Transmission Using Internal Clock**

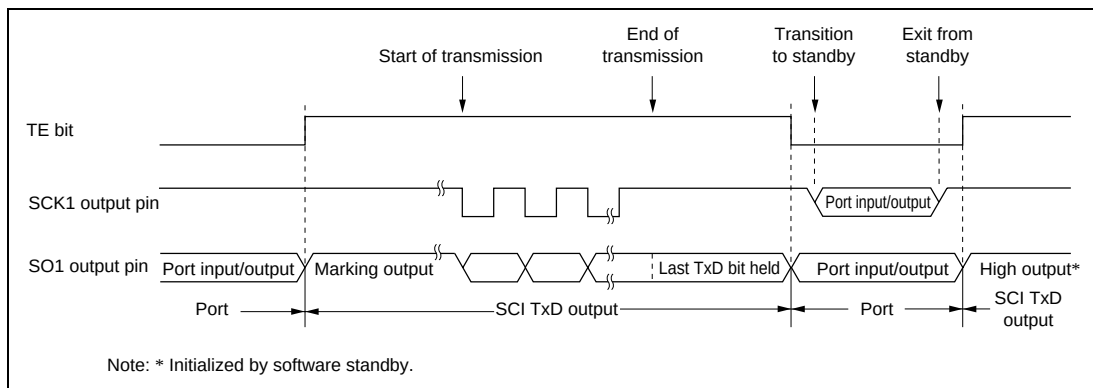


**Figure 22.26 Synchronous Transmission Using Internal Clock**

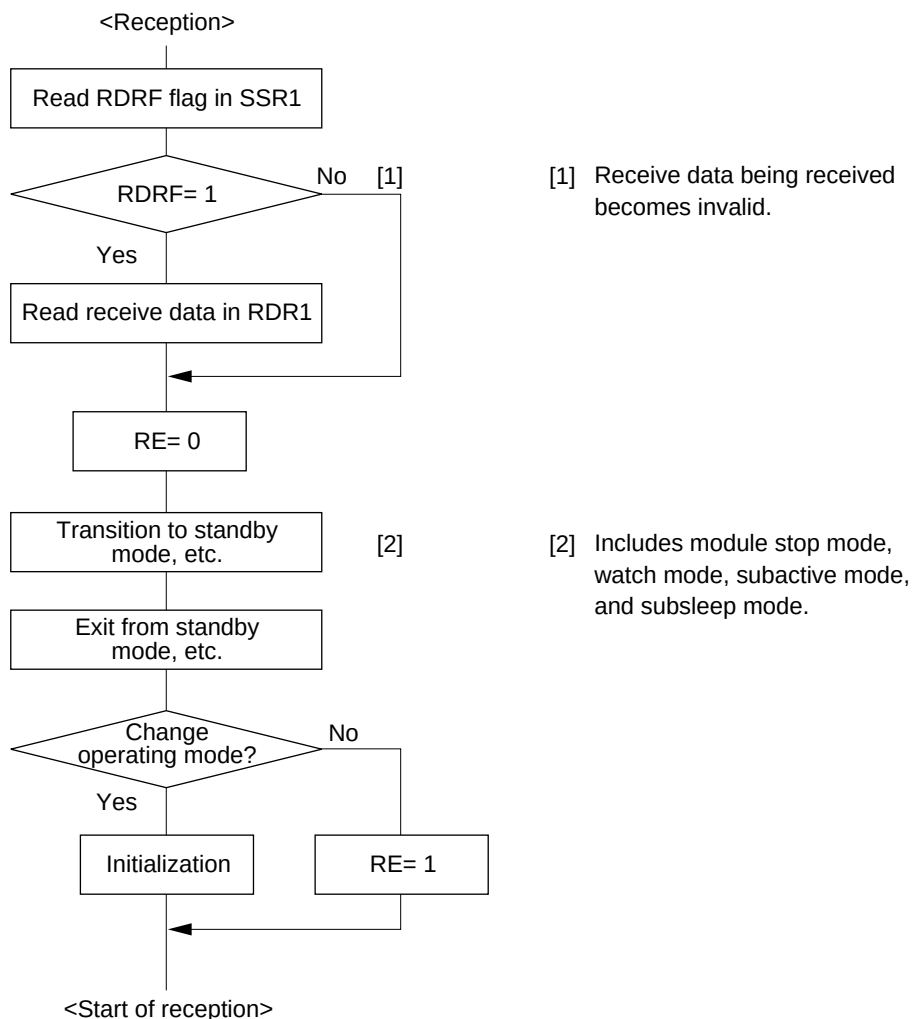


**Figure 22.27 Sample Flowchart for Mode Transition during Reception**



# Section 23 I<sup>2</sup>C Bus Interface (IIC)

## 23.1 Overview

This LSI incorporates a 2-channel I<sup>2</sup>C bus interface (H8S/2197S and H8S/2196S: 1 channel).

The I<sup>2</sup>C bus interface conforms to and provides a subset of the Philips I<sup>2</sup>C bus (inter-IC bus) interface functions. The register configuration that controls the I<sup>2</sup>C bus differs partly from the Philips configuration, however.

Each I<sup>2</sup>C bus interface channel uses only one data line (SDA) and one clock line (SCL) to transfer data, saving board and connector space.

### 23.1.1 Features

- Selection of addressing format or non-addressing format
  - I<sup>2</sup>C bus format: addressing format with acknowledge bit, for master/slave operation
  - Serial format: non-addressing format without acknowledge bit, for master operation only
- Conforms to Philips I<sup>2</sup>C bus interface (I<sup>2</sup>C bus format)
- Two ways of setting slave address (I<sup>2</sup>C bus format)
- Start and stop conditions generated automatically in master mode (I<sup>2</sup>C bus format)
- Selection of acknowledge output levels when receiving (I<sup>2</sup>C bus format)
- Automatic loading of acknowledge bit when transmitting (I<sup>2</sup>C bus format)
- Wait function in master mode (I<sup>2</sup>C bus format)
  - A wait can be inserted by driving the SCL pin low after data transfer, excluding acknowledgement. The wait can be cleared by clearing the interrupt flag.
- Wait function in slave mode (I<sup>2</sup>C bus format)
  - A wait request can be generated by driving the SCL pin low after data transfer, excluding acknowledgement. The wait request is cleared when the next transfer becomes possible.
- Three interrupt sources
  - Data transfer end (including transmission mode transition with I<sup>2</sup>C bus format and address reception after loss of master arbitration)
  - Address match: when any slave address matches or the general call address is received in slave receive mode (I<sup>2</sup>C bus format)
  - Stop condition detection
- Selection of 16 internal clocks (in master mode)
- Direct bus drive (with SCL and SDA pins)
  - Four pins P26/SCL0, P25/SDA0, P24/SCL1 and P23/SDA1 (normally CMOS pins) function as NMOS-only outputs when the bus drive function is selected.

### 23.1.2 Block Diagram

Figure 23.1 shows a block diagram of the I<sup>2</sup>C bus interface.

Figure 23.2 shows an example of I/O pin connections to external circuits. I/O pins are driven only by NMOS and apparently function as NMOS open-drain outputs. However, applicable voltages to input pins depend on the power (V<sub>CC</sub>) voltage of this LSI.

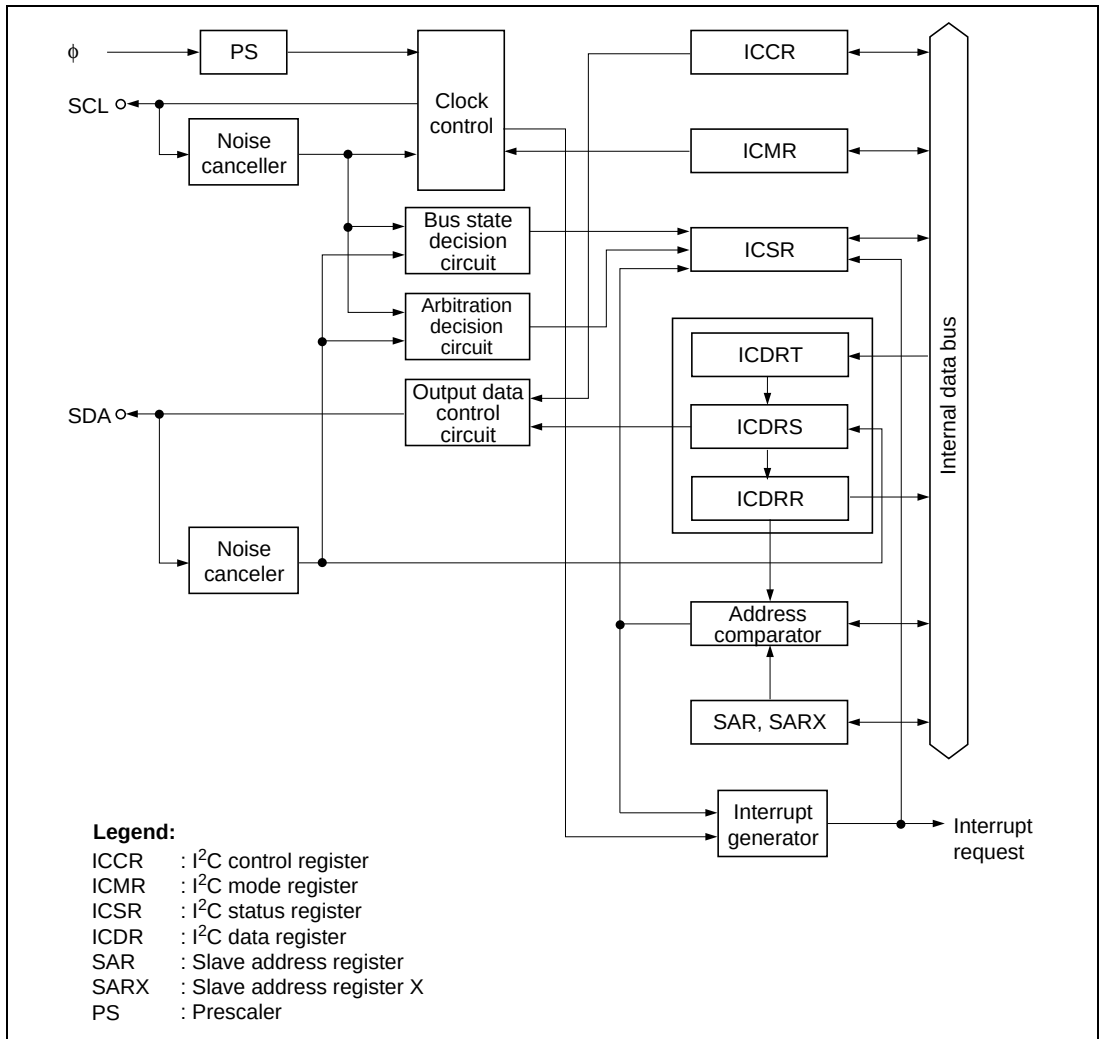


**Figure 23.1 Block Diagram of I<sup>2</sup>C Bus Interface**

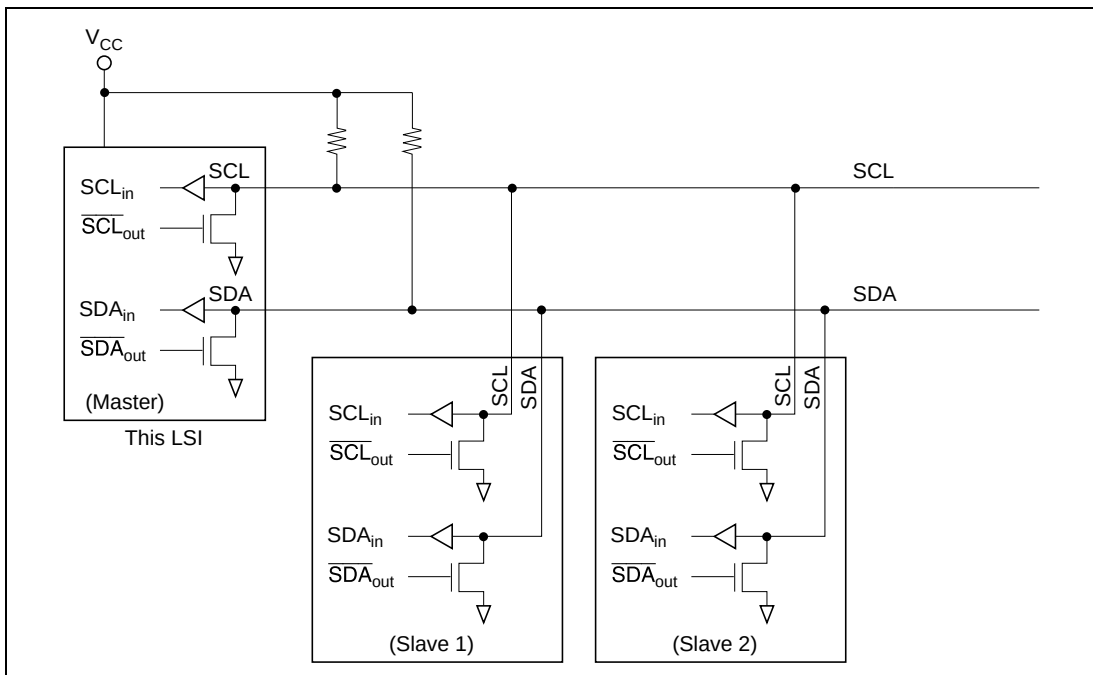


**Figure 23.2 I²C Bus Interface Connections (Example: This Chip as Master)**

### 23.1.3 Pin Configuration

Table 23.1 summarizes the input/output pins used by the I²C bus interface.

**Table 23.1 I²C Bus Interface Pins**

| Channel | Name                        | Abbrev.* | I/O          | Function                           |
|---------|-----------------------------|----------|--------------|------------------------------------|
| 0       | Serial clock pin            | SCL0     | Input/output | IIC0 serial clock input/output     |
|         | Serial data pin             | SDA0     | Input/output | IIC0 serial data input/output      |
|         | Formatless serial clock pin | SYNCl    | Input        | IIC0 formatless serial clock input |
| 1       | Serial clock pin            | SCL1     | Input/output | IIC1 serial clock input/output     |
|         | Serial data pin             | SDA1     | Input/output | IIC1 serial data input/output      |

Notes: \* In this section, channel numbers in the abbreviated register names are omitted; SCL0 and SCL1 are collectively referred to as SCL, and SDA0 and SDA1 as SDA.

Channel 0 is not provided (incorporated in) for the H8S/2197S and H8S/2196S.

### 23.1.4 Register Configuration

Table 23.2 summarizes the registers of the I<sup>2</sup>C bus interface.

**Table 23.2 Register Configuration**

| Channel         | Name                                  | Abbrev. | R/W | Initial Value | Address* <sup>1</sup> |
|-----------------|---------------------------------------|---------|-----|---------------|-----------------------|
| 0* <sup>3</sup> | I <sup>2</sup> C bus control register | ICCR0   | R/W | H'01          | H'D0E8                |
|                 | I <sup>2</sup> C bus status register  | ICSR0   | R/W | H'00          | H'D0E9                |
|                 | I <sup>2</sup> C bus data register    | ICDR0   | R/W | —             | H'D0EE* <sup>2</sup>  |
|                 | I <sup>2</sup> C bus mode register    | ICMR0   | R/W | H'00          | H'D0EF* <sup>2</sup>  |
|                 | Slave address register                | SAR0    | R/W | H'00          | H'D0EF* <sup>2</sup>  |
|                 | Second slave address register         | SARX0   | R/W | H'01          | H'D0EE* <sup>2</sup>  |
| 1               | I <sup>2</sup> C bus control register | ICCR1   | R/W | H'01          | H'D158                |
|                 | I <sup>2</sup> C bus status register  | ICSR1   | R/W | H'00          | H'D159                |
|                 | I <sup>2</sup> C bus data register    | ICDR1   | R/W | —             | H'D15E* <sup>2</sup>  |
|                 | I <sup>2</sup> C bus mode register    | ICMR1   | R/W | H'00          | H'D15F* <sup>2</sup>  |
|                 | Slave address register                | SAR1    | R/W | H'00          | H'D15F* <sup>2</sup>  |
|                 | Second slave address register         | SARX1   | R/W | H'01          | H'D15E* <sup>2</sup>  |
| 0 and 1         | DDC switch register                   | DDCSWR  | R/W | H'0F          | H'D0E5                |
|                 | Module stop control register          | MSTPCRH | R/W | H'FF          | H'FFEC                |
|                 |                                       | MSTPCRL |     | H'FF          | H'FFED                |

Notes: 1. Lower 16 bits of the address.

2. The registers that can be read from or written to depend on the ICE bit in the I<sup>2</sup>C bus control register. The slave address registers can be accessed when ICE = 0, and the I<sup>2</sup>C bus mode registers can be accessed when ICE = 1.

3. Channel 0 is not provided (incorporated in) for the H8S/2197S and H8S/2196S.



# 23.2 Register Descriptions

## 23.2.1 I<sup>2</sup>C Bus Data Register (ICDR)

|                 |       |       |       |       |       |       |       |       |
|-----------------|-------|-------|-------|-------|-------|-------|-------|-------|
| Bit :           | 7     | 6     | 5     | 4     | 3     | 2     | 1     | 0     |
|                 | ICDR7 | ICDR6 | ICDR5 | ICDR4 | ICDR3 | ICDR2 | ICDR1 | ICDR0 |
| Initial value : | —     | —     | —     | —     | —     | —     | —     | —     |
| R/W :           | R/W   | R/W   | R/W   | R/W   | R/W   | R/W   | R/W   | R/W   |

### ICDRR

|                 |        |        |        |        |        |        |        |        |
|-----------------|--------|--------|--------|--------|--------|--------|--------|--------|
| Bit :           | 7      | 6      | 5      | 4      | 3      | 2      | 1      | 0      |
|                 | ICDRR7 | ICDRR6 | ICDRR5 | ICDRR4 | ICDRR3 | ICDRR2 | ICDRR1 | ICDRR0 |
| Initial value : | —      | —      | —      | —      | —      | —      | —      | —      |
| R/W :           | R      | R      | R      | R      | R      | R      | R      | R      |

### ICDRS

|                 |        |        |        |        |        |        |        |        |
|-----------------|--------|--------|--------|--------|--------|--------|--------|--------|
| Bit :           | 7      | 6      | 5      | 4      | 3      | 2      | 1      | 0      |
|                 | ICDRS7 | ICDRS6 | ICDRS5 | ICDRS4 | ICDRS3 | ICDRS2 | ICDRS1 | ICDRS0 |
| Initial value : | —      | —      | —      | —      | —      | —      | —      | —      |
| R/W :           | —      | —      | —      | —      | —      | —      | —      | —      |

### ICDRT

|                 |        |        |        |        |        |        |        |        |
|-----------------|--------|--------|--------|--------|--------|--------|--------|--------|
| Bit :           | 7      | 6      | 5      | 4      | 3      | 2      | 1      | 0      |
|                 | ICDRT7 | ICDRT6 | ICDRT5 | ICDRT4 | ICDRT3 | ICDRT2 | ICDRT1 | ICDRT0 |
| Initial value : | —      | —      | —      | —      | —      | —      | —      | —      |
| R/W :           | W      | W      | W      | W      | W      | W      | W      | W      |

### TDRE, RDRF (Internal flag)

|                 |      |      |
|-----------------|------|------|
| Bit :           | —    | —    |
|                 | TDRE | RDRF |
| Initial value : | 0    | 0    |
| R/W :           | —    | —    |

ICDR is an 8-bit readable/writable register that is used as a transmit data register when transmitting and a receive data register when receiving. ICDR is divided internally into a shift register (ICDRS), receive buffer (ICDRR), and transmit buffer (ICDRT). ICDRS cannot be read or written by the CPU, ICDRR is read-only, and ICDRT is write-only. Data transfers among the three registers are performed automatically in coordination with changes in the bus state, and affect the status of internal flags such as TDRE and RDRF.

After transmission/reception of one frame of data using ICDRS, if the I<sup>2</sup>C bus is in transmit mode and the next data is in ICDRT (the TDRE flag is 0), data is transferred automatically from ICDRT to ICDRS. After transmission/reception of one frame of data using ICDRS, if the I<sup>2</sup>C bus is in receive mode and no previous data remains in ICDRR (the RDRF flag is 0), data is transferred automatically from ICDRS to ICDRR.

If the number of bits in a frame, excluding the acknowledge bit, is less than 8, transmit data and receive data are stored differently. Transmit data should be written justified toward the MSB side when MLS = 0, and toward the LSB side when MLS = 1. Receive data bits read from the LSB side should be treated as valid when MLS = 0, and bits read from the MSB side when MLS = 1. ICDR is assigned to the same address as SARX, and can be written and read only when the ICE bit is set to 1 in ICCR.

The value of ICDR is undefined after a reset.

The TDRE and RDRF flags are set and cleared under the conditions shown below. Setting the TDRE and RDRF flags affects the status of the interrupt flags.

| <b>TDRE</b> | <b>Description</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
|-------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 0           | <p>The next transmit data is in ICDR (ICDRT), or transmission cannot be started (Initial value)</p> <p>[Clearing conditions]</p> <ol style="list-style-type: none"> <li>1. When transmit data is written in ICDR (ICDRT) in transmit mode (TRS = 1)</li> <li>2. When a stop condition is detected in the bus line state after a stop condition is issued with the I<sup>2</sup>C bus format or serial format selected</li> <li>3. When a stop condition is detected with the I<sup>2</sup>C bus format selected</li> <li>4. In receive mode (TRS = 0)<br/>(A 0 write to TRS during transfer is valid after reception of a frame containing an acknowledge bit)</li> </ol>                                 |
| 1           | <p>The next transmit data can be written in ICDR (ICDRT)</p> <p>[Setting conditions]</p> <ol style="list-style-type: none"> <li>1. In transmit mode (TRS = 1), when a start condition is detected in the bus line state after a start condition is issued in master mode with the I<sup>2</sup>C bus format or serial format selected</li> <li>2. In transmit mode (TRS = 1) when formatless transfer is selected</li> <li>3. When data is transferred from ICDRT to ICDRS<br/>(Data transfer from ICDRT to ICDRS when TRS = 1 and TDRE = 0, and ICDRS is empty)</li> <li>4. When a switch is made from receive mode (TRS = 0) to transmit mode (TRS = 1) after detection of a start condition</li> </ol> |

| <b>RDRF</b> | <b>Description</b>                                                                                                                                                                                                              |
|-------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 0           | <p>The data in ICDR (ICDRR) is invalid (Initial value)</p> <p>[Clearing condition]</p> <p>When ICDR (ICDRR) receive data is read in receive mode</p>                                                                            |
| 1           | <p>The ICDR (ICDRR) receive data can be read</p> <p>[Setting condition]</p> <p>When data is transferred from ICDRS to ICDRR<br/>(Data transfer from ICDRS to ICDRR in case of normal termination with TRS = 0 and RDRF = 0)</p> |

### 23.2.2 Slave Address Register (SAR)

|                 |      |      |      |      |      |      |      |     |
|-----------------|------|------|------|------|------|------|------|-----|
| Bit :           | 7    | 6    | 5    | 4    | 3    | 2    | 1    | 0   |
|                 | SVA6 | SVA5 | SVA4 | SVA3 | SVA2 | SVA1 | SVA0 | FS  |
| Initial value : | 0    | 0    | 0    | 0    | 0    | 0    | 0    | 0   |
| R/W :           | R/W  | R/W  | R/W  | R/W  | R/W  | R/W  | R/W  | R/W |

SAR is an 8-bit readable/writable register that stores the slave address and selects the communication format. When the chip is in slave mode (and the addressing format is selected), if the upper 7 bits of SAR match the upper 7 bits of the first frame received after a start condition, the chip operates as the slave device specified by the master device. SAR is assigned to the same address as ICMR, and can be written and read only when the ICE bit is cleared to 0 in ICCR. SAR is initialized to H'00 by a reset.

**Bits 7 to 1—Slave Address (SVA6 to SVA0):** Set a unique address in bits SVA6 to SVA0, differing from the addresses of other slave devices connected to the I<sup>2</sup>C bus.

**Bit 0—Format Select (FS):** Used together with the FSX bit in SARX and the SW bit in DDCSWR to select the communication format.

- I<sup>2</sup>C bus format: addressing format with acknowledge bit
- Synchronous serial format: non-addressing format without acknowledge bit, for master mode only
- Formatless transfer (only for channel 0): non-addressing with or without an acknowledge bit and without detection of start or stop condition, for slave mode only.

The FS bit also specifies whether or not SAR slave address recognition is performed in slave mode.

| DDCSWR | SAR   | SARX  | Operating Mode                                                                                                                                                  |
|--------|-------|-------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Bit 6  | Bit 0 | Bit 0 |                                                                                                                                                                 |
| SW     | FS    | FSX   |                                                                                                                                                                 |
| 0      | 0     | 0     | I <sup>2</sup> C bus format <ul style="list-style-type: none"><li>• SAR and SARX slave addresses recognized</li></ul>                                           |
|        |       | 1     | I <sup>2</sup> C bus format (Initial value) <ul style="list-style-type: none"><li>• SAR slave address recognized</li><li>• SARX slave address ignored</li></ul> |
|        | 1     | 0     | I <sup>2</sup> C bus format <ul style="list-style-type: none"><li>• SAR slave address ignored</li><li>• SARX slave address recognized</li></ul>                 |
|        |       | 1     | Synchronous serial format <ul style="list-style-type: none"><li>• SAR and SARX slave addresses ignored</li></ul>                                                |
|        |       | 0     | Formatless transfer (start and stop conditions are not detected)                                                                                                |
|        |       | 1     | Formatless transfer* (start and stop conditions are not detected)                                                                                               |
| 1      | 0     | 0     | Formatless transfer (start and stop conditions are not detected) <ul style="list-style-type: none"><li>• With acknowledge bit</li></ul>                         |
|        | 1     | 0     | Formatless transfer* (start and stop conditions are not detected) <ul style="list-style-type: none"><li>• Without acknowledge bit</li></ul>                     |

Note: \*Do not use this setting when automatically switching the mode from formatless transfer to I<sup>2</sup>C bus format by setting DDCSWR.

### 23.2.3 Second Slave Address Register (SARX)

|                 |       |       |       |       |       |       |       |     |
|-----------------|-------|-------|-------|-------|-------|-------|-------|-----|
| Bit :           | 7     | 6     | 5     | 4     | 3     | 2     | 1     | 0   |
|                 | SVAX6 | SVAX5 | SVAX4 | SVAX3 | SVAX2 | SVAX1 | SVAX0 | FSX |
| Initial value : | 0     | 0     | 0     | 0     | 0     | 0     | 0     | 1   |
| R/W :           | R/W   | R/W   | R/W   | R/W   | R/W   | R/W   | R/W   | R/W |

SARX is an 8-bit readable/writable register that stores the second slave address and selects the communication format. When the chip is in slave mode (and the addressing format is selected), if the upper 7 bits of SARX match the upper 7 bits of the first frame received after a start condition, the chip operates as the slave device specified by the master device. SARX is assigned to the same address as ICDR, and can be written and read only when the ICE bit is cleared to 0 in ICCR. SARX is initialized to H'01 by a reset and in hardware standby mode.

**Bits 7 to 1—Second Slave Address (SVAX6 to SVAX0):** Set a unique address in bits SVAX6 to SVAX0, differing from the addresses of other slave devices connected to the I<sup>2</sup>C bus.

**Bit 0—Format Select X (FSX):** Used together with the FSX bit in SARX and the SW bit in DDCSWR to select the communication format.

- I<sup>2</sup>C bus format: addressing format with acknowledge bit
- Synchronous serial format: non-addressing format without acknowledge bit, for master mode only
- Formatless transfer: non-addressing with or without an acknowledge bit and without detection of start or stop condition, for slave mode only.

The FSX bit also specifies whether or not SARX slave address recognition is performed in slave mode. For details, see the description of the FS bit in section 23.2.2, Slave Address Register (SAR).

23.2.4 I<sup>2</sup>C Bus Mode Register (ICMR)

|                 |     |      |      |      |      |     |     |     |
|-----------------|-----|------|------|------|------|-----|-----|-----|
| Bit :           | 7   | 6    | 5    | 4    | 3    | 2   | 1   | 0   |
|                 | MLS | WAIT | CKS2 | CKS1 | CKS0 | BC2 | BC1 | BC0 |
| Initial value : | 0   | 0    | 0    | 0    | 0    | 0   | 0   | 0   |
| R/W :           | R/W | R/W  | R/W  | R/W  | R/W  | R/W | R/W | R/W |

ICMR is an 8-bit readable/writable register that selects whether the MSB or LSB is transferred first, performs master mode wait control, and selects the master mode transfer clock frequency and the transfer bit count. ICMR is assigned to the same address as SAR. ICMR can be written and read only when the ICE bit is set to 1 in ICCR. ICMR is initialized to H'00 by a reset.

**Bit 7—MSB-First/LSB-First Select (MLS):** Selects whether data is transferred MSB-first or LSB-first.

If the number of bits in a frame, excluding the acknowledge bit, is less than 8, transmit data and receive data are stored differently. Transmit data should be written justified toward the MSB side when MLS = 0, and toward the LSB side when MLS = 1. Receive data bits read from the LSB side should be treated as valid when MLS = 0, and bits read from the MSB side when MLS = 1. Do not set this bit to 1 when the I<sup>2</sup>C bus format is used.

Bit 7

| MLS | Description               |
|-----|---------------------------|
| 0   | MSB-first (Initial value) |
| 1   | LSB-first                 |

**Bit 6—Wait Insertion Bit (WAIT):** Selects whether to insert a wait between the transfer of data and the acknowledge bit, in master mode with the I<sup>2</sup>C bus format. When WAIT is set to 1, after the fall of the clock for the final data bit, the IRIC flag is set to 1 in ICCR, and a wait state begins (with SCL at the low level). When the IRIC flag is cleared to 0 in ICCR, the wait ends and the acknowledge bit is transferred. If WAIT is cleared to 0, data and acknowledge bits are transferred consecutively with no wait inserted.

The IRIC flag in ICCR is set to 1 on completion of the acknowledge bit transfer, regardless of the WAIT setting.

The setting of this bit is invalid in slave mode.

#### Bit 6

| WAIT | Description                                                         |
|------|---------------------------------------------------------------------|
| 0    | Data and acknowledge bits transferred consecutively (Initial value) |
| 1    | Wait inserted between data and acknowledge bits                     |



**Bits 5 to 3—Transfer Clock Select (CKS2 to CKS0):** These bits, together with the IICX1 bit (for channel 1) or IICX0 bit (for channel 0) in STCR, select the serial clock frequency in master mode. They should be set according to the required transfer rate.

| STCR      |       |       |       |            | Transfer Rate          |                         |
|-----------|-------|-------|-------|------------|------------------------|-------------------------|
| Bits 5, 6 | Bit 5 | Bit 4 | Bit 3 |            |                        |                         |
| IICX      | CKS2  | CKS1  | CKS0  | Clock      | $\phi = 8 \text{ MHz}$ | $\phi = 10 \text{ MHz}$ |
| 0         | 0     | 0     | 0     | $\phi/28$  | 286 kHz                | 357 kHz                 |
|           |       |       | 1     | $\phi/40$  | 200 kHz                | 250 kHz                 |
|           |       | 1     | 0     | $\phi/48$  | 167 kHz                | 208 kHz                 |
|           |       |       | 1     | $\phi/64$  | 125 kHz                | 156 kHz                 |
|           | 1     | 0     | 0     | $\phi/80$  | 100 kHz                | 125 kHz                 |
|           |       |       | 1     | $\phi/100$ | 80.0 kHz               | 100 kHz                 |
|           |       | 1     | 0     | $\phi/112$ | 71.4 kHz               | 89.3 kHz                |
|           |       |       | 1     | $\phi/128$ | 62.5 kHz               | 78.1 kHz                |
| 1         | 0     | 0     | 0     | $\phi/56$  | 143 kHz                | 179 kHz                 |
|           |       |       | 1     | $\phi/80$  | 100 kHz                | 125 kHz                 |
|           |       | 1     | 0     | $\phi/96$  | 83.3 kHz               | 104 kHz                 |
|           |       |       | 1     | $\phi/128$ | 62.5 kHz               | 78.1 kHz                |
|           | 1     | 0     | 0     | $\phi/160$ | 50.0 kHz               | 62.5 kHz                |
|           |       |       | 1     | $\phi/200$ | 40.0 kHz               | 50.0 kHz                |
|           |       | 1     | 0     | $\phi/224$ | 35.7 kHz               | 44.6 kHz                |
|           |       |       | 1     | $\phi/256$ | 31.3 kHz               | 39.1 kHz                |

**Bits 2 to 0—Bit Counter (BC2 to BC0):** Bits BC2 to BC0 specify the number of bits to be transferred next. With the I<sup>2</sup>C bus format (when the FS bit in SAR or the FSX bit in SARX is 0), the data is transferred with one addition acknowledge bit. Bit BC2 to BC0 settings should be made during an interval between transfer frames. If bits BC2 to BC0 are set to a value other than 000, the setting should be made while the SCL line is low.

The bit counter is initialized to 000 by a reset and when a start condition is detected. The value returns to 000 at the end of a data transfer, including the acknowledge bit.

| Bit 2 | Bit 1 | Bit 0 | Bits/Frame                |                             |
|-------|-------|-------|---------------------------|-----------------------------|
| BC2   | BC1   | BC0   | Synchronous Serial Format | I <sup>2</sup> C Bus Format |
| 0     | 0     | 0     | 8                         | 9 (Initial value)           |
|       |       | 1     | 1                         | 2                           |
|       | 1     | 0     | 2                         | 3                           |
|       |       | 1     | 3                         | 4                           |
| 1     | 0     | 0     | 4                         | 5                           |
|       |       | 1     | 5                         | 6                           |
|       | 1     | 0     | 6                         | 7                           |
|       |       | 1     | 7                         | 8                           |

23.2.5 I<sup>2</sup>C Bus Control Register (ICCR)

|                 |     |      |     |     |      |      |        |     |
|-----------------|-----|------|-----|-----|------|------|--------|-----|
| Bit :           | 7   | 6    | 5   | 4   | 3    | 2    | 1      | 0   |
|                 | ICE | IEIC | MST | TRS | ACKE | BBSY | IRIC   | SCP |
| Initial value : | 0   | 0    | 0   | 0   | 0    | 0    | 0      | 1   |
| R/W :           | R/W | R/W  | R/W | R/W | R/W  | R/W  | R/(W)* | W   |

Note: \* Only 0 can be written to clear the flag.

ICCR is an 8-bit readable/writable register that enables or disables the I<sup>2</sup>C bus interface, enables or disables interrupts, selects master or slave mode and transmission or reception, enables or disables acknowledgement, confirms the I<sup>2</sup>C bus interface bus status, issues start/stop conditions, and performs interrupt flag confirmation.  
ICCR is initialized to H'01 by a reset.

**Bit 7—I<sup>2</sup>C Bus Interface Enable (ICE):** Selects whether or not the I<sup>2</sup>C bus interface is to be used. When ICE is set to 1, port pins function as SCL and SDA input/output pins and transfer operations are enabled. When ICE is cleared to 0, the IIC stops and its internal status is initialized. The SAR and SARX registers can be accessed when ICE is 0. The ICMR and ICDR registers can be accessed when ICE is 1.

Bit 7

| ICE | Description                                                                                                                                                                                        |
|-----|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 0   | I <sup>2</sup> C bus interface module disabled, with SCL and SDA signal pins set to port function<br>The internal status of the IIC is initialized<br>SAR and SARX can be accessed (Initial value) |
| 1   | I <sup>2</sup> C bus interface module enabled for transfer operations (pins SCL and SCA are driving the bus)<br>ICMR and ICDR can be accessed                                                      |

**Bit 6—I<sup>2</sup>C Bus Interface Interrupt Enable (IEIC):** Enables or disables interrupts from the I<sup>2</sup>C bus interface to the CPU.

Bit 6

| IEIC | Description                         |
|------|-------------------------------------|
| 0    | Interrupts disabled (Initial value) |
| 1    | Interrupts enabled                  |

**Bits 5 and 4—Master/Slave Select (MST) and Transmit/Receive Select (TRS):** MST selects whether the I<sup>2</sup>C bus interface operates in master mode or slave mode.

TRS selects whether the I<sup>2</sup>C bus interface operates in transmit mode or receive mode.

In master mode with the I<sup>2</sup>C bus format, when arbitration is lost, MST and TRS are both reset by hardware, causing a transition to slave receive mode. In slave receive mode with the addressing format (FS = 0 or FSX = 0), hardware automatically selects transmit or receive mode according to the R/W bit in the first frame after a start condition.

Modification of the TRS bit during transfer is deferred until transfer of the frame containing the acknowledge bit is completed, and the changeover is made after completion of the transfer.

MST and TRS select the operating mode as follows.

| Bit 5 | Bit 4 | Description                        |
|-------|-------|------------------------------------|
| MST   | TRS   |                                    |
| 0     | 0     | Slave receive mode (Initial value) |
|       | 1     | Slave transmit mode                |
| 1     | 0     | Master receive mode                |
|       | 1     | Master transmit mode               |

| Bit 5 | Description                                                                                                                                                                                               |
|-------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| MST   |                                                                                                                                                                                                           |
| 0     | Slave mode (Initial value)<br>[Clearing conditions]<br>1. When 0 is written by software<br>2. When bus arbitration is lost after transmission is started in I <sup>2</sup> C bus format master mode       |
| 1     | Master mode<br>[Setting conditions]<br>1. When 1 is written by software (in cases other than clearing condition 2)<br>2. When 1 is written in MST after reading MST = 0 (in case of clearing condition 2) |

**Bit 4**

| TRS | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
|-----|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 0   | Receive mode (Initial value)<br>[Clearing conditions]<br><ol style="list-style-type: none"> <li>1. When 0 is written by software (in cases other than setting condition 3)</li> <li>2. When 0 is written in TRS after reading TRS = 1 (in case of setting condition 3)</li> <li>3. When bus arbitration is lost after transmission is started in I<sup>2</sup>C bus format master mode</li> <li>4. When the SW bit in DDOSWR changes from 1 to 0</li> </ol> |
| 1   | Transmit mode<br>[Setting conditions]<br><ol style="list-style-type: none"> <li>1. When 1 is written by software (in cases other than clearing conditions 3)</li> <li>2. When 1 is written in TRS after reading TRS = 0 (in case of clearing conditions 3)</li> <li>3. When a 1 is received as the R/W bit of the first frame in I<sup>2</sup>C bus format slave mode</li> </ol>                                                                            |

**Bit 3—Acknowledge Bit Judgement Selection (ACKE):** Specifies whether the value of the acknowledge bit returned from the receiving device when using the I<sup>2</sup>C bus format is to be ignored and continuous transfer is performed, or transfer is to be aborted and error handling, etc., performed if the acknowledge bit is 1. When the ACKE bit is 0, the value of the received acknowledge bit is not indicated by the ACKB bit, which is always 0.

When the ACKE bit is 0, the TDRE, IRIC, and IRTR flags are set on completion of data transmission, regardless of the value of the acknowledge bit. When the ACKE bit is 1, the TDRE, IRIC, and IRTR flags are set on completion of data transmission when the acknowledge bit is 0, and the IRIC flag alone is set on completion of data transmission when the acknowledge bit is 1. Depending on the receiving device, the acknowledge bit may be significant, in indicating completion of processing of the received data, for instance, or may be fixed at 1 and have no significance.

**Bit 3**

| ACKE | Description                                                                                       |
|------|---------------------------------------------------------------------------------------------------|
| 0    | The value of the acknowledge bit is ignored, and continuous transfer is performed (Initial value) |
| 1    | If the acknowledge bit is 1, continuous transfer is interrupted                                   |

**Bit 2—Bus Busy (BBSY):** The BBSY flag can be read to check whether the I<sup>2</sup>C bus (SCL, SDA) is busy or free. In master mode, this bit is also used to issue start and stop conditions. A high-to-low transition of SDA while SCL is high is recognized as a start condition, setting BBSY to 1. A low-to-high transition of SDA while SCL is high is recognized as a stop condition, clearing BBSY to 0.

To issue a start condition, use a MOV instruction to write 1 in BBSY and 0 in SCP. A retransmit start condition is issued in the same way. To issue a stop condition, use a MOV instruction to write 0 in BBSY and 0 in SCP.

It is not possible to write to BBSY in slave mode; the I<sup>2</sup>C bus interface must be set to master transmit mode before issuing a start condition. MST and TRS should both be set to 1 before writing 1 in BBSY and 0 in SCP.

## Bit 2

| BBSY | Description                                                                              |
|------|------------------------------------------------------------------------------------------|
| 0    | Bus is free<br>[Clearing condition]<br>When a stop condition is detected (Initial value) |
| 1    | Bus is busy<br>[Setting condition]<br>When a start condition is detected                 |

**Bit 1—I<sup>2</sup>C Bus Interface Interrupt Request Flag (IRIC):** Indicates that the I<sup>2</sup>C bus interface has issued an interrupt request to the CPU. IRIC is set to 1 at the end of a data transfer, when a slave address or general call address is detected in slave receive mode, when bus arbitration is lost in master transmit mode, and when a stop condition is detected. IRIC is set at different times depending on the FS bit in SAR and the WAIT bit in ICMR. See section 23.3.6, IRIC Setting Timing and SCL Control. The conditions under which IRIC is set also differ depending on the setting of the ACKIE bit in ICCR.

IRIC is cleared by reading IRIC after it has been set to 1, then writing 0 in IRIC.

When the DTC is used, IRIC is cleared automatically and transfer can be performed continuously without CPU intervention.

**Bit 1**

| IRIC | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
|------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 0    | Waiting for transfer, or transfer in progress (Initial value)<br>[Clearing condition]<br>When 0 is written in IRIC after reading IRIC = 1                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| (1)  | Interrupt requested<br>[Setting conditions] <ul style="list-style-type: none"><li>• I<sup>2</sup>C bus format master mode<ol style="list-style-type: none"><li>1. When a start condition is detected in the bus line state after a start condition is issued<br/>(when the TDRE flag is set to 1 because of first frame transmission)</li><li>2. When a wait is inserted between the data and acknowledge bit when WAIT = 1</li><li>3. At the end of data transfer<br/>(at the rise of the 9th transmit/receive clock pulse, or at the fall of the 8th transmit/receive clock pulse when using wait insertion)</li><li>4. When a slave address is received after bus arbitration is lost<br/>(when the AL flag is set to 1)</li><li>5. When 1 is received as the acknowledge bit when the ACKE bit is 1<br/>(when the ACKB bit is set to 1)</li></ol></li><li>• I<sup>2</sup>C bus format slave mode<ol style="list-style-type: none"><li>1. When the slave address (SVA, SVAX) matches<br/>(when the AAS and AASX flags are set to 1)<br/>and at the end of data transfer up to the subsequent retransmission start condition or stop condition detection<br/>(when the TDRE or RDRF flag is set to 1)</li><li>2. When the general call address is detected<br/>(when FS = 0 and the ADZ flag is set to 1)<br/>and at the end of data transfer up to the subsequent retransmission start condition or stop condition detection<br/>(when the TDRE or RDRF flag is set to 1)</li><li>3. When 1 is received as the acknowledge bit when the ACKE bit is 1<br/>(when the ACKB bit is set to 1)</li><li>4. When a stop condition is detected<br/>(when the STOP or ESTP flag is set to 1)</li></ol></li><li>• Synchronous serial format<ol style="list-style-type: none"><li>1. At the end of data transfer<br/>(when the TDRE or RDRF flag is set to 1)</li><li>2. When a start condition is detected with serial format selected</li></ol></li><li>• When a condition, other than the above, that sets the TDRE or RDRF flag to 1 is detected</li></ul> |

When, with the I<sup>2</sup>C bus format selected, IRIC is set to 1 and an interrupt is generated, other flags must be checked in order to identify the source that set IRIC to 1. Although each source has a corresponding flag, caution is needed at the end of a transfer.

When the TDRE or RDRF internal flag is set, the readable IRTR flag may or may not be set. The IRTR flag (the DTC start request flag) is not set at the end of a data transfer up to detection of a retransmission start condition or stop condition after a slave address (SVA) or general call address match in I<sup>2</sup>C bus format slave mode.

Even when the IRIC flag and IRTR flag are set, the TDRE or RDRF internal flag may not be set. The IRIC and IRTR flags are not cleared at the end of the specified number of transfers in continuous transfer using the DTC. The TDRE or RDRF flag is cleared, however, since the specified number of ICDR reads or writes have been completed.

Table 23.3 shows the relationship between the flags and the transfer states.

Note: \* This LSI does not incorporate DTC.



**Table 23.3 Flags and Transfer States**

| MST | TRS | BBSY | ESTP | STOP | IRTR | AASX | AL | AAS | ADZ | ACKB | State                                                     |
|-----|-----|------|------|------|------|------|----|-----|-----|------|-----------------------------------------------------------|
| 1/0 | 1/0 | 0    | 0    | 0    | 0    | 0    | 0  | 0   | 0   | 0    | Idle state (flag clearing required)                       |
| 1   | 1   | 0    | 0    | 0    | 0    | 0    | 0  | 0   | 0   | 0    | Start condition issuance                                  |
| 1   | 1   | 1    | 0    | 0    | 1    | 0    | 0  | 0   | 0   | 0    | Start condition established                               |
| 1   | 1/0 | 1    | 0    | 0    | 0    | 0    | 0  | 0   | 0   | 0/1  | Master mode wait                                          |
| 1   | 1/0 | 1    | 0    | 0    | 1    | 0    | 0  | 0   | 0   | 0/1  | Master mode transmit/receive end                          |
| 0   | 0   | 1    | 0    | 0    | 0    | 1/0  | 1  | 1/0 | 1/0 | 0    | Arbitration lost                                          |
| 0   | 0   | 1    | 0    | 0    | 0    | 0    | 0  | 1   | 0   | 0    | SAR match by first frame in slave mode                    |
| 0   | 0   | 1    | 0    | 0    | 0    | 0    | 0  | 1   | 1   | 0    | General call address match                                |
| 0   | 0   | 1    | 0    | 0    | 0    | 1    | 0  | 0   | 0   | 0    | SARX match                                                |
| 0   | 1/0 | 1    | 0    | 0    | 0    | 0    | 0  | 0   | 0   | 0/1  | Slave mode transmit/receive end (except after SARX match) |
| 0   | 1/0 | 1    | 0    | 0    | 1    | 1    | 0  | 0   | 0   | 0    | Slave mode transmit/receive end (after SARX match)        |
| 0   | 1   | 1    | 0    | 0    | 0    | 1    | 0  | 0   | 0   | 1    |                                                           |
| 0   | 1/0 | 0    | 1/0  | 1/0  | 0    | 0    | 0  | 0   | 0   | 0/1  | Stop condition detected                                   |

**Bit 0—Start Condition/Stop Condition Prohibit (SCP):** Controls the issuing of start and stop conditions in master mode. To issue a start condition, write 1 in BBSY and 0 in SCP. A retransmit start condition is issued in the same way. To issue a stop condition, write 0 in BBSY and 0 in SCP. This bit is always read as 1. If 1 is written, the data is not stored.

#### Bit 0

| SCP | Description                                                                   |
|-----|-------------------------------------------------------------------------------|
| 0   | Writing 0 issues a start or stop condition, in combination with the BBSY flag |
| 1   | Reading always returns a value of 1 (Initial value)<br>Writing is ignored     |

23.2.6 I<sup>2</sup>C Bus Status Register (ICSR)

|                 |        |        |        |        |        |        |        |      |
|-----------------|--------|--------|--------|--------|--------|--------|--------|------|
| Bit :           | 7      | 6      | 5      | 4      | 3      | 2      | 1      | 0    |
|                 | ESTP   | STOP   | IRTR   | AASX   | AL     | AAS    | ADZ    | ACKB |
| Initial value : | 0      | 0      | 0      | 0      | 0      | 0      | 0      | 0    |
| R/W :           | R/(W)* | R/(W)* | R/(W)* | R/(W)* | R/(W)* | R/(W)* | R/(W)* | R/W  |

Note: \* Only 0 can be written to clear the flag.

ICSR is an 8-bit readable/writable register that performs flag confirmation and acknowledge confirmation and control.

ICSR is initialized to H'00 by a reset.

**Bit 7—Error Stop Condition Detection Flag (ESTP):** Indicates that a stop condition has been detected during frame transfer in I<sup>2</sup>C bus format slave mode.

Bit 7

| ESTP | Description                                                                                                                                                                                  |
|------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 0    | No error stop condition (Initial value)<br>[Clearing conditions]<br>1. When 0 is written in ESTP after reading ESTP = 1<br>2. When the IRIC flag is cleared to 0                             |
| 1    | • In I <sup>2</sup> C bus format slave mode: Error stop condition detected<br>[Setting condition]<br>When a stop condition is detected during frame transfer<br>• In other modes: No meaning |

**Bit 6—Normal Stop Condition Detection Flag (STOP):** Indicates that a stop condition has been detected after completion of frame transfer in I<sup>2</sup>C bus format slave mode.

#### Bit 6

| STOP | Description                                                                                                                                                                                                                                                                                          |
|------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 0    | No normal stop condition (Initial value)<br>[Clearing conditions]<br>1. When 0 is written in STOP after reading STOP = 1<br>2. When the IRIC flag is cleared to 0                                                                                                                                    |
| 1    | <ul style="list-style-type: none"> <li>In I<sup>2</sup>C bus format slave mode: Error stop condition detected</li> </ul> [Setting condition]<br>When a stop condition is detected after completion of frame transfer<br><ul style="list-style-type: none"> <li>In other modes: No meaning</li> </ul> |

#### Bit 5—I<sup>2</sup>C Bus Interface Continuous Transmission/Reception Interrupt Request Flag

**(IRTR):** Indicates that the I<sup>2</sup>C bus interface has issued an interrupt request to the CPU, and the source is completion of reception/transmission of one frame in continuous transmission/reception for which DTC activation is possible. When the IRTR flag is set to 1, the IRIC flag is also set to 1 at the same time.

IRTR flag setting is performed when the TDRE or RDRF flag is set to 1. IRTR is cleared by reading IRTR after it has been set to 1, then writing 0 in IRTR. IRTR is also cleared automatically when the IRIC flag is cleared to 0.

Note: \* This LSI does not incorporate DTC.

#### Bit 5

| IRTR | Description                                                                                                                                                                                                                                                             |
|------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 0    | Waiting for transfer, or transfer in progress (Initial value)<br>[Clearing conditions]<br>1. When 0 is written in IRTR after reading IRTR = 1<br>2. When the IRIC flag is cleared to 0                                                                                  |
| 1    | Continuous transfer state<br>[Setting conditions]<br><ul style="list-style-type: none"> <li>In I<sup>2</sup>C bus interface slave mode: When the TDRE or RDRF flag is set to 1 when AASX = 1</li> <li>In other modes: When the TDRE or RDRF flag is set to 1</li> </ul> |

**Bit 4—Second Slave Address Recognition Flag (AASX):** In I<sup>2</sup>C bus format slave receive mode, this flag is set to 1 if the first frame following a start condition matches bits SVAX6 to SVAX0 in SARX.

AASX is cleared by reading AASX after it has been set to 1, then writing 0 in AASX. AASX is also cleared automatically when a start condition is detected.

#### Bit 4

| AASX | Description                                                                                                                                                                                       |
|------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 0    | Second slave address not recognized (Initial value)<br>[Clearing conditions]<br>1. When 0 is written in AASX after reading AASX = 1<br>2. When a start condition is detected<br>3. In master mode |
| 1    | Second slave address recognized<br>[Setting condition]<br>When the second slave address is detected in slave receive mode while FSX=0                                                             |

**Bit 3—Arbitration Lost (AL):** This flag indicates that arbitration was lost in master mode. The I<sup>2</sup>C bus interface monitors the bus. When two or more master devices attempt to seize the bus at nearly the same time, if the I<sup>2</sup>C bus interface detects data differing from the data it sent, it sets AL to 1 to indicate that the bus has been taken by another master.

AL is cleared by reading AL after it has been set to 1, then writing 0 in AL. In addition, AL is reset automatically by write access to ICDR in transmit mode, or read access to ICDR in receive mode.

#### Bit 3

| AL | Description                                                                                                                                                                                                          |
|----|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 0  | Bus arbitration won (Initial value)<br>[Clearing conditions]<br>1. When ICDR data is written (transmit mode) or read (receive mode)<br>2. When 0 is written in AL after reading AL = 1                               |
| 1  | Arbitration lost<br>[Setting conditions]<br>1. If the internal SDA and SDA pin disagree at the rise of SCL in master transmit mode<br>2. If the internal SCL line is high at the fall of SCL in master transmit mode |

**Bit 2—Slave Address Recognition Flag (AAS):** In I<sup>2</sup>C bus format slave receive mode, this flag is set to 1 if the first frame following a start condition matches bits SVA6 to SVA0 in SAR, or if the general call address (H'00) is detected.

AAS is cleared by reading AAS after it has been set to 1, then writing 0 in AAS. In addition, AAS is reset automatically by write access to ICDR in transmit mode, or read access to ICDR in receive mode.

#### Bit 2

| AAS | Description                                                                                                                                                                                                                                    |
|-----|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 0   | Slave address or general call address not recognized (Initial value)<br>[Clearing conditions]<br>1. When ICDR data is written (transmit mode) or read (receive mode)<br>2. When 0 is written in AAS after reading AAS = 1<br>3. In master mode |
| 1   | Slave address or general call address recognized<br>[Setting condition]<br>When the slave address or general call address is detected when FS = 0 in slave receive mode                                                                        |

**Bit 1—General Call Address Recognition Flag (ADZ):** In I<sup>2</sup>C bus format slave receive mode, this flag is set to 1 if the first frame following a start condition is the general call address (H'00). ADZ is cleared by reading ADZ after it has been set to 1, then writing 0 in ADZ. In addition, ADZ is reset automatically by write access to ICDR in transmit mode, or read access to ICDR in receive mode.

#### Bit 1

| ADZ | Description                                                                                                                                                                                                                   |
|-----|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 0   | General call address not recognized (Initial value)<br>[Clearing conditions]<br>1. When ICDR data is written (transmit mode) or read (receive mode)<br>2. When 0 is written in ADZ after reading ADZ = 1<br>3. In master mode |
| 1   | General call address recognized<br>[Setting condition]<br>If the general call address is detected when FSX = 0 or FS = 0 is selected in the slave receive mode.                                                               |

**Bit 0—Acknowledge Bit (ACKB):** Stores acknowledge data. In transmit mode, after the receiving device receives data, it returns acknowledge data, and this data is loaded into ACKB. In receive mode, after data has been received, the acknowledge data set in this bit is sent to the transmitting device.

When this bit is read, in transmission (when TRS = 1), the value loaded from the bus line (returned by the receiving device) is read. In reception (when TRS = 0), the value set by internal software is read.

**Bit 0**

| ACKB | Description                                                                                                                                                          |
|------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 0    | Receive mode: 0 is output at acknowledge output timing (Initial value)<br>Transmit mode: Indicates that the receiving device has acknowledged the data (signal is 0) |
| 1    | Receive mode: 1 is output at acknowledge output timing<br>Transmit mode: Indicates that the receiving device has not acknowledged the data (signal is 1)             |

**23.2.7 Serial/Timer Control Register (STCR)**

|                 |   |       |       |   |       |        |   |   |
|-----------------|---|-------|-------|---|-------|--------|---|---|
| Bit :           | 7 | 6     | 5     | 4 | 3     | 2      | 1 | 0 |
|                 | — | IICX1 | IICX0 | — | FLSHE | OSROME | — | — |
| Initial value : | 0 | 0     | 0     | 0 | 0     | 0      | 0 | 0 |
| R/W :           | — | R/W   | R/W   | — | R/W   | R/W    | — | — |

STCR is an 8-bit readable/writable register that controls the IIC operating mode.  
STCR is initialized to H'00 by a reset.

**Bit 7—Reserved:** This bit cannot be modified and is always read as 0.

**Bits 6 and 5—I<sup>2</sup>C Transfer Select 1, 0 (IICX1, IICX0):** These bits, together with bits CKS2 to CKS0 in ICMR of IIC, select the transfer rate in master mode. For details, see section 23.2.4, I<sup>2</sup>C Bus Mode Register (ICMR).

**Bit 3—Flash Memory Control Resister Enable (FLSHE):** This bit selects the control resister of the flash memory. For details, refer to section 7.3.5, Serial Timer Control Resister (STCR).

**Bit 2—OSD ROM Enable (OSROME):** This bit controls the OSD ROM. For details, refer to section 7, ROM.

**Bits 4, 1, and 0—Reserved:** These bits cannot be modified and are always read as 0.

## 23.2.8 DDC Switch Register (DDCSWR)

|                 |       |      |      |         |      |      |      |      |
|-----------------|-------|------|------|---------|------|------|------|------|
| Bit :           | 7     | 6    | 5    | 4       | 3    | 2    | 1    | 0    |
|                 | SWE*3 | SW*3 | IE*3 | IF*3    | CLR3 | CLR2 | CLR1 | CLR0 |
| Initial value : | 0     | 0    | 0    | 0       | 1    | 1    | 1    | 1    |
| R/W :           | R/W   | R/W  | R/W  | R/(W)*1 | W*2  | W*2  | W*2  | W*2  |

- Notes: 1. Only 0 can be written to clear the flag.  
2. Always read as 1.  
3. These bits are not provided (incorporated in) for the H8S/2197S and H8S/2196S.

DDCSWR is an 8-bit read/write register that controls automatic format switching for IIC channel 0 and IIC internal latch clearing. DDCSWR is initialized to H'0F by a reset or in hardware standby mode.

**Bit 7—DDC Mode Switch Enable (SWE):** Enables or disables automatic switching from formatless transfer to I<sup>2</sup>C bus format transfer for IIC channel 0.

### Bit 7

| SWE | Description                                                                                                                         |
|-----|-------------------------------------------------------------------------------------------------------------------------------------|
| 0   | Disables automatic switching from formatless transfer to I <sup>2</sup> C bus format transfer for IIC channel 0.<br>(Initial value) |
| 1   | Enables automatic switching from formatless transfer to I <sup>2</sup> C bus format transfer for IIC channel 0.                     |

**Bit 6—DDC Mode Switch (SW):** Selects formatless transfer or I<sup>2</sup>C bus format transfer for IIC channel 0.

### Bit 6

| SW | Description                                                                                                                                                                                        |
|----|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 0  | I <sup>2</sup> C bus format is selected for IIC channel 0.<br>[Clearing conditions]<br>1. When 0 is written by software<br>2. When an SCL falling edge is detected when SWE = 1<br>(Initial value) |
| 1  | Formatless transfer is selected for IIC channel 0.<br>[Setting condition]<br>When 1 is written after SW = 0 is read                                                                                |

**Bit 5—DDC Mode Switch Interrupt Enable Bit (IE):** Enables or disables an interrupt request to the CPU when the format for IIC channel 0 is automatically switched.

#### Bit 5

| IE | Description                                                         |
|----|---------------------------------------------------------------------|
| 0  | Disables an interrupt at automatic format switching (Initial value) |
| 1  | Enables an interrupt at automatic format switching                  |

**Bit 4—DDC Mode Switch Interrupt Flag (IF):** Indicates the interrupt request to the CPU when the format for IIC channel 0 is automatically switched.

#### Bit 4

| IF | Description                                                                                                        |
|----|--------------------------------------------------------------------------------------------------------------------|
| 0  | Interrupt has not been requested (Initial value)<br>[Clearing condition]<br>When 0 is written after IF = 1 is read |
| 1  | Interrupt has been requested<br>[Setting condition]<br>When an SCL falling edge is detected when SWE = 1           |

**Bits 3 to 0—IIC Clear 3 to 0 (CLR3 to CLR0):** Control the IIC0 and IIC1 initialization. These are write-only bits and are always read as 1.

Writing to these bits generates a clearing signal for the internal latch circuit which initializes the IIC status.


The data written to these bits are not held. When initializing the IIC, be sure to use the MOV instruction to write to all the CLR3 to CLR0 bits at the same time; do not use bit manipulation instructions such as BCLR.

When reinitializing the module status, the CLR3 to CLR0 bits must be rewritten.



| Bit 3 | Bit 2 | Bit 1 | Bit 0 |                                         |
|-------|-------|-------|-------|-----------------------------------------|
| CLR3  | CLR2  | CLR1  | CLR0  | Description                             |
| 0     | 0     | —     | —     | The setting is invalid                  |
|       |       |       | 0     | The setting is invalid                  |
|       | 1     | 0     | 1     | IIC0 internal latch cleared             |
|       |       |       | 0     | IIC1 internal latch cleared             |
|       |       |       | 1     | IIC 0 and IIC1 internal latches cleared |
| 1     | —     | —     | —     | This setting is invalid                 |

23.2.9 Module Stop Control Register (MSTPCR)

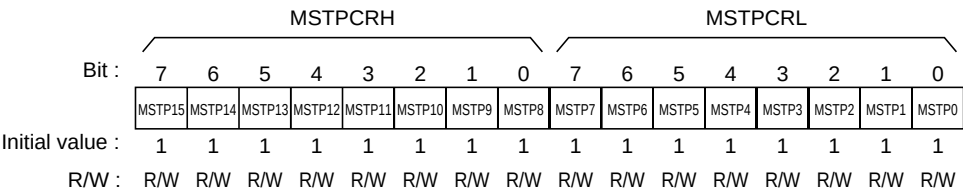

MSTPCR comprises two 8-bit readable/writable registers, and is used to perform module stop mode control.

When the corresponding bit in MSTPCR is set to 1, operation of the corresponding IIC channel is halted at the end of the bus cycle, and a transition is made to module stop mode. For details, see section 4.5, Module Stop Mode.

MSTPCR is initialized to H'FFFF by a reset. It is not initialized in standby mode.

**MSTPCRL Bit 7—Module Stop (MSTP7):** Specifies the module stop mode for IIC channel 0.

MSTPCRL

Bit 7

| MSTP7 | Description                                               |
|-------|-----------------------------------------------------------|
| 0     | Module stop mode for IIC channel 0 is cleared             |
| 1     | Module stop mode for IIC channel 0 is set (Initial value) |

**MSTPCRL Bit 6—Module Stop (MSTP6):** Specifies the module stop mode for IIC channel 1.

MSTPCRL

Bit 6

| MSTP6 | Description                                               |
|-------|-----------------------------------------------------------|
| 0     | Module stop mode for IIC channel 1 is cleared             |
| 1     | Module stop mode for IIC channel 1 is set (Initial value) |

# 23.3 Operation

## 23.3.1 I<sup>2</sup>C Bus Data Format

The I<sup>2</sup>C bus interface has serial and I<sup>2</sup>C bus formats.

The I<sup>2</sup>C bus formats are addressing formats with an acknowledge bit. These are shown in figures 23.3(1) and (2). The first frame following a start condition always consists of 8 bits. Formatless transfer can be selected only for IIC channel 0. The formatless transfer data is shown in figure 23.3 (3).

The serial format is a non-addressing format with no acknowledge bit. This is shown in figure 23.4.

Figure 23.5 shows the I<sup>2</sup>C bus timing.

The symbols used in figures 23.3 to 23.5 are explained in table 23.4.

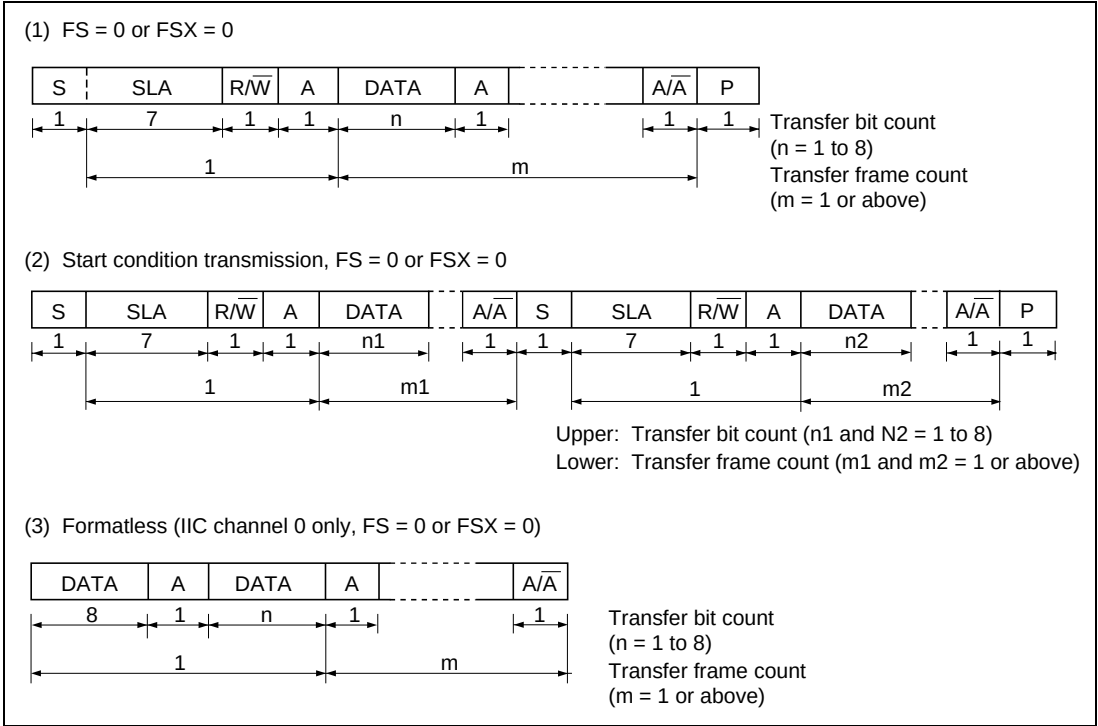


Figure 23.3 I<sup>2</sup>C Bus Data Formats (I<sup>2</sup>C Bus Formats)

FS = 1 and FSX = 1

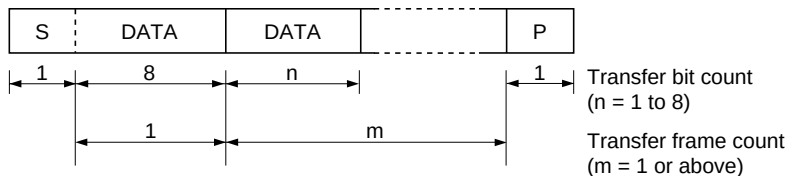


**Figure 23.4 I²C Bus Data Format (Serial Format)**

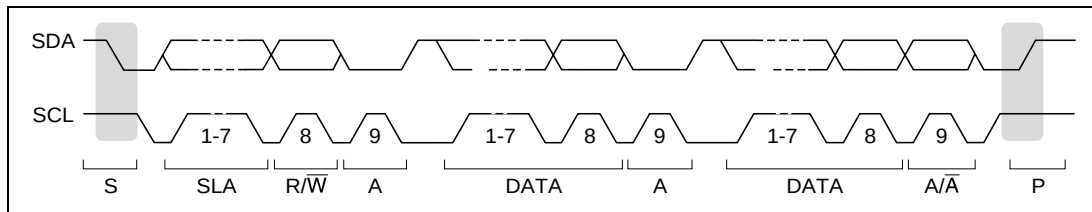


**Figure 23.5 I²C Bus Timing**

**Table 23.4 I²C Bus Data Format Symbols**

| Symbol            | Description                                                                                                                                                                                 |
|-------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| S                 | Start condition. The master device drives SDA from high to low while SCL is high                                                                                                            |
| SLA               | Slave address, by which the master device selects a slave device                                                                                                                            |
| R/ $\overline{W}$ | Indicates the direction of data transfer: from the slave device to the master device when R/ $\overline{W}$ is 1, or from the master device to the slave device when R/ $\overline{W}$ is 0 |
| A                 | Acknowledge. The receiving device (the slave in master transmit mode, or the master in master receive mode) drives SDA low to acknowledge a transfer                                        |
| DATA              | Transferred data. The bit length is set by bits BC2 to BC0 in ICMR. The MSB-first or LSB-first format is selected by bit MLS in ICMR                                                        |
| P                 | Stop condition. The master device drives SDA from low to high while SCL is high                                                                                                             |

### 23.3.2 Master Transmit Operation

In I²C bus format master transmit mode, the master device outputs the transmit clock and transmit data, and the slave device returns an acknowledge signal. The transmission procedure and operations synchronize with the ICDR writing are described below.

- [1] Set bit ICE in ICCR to 1. Set bits MLS, WAIT, and CKS2 to CKS0 in ICMR, and bit IICX in STCR, according to the operating mode.
- [2] Read the BBSY flag in ICCR to confirm that the bus is free.
- [3] Set bits MST and TRS to 1 in ICCR to select master transmit mode.

- [4] Write 1 to BBSY and 0 to SCP. This changes SDA from high to low when SCL is high, and generates the start condition.
- [5] Then IRIC and IRTR flags are set to 1. If the IEIC bit in ICCR has been set to 1, an interrupt request is sent to the CPU.
- [6] Write the data (slave address +  $R/\overline{W}$ ) to ICDR. After the start condition instruction has been issued and the start condition has been generated, write data to ICDR. If this procedure is not followed, data may not be output correctly. With the I<sup>2</sup>C bus format (when the FS bit in SAR or the FSX bit in SARX is 0), the first frame data following the start condition indicates the 7-bit slave address and transmit/receive direction. As indicating the end of the transfer, and so the IRIC flag is cleared to 0. After writing ICDR, clear IRIC immediately not to execute other interrupt handling routine. If one frame of data has been transmitted before the IRIC clearing, it can not be determine the end of transmission. The master device sequentially sends the transmission clock and the data written to ICDR using the timing shown in figure 23.6. The selected slave device (i.e. the slave device with the matching slave address) drives SDA low at the 9th transmit clock pulse and returns an acknowledge signal.
- [7] When one frame of data has been transmitted, the IRIC flag is set to 1 at the rise of the 9th transmit clock pulse. After one frame has been transmitted SCL is automatically fixed low in synchronization with the internal clock until the next transmit data is written.
- [8] Read the ACKB bit in ICSR to confirm that ACKB is cleared to 0. When the slave device has not acknowledged (ACKB bit is 1), operate the step [12] to end transmission, and retry the transmit operation.
- [9] Write the transmit data to ICDR. As indicating the end of the transfer, and so the IRIC flag is cleared to 0. After writing ICDR, clear IRIC immediately not to execute other interrupt handling routine. The master device sequentially sends the transmission clock and the data written to ICDR. Transmission of the next frame is performed in synchronization with the internal clock.
- [10] When one frame of data has been transmitted, the IRIC flag is set to 1 at the rise of the 9th transmit clock pulse. After one frame has been transmitted SCL is automatically fixed low in synchronization with the internal clock until the next transmit data is written.
- [11] Read the ACKB bit in ICSR and confirm ACKB is cleared to 0. When there is data to be transmitted, go to the step [6] to continue next transmission. When the slave device has not acknowledged (ACKB bit is set to 1), operate the step [12] to end transmission.
- [12] Clear the IRIC flag to 0. And write 0 to BBSY and SCP in ICCR. This changes SDA from low to high when SCL is high, and generates the stop condition.

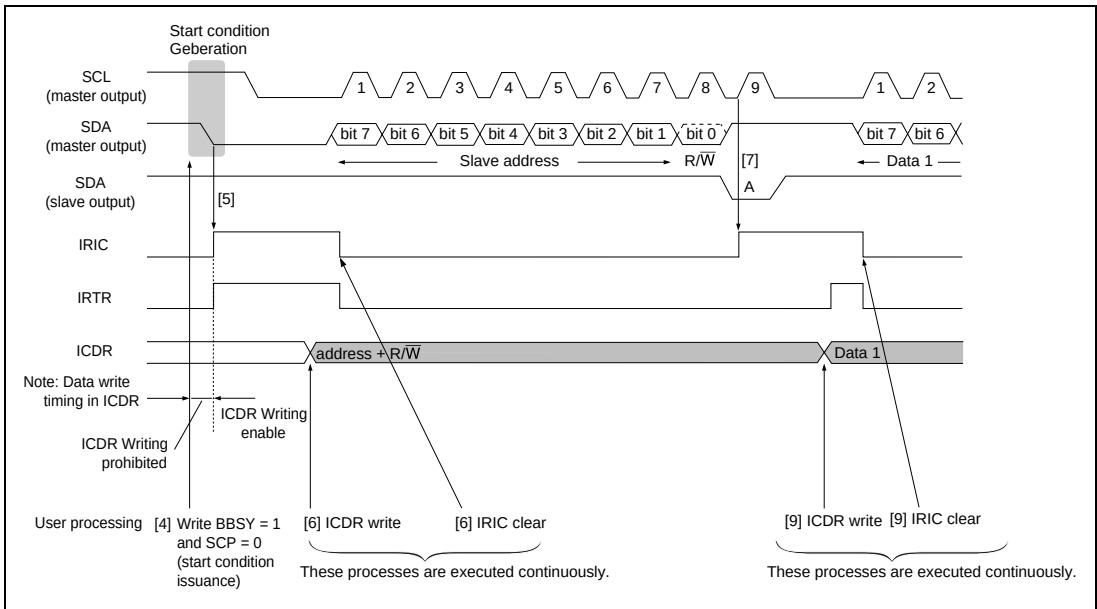



**Figure 23.6 Example of Master Transmit Mode Operation Timing (MLS = WAIT = 0)**

### 23.3.3 Master Receive Operation

In master receive mode, the master device outputs the receive clock, receives data, and returns an acknowledge signal. The slave device transmits data. I<sup>2</sup>C bus interface module consists of the data buffers of ICDRR and ICDRS, so data can be received continuously in master receive mode. For this construction, when stop condition issuing timing delayed, it may occurs the internal contention between stop condition issuance and SCL clock output for next data receiving, and then the extra SCL clock would be outputted automatically or the SCL line would be held to low. And for I<sup>2</sup>C bus interface system, the acknowledge bit must be set to 1 at the last data receiving, so the change timing of ACKB bit in ICSR should be controlled by software. To take measures against these problems, the wait function should be used in master receive mode. The reception procedure and operations with the wait function in master receive mode are described below.

- [1] Clear the TRS bit in ICCR to 0 to switch from transmit mode to receive mode, and set the WAIT bit in ICMR to 1. Also clear the ACKB bit in ICSR to 0 (acknowledge data setting).
- [2] When ICDR is read (dummy data read), reception is started, and the receive clock is output, and data received, in synchronization with the internal clock. In order to detect wait operation, set the IRIC flag in ICCR must be cleared to 0. After reading ICDR, clear IRIC immediately not to execute other interrupt handling routine. If one frame of data has been received before the IRIC clearing, it can not be determine the end of reception.
- [3] The IRIC flag is set to 1 at the fall of the 8th receive clock pulse. If the IEIC bit in ICCR has been set to 1, an interrupt request is sent to the CPU. SCL is automatically fixed low in synchronization with the internal clock until the IRIC flag clearing. If the first frame is the last receive data, execute step [10] to halt reception.
- [4] Clear the IRIC flag to release from the Wait State. The master device outputs the 9th clock and drives SDA at the 9th receive clock pulse to return an acknowledge signal.
- [5] When one frame of data has been received, the IRIC flag in ICCR and the IRTR flag in ICSR are set to 1 at the rise of the 9th receive clock pulse. The master device outputs SCL clock to receive next data.
- [6] Read ICDR.
- [7] Clear the IRIC flag to detect next wait operation. From clearing of the IRIC flag to negation of a wait as described in step [4] (and [9]) to clearing of the IRIC flag as described in steps [5], [6], and [7], must be performed within the time taken to transfer one byte.
- [8] The IRIC flags set to 1 at the fall of the 8th receive clock pulse. SCL is automatically fixed low in synchronization with the internal clock until the IRIC flag clearing. If this frame is the last receive data, execute step [10] to halt reception.
- [9] Clear the IRIC flag in ICCR to cancel wait operation. The master device outputs the 9th clock and drives SDA at the 9th receive clock pulse to return an acknowledge signal. Data can be received continuously by repeating step [5] to [9].
- [10] Set the ACKB bit in ICSR to 1 so as to return “No acknowledge” data. Also set the TRS bit to 1 to switch from receive mode to transmit mode.

- [11] Clear IRIC flag to 0 to release from the Wait State.
- [12] When one frame of data has been received, the IRIC flag is set to 1 at the rise of the 9th receive clock pulse.
- [13] Clear the WAIT bit to 0 to switch from wait mode to no wait mode. Read ICDR and the IRIC flag to 0. Clearing of the IRIC flag should be after the WAIT = 0.
- [14] Clear the BBSY bit and SCP bit to 0. This changes SDA from low to high when SCL is high, and generates the stop condition.

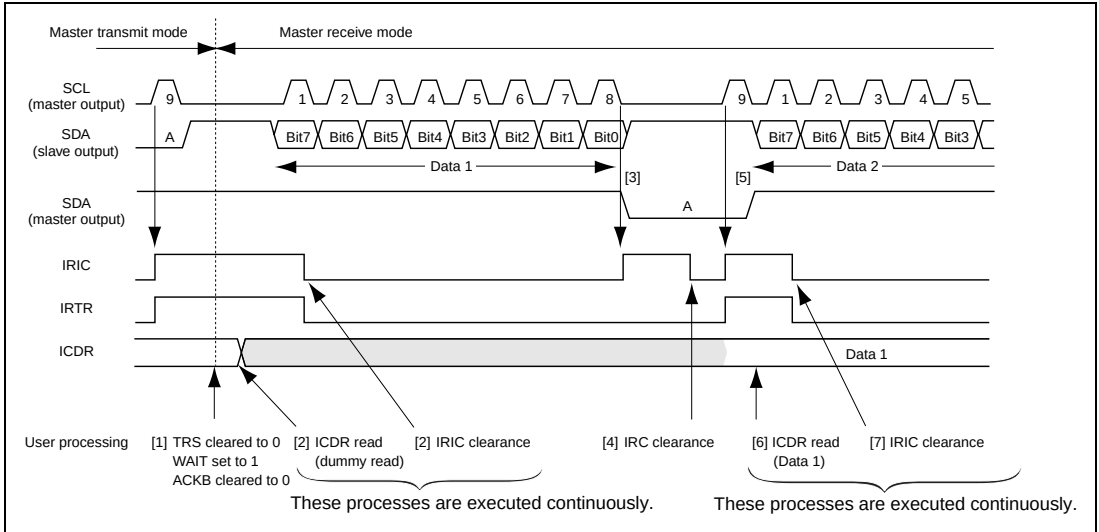



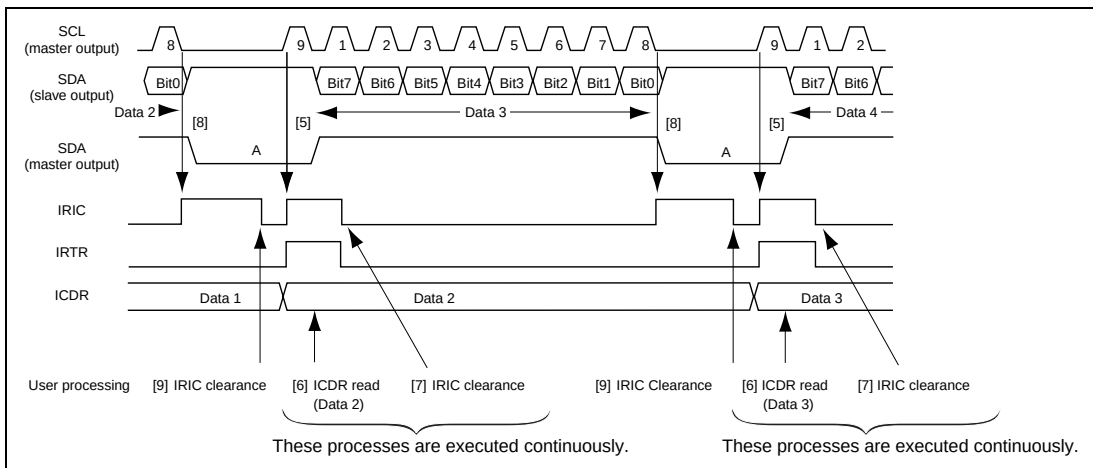


**Figure 23.8 Example of Master Receive Mode Operation Timing**  
**(MLS = ACKB = 0, WAIT = 1) continued**

### 23.3.4 Slave Receive Operation

In slave receive mode, the master device outputs the transmit clock and transmit data, and the slave device returns an acknowledge signal. The receive procedure and operations in slave receive mode are described below.

1. Set bit ICE in ICCR to 1. Set bits MLS in ICMR and bits MST and TRS in ICCR according to the operating mode.
2. A start condition output by the master device sets the BBSY flag to 1 in ICCR.
3. After the slave device detects the start condition, if the first frame matches its slave address, it functions as the slave device designated as the master device. If the 8th bit data ( $R/\overline{W}$ ) is 0, TRS bit in ICCR remains 0 and executes slave receive operation.
4. At the ninth clock pulse of the receive frame, the slave device drives SDA low to acknowledge the transfer. At the same time, the IRIC flag is set to 1 in ICCR. If IEIC is 1 in ICCR, a CPU interrupt is requested. If the RDRF internal flag is 0, it is set to 1 and continuous reception is performed. If the RDRF internal flag is 1, the slave device holds SCL low from the fall of the receive clock until it has read the data in ICDR.
5. Read ICDR and clear IRIC to 0 in ICCR. At this time, the RDRF flag is cleared to 0.

Steps 4 and 5 can be repeated to receive data continuously. When a stop condition is detected (a low-to-high transition of SDA while SCL is high), the BBSY flag is cleared to 0 in ICCR.

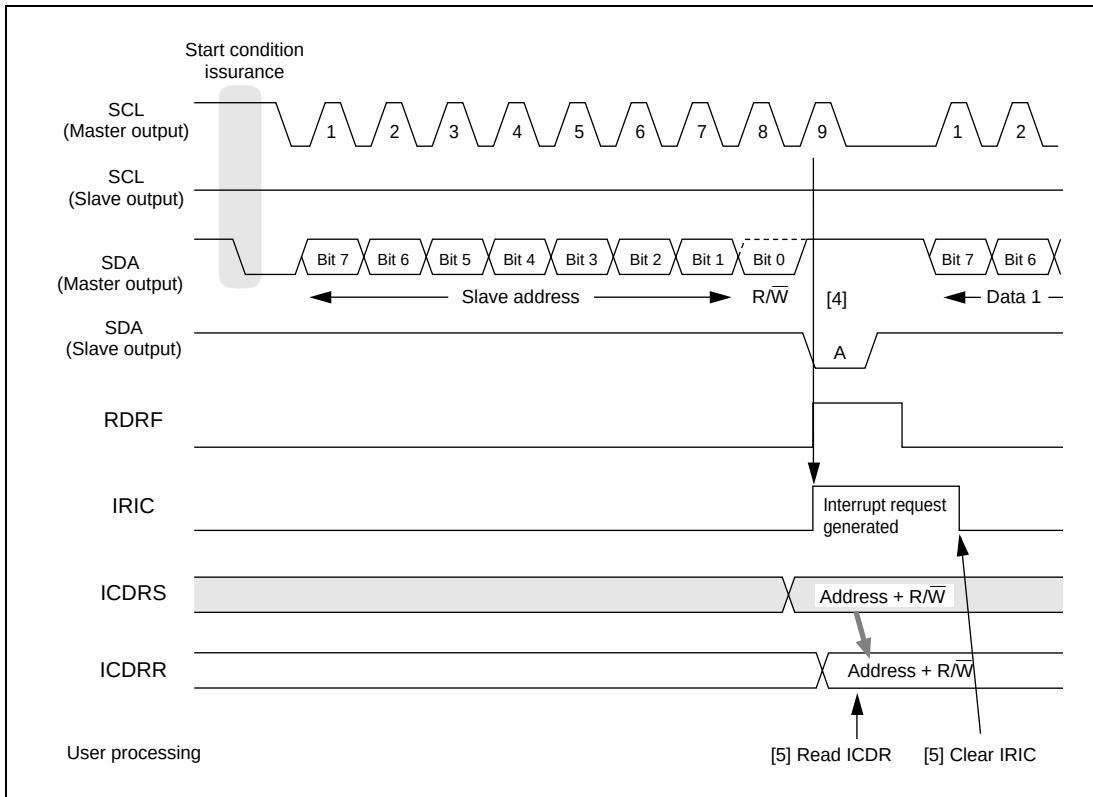


**Figure 23.9 Example of Timing in Slave Receive Mode (MLS = ACKB = 0)**

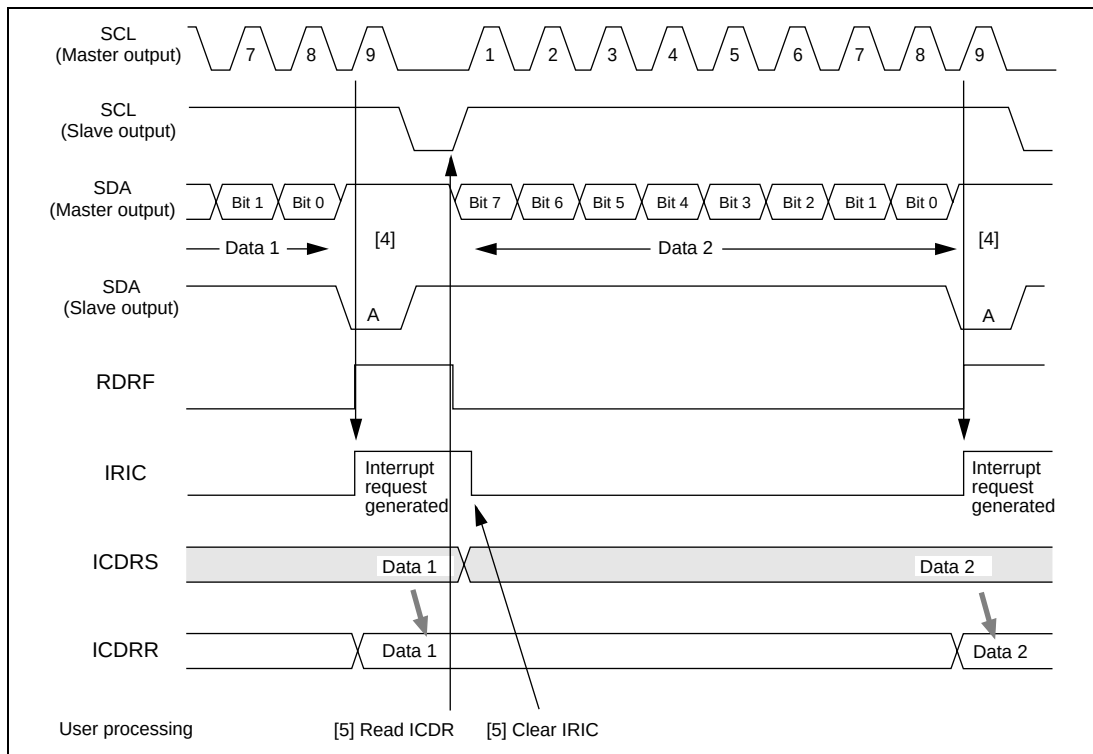


**Figure 23.10 Example of Timing in Slave Receive Mode (MLS = ACKB = 0)**

### 23.3.5 Slave Transmit Operation

In slave transmit mode, the slave device outputs the transmit data, and the master device outputs the transmit clock and returns an acknowledge signal. The transmit procedure and operations in slave transmit mode are described below.

1. Set bit ICE in ICCR to 1. Set bits MLS in ICMR and bits MST and TRS in ICCR according to the operating mode.
2. After the slave device detects a start condition, if the first frame matches its slave address, at the ninth clock pulse the slave device drives SDA low to acknowledge the transfer. At the same time, the IRIC flag is set to 1 in ICCR, and if the IEIC bit in ICCR is set to 1 at this time, an interrupt request is sent to the CPU. If the eighth data bit ( $R/\overline{W}$ ) is 1, the TRS bit is set to 1 in ICCR, automatically causing a transition to slave transmit mode. The slave device holds SCL low from the fall of the transmit clock until data is written in ICDR.
3. Clear the IRIC flag to 0, then write data in ICDR. The written data is transferred to ICDRS, and the TDRE internal flag and the IRIC and IRTR flags are set to 1 again. Clear IRIC to 0, then write the next data in ICDR. The slave device outputs the written data serially in step with the clock output by the master device, with the timing shown in figure 23.11.
4. When one frame of data has been transmitted, at the rise of the ninth transmit clock pulse IRIC is set to 1 in ICCR. If the TDRE internal flag is 1, the slave device holds SCL low from the fall of the transmit clock until data is written in ICDR. The master device drives SDA low at the ninth clock pulse to acknowledge the data. The acknowledge signal is stored in the ACKB bit in ICSR, and can be used to check whether the transfer was carried out normally. If TDRE internal flag is set to 0, the data written in ICDR is transferred to ICDRS, then transmission starts and TDRE internal flag and IRIC and IRTR flags are all set to 1 again.
5. To continue transmitting, clear IRIC to 0, then write the next transmit data in ICDR. At this time, the TDRE internal flag is cleared to 0.

Steps 4 and 5 can be repeated to transmit continuously. To end the transmission, write H'FF in ICDR so that the SDA may be freed on the slave side. When a stop condition is detected (a low-to-high transition of SDA while SCL is high), the BBSY flag will be cleared to 0 in ICCR.


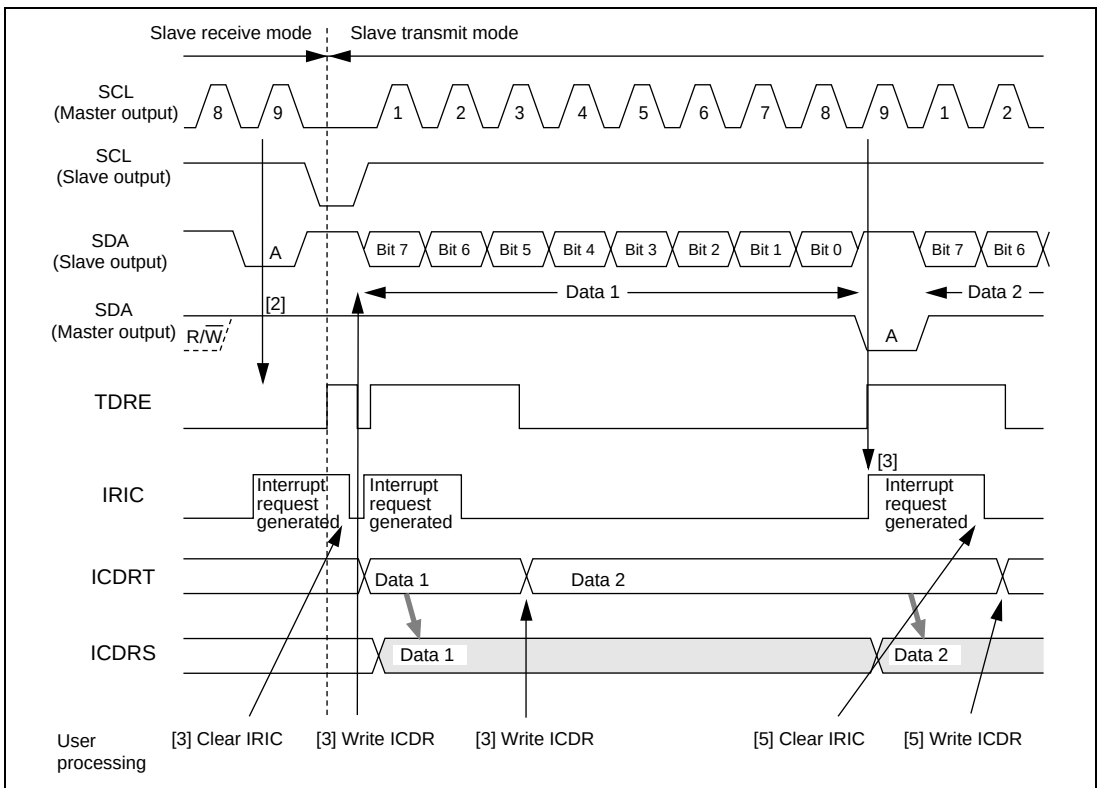


**Figure 23.11 Example of Timing in Slave Transmit Mode (MLS = 0)**


### 23.3.6 IRIC Setting Timing and SCL Control

The interrupt request flag (IRIC) is set at different times depending on the WAIT bit in ICMR, the FS bit in SAR, and the FSX bit in SARX. If the TDRE or RDRF internal flag is set to 1, SCL is automatically held low after one frame has been transferred; this timing is synchronized with the internal clock. Figure 23.12 shows the IRIC set timing and SCL control.

(a) When WAIT = 0, and FS = 0 or FSX = 0 (I<sup>2</sup>C bus format, no wait)

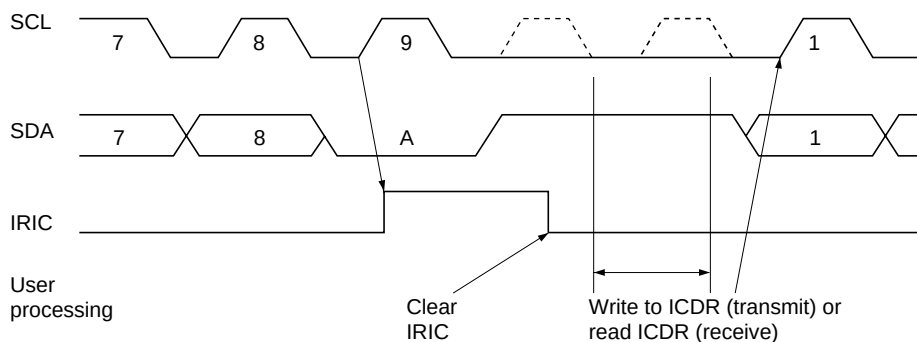

(b) When WAIT = 1, and FS = 0 or FSX = 0 (I<sup>2</sup>C bus format, wait inserted)

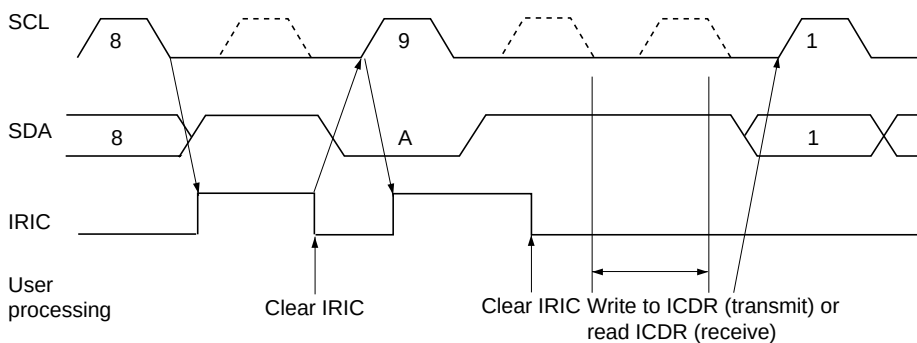

(c) When FS = 1 and FSX = 1 (synchronous serial format)

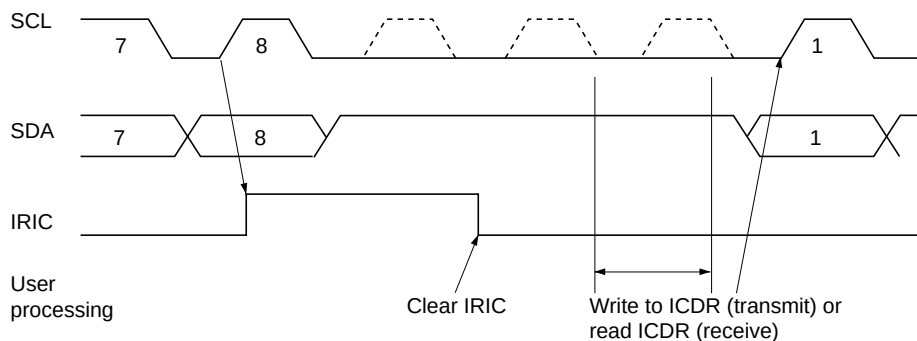


**Figure 23.12 IRIC Setting Timing and SCL Control**

### 23.3.7 Automatic Switching from Formatless Transfer to I<sup>2</sup>C Bus Format Transfer

Setting the SW bit in DDCSWR to 1 selects the IIC0 formatless transfer operation. When an SCL falling edge is detected, the operating mode automatically switches from formatless transfer to I<sup>2</sup>C bus format transfer (slave mode). For automatic switching to be possible, the following four conditions must be observed:

1. The same data pin (SDA) is used in common for formatless transfer and I<sup>2</sup>C bus format transfer.
2. Separate clock pins are used for formatless transfer and I<sup>2</sup>C bus format transfer (SYNC1 for formatless, and SCL for I<sup>2</sup>C bus format)
3. The SCL pin is kept high during formatless transfer.
4. Register bits other than the TRS bit in ICCR are set to appropriate values so that I<sup>2</sup>C bus format transfer can be performed.

The operating mode is automatically switched from formatless transfer to I<sup>2</sup>C bus format transfer when an SCL falling edge is detected and the SW bit in DDCSWR is automatically cleared to 0. To switch the mode from I<sup>2</sup>C bus format transfer to formatless transfer, set the SW bit to 1 by software.

During formatless transfer, do not modify the bits that control the I<sup>2</sup>C bus interface operating mode, such as the MSL or TRS bit. When switching from the I<sup>2</sup>C bus format transfer to formatless transfer, specify the formatless transfer direction (transmit or receive) by setting or clearing the TRS bit, then set the SW bit to 1. After the automatic switching from formatless transfer to I<sup>2</sup>C bus format transfer (slave mode), the TRS bit is automatically cleared to 0 to enter the slave address receive wait state.

If an SCL falling edge is detected during formatless transfer, the IIC does not wait for the stop condition but switches the operating mode immediately.

Note: The IIC0 is not provided (incorporated in) for the H8S/2197S and H8S/2196S.



### 23.3.8 Noise Canceler

The logic levels at the SCL and SDA pins are routed through noise cancelers before being latched internally. Figure 23.13 shows a block diagram of the noise canceler circuit.

The noise canceler consists of two cascaded latches and a match detector. The SCL (or SDA) input signal is sampled on the system clock, but is not passed forward to the next circuit unless the outputs of both latches agree. If they do not agree, the previous value is held.

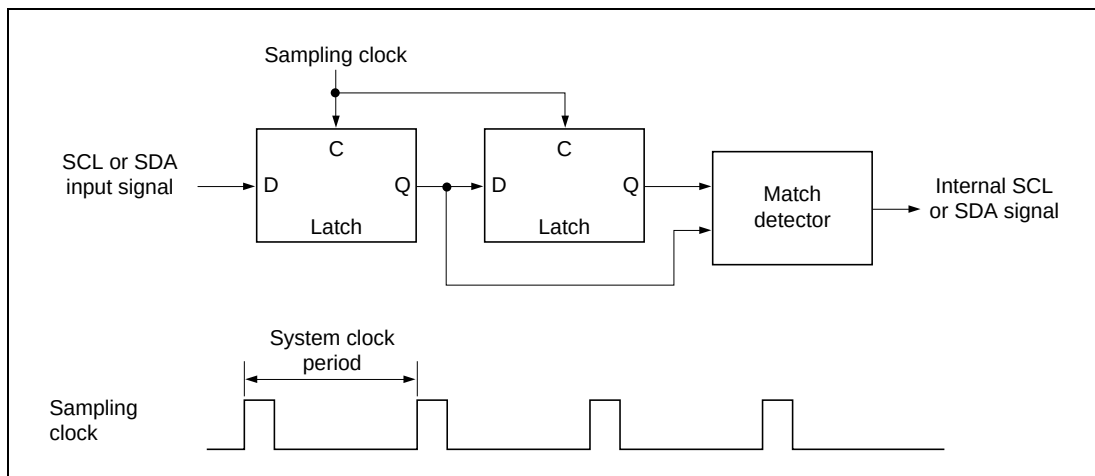


**Figure 23.13 Block Diagram of Noise Canceler**

### 23.3.9 Sample Flowcharts

Figures 23.14 to 23.17 show sample flowcharts for using the I<sup>2</sup>C bus interface in each mode.

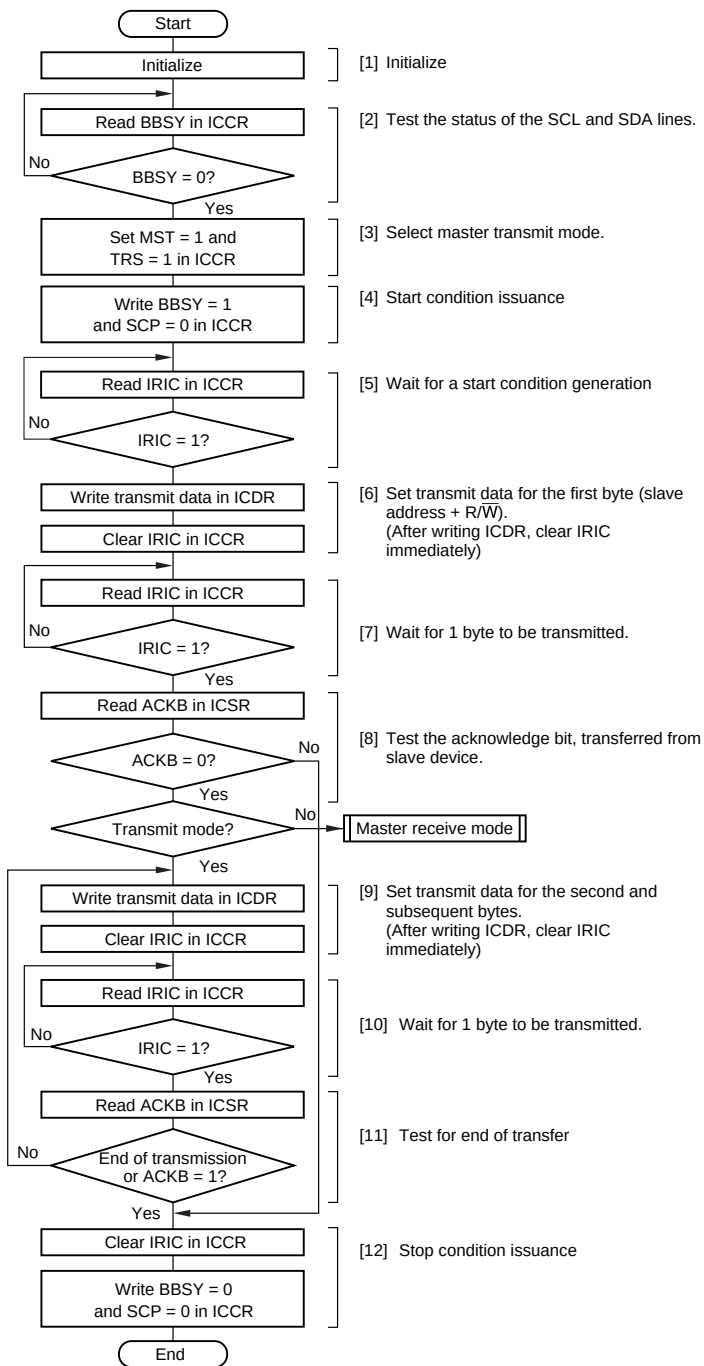


**Figure 23.14 Flowchart for Master Transmit Mode (Example)**


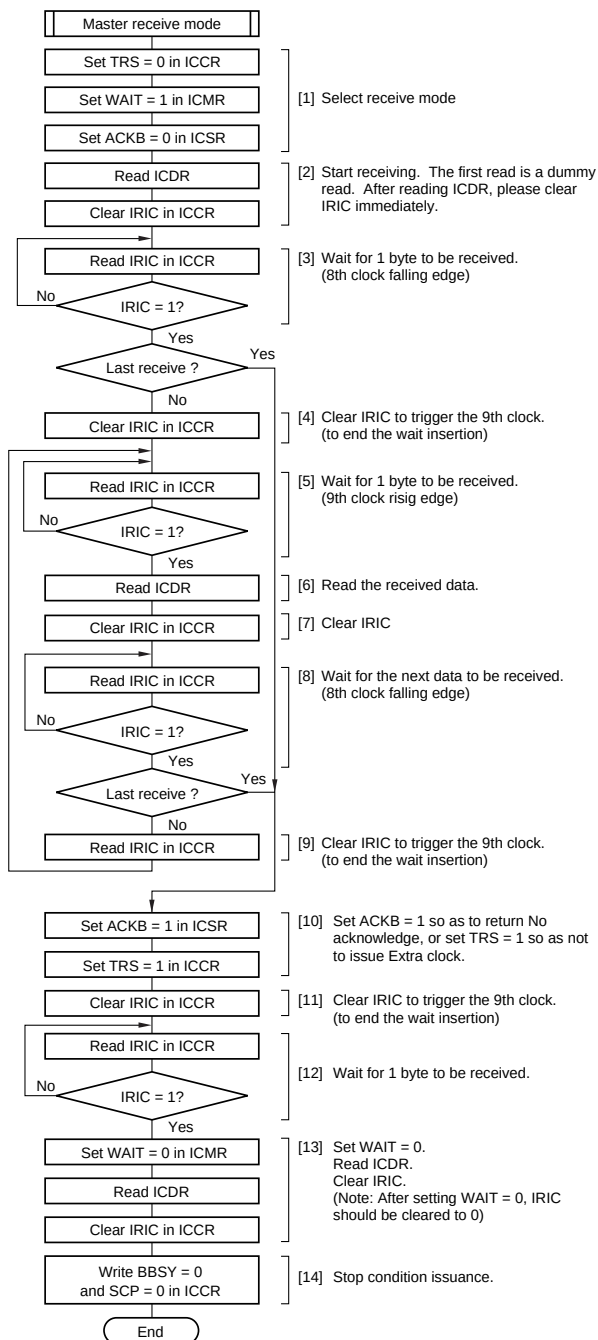


**Figure 23.15 Flowchart for Master Receive Mode (Example)**

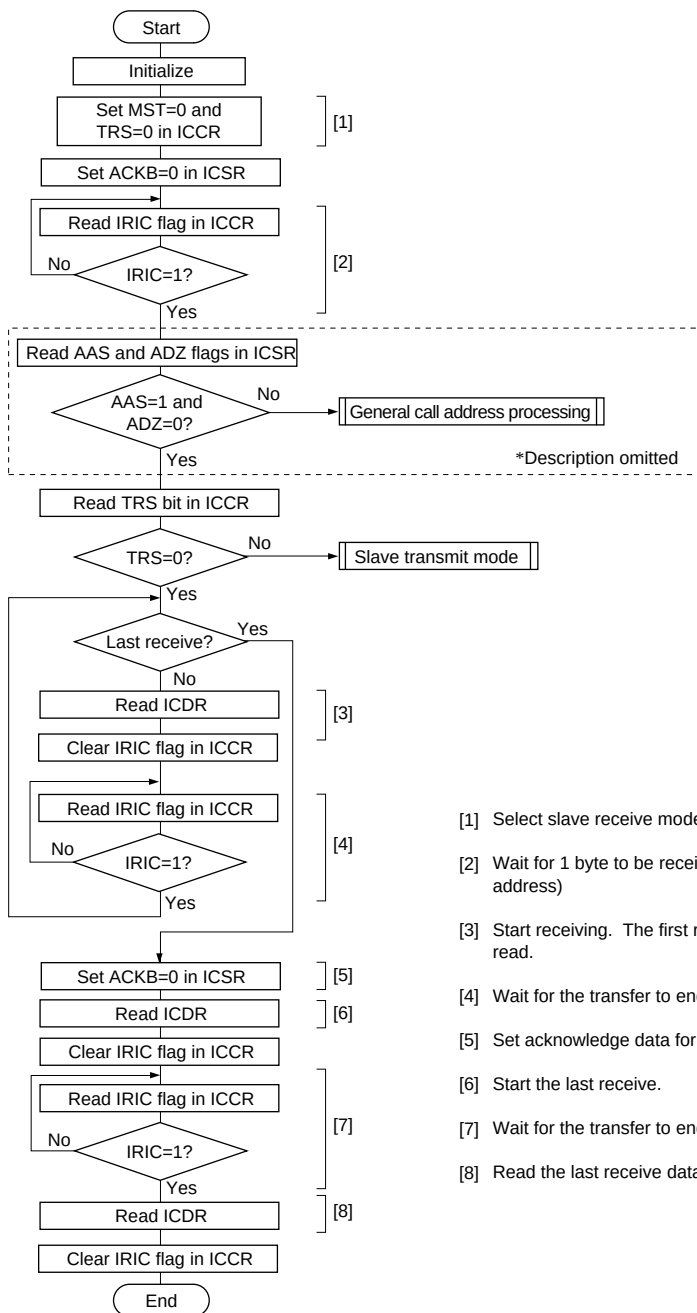

- [1] Select slave receive mode.
- [2] Wait for 1 byte to be received (slave address)
- [3] Start receiving. The first read is a dummy read.
- [4] Wait for the transfer to end.
- [5] Set acknowledge data for the last receive.
- [6] Start the last receive.
- [7] Wait for the transfer to end.
- [8] Read the last receive data.

**Figure 23.16 Flowchart for Slave Transmit Mode (Example)**

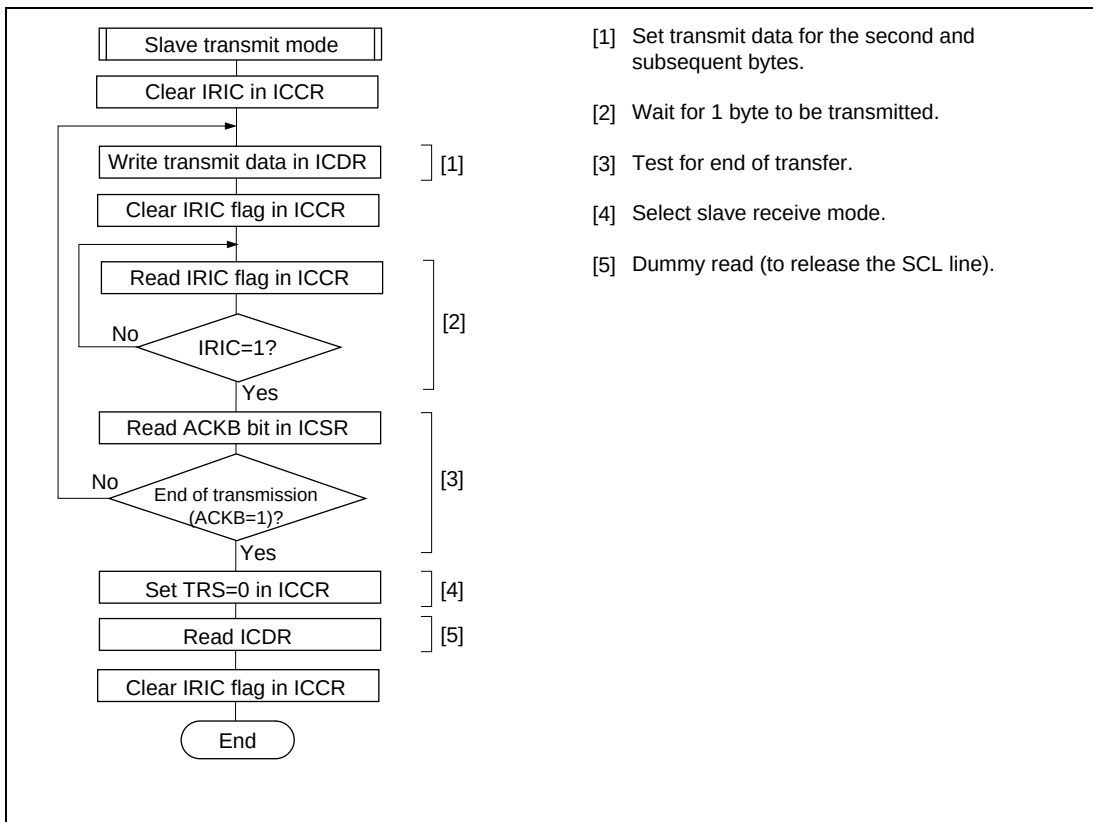


**Figure 23.17 Flowchart for Slave Receive Mode (Example)**

### 23.3.10 Initializing Internal Status

The I<sup>2</sup>C can forcibly initialize the I<sup>2</sup>C internal status when a dead lock occurs during communication. Initialization is enabled by (1) setting the CLR3 to CLR0 bits in DDCCSWR, or (2) clearing the ICE bit. For details on CLR3 to CLR0 settings, refer to section 23.2.8, DDC Switch Register (DDCCSWR).

#### (1) Initialized Status

This function initializes the following:

- TDRE and RDRF internal flags
- Transmit/receive sequencer and internal clock counter
- Internal latches (wait, clock, or data output) which holds the levels output from the SCL and SDA pins

This function does not initialize the following:

- Register contents (ICDR, SAR, SARX, ICMR, ICCR, ICSR, DDCCSWR, and STCR)

- Internal latches which holds the register read information to set or clear the flags in ICMR, ICCR, ICSR, and DDCCSWR
- Bit counter (BC2 to BC0) value in ICMR
- Sources of interrupts generated (interrupts that has been transferred to the interrupt controller)

## (2) Notes on Initialization

- Interrupt flags and interrupt sources are not cleared; clear them by software if necessary.
- Other register flags cannot be assumed to be cleared, either; clear them by software if necessary.
- When initialization is specified by the DDCCSWR settings, the data written to the CLR3 to CLR0 bits are not held. When initializing the I<sup>2</sup>C, be sure to use the MOV instruction to write to all the CLR3 to CLR0 bits at the same time; do not use bit manipulation instructions such as BCLR. When reinitializing the module status, all the CLR3 to CLR0 bits must be rewritten to at the same time.
- If a flag is cleared during transfer, the I<sup>2</sup>C module stops transfer immediately, and releases the control of the SCL and SDA pins. Before starting again, set the registers to appropriate values to make a correct communication if necessary.

This module initializing function does not modify the BBSY bit value, but in some cases, depending on the SCL and SDA pin status and the release timing, the signal waveforms at the SCL and SDA pins may indicate the stop condition, and accordingly the BBSY bit may be cleared. Other bits or flags may be affected in the same way by module initialization.

To avoid these problems, take the following procedure to initialize the I<sup>2</sup>C:

1. Initialize the I<sup>2</sup>C by setting the CLR3 to CLR0 bits or the ICE bit.
2. Execute a stop condition issuing instruction to clear the BBSY bit to 0 (writing 0 to BBSY and SCP), and wait for two cycles of the transfer clock.
3. Initialize the I<sup>2</sup>C again by setting the CLR3 to CLR0 bits or the ICE bit.
4. Set the registers in I<sup>2</sup>C to appropriate values.

## 23.4 Usage Notes

1. In master mode, if an instruction to generate a start condition is immediately followed by an instruction to generate a stop condition, neither condition will be output correctly. To output consecutive start and stop conditions, after issuing the instruction that generates the start condition, read the relevant ports, check that SCL and SDA are both low, then issue the instruction that generates the stop condition. Note that the SCL may briefly remain at a high level immediately after BBSY is cleared to 0.
2. Either of the following two conditions will start the next transfer. Pay attention to these conditions when reading or writing to ICDR.
  - a. Write access to ICDR when ICE = 1 and TRS = 1 (including automatic transfer from ICDRT to ICDRS)
  - b. Read access to ICDR when ICE = 1 and TRS = 0 (including automatic transfer from ICDRS to ICDRR)
3. Table 23.5 shows the timing of SCL and SDA output in synchronization with the internal clock. Timings on the bus are determined by the rise and fall times of signals affected by the bus load capacitance, series resistance, and parallel resistance.

**Table 23.5 I<sup>2</sup>C Bus Timing (SCL and SDA Output)**

| Item                                             | Symbol      | Output Timing                                    | Unit | Notes                   |
|--------------------------------------------------|-------------|--------------------------------------------------|------|-------------------------|
| SCL output cycle time                            | $t_{SCLO}$  | $28t_{cyc}$ to $256t_{cyc}$                      | ns   | Figure 31.8 (reference) |
| SCL output high pulse width                      | $t_{SCLHO}$ | $0.5t_{SCLO}$                                    | ns   |                         |
| SCL output low pulse width                       | $t_{SCLLO}$ | $0.5t_{SCLO}$                                    | ns   |                         |
| SDA output bus free time                         | $t_{BUFO}$  | $0.5t_{SCLO} - 1t_{cyc}$                         | ns   |                         |
| Start condition output hold time                 | $t_{STAH0}$ | $0.5t_{SCLO} - 1t_{cyc}$                         | ns   |                         |
| Retransmission start condition output setup time | $t_{STAS0}$ | $1t_{SCLO}$                                      | ns   |                         |
| Stop condition output setup time                 | $t_{STOS0}$ | $0.5t_{SCLO} + 2t_{cyc}$                         | ns   |                         |
| Data output setup time (master)                  | $t_{SDAS0}$ | $1t_{SCLLO} - 3t_{cyc}$                          | ns   |                         |
| Data output setup time (slave)                   |             | $1t_{SCLL} - (6t_{cyc} \text{ or } 12t_{cyc}^*)$ | ns   |                         |
| Data output hold time                            | $t_{SDAHO}$ | $3t_{cyc}$                                       | ns   |                         |

Note: \* $6t_{cyc}$  when IICX is 0,  $12t_{cyc}$  when 1.

4. SCL and SDA input is sampled in synchronization with the internal clock. The AC timing therefore depends on the system clock cycle  $t_{cyc}$ , as shown in table 31.6 in section 31, Electrical Characteristics. Note that the I<sup>2</sup>C bus interface AC timing specifications will not be met with a system clock frequency of less than 5 MHz.

5. The I<sup>2</sup>C bus interface specification for the SCL rise time  $t_{sr}$  is under 1000 ns (300 ns for high-speed mode). In master mode, the I<sup>2</sup>C bus interface monitors the SCL line and synchronizes one bit at a time during communication. If  $t_{sr}$  (the time for SCL to go from low to  $V_{IH}$ ) exceeds the time determined by the input clock of the I<sup>2</sup>C bus interface, the high period of SCL is extended. The SCL rise time is determined by the pull-up resistance and load capacitance of the SCL line. To insure proper operation at the set transfer rate, adjust the pull-up resistance and load capacitance so that the SCL rise time does not exceed the values given in table 23.6.

**Table 23.6 Permissible SCL Rise Time ( $t_{sr}$ ) Values**

| IICX | $t_{cyc}$ Indication | Time Indication [ns] |                                           |                        |                         |
|------|----------------------|----------------------|-------------------------------------------|------------------------|-------------------------|
|      |                      |                      | I <sup>2</sup> C Bus Specification (Max.) | $\phi = 8 \text{ MHz}$ | $\phi = 10 \text{ MHz}$ |
| 0    | $7.5t_{cyc}$         | Normal mode          | 1000                                      | 937                    | 750                     |
|      |                      | High-speed mode      | 300                                       | ←                      | ←                       |
| 1    | $17.5t_{cyc}$        | Normal mode          | 1000                                      | ←                      | ←                       |
|      |                      | High-speed mode      | 300                                       | ←                      | ←                       |

6. The I<sup>2</sup>C bus interface specifications for the SCL and SDA rise and fall times are under 1000 ns and 300 ns. The I<sup>2</sup>C bus interface SCL and SDA output timing is prescribed by  $t_{S_{cyc}}$ , as shown in table 23.5. However, because of the rise and fall times, the I<sup>2</sup>C bus interface specifications may not be satisfied at the maximum transfer rate. Table 23.7 shows output timing calculations for different operating frequencies, including the worst-case influence of rise and fall times.

$t_{BUFO}$  fails to meet the I<sup>2</sup>C bus interface specifications at any frequency. The solution is either (a) to provide coding to secure the necessary interval (approximately 1  $\mu$ s) between issuance of a stop condition and issuance of a start condition, or (b) to select devices whose input timing permits this output timing for use as slave devices connected to the I<sup>2</sup>C bus.

$t_{SCLLO}$  in high-speed mode and  $t_{STASO}$  in standard mode fail to satisfy the I<sup>2</sup>C bus interface specifications for worst-case calculations of  $t_{sr}/t_{sf}$ . Possible solutions that should be investigated include (a) adjusting the rise and fall times by means of a pull-up resistor and capacitive load, (b) reducing the transfer rate to meet the specifications, or (c) selecting devices whose input timing permits this output timing for use as slave devices connected to the I<sup>2</sup>C bus.



## 7. Precautions on reading ICDR at the end of master receive mode

When terminating the master receive mode, set TRS bit to 1, and select "write" for ICCR  
BBSY = 0 and SCP = 0. This forces to move SDA from low to high level when SCL is at high level, thereby generating the stop condition.

Now you can read received data from ICDR. If, however, any data is remaining on the buffer, received data on ICDRS is not transferred to ICDR, thus you won't be able to read the second byte data.

When it is required to read the second byte data, issue the stop condition from the master receive state (TRS bit is 0).

Before reading data from ICDR register, make sure that BBSY bit on ICCR register is 0, stop condition is generated and bus is made free.

If you try to read received data after the stop condition issue instruction (setting ICCR's BBSY = 0 and SCP = 0 to write) has been executed but before the actual stop condition is generated, clock may not be appropriately signaled when the next master sending mode is turned on.

Thus, reasonable care is needed for determining when to read the received data.

After the master receive is complete, if you want to re-write IIC control bit (such as clearing MST bit) for switching the sending/receiving mode or modifying settings, it must be done during period (a) indicated in figure 23.18 (after making sure ICCR register BBSY bit is cleared to 0).

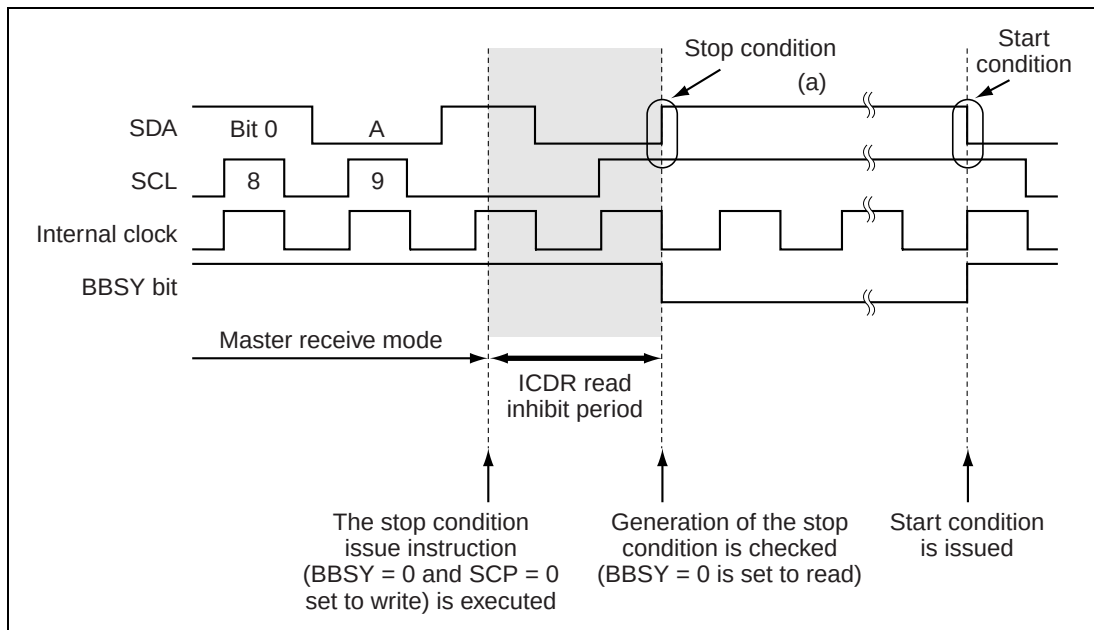


**Figure 23.18 Precautions on Reading the Master Receive Data**

## 8. Notes on Start Condition Issuance for Retransmission

Figure 23.19 shows the timing of start condition issuance for retransmission, and the timing for subsequently writing data to ICDR, together with the corresponding flowchart. After start condition issuance is done and determined the start condition, write the transmit data to ICDR.

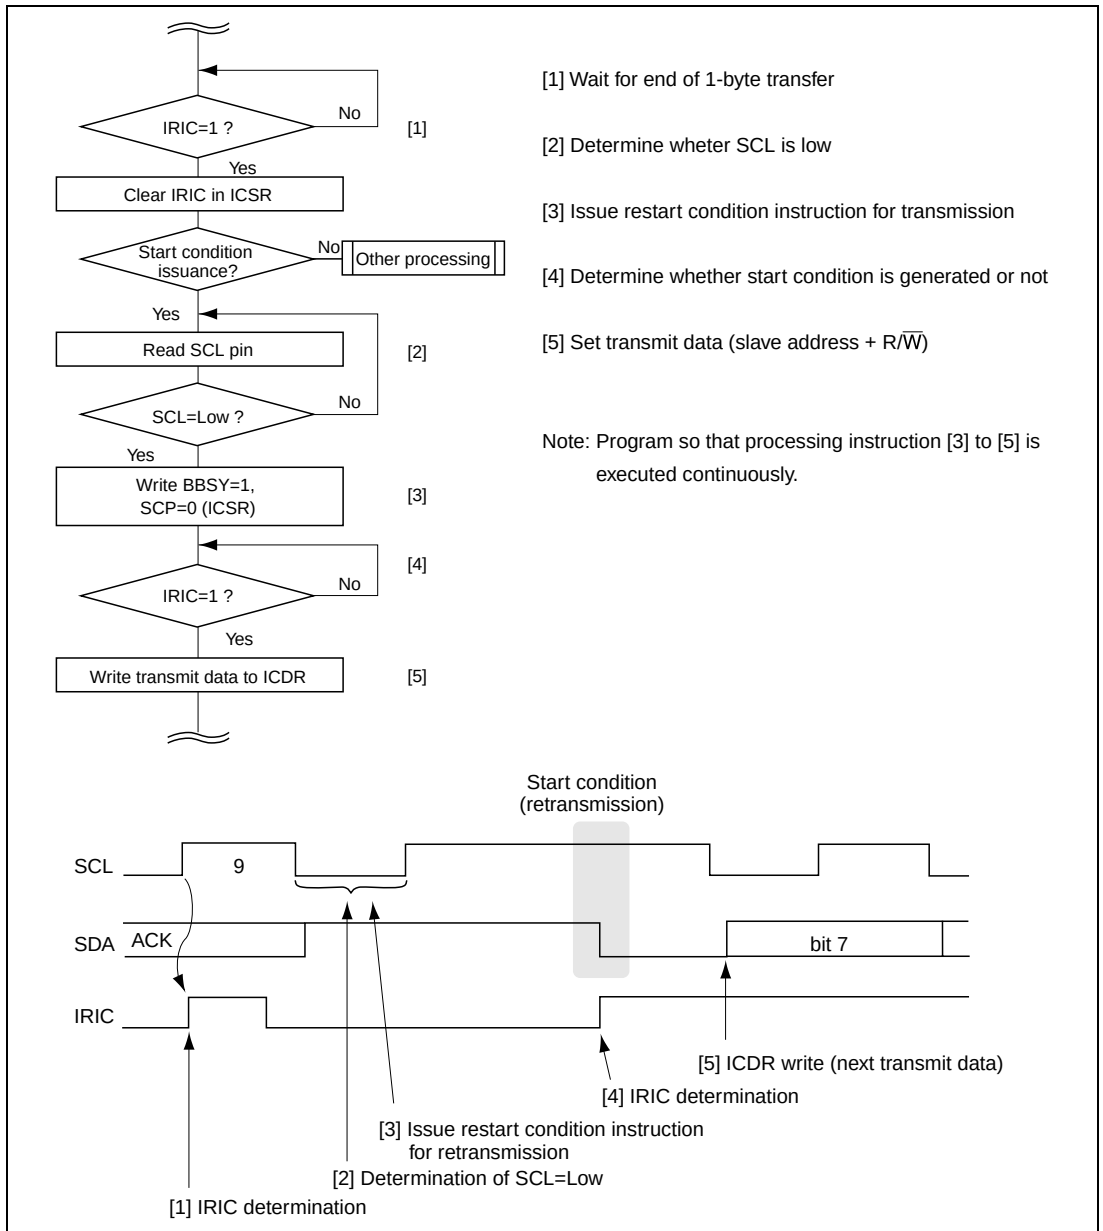


**Figure 23.19 Flowchart and Timing of Start Condition Instruction Issuance for Retransmission**

## 9. Notes on I<sup>2</sup>C Bus Interface Stop Condition Instruction Issuance

If the rise time of the 9th SCL acknowledge exceeds the specification because the bus load capacitance is large, or if there is a slave device of the type that drives SCL low to effect a wait, issue the stop condition instruction after reading SCL and determining it to be low, as shown below.

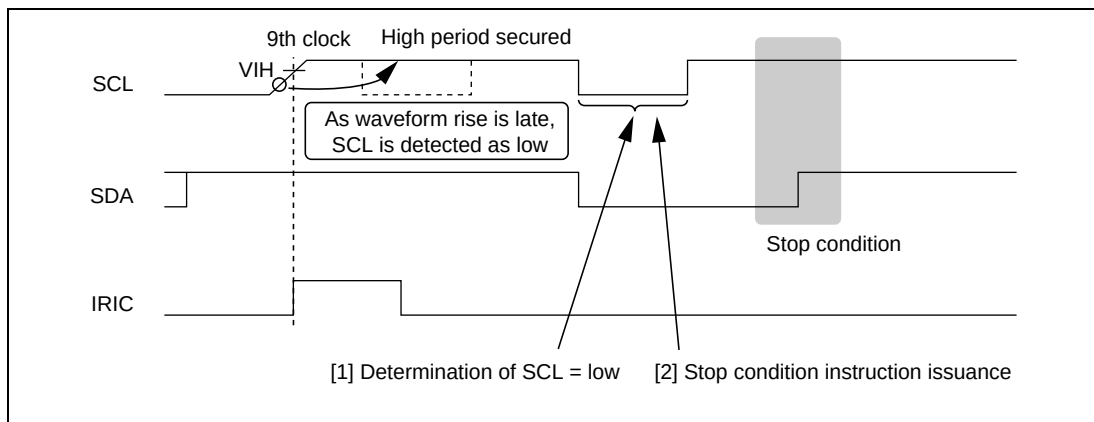


**Figure 23.20 Timing of Stop Condition Issuance**

**Table 23.7 I<sup>2</sup>C Bus Timing (with Maximum Influence of  $t_{Sr}/t_{St}$ )**

| Item                    | $t_{cyc}$ Indication                             | Time Indication (at Maximum Transfer Rate) [ns] |                                        |                                                 |                        |                         |
|-------------------------|--------------------------------------------------|-------------------------------------------------|----------------------------------------|-------------------------------------------------|------------------------|-------------------------|
|                         |                                                  |                                                 | $t_{Sr}/t_{St}$<br>Influence<br>(Max.) | I <sup>2</sup> C Bus<br>Specification<br>(Min.) | $\phi = 8 \text{ MHz}$ | $\phi = 10 \text{ MHz}$ |
| $t_{SCLHO}$             | $0.5t_{SCLO}$<br>( $-t_{Sr}$ )                   | Normal mode                                     | -1000                                  | 4000                                            | ←                      | ←                       |
|                         |                                                  | High-speed mode                                 | -300                                   | 600                                             | ←                      | ←                       |
| $t_{SCLLO}$             | $0.5t_{SCLO}$<br>( $-t_{St}$ )                   | Normal mode                                     | -250                                   | 4700                                            | ←                      | ←                       |
|                         |                                                  | High-speed mode                                 | -250                                   | 1300                                            | ←                      | ←                       |
| $t_{BUFO}$              | $0.5t_{SCLO}-1t_{cyc}$<br>( $-t_{Sr}$ )          | Normal mode                                     | -1000                                  | 4700                                            | 3875* <sup>1</sup>     | 3900* <sup>1</sup>      |
|                         |                                                  | High-speed mode                                 | -300                                   | 1300                                            | 825* <sup>1</sup>      | 850* <sup>1</sup>       |
| $t_{STAO}$              | $0.5t_{SCLO}-1t_{cyc}$<br>( $-t_{St}$ )          | Normal mode                                     | -250                                   | 4000                                            | 4625                   | 4650                    |
|                         |                                                  | High-speed mode                                 | -250                                   | 600                                             | 875                    | 900                     |
| $t_{STASO}$             | $1t_{SCLO}$<br>( $-t_{Sr}$ )                     | Normal mode                                     | -1000                                  | 4700                                            | 9000                   | 9000                    |
|                         |                                                  | High-speed mode                                 | -300                                   | 600                                             | 2200                   | 2200                    |
| $t_{STOSO}$             | $0.5t_{SCLO}+2t_{cyc}$<br>( $-t_{Sr}$ )          | Normal mode                                     | -1000                                  | 4000                                            | 4250                   | 4200                    |
|                         |                                                  | High-speed mode                                 | -300                                   | 600                                             | 1200                   | 1150                    |
| $t_{SDASO}$<br>(master) | $1t_{SCLLO}^{*3}-3t_{cyc}$<br>( $-t_{Sr}$ )      | Normal mode                                     | -1000                                  | 250                                             | 3325                   | 3400                    |
|                         |                                                  | High-speed mode                                 | -300                                   | 100                                             | 625                    | 700                     |
| $t_{SDASO}$<br>(slave)  | $1t_{SCLL}^{*3}-12t_{cyc}^{*2}$<br>( $-t_{Sr}$ ) | Normal mode                                     | -1000                                  | 250                                             | 2200                   | 2500                    |
|                         |                                                  | High-speed mode                                 | -300                                   | 100                                             | -500* <sup>1</sup>     | -200* <sup>1</sup>      |
| $t_{SDAHO}$             | $3t_{cyc}$                                       | Normal mode                                     | 0                                      | 0                                               | 375                    | 300                     |
|                         |                                                  | High-speed mode                                 | 0                                      | 0                                               | ↑                      | ↑                       |

- Notes: 1. Does not meet the I<sup>2</sup>C bus interface specification. Remedial action such as the following is necessary: (a) secure a start/stop condition issuance interval; (b) adjust the rise and fall times by means of a pull-up resistor and capacitive load; (c) reduce the transfer rate; (d) select slave devices whose input timing permits this output timing. The values in the above table will vary depending on the settings of the IICX bit and bits CKS0 to CKS2. Depending on the frequency it may not be possible to achieve the maximum transfer rate; therefore, whether or not the I<sup>2</sup>C bus interface specifications are met must be determined in accordance with the actual setting conditions.
2. Value when the IICX bit is set to 1. When the IICX bit is cleared to 0, the value is ( $t_{SCLL} - 6t_{cyc}$ ).
3. Calculated using the I<sup>2</sup>C bus specification values (standard mode: 4700 ns min.; high-speed mode: 1300 ns min.).

## Section 24 A/D Converter

### 24.1 Overview

This LSI incorporates a 10-bit successive-approximations A/D converter that allows up to 12 analog input channels to be selected.

#### 24.1.1 Features

A/D converter has the following features.

- 10-bit resolution
- 12 input channels
- Sample and hold function
- Choice of software, hardware (internal signal) triggering or external triggering for A/D conversion start.
- A/D conversion end interrupt request generation

## 24.1.2 Block Diagram

Figure 24.1 shows a block diagram of the A/D converter.

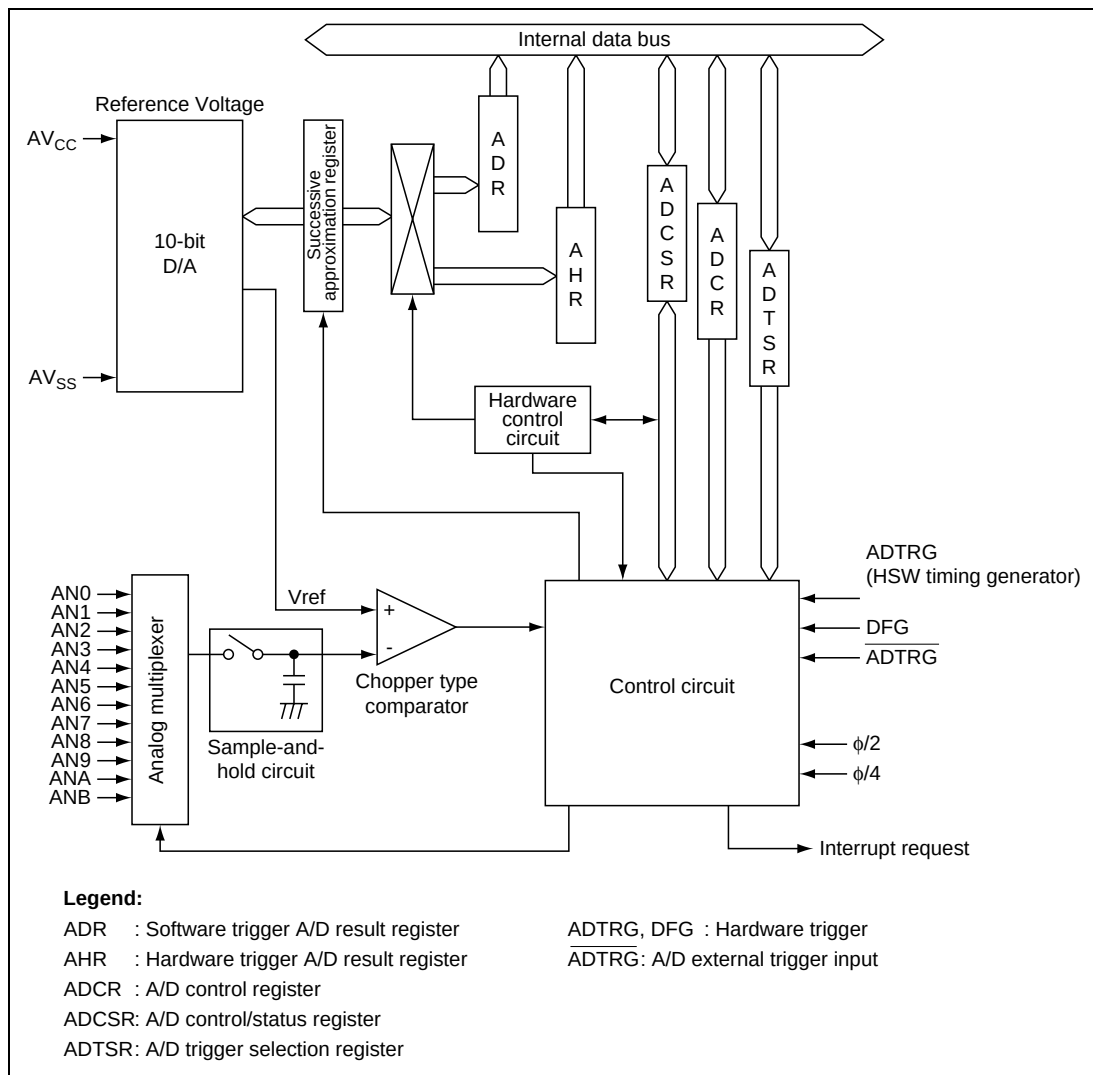


**Figure 24.1 Block Diagram of A/D Converter**

### 24.1.3 Pin Configuration

Table 24.1 summarizes the input pins used by the A/D converter.

**Table 24.1 A/D Converter Pins**

| Name                           | Abbrev.            | I/O   | Function                                                       |
|--------------------------------|--------------------|-------|----------------------------------------------------------------|
| Analog power supply pin        | $AV_{cc}$          | Input | Analog block power supply and A/D conversion reference voltage |
| Analog ground pin              | $AV_{ss}$          | Input | Analog block ground and A/D conversion reference voltage       |
| Analog input pin 0             | AN0                | Input | Analog input channel 0                                         |
| Analog input pin 1             | AN1                | Input | Analog input channel 1                                         |
| Analog input pin 2             | AN2                | Input | Analog input channel 2                                         |
| Analog input pin 3             | AN3                | Input | Analog input channel 3                                         |
| Analog input pin 4             | AN4                | Input | Analog input channel 4                                         |
| Analog input pin 5             | AN5                | Input | Analog input channel 5                                         |
| Analog input pin 6             | AN6                | Input | Analog input channel 6                                         |
| Analog input pin 7             | AN7                | Input | Analog input channel 7                                         |
| Analog input pin 8             | AN8                | Input | Analog input channel 8                                         |
| Analog input pin 9             | AN9                | Input | Analog input channel 9                                         |
| Analog input pin A             | ANA                | Input | Analog input channel A                                         |
| Analog input pin B             | ANB                | Input | Analog input channel B                                         |
| A/D external trigger input pin | $\overline{ADTRG}$ | Input | External trigger input for starting A/D conversion             |

### 24.1.4 Register Configuration

Table 24.2 summarizes the registers of the A/D converter.

**Table 24.2 A/D Converter Registers**

| Name                                   | Abbrev. | R/W     | Size | Initial Value | Address**2 |
|----------------------------------------|---------|---------|------|---------------|------------|
| Software trigger A/D result register H | ADRH    | R       | Byte | H'00          | H'D130     |
| Software trigger A/D result register L | ADRL    | R       | Byte | H'00          | H'D131     |
| Hardware trigger A/D result register H | AHRH    | R       | Byte | H'00          | H'D132     |
| Hardware trigger A/D result register L | AHRL    | R       | Byte | H'00          | H'D133     |
| A/D control register                   | ADCR    | R/W     | Byte | H'40          | H'D134     |
| A/D control/status register            | ADCSR   | R (W)*1 | Byte | H'01          | H'D135     |
| A/D trigger selection register         | ADTSR   | R/W     | Byte | H'FC          | H'D136     |
| Port mode register 0                   | PMR0    | R/W     | Byte | H'00          | H'FFCD     |

Notes: 1. Only 0 can be written in bits 7 and 6, to clear the flag. Bits 3 to 1 are read-only.  
2. Lower 16 bits of the address.



## 24.2 Register Descriptions

### 24.2.1 Software-Triggered A/D Result Register (ADR)

| ADRH            |      |      |      |      |      |      |      | ADRL |      |      |   |   |   |   |   |   |
|-----------------|------|------|------|------|------|------|------|------|------|------|---|---|---|---|---|---|
| Bit :           | 15   | 14   | 13   | 12   | 11   | 10   | 9    | 8    | 7    | 6    | 5 | 4 | 3 | 2 | 1 | 0 |
|                 | ADR9 | ADR8 | ADR7 | ADR6 | ADR5 | ADR4 | ADR3 | ADR2 | ADR1 | ADR0 | — | — | — | — | — | — |
| Initial value : | 0    | 0    | 0    | 0    | 0    | 0    | 0    | 0    | 0    | 0    | 0 | 0 | 0 | 0 | 0 | 0 |
| R/W :           | R    | R    | R    | R    | R    | R    | R    | R    | R    | R    | — | — | — | — | — | — |

The software-triggered A/D result register (ADR) is a register that stores the result of an A/D conversion started by software.

The A/D-converted data is 10-bit data. Upon completion of software-triggered A/D conversion, the 10-bit result data is transferred to ADR and the data is retained until the next software-triggered A/D conversion completion. The upper 8 bits of the data are stored in the upper bytes (bits 15 to 8) of ADR, and the lower 2 bits are stored in the lower bytes (bits 7 and 6). Bits 5 to 0 are always read as 0.

ADR can be read by the CPU at any time, but the ADR value during A/D conversion is not fixed. The upper bytes can always be read directly, but the data in the lower bytes is transferred via a temporary register (TEMP). For details, see section 24.3, Interface to Bus Master.

ADR is a 16-bit read-only register which is initialized to H'0000 at a reset, and in module stop mode, standby mode, watch mode, subactive mode and subsleep mode.

### 24.2.2 Hardware-Triggered A/D Result Register (AHR)

| AHRH            |      |      |      |      |      |      |      | AHL  |      |      |   |   |   |   |   |   |
|-----------------|------|------|------|------|------|------|------|------|------|------|---|---|---|---|---|---|
| Bit :           | 15   | 14   | 13   | 12   | 11   | 10   | 9    | 8    | 7    | 6    | 5 | 4 | 3 | 2 | 1 | 0 |
|                 | AHR9 | AHR8 | AHR7 | AHR6 | AHR5 | AHR4 | AHR3 | AHR2 | AHR1 | AHR0 | — | — | — | — | — | — |
| Initial value : | 0    | 0    | 0    | 0    | 0    | 0    | 0    | 0    | 0    | 0    | 0 | 0 | 0 | 0 | 0 | 0 |
| R/W :           | R    | R    | R    | R    | R    | R    | R    | R    | R    | R    | — | — | — | — | — | — |

The hardware-triggered A/D result register (AHR) is a register that stores the result of an A/D conversion started by hardware (internal signal: ADTRG and DFG) or by external trigger input (ADTRG).

The A/D-converted data is 10-bit data. Upon completion of hardware- or external-triggered A/D conversion, the 10-bit result data is transferred to AHR and the data is retained until the next hardware- or external- triggered A/D conversion completion. The upper 8 bits of the data are stored in the upper bytes (bits 15 to 8) of AHR, and the lower 2 bits are stored in the lower bytes (bits 7 and 6). Bits 5 to 0 are always read as 0.

AHR can be read by the CPU at any time, but the AHR value during A/D conversion is not fixed. The upper bytes can always be read directly, but the data in the lower bytes is transferred via a temporary register (TEMP). For details, see section 24.3, Interface to Bus Master. AHR is a 16-bit read-only register which is initialized to H'0000 at a reset, and in module stop mode, standby mode, watch mode, subactive mode and subsleep mode.

### 24.2.3 A/D Control Register (ADCR)

|                 |     |   |      |      |      |      |      |      |
|-----------------|-----|---|------|------|------|------|------|------|
| Bit :           | 7   | 6 | 5    | 4    | 3    | 2    | 1    | 0    |
|                 | CK  | — | HCH1 | HCH0 | SCH3 | SCH2 | SCH1 | SCH0 |
| Initial value : | 0   | 1 | 0    | 0    | 0    | 0    | 0    | 0    |
| R/W :           | R/W | — | R/W  | R/W  | R/W  | R/W  | R/W  | R/W  |

ADCR is a register that sets A/D conversion speed and selects analog input channel. When executing ADCR setting, make sure that the SST and HST flags in ADCSR is set to 0. ADCR is an 8-bit readable/writable register that is initialized to H'40 by a reset, and in module stop mode, standby mode, watch mode, subactive mode and subsleep mode.

**Bit 7—Clock Select (CK):** Sets A/D conversion speed.

#### Bit 7

| CK | Description                                        |
|----|----------------------------------------------------|
| 0  | Conversion frequency is 266 states (Initial value) |
| 1  | Conversion frequency is 134 states                 |

Note: A/D conversion starts when 1 is written in SST, or when HST is set to 1. The conversion period is the time from when this start flag is set until the flag is cleared at the end of conversion. Actual sample-and-hold takes place (repeatedly) during the conversion frequency shown in figure 24.2.

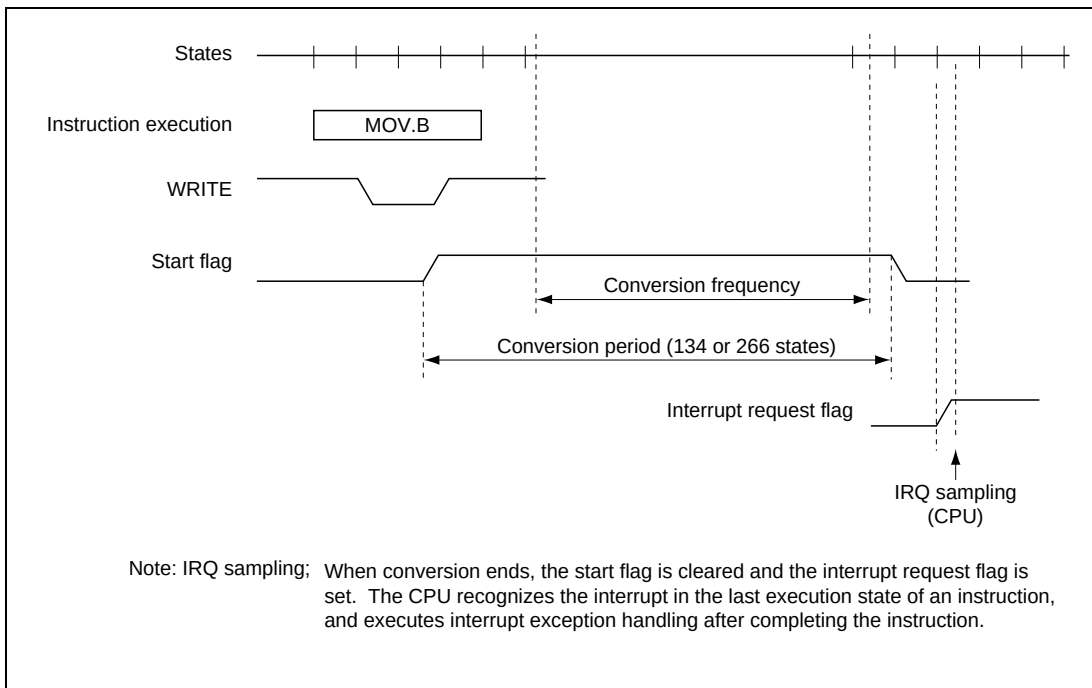


**Figure 24.2 Internal Operation of A/D Converter**

**Bit 6—Reserved:** This bit cannot be modified and is always read as 1.

**Bits 5 and 4—Hardware Channel Select (HCH1, HCH0):** These bits select the analog input channel that is converted by hardware triggering or triggering by an external input. Only channels AN8 to ANB are available for hardware- or external-triggered conversion.

| Bit 5 | Bit 4 |                      |
|-------|-------|----------------------|
| HCH1  | HCH0  | Analog Input Channel |
| 0     | 0     | AN8 (Initial value)  |
|       | 1     | AN9                  |
| 1     | 0     | ANA                  |
|       | 1     | ANB                  |

**Bits 3 to 0—Software Channel Select (SCH3 to SCH0):** These bits select the analog input channel that is converted by software triggering.

When channels AN0 to AN7 are used, appropriate pin settings must be made in port mode register 0 (PMR0). For pin settings, see section 24.2.6, Port Mode Register 0 (PMR0).

| Bit 3 | Bit 2 | Bit 1 | Bit 0 |                                                       |                 |
|-------|-------|-------|-------|-------------------------------------------------------|-----------------|
| SCH3  | SCH2  | SCH1  | SCH0  | Analog Input Channel                                  |                 |
| 0     | 0     | 0     | 0     | AN0                                                   | (Initial value) |
|       |       |       | 1     | AN1                                                   |                 |
|       |       | 1     | 0     | AN2                                                   |                 |
|       |       |       | 1     | AN3                                                   |                 |
|       | 1     | 0     | 0     | AN4                                                   |                 |
|       |       |       | 1     | AN5                                                   |                 |
|       |       | 1     | 0     | AN6                                                   |                 |
|       |       |       | 1     | AN7                                                   |                 |
| 1     | 0     | 0     | 0     | AN8                                                   |                 |
|       |       |       | 1     | AN9                                                   |                 |
|       |       | 1     | 0     | ANA                                                   |                 |
|       |       |       | 1     | ANB                                                   |                 |
|       | 1     | *     | *     | No channel selected for software-triggered conversion |                 |

Notes: 1. If conversion is started by software when SCH3 to SCH0 are set to 11\*\*, the conversion result is undetermined. Hardware- or external-triggered conversion, however, will be performed on the channel selected by HCH1 and HCH0.

2. \* Don't care.

24.2.4 A/D Control/Status Register (ADCSR)

|                 |        |        |      |     |     |      |      |   |
|-----------------|--------|--------|------|-----|-----|------|------|---|
| Bit :           | 7      | 6      | 5    | 4   | 3   | 2    | 1    | 0 |
|                 | SEND   | HEND   | ADIE | SST | HST | BUSY | SCNL | — |
| Initial value : | 0      | 0      | 0    | 0   | 0   | 0    | 0    | 1 |
| R/W :           | R/(W)* | R/(W)* | R/W  | R/W | R   | R    | R    | — |

Note: \* Only 0 can be written to bits 7 and 6, to clear the flag.

The A/D status register (ADCSR) is an 8-bit register that can be used to start or stop A/D conversion, or check the status of the A/D converter.

A/D conversion starts when 1 is written in SST flag. A/D conversion can also start by setting HST flag to 1 by hardware- or external-triggering.

For ADTRG start by HSW timing generator in hardware triggering, see section 26.4, HSW (Head-switch) Timing Generator.

When conversion ends, the converted data is stored in the software-triggered A/D result register (ADR) or hardware-triggered A/D result register (AHR), and the SST or HST bit is cleared to 0.

If software-triggering and hardware- or external-triggering are generated at the same time, priority is given to hardware- or external-triggering.

ADCSR is an 8-bit register which is initialized to H'01 by a reset, and in module stop mode, standby mode, watch mode, subactive mode and subsleep mode.

**Bit 7—Software A/D End Flag (SEND):** Indicates the end of A/D conversion.

Bit 7

| SEND | Description                                                           |
|------|-----------------------------------------------------------------------|
| 0    | [Clearing Conditions] (Initial value)<br>0 is written after reading 1 |
| 1    | [Setting Conditions]<br>Software-triggered A/D conversion has ended   |

**Bit 6—Hardware A/D End Flag (HEND):** Indicates that hardware- or external-triggered A/D conversion has ended.

Bit 6

| HEND | Description                                                                      |
|------|----------------------------------------------------------------------------------|
| 0    | [Clearing Conditions] (Initial value)<br>0 is written after reading 1            |
| 1    | [Setting Conditions]<br>Hardware- or external-triggered A/D conversion has ended |

**Bit 5—A/D Interrupt Enable (ADIE):** Selects enable or disable of interrupt (ADI) generation upon A/D conversion end.

**Bit 5**

| ADIE | Description                                                         |
|------|---------------------------------------------------------------------|
| 0    | Interrupt (ADI) upon A/D conversion end is disabled (Initial value) |
| 1    | Interrupt (ADI) upon A/D conversion end is enabled                  |

**Bit 4—Software A/D Start Flag (SST):** Indicates or controls the start and end of software-triggered A/D conversion. This bit remains 1 during software-triggered A/D conversion. When 0 is written in this bit, software-triggered A/D conversion operation can forcibly be aborted.

**Bit 4**

| SST | Description                                                                                      |
|-----|--------------------------------------------------------------------------------------------------|
| 0   | Read: Indicates that software-triggered A/D conversion has ended or been stopped (Initial value) |
|     | Write: Software-triggered A/D conversion is aborted                                              |
| 1   | Read: Indicates that software-triggered A/D conversion is in progress                            |
|     | Write: Starts software-triggered A/D conversion                                                  |

**Bit 3—Hardware A/D Status Flag (HST):** Indicates the status of hardware- or external-triggered A/D conversion. When 0 is written in this bit, A/D conversion is aborted regardless of whether it was hardware-triggered or external-triggered.

**Bit 3**

| HST | Description                                                                             |
|-----|-----------------------------------------------------------------------------------------|
| 0   | Read: Hardware- or external-triggered A/D conversion is not in progress (Initial value) |
|     | Write: Hardware- or external-triggered A/D conversion is aborted                        |
| 1   | Hardware- or external-triggered A/D conversion is in progress                           |

**Bit 2—Busy Flag (BUSY):** During hardware- or external-triggered A/D conversion, if software attempts to start A/D conversion by writing to the SST bit, the SST bit is not modified and instead the BUSY flag is set to 1.

This flag is cleared when the hardware-triggered A/D result register (AHR) is read.

#### Bit 2

| BUSY | Description                                                                                                                            |
|------|----------------------------------------------------------------------------------------------------------------------------------------|
| 0    | No contention for A/D conversion (Initial value)                                                                                       |
| 1    | Indicates an attempt to execute software-triggered A/D conversion while hardware- or external-triggered A/D conversion was in progress |

**Bit 1—Software-Triggered Conversion Cancel Flag (SCNL):** Indicates that software-triggered A/D conversion was canceled by the start of hardware-triggered A/D conversion.

This flag is cleared when A/D conversion is started by software.

#### Bit 1

| SCNL | Description                                                                                                     |
|------|-----------------------------------------------------------------------------------------------------------------|
| 0    | No contention for A/D conversion (Initial value)                                                                |
| 1    | Indicates that software-triggered A/D conversion was canceled by the start of hardware-triggered A/D conversion |

**Bit 0—Reserved:** This bit cannot be modified and is always read as 1.

24.2.5 Trigger Select Register (ADTSR)

|                 |   |   |   |   |   |   |       |       |
|-----------------|---|---|---|---|---|---|-------|-------|
| Bit :           | 7 | 6 | 5 | 4 | 3 | 2 | 1     | 0     |
|                 | — | — | — | — | — | — | TRGS1 | TRGS0 |
| Initial value : | 1 | 1 | 1 | 1 | 1 | 1 | 0     | 0     |
| R/W :           | — | — | — | — | — | — | R/W   | R/W   |

The trigger select register (ADTSR) selects hardware- or external-triggered A/D conversion start factor.

ADTSR is an 8-bit readable/writable register that is initialized to H'FC by a reset, and in module stop mode, standby mode, watch mode, subactive mode and subsleep mode.

**Bits 7 to 2—Reserved:** These bits cannot be modified and are always read as 1.

**Bits 1 and 0—Trigger Select (TRGS1, TRGS0):** These bits select hardware- or external-triggered A/D conversion start factor. Set these bits when A/D conversion is not in progress.

| Bit 1 | Bit 0 | Description                                                                   |
|-------|-------|-------------------------------------------------------------------------------|
| TRGS1 | TRGS0 |                                                                               |
| 0     | 0     | Hardware- or external-triggered A/D conversion is disabled<br>(Initial value) |
|       | 1     | Hardware-triggered (ADTRG) A/D conversion is selected                         |
| 1     | 0     | Hardware-triggered (DFG) A/D conversion is selected                           |
|       | 1     | External-triggered (ADTRG) A/D conversion is selected                         |

24.2.6 Port Mode Register 0 (PMR0)

|                 |       |       |       |       |       |       |       |       |
|-----------------|-------|-------|-------|-------|-------|-------|-------|-------|
| Bit :           | 7     | 6     | 5     | 4     | 3     | 2     | 1     | 0     |
|                 | PMR07 | PMR06 | PMR05 | PMR04 | PMR03 | PMR02 | PMR01 | PMR00 |
| Initial value : | 0     | 0     | 0     | 0     | 0     | 0     | 0     | 0     |
| R/W :           | R/W   | R/W   | R/W   | R/W   | R/W   | R/W   | R/W   | R/W   |

Port mode register 0 (PMR0) controls switching of each pin function of port 0. Switching is specified for each bit.

PMR0 is an 8-bit readable/writable register and is initialized to H'00 by a reset.




**Bits 7 to 0—P07/AN7 to P00/AN0 Pin Switching (PMR07 to PMR00):** These bits set the P0n/ANn pin as the input pin for P0n or as the ANn pin for A/D conversion analog input channel.

**Bit n**

| PMR0n | Description                                                       |
|-------|-------------------------------------------------------------------|
| 0     | P0n/ANn functions as a general-purpose input port (Initial value) |
| 1     | P0n/ANn functions as an analog input channel                      |

(n = 7 to 0)

**24.2.7 Module Stop Control Register (MSTPCR)**

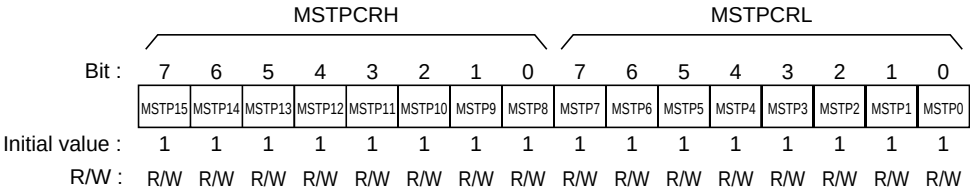

MSTPCR consists of 8-bit readable/writable registers and performs module stop mode control. When the MSTP2 bit in MSTPCR is set to 1, A/D converter operation stops at the end of the bus cycle and a transition is made to module stop mode. For details, see section 4.5, Module Stop Mode.

MSTPCR is initialized to H'FFFF by a reset

**Bit 2—Module Stop (MSTP2):** Specifies the A/D converter module stop mode.

**MSTPCRL**

**Bit 2**

| MSTP2 | Description                                           |
|-------|-------------------------------------------------------|
| 0     | A/D converter module stop mode is cleared             |
| 1     | A/D converter module stop mode is set (Initial value) |

## 24.3 Interface to Bus Master

ADR and AHR are 16-bit registers, but the data bus to the bus master is only 8 bits wide. Therefore, in accesses by the bus master, the upper byte is accessed directly, but the lower byte is accessed via a temporary register (TEMP).

A data reading from ADR and AHR is performed as follows. When the upper byte is read, the upper byte value is transferred to the CPU and the lower byte value is transferred to TEMP. Next, when the lower byte is read, the TEMP contents are transferred to the CPU.

When reading ADR and AHR, always read the upper byte before the lower byte. It is possible to read only the upper byte, but if only the lower byte is read, incorrect data may be obtained.

Figure 24.3 shows the data flow for ADR access. The data flow for AHR access is the same.

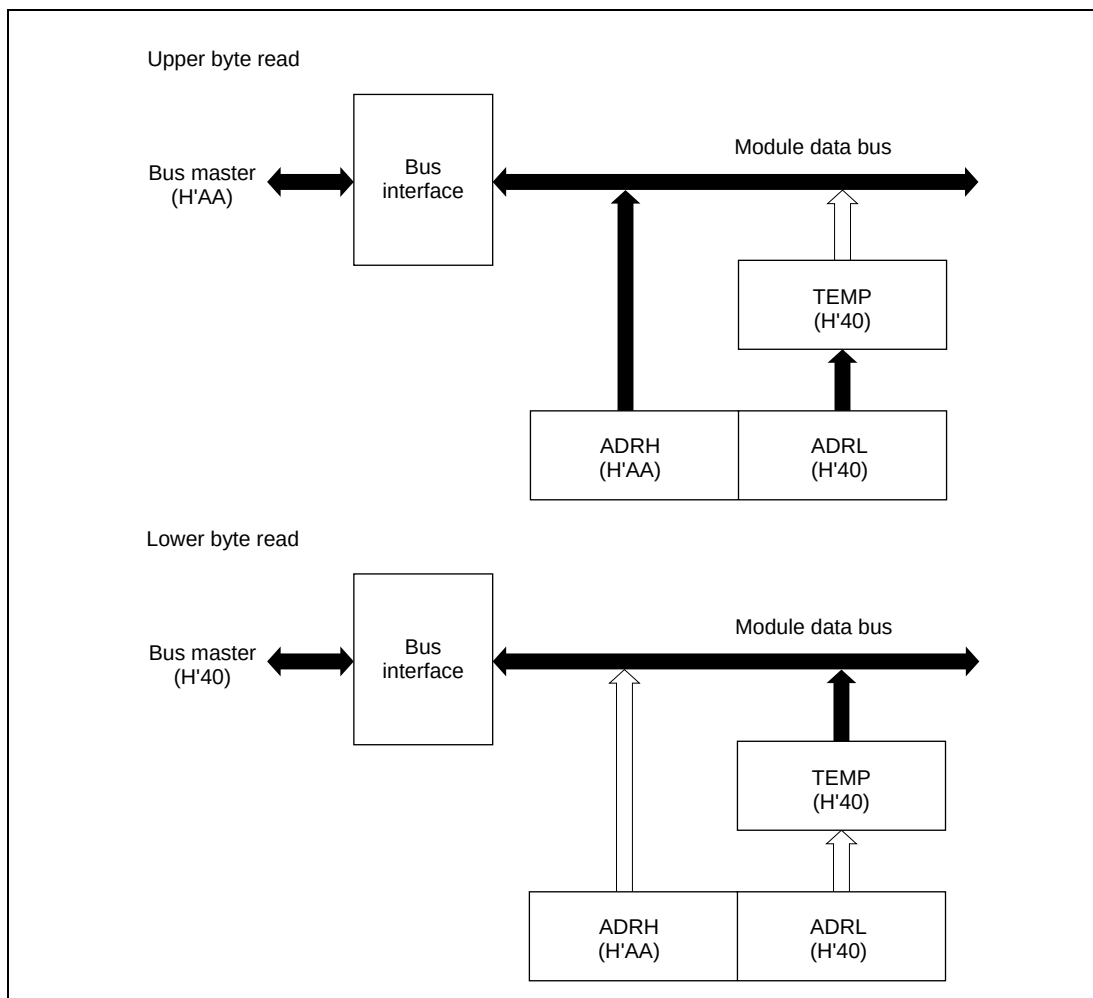


Figure 24.3 ADR Access Operation (Reading H'AA40)

## 24.4 Operation

The A/D converter operates by successive approximations with 10-bit resolution.

### 24.4.1 Software-Triggered A/D Conversion

A/D conversion starts when software sets the software A/D start flag (SST bit) to 1. The SST bit remains set to 1 during A/D conversion, and is automatically cleared to 0 when conversion ends. Conversion can be software-triggered on any of the 12 channels provided by analog input pins AN0 to ANB. Bits SCH3 to SCH0 in ADCR select the analog input pin used for software-triggered A/D conversion. Pins AN8 to ANB are also available for hardware- or external-triggered conversion.

When conversion ends, SEND flag in ADCSR bit is set to 1. If ADIE bit in ADCSR is also set to 1, an A/D conversion end interrupt occurs.

If the conversion time or input channel selection in ADCR needs to be changed during A/D conversion, to avoid malfunctions, first clear the SST bit to 0 to halt A/D conversion.

If software writes 1 in the SST bit to start software-triggered conversion while hardware- or external-triggered conversion is in progress, the hardware- or external-triggered conversion has priority and the software-triggered conversion is not executed. At this time, BUSY flag in ADCSR is set to 1. The BUSY flag is cleared to 0 when the hardware-triggered A/D result register (AHR) is read. If conversion is triggered by hardware while software-triggered conversion is in progress, the software-triggered conversion is immediately canceled and the SST flag is cleared to 0, and SCNL flag in ADCSR is set to 1. The SCNL flag is cleared when software writes 1 in the SST bit to start conversion after the hardware-triggered conversion ends.

## 24.4.2 Hardware- or External-Triggered A/D Conversion

The system contains the hardware trigger function that allows to turn on A/D conversion at a specified timing by use of the hardware trigger (internal signals: ADTRG and DFG) and the incoming external trigger ( $\overline{\text{ADTRG}}$ ). This function can be used to measure an analog signal that varies in synchronization with an external signal at a fixed timing.

To execute hardware- or external-triggered A/D conversion, select appropriate start factor in TRGS1 and TRGS0 bits in ADTSR. When the selected triggering occurs, HST flag in ADCSR is set to 1 and A/D conversion starts. The HST flag remains 1 during A/D conversion, and is automatically cleared to 0 when conversion ends. For ADTRG start by HSW timing generator in hardware triggering, see section 26.4, HSW Timing Generator. Setting of the analog input pins on four channels from AN8 to ANB can be modified with the hardware trigger or the incoming external trigger. Setting is done from HCH1 and HCH0 bits on ADCR. Pins AN8 to ANB are also available for software-triggered conversion.

When conversion ends, HEND flag in ADCSR is set to 1. If ADIE bit in ADCSR is also set to 1, an A/D conversion end interrupt occurs.

If the conversion time or input channel selection in ADCR needs to be changed during A/D conversion, to avoid malfunctions, first clear the HST flag to 0 to halt A/D conversion.

If software writes 1 in the SST bit to start software-triggered conversion while hardware- or external-triggered conversion is in progress, the hardware- or external-triggered conversion has priority and the software-triggered conversion is not executed. At this time, BUSY flag in ADCSR is set to 1. The BUSY flag is cleared to 0 when the hardware-triggered A/D result register (AHR) is read.

If conversion is triggered by hardware while software-triggered conversion is in progress, the software-triggered conversion is immediately canceled and the SST flag is cleared to 0, and SCNL flag in ADCSR is set to 1 (the SCNL flag is cleared when software writes 1 in the SST bit to start conversion after the hardware-triggered conversion ends). The analog input channel changes automatically from the channel that was undergoing software-triggered conversion (selected by bits SCH3 to SCH0 in ADCR) to the channel selected by bits HCH1 and HCH0 in ADCR for hardware- or external-triggered conversion. After the hardware- or external-triggered conversion ends, the channel reverts to the channel selected by the software-triggered conversion channel select bits in ADCR.

Hardware- or external-triggered conversion has priority over software-triggered conversion, so the A/D interrupt-handling routine should check the SCNL and BUSY flags when it processes the converted data.

## 24.5 Interrupt Sources

When A/D conversion ends, SEND or HEND flag in ADCSR is set to 1. The A/D conversion end interrupt (ADI) can be enabled or disabled by ADIE bit in ADCSR.

Figure 24.4 shows the block diagram of A/D conversion end interrupt.

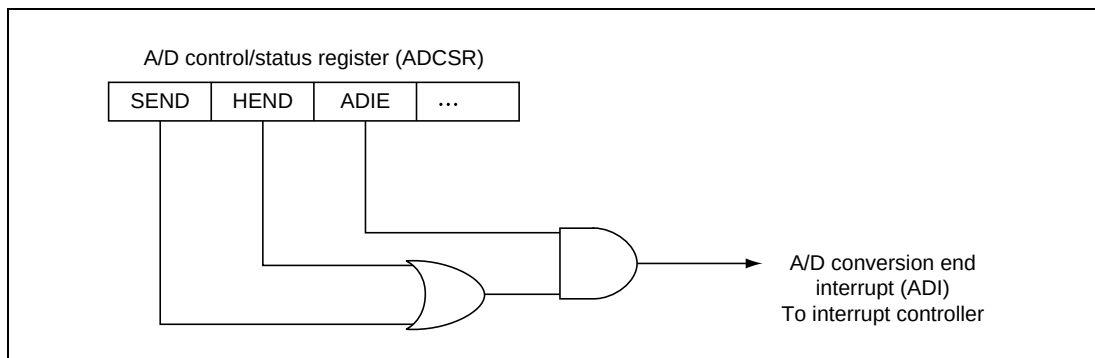


**Figure 24.4 Block Diagram of A/D Conversion End Interrupt**



# Section 25 Address Trap Controller (ATC)

## 25.1 Overview

The address trap controller (ATC) is capable of generating interrupt by setting an address to trap, when the address set appears during bus cycle.

### 25.1.1 Features

Address to trap can be set independently at three points.

### 25.1.2 Block Diagram

Figure 25.1 shows a block diagram of the address trap controller.

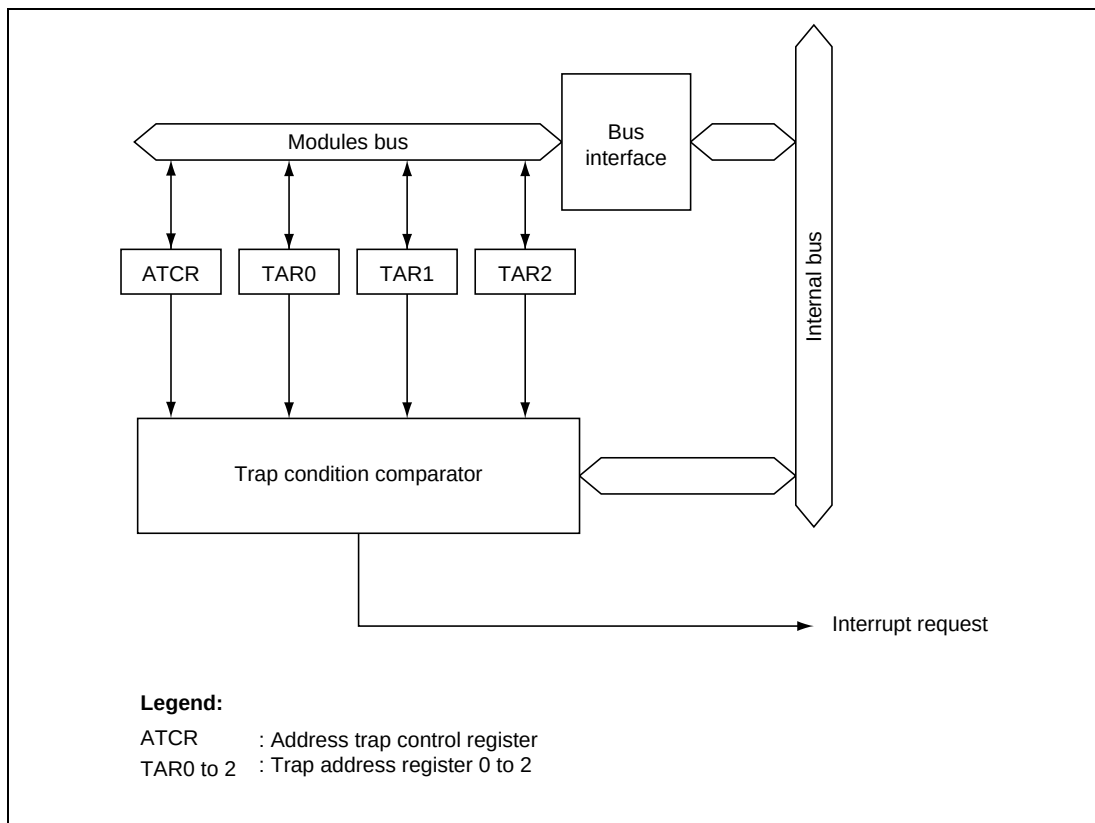


**Figure 25.1 Block Diagram of ATC**

### 25.1.3 Register Configuration

**Table 25.1 Register List**

| Name                          | Abbrev. | R/W | Initial Value | Address*         |
|-------------------------------|---------|-----|---------------|------------------|
| Address trap control register | ATCR    | R/W | H'F8          | H'FFB9           |
| Trap address register 0       | TAR0    | R/W | H'F00000      | H'FFB0 to H'FFB2 |
| Trap address register 1       | TAR1    | R/W | H'F00000      | H'FFB3 to H'FFB5 |
| Trap address register 2       | TAR2    | R/W | H'F00000      | H'FFB6 to H'FFB8 |

Note: \* Lower 16 bits of the address.

## 25.2 Register Descriptions

### 25.2.1 Address Trap Control Register (ATCR)

|                 |   |   |   |   |   |      |      |      |
|-----------------|---|---|---|---|---|------|------|------|
| Bit :           | 7 | 6 | 5 | 4 | 3 | 2    | 1    | 0    |
|                 | — | — | — | — | — | TRC2 | TRC1 | TRC0 |
| Initial value : | 1 | 1 | 1 | 1 | 1 | 0    | 0    | 0    |
| R/W :           | — | — | — | — | — | R/W  | R/W  | R/W  |

**Bits 7 to 3—Reserved:** These bits cannot be modified and are always read as 1.

**Bit 2—Trap Control 2 (TRC2):** Sets ON/OFF operation of the address trap function 2.

#### Bit 2

| TRC2 | Description                                      |
|------|--------------------------------------------------|
| 0    | Address trap function 2 disabled (Initial value) |
| 1    | Address trap function 2 enabled                  |



**Bit 1—Trap Control 1 (TRC1):** Sets ON/OFF operation of the address trap function 1.

**Bit 1**

| TRC1 | Description                                      |
|------|--------------------------------------------------|
| 0    | Address trap function 1 disabled (Initial value) |
| 1    | Address trap function 1 enabled                  |

**Bit 0—Trap Control 0 (TRC0):** Sets ON/OFF operation of the address trap function 0.

**Bit 0**

| TRC0 | Description                                      |
|------|--------------------------------------------------|
| 0    | Address trap function 0 disabled (Initial value) |
| 1    | Address trap function 0 enabled                  |

## 25.2.2 Trap Address Register 2 to 0 (TAR2 to TAR0)

|                 |     |     |     |     |     |     |     |     |
|-----------------|-----|-----|-----|-----|-----|-----|-----|-----|
| Bit :           | 7   | 6   | 5   | 4   | 3   | 2   | 1   | 0   |
|                 | A23 | A22 | A21 | A20 | A19 | A18 | A17 | A16 |
| Initial value : | 0   | 0   | 0   | 0   | 0   | 0   | 0   | 0   |
| R/W :           | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |

|                 |     |     |     |     |     |     |     |     |
|-----------------|-----|-----|-----|-----|-----|-----|-----|-----|
| Bit :           | 7   | 6   | 5   | 4   | 3   | 2   | 1   | 0   |
|                 | A15 | A14 | A13 | A12 | A11 | A10 | A9  | A8  |
| Initial value : | 0   | 0   | 0   | 0   | 0   | 0   | 0   | 0   |
| R/W :           | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |

|                 |     |     |     |     |     |     |     |   |
|-----------------|-----|-----|-----|-----|-----|-----|-----|---|
| Bit :           | 7   | 6   | 5   | 4   | 3   | 2   | 1   | 0 |
|                 | A7  | A6  | A5  | A4  | A3  | A2  | A1  | — |
| Initial value : | 0   | 0   | 0   | 0   | 0   | 0   | 0   | 0 |
| R/W :           | R/W | R/W | R/W | R/W | R/W | R/W | R/W | — |

The TAR is composed of three 8-bit readable/writable registers (TARnA, B, and C)(n = 2 to 0)

The TAR sets the address to trap. The function of the TAR2 to TAR0 is the same.

The TAR is initialized to H'00 by a reset.

TARA bits 7 to 0: Addresses 23 to 16 (A23 to A16)

TARB bits 7 to 0: Addresses 15 to 8 (A15 to A8)

TARC bits 7 to 0: Addresses 7 to 1 (A7 to A1)

If the value installed in this register and internal address buses A23 to A1 match as a result of comparison, an interruption occurs.

For the address to trap, set to the address where the first byte of an instruction exists. In the case of other addresses, it may not be considered that the condition has been satisfied.

Bit 0 of this register is fixed at 0. The address to trap becomes an even address.

The range where comparison is made is H'000000 to H'FFFFFFE.

## 25.3 Precautions in Usage

Address trap interrupt arises 2 states after prefetching the trap address. Trap interrupt may occur after the trap instruction has been executed, depending on a combination of instructions immediately preceding the setting up of the address trap.

If the instruction to trap immediately follows the branch instruction or the conditional branch instruction, operation may differ, depending on whether the condition was satisfied or not, or the address to be stacked may be located at the branch. Figures 25.2 to 25.22 show specific operations.

For information as to where the next instruction prefetch occurs during the execution cycle of the instruction, see appendix A.5 of this manual or section 2.7 Bus State during Execution of Instruction of the H8S/2600 and H8S/2000 Series Programming Manual. (R:W NEXT is the next instruction prefetch.)

### 25.3.1 Basic Operations

After terminating the execution of the instruction being executed in the second state from the trap address prefetch, the address trap interrupt exception handling is started.

- Figure 25.2 shows the operation when the instruction immediately preceding the trap address is that of 3 states or more of the execution cycle and the next instruction prefetch occurs in the state before the last 2 states. The address to be stacked is 0260.

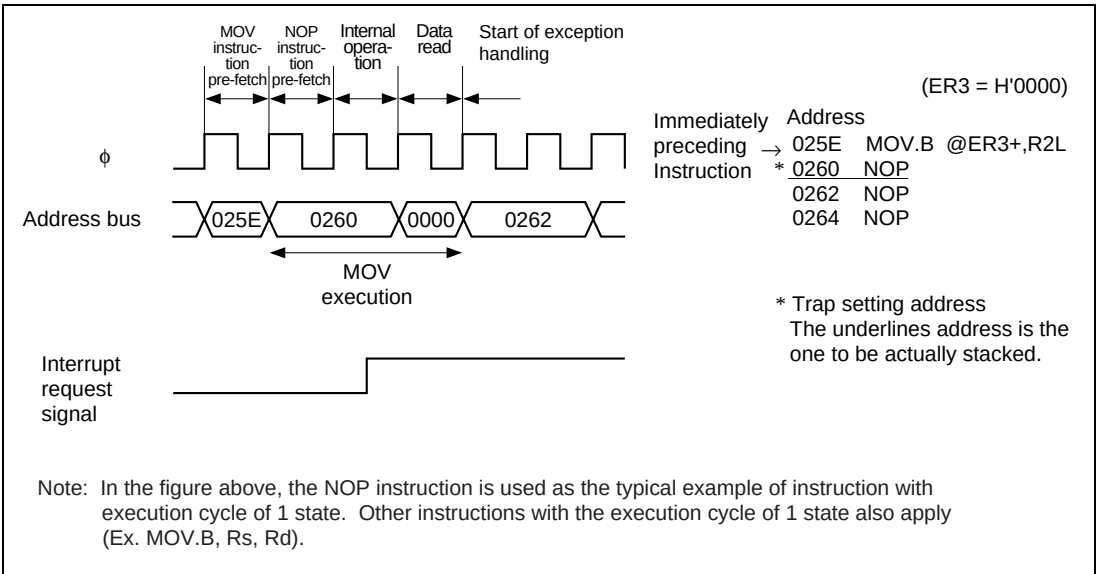


Figure 25.2 Basic Operations (1)

2. Figure 25.3 shows the operation when the instruction immediately preceding the trap address is that of 2 states or more of the execution cycle and the next instruction prefetch occurs in the second state from the last. The address to be stacked is 0268.

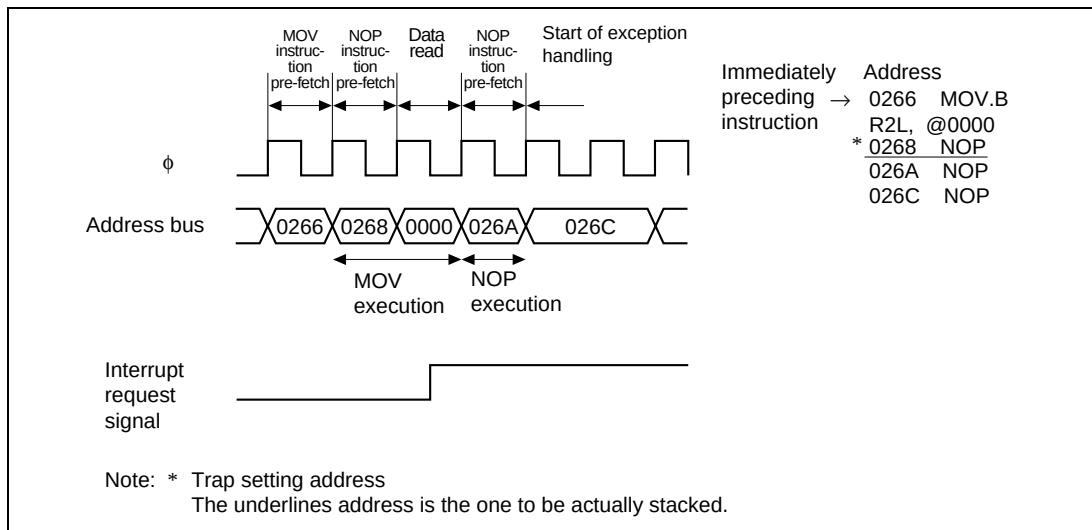


**Figure 25.3 Basic Operations (2)**

3. Figure 25.4 shows the operation when the instruction immediately preceding the trap address is that of 1 state or 2 states or more and the prefetch occurs in the last state. The address to be stacked is 025C.

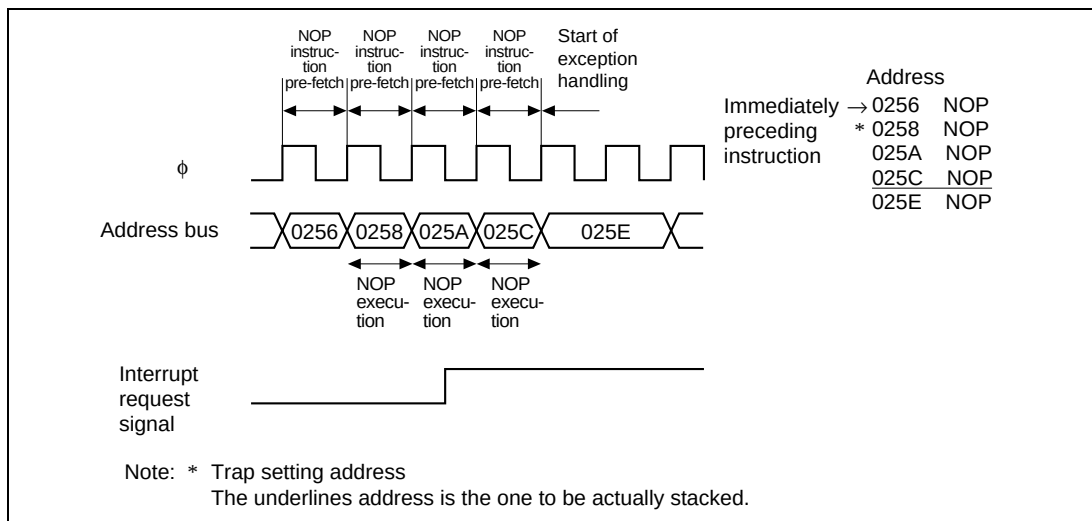


**Figure 25.4 Basic Operations (3)**

25.3.2 Enabling

The address trap function becomes valid after executing one instruction following the setting of the enable bit of the address trap control register (ATCR) to 1.

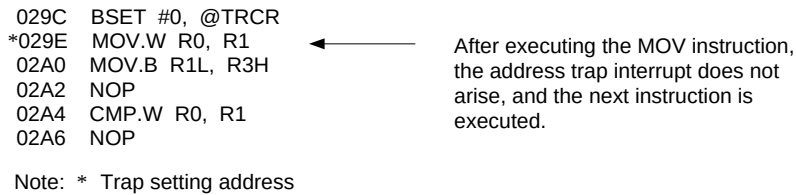


Figure 25.5 Enabling

25.3.3 Bcc Instruction

- 1. When the condition is satisfied by Bcc instruction (8-bit displacement)

If the trap address is the next instruction to the Bcc instruction and the condition is satisfied by the Bcc instruction and then branched, transition is made to the address trap interrupt after executing the instruction at the branch. The address to be stacked is 02A8.

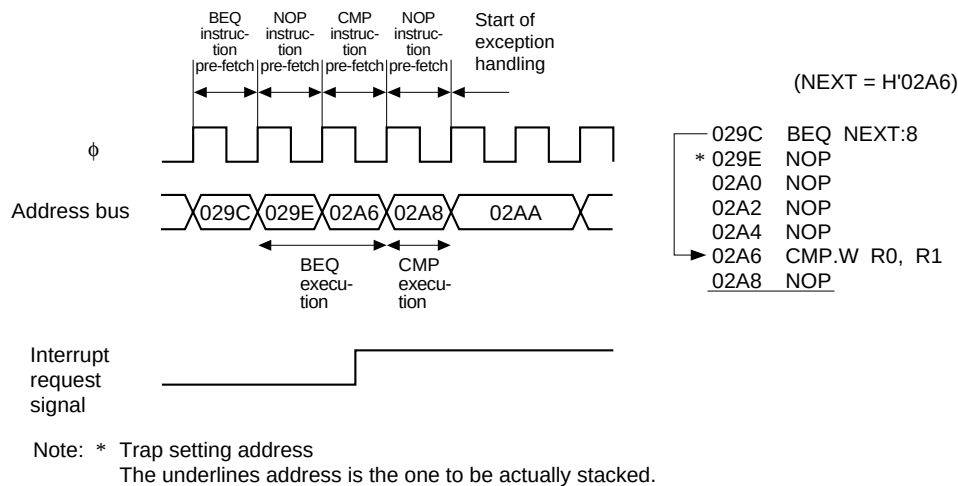


Figure 25.6 When the Condition Satisfied by Bcc Instruction (8-bit Displacement)

## 2. When the condition is not satisfied by Bcc instruction (8-bit displacement)

If the trap address is the next instruction to the Bcc instruction and the condition is not satisfied by the Bcc instruction and thus it fails to branch, transition is made to the address trap interrupt after executing the trap address instruction and prefetching the next instruction. The address to be stacked is 02A2.

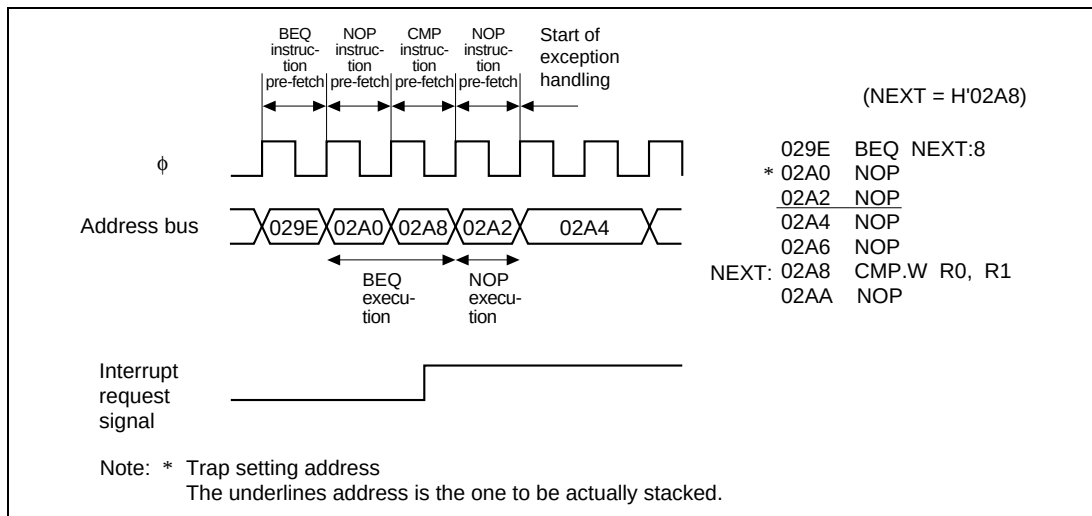


**Figure 25.7 When the Condition Not Satisfied by Bcc Instruction (8-bit Displacement)**

### 3. When condition is not satisfied by Bcc instruction (16-bit displacement)

If the trap address is the next instruction to the Bcc instruction and the condition is not satisfied by the Bcc instruction and thus it fails to branch, transition is made to the address trap interrupt after executing the trap address instruction (if the trap address instruction is that of 2 states or more. If the instruction is that of 1 state, after executing two instructions). The address to be stacked is 02C0.

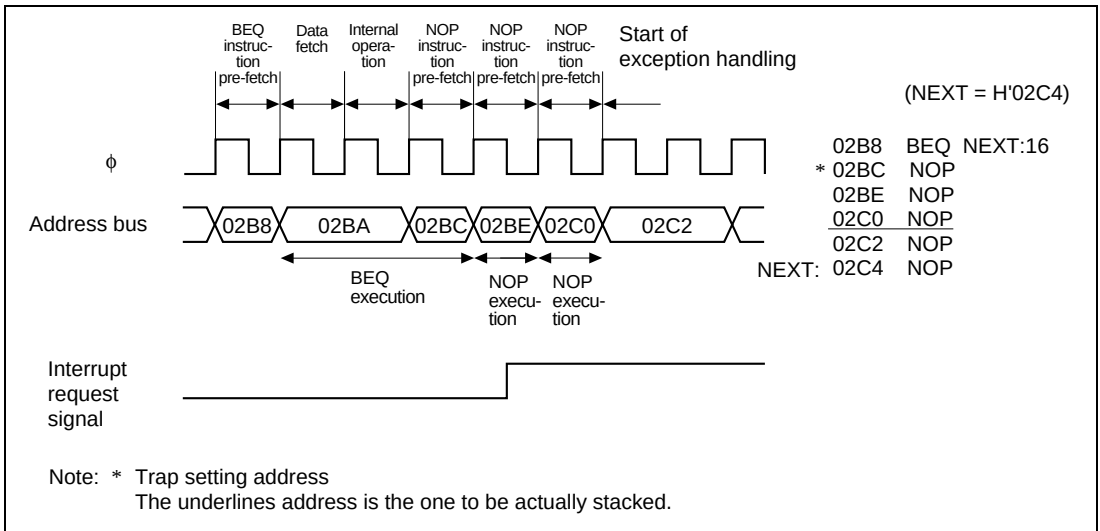


**Figure 25.8 When the Condition Not Satisfied by Bcc Instruction (16-bit Displacement)**

4. When the condition is not satisfied by Bcc instruction (Trap address at branch)

When the trap address is at the branch of the Bcc instruction and the condition is not satisfied by the Bcc instruction and thus it fails to branch, transition is made into the address trap interrupt after executing the next instruction (if the next instruction is that of 2 states or more. If the next instruction is that of 1 state, after executing two instructions). The address to be stacked is 0262.

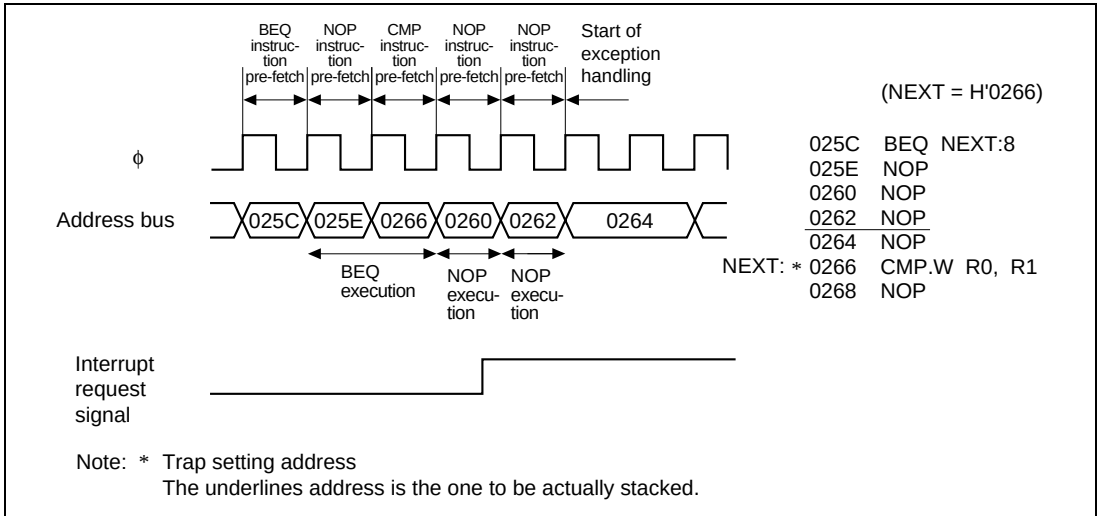


**Figure 25.9 When the Condition Not Satisfied by Bcc Instruction  
(Trap Address at Branch)**



25.3.4 BSR Instruction

1. BSR Instruction (8-bit displacement)

When the trap address is the next instruction to the BSR instruction and the addressing mode is an 8-bit displacement, transition is made to the address trap interrupt after prefetching the instruction at the branch. The address to be stacked is 02C2.

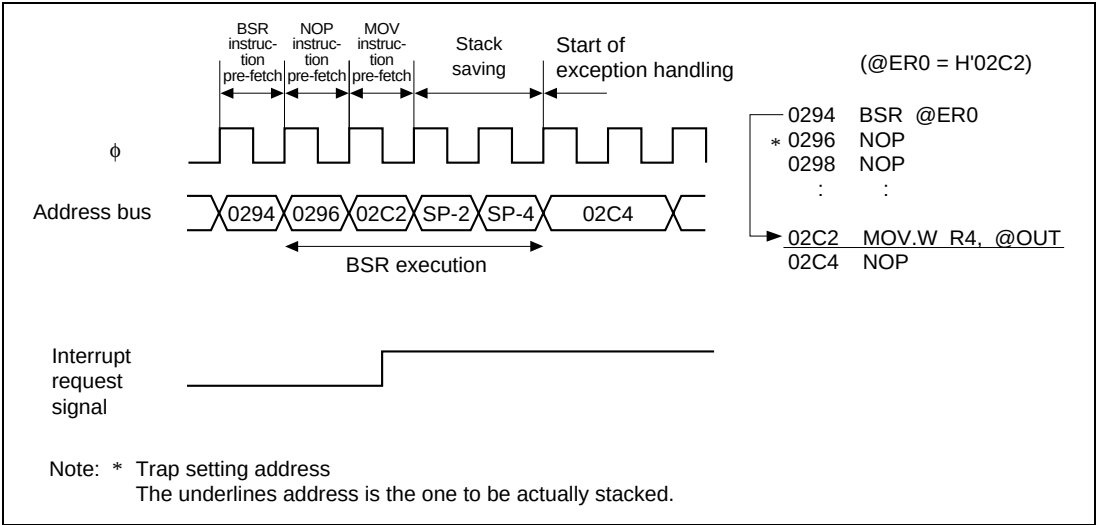


Figure 25.10 BSR Instruction (8-bit Displacement)

25.3.5 JSR Instruction

1. JSR Instruction (Register indirect)

When the trap address is the next instruction to the JSR instruction and the addressing mode is a register indirect, transition is made to the address trap interrupt after prefetching the instruction at the branch. The address to be stacked is 02C8.

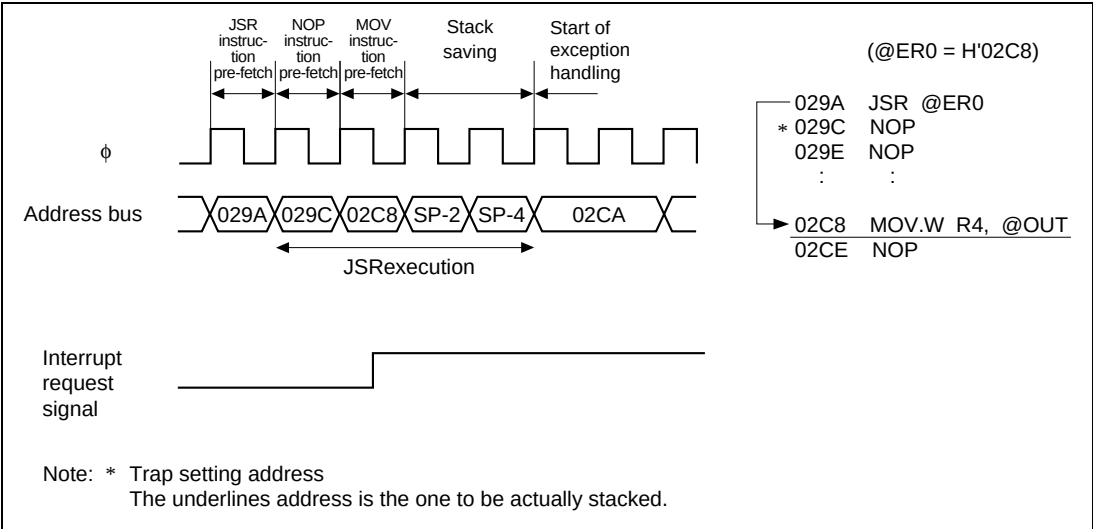


Figure 25.11 JSR Instruction (Register Indirect)

2. JSR Instruction (Memory indirect)

When the trap address is the next instruction to the JSR instruction and the addressing mode is memory indirect, transition is made to the address trap interrupt after prefetching the instruction at the branch. The address to be stacked is 02EA.

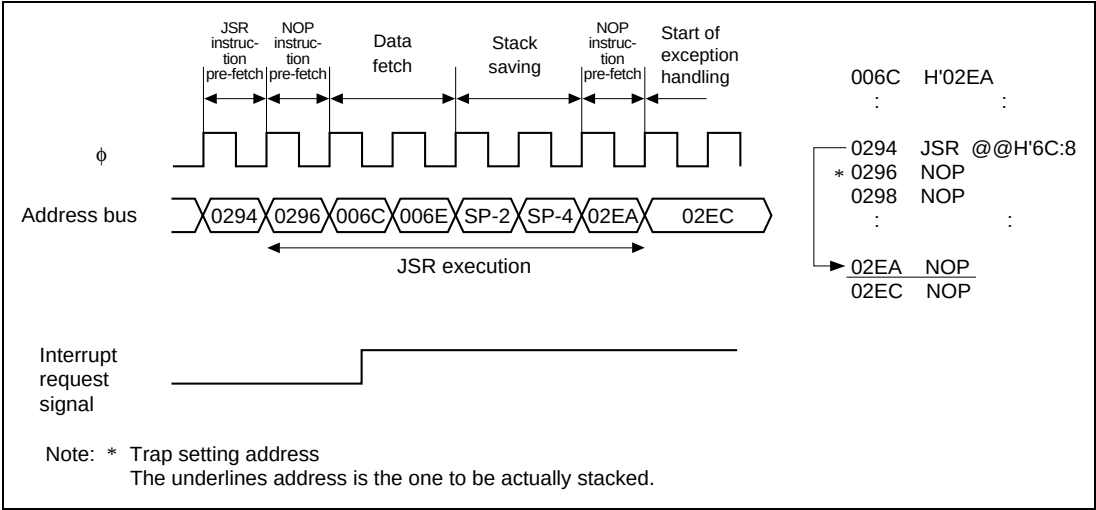


Figure 25.12 JSR Instruction (Memory Indirect)

## 25.3.6 JMP Instruction

### 1. JMP Instruction (Register indirect)

When the trap address is the next instruction to the JMP instruction and the addressing mode is a register indirect, transition is made to the address trap interrupt after prefetching the instruction at the branch. The address to be stacked is 02AA.

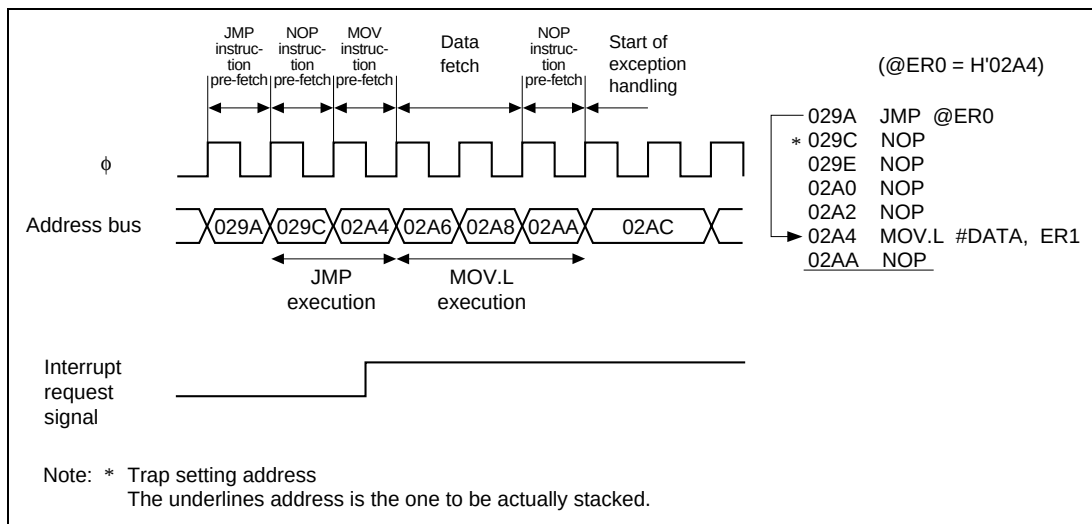


**Figure 25.13 JMP Instruction (Register Indirect)**

## 2. JMP Instruction (Memory indirect)

When the trap address is the next instruction to the JMP instruction and the addressing mode is memory indirect, transition is made to the address trap interrupt after prefetching the instruction at the branch. The address to be stacked is 02E4.

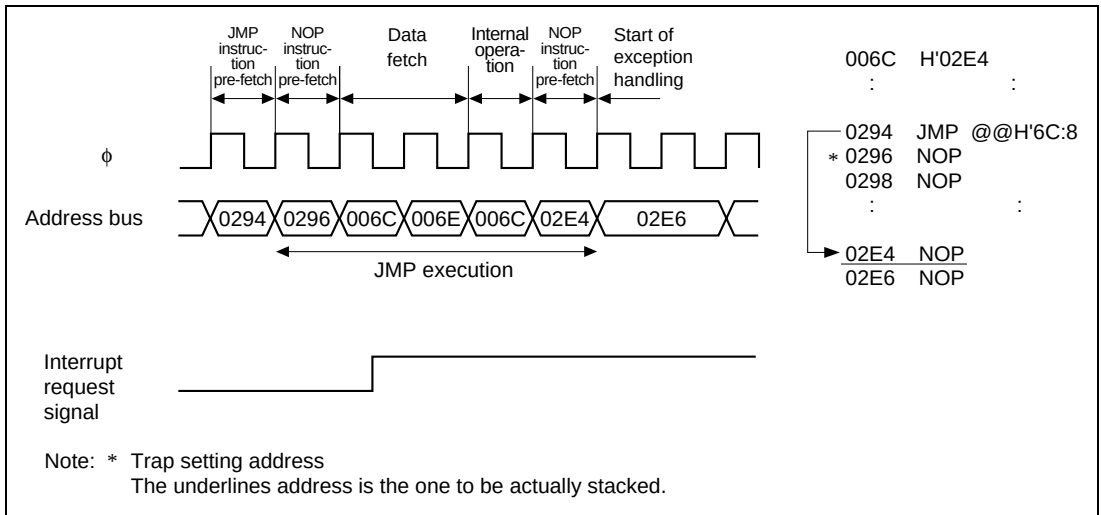


**Figure 25.14 JMP Instruction (Memory Indirect)**

## 25.3.7 RTS Instruction

When the trap address is the next instruction to the RTS instruction, transition is made to the address trap interrupt after reading the CCR and PC from the stack and prefetching the instruction at the return location. The address to be stacked is 0298.

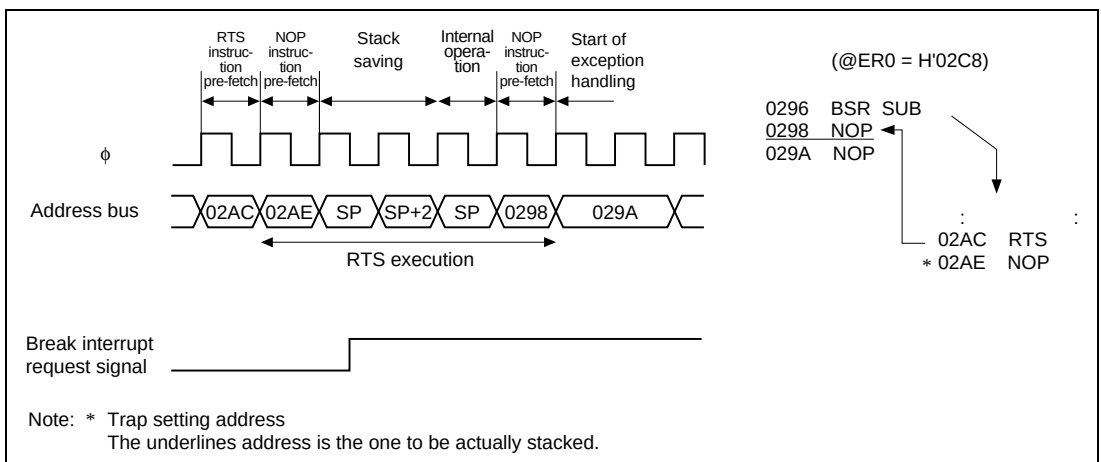


**Figure 25.15 RTS Instruction**

25.3.8 SLEEP Instruction

1. SLEEP Instruction 1

When the trap address is the SLEEP instruction and the instruction execution cycle immediately preceding the SLEEP instruction is that of 2 states or more and prefetch does not occur in the last state, the SLEEP instruction is not executed and transition is made to the address trap interrupt without going into SLEEP mode. The address to be stacked is 0274.

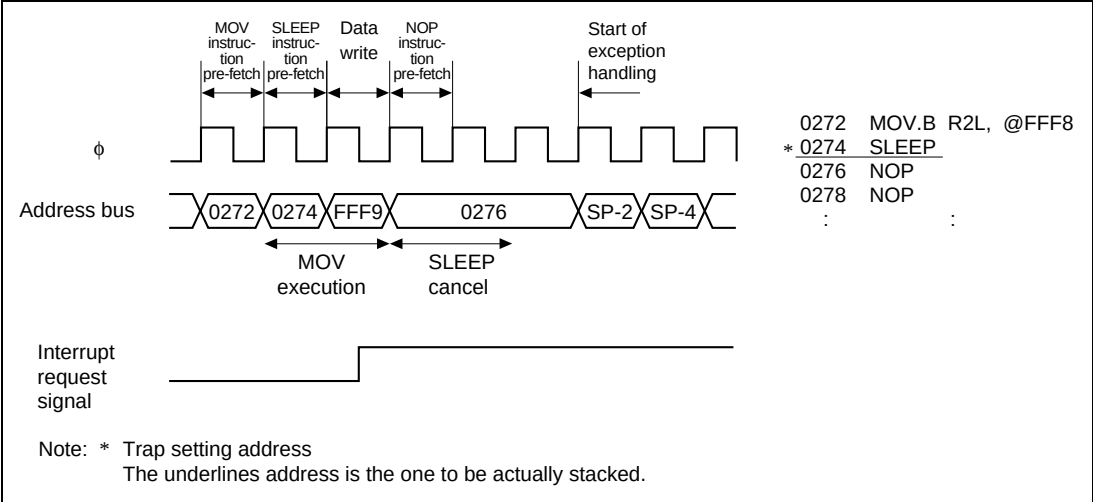


Figure 25.16 SLEEP Instruction (1)

2. SLEEP Instruction 2

When the trap address is the SLEEP instruction and the instruction execution cycle immediately preceding the SLEEP instruction is that of 1 state 2 states or more and prefetch occurs in the last state, this puts in the SLEEP mode after execution of the SLEEP instruction, and the SLEEP mode is cancelled by the address trap interrupt and transition is made to the exception handling. The address to be stacked is 0264.

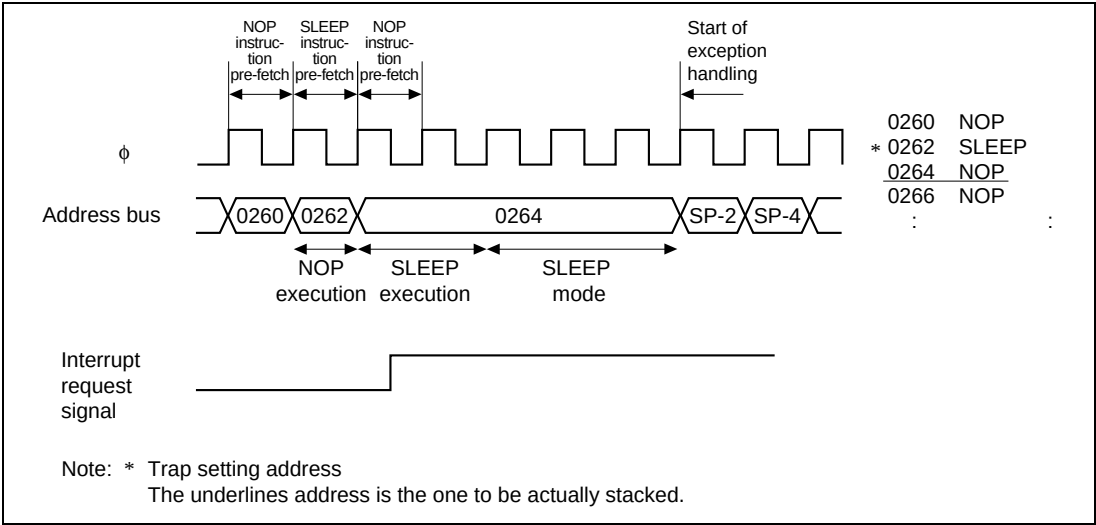


Figure 25.17 SLEEP Instruction (2)

### 3. SLEEP Instruction 3

When the trap address is the next instruction to the SLEEP instruction, this puts in the SLEEP mode after execution of the SLEEP instruction, and the SLEEP mode is cancelled by the address trap interrupt and transition is made to the exception handling. The address to be stacked is 0282.

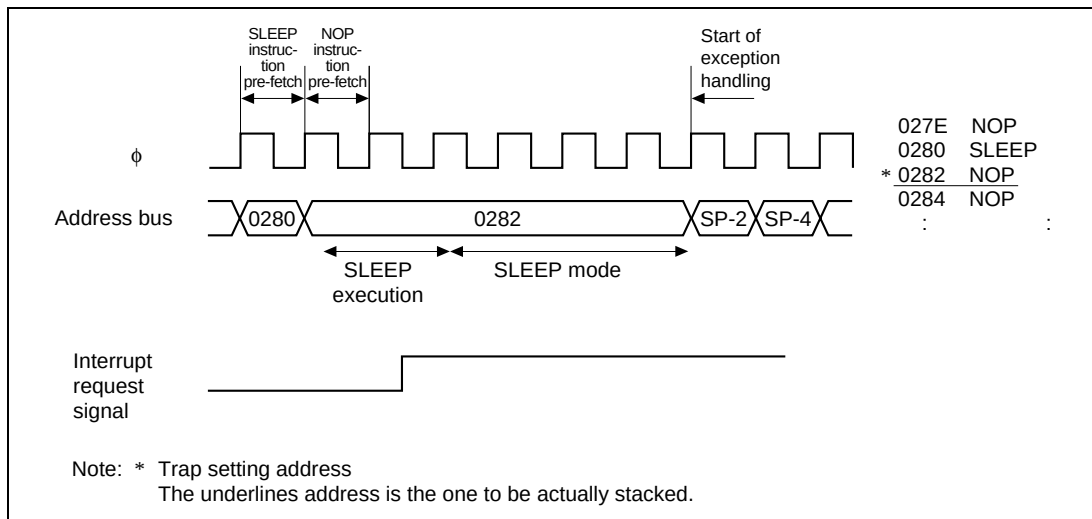


**Figure 25.18 SLEEP Instruction (3)**



#### 4. SLEEP Instruction 4 (Standby or Watch Mode Setting)

When the trap address is the SLEEP instruction and the instruction immediately preceding the SLEEP instruction is that of 1 state or 2 states or more and prefetch occurs in the last state, this puts in the standby (watch) mode after execution of the SLEEP instruction. After that, if the standby (watch) mode is cancelled by the NMI interrupt, transition is made to NMI interrupt following the CCR and PC (at the address of 0266) stack saving and vector reading. However, if the address trap interrupt arises before starting execution of the NMI interrupt processing, transition is made to the address trap exception handling. The address to be stacked is the starting address of the NMI interrupt processing.

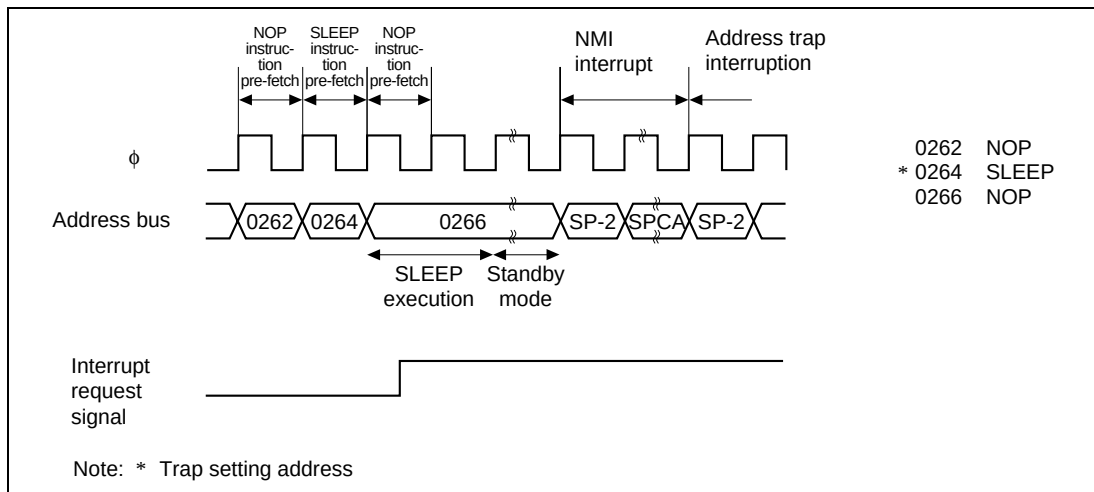


**Figure 25.19 SLEEP Instruction (4) (Standby or Watch Mode Setting)**

## 5. SLEEP Instruction 5 (Standby or Watch Mode Setting)

When the trap address is the next instruction to the SLEEP instruction, this puts in the standby (watch) mode after execution of the SLEEP instruction. After that, if the standby (watch) mode is cancelled by the NMI interruption, transition is made to the NMI interrupt following the CCR and PC (at the address of 0266) stack saving and vector reading. However, if the address trap interrupt arises before starting execution of the NMI interrupt processing, transition is made to the address trap exception handling. The address to be stacked is the starting address of the NMI interrupt processing.

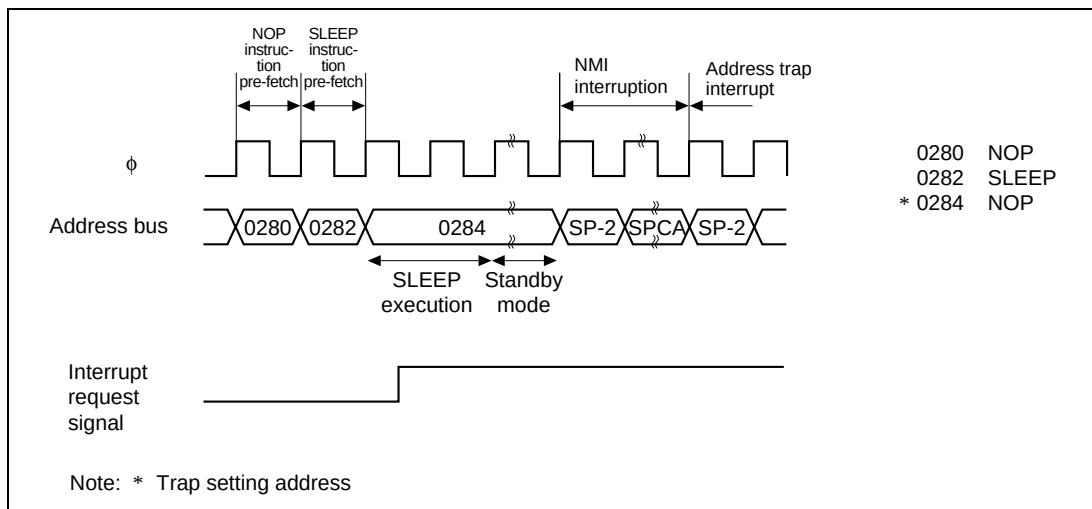


**Figure 25.20 SLEEP Instruction (5) (Standby or Watch Mode Setting)**

### 25.3.9 Competing Interrupt


#### 1. General Interrupt (Interrupt other than NMI)

When the ATC interrupt request is made at the timing in (1) (A) against the general interrupt request, the interruption appears to take place in the ATC at the timing earlier than usual, because higher priority is assigned to the ATC interrupt processing (Simultaneous interrupt with the general interrupt has no effect on processing). The address to be stacked is 029E. For comparison, the case where the trap address is set at 02A0 if no general interrupt request was made is shown in (2). The address to be stacked is 02A4.

```

0296 MOV.B R2L, @Port
029A NOP
029C NOP
029E NOP } Set one of these to the
02A0 NOP   trap address
02A2 NOP
02A4 NOP

```

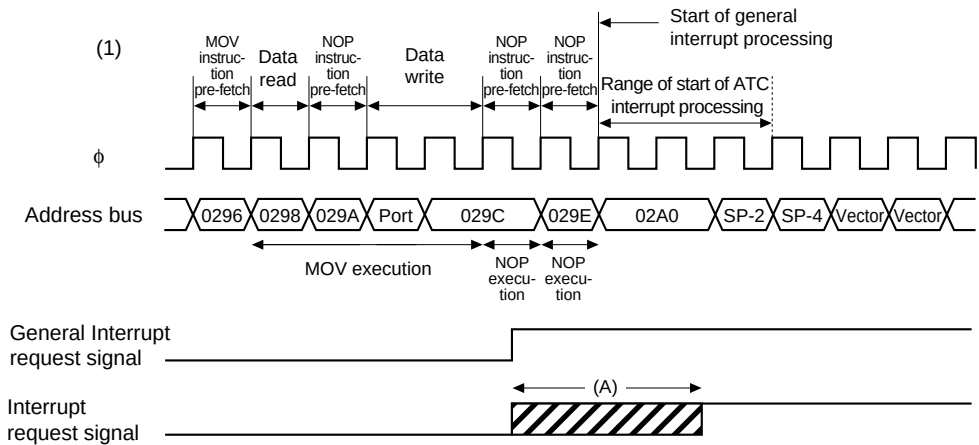

```

0296 MOV.B R2L, @Port
029A NOP
029C NOP
029E NOP
02A0 NOP Trap address
02A2 NOP
Address to be stacked → 02A4 NOP

```

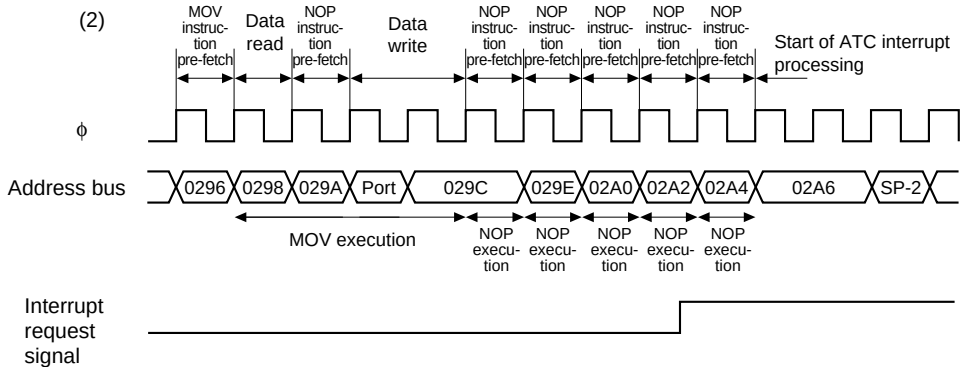


**Figure 25.21 Competing Interrupt (General Interrupt)**

## 2. In case of NMI

When the NMI interruption request is made at the timing in (1) (A) against the ATC interrupt request, the interrupt appears to take place in NMI at the timing earlier than usual, because higher priority is assigned to the NMI interrupt processing. The ATC interrupt processing starts after fetching the instruction at the starting address of the NMI interrupt processing. The address to be stacked is 02E0 for the NMI and 340 for the ATC.

When the ATC interrupt request is made at the timing in (2) (B) against the NMI interrupt request, the ATC interrupt processing starts after fetching the instruction at the starting address of the NMI interrupt processing. The address to be stacked is 02E6 for the NMI and 0340 for the ATC.

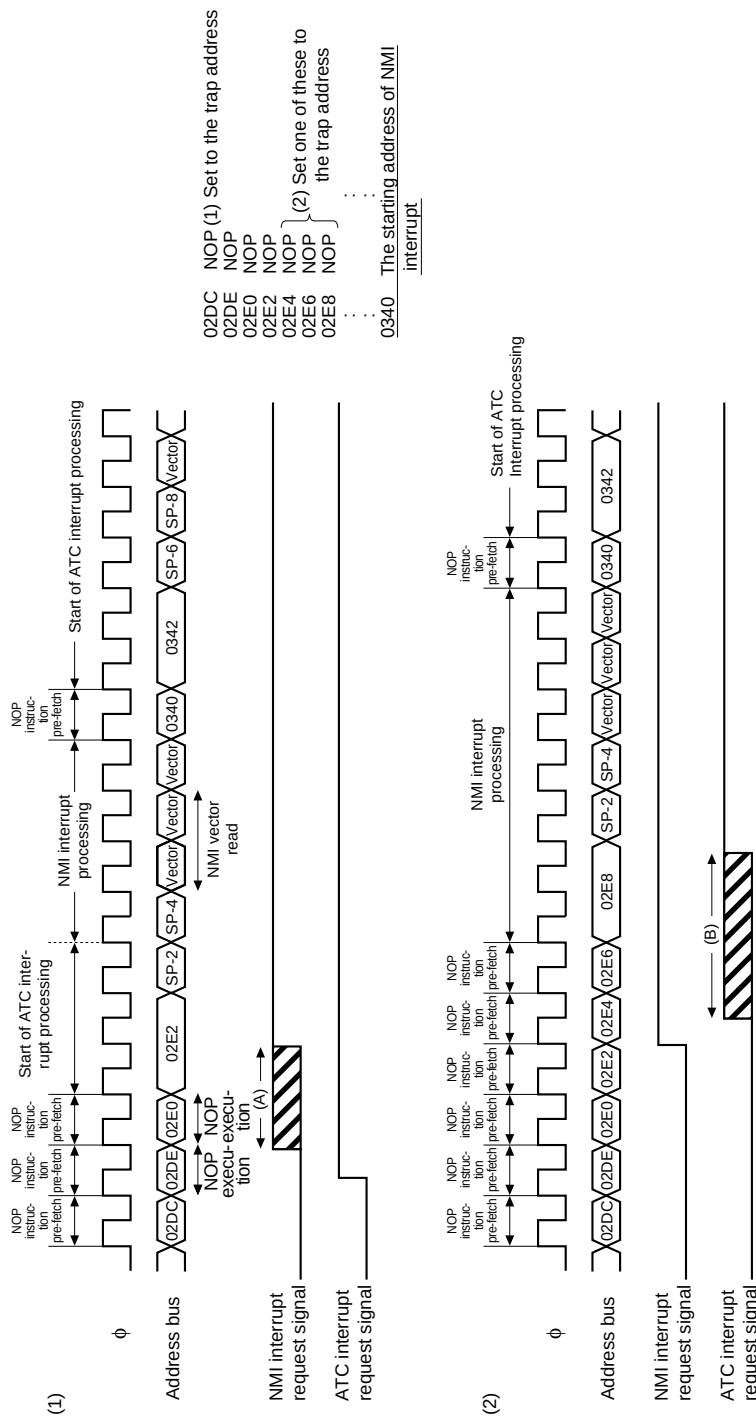


Figure 25.22 Competing Interrupt (In Case of NMI)



# Section 26 Servo Circuits

## 26.1 Overview

### 26.1.1 Functions

Servo circuits for a video cassette recorder are included on-chip.

The functions of the servo circuits can be divided into four groups, as listed in table 26.1.

**Table 26.1 Servo Circuit Functions**

| Group                           | Function                                                    | Description                                                                                                                                                                       |
|---------------------------------|-------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| (1) Input and output circuits   | CTL I/O amplifier                                           | Gain variable input amplifier<br>Output amplifier with rewrite mode                                                                                                               |
|                                 | CFG Duty compensation input                                 | Duty accuracy: 50±2%<br>(Zero cross type comparator)                                                                                                                              |
|                                 | DFG, DPG separation/overlap input                           | Overlap input available: Three-level input method, DFG noise mask function                                                                                                        |
|                                 | Reference signal generators                                 | V compensation, field detection, external signal sync, V sync in REC mode, REF30 signal output to outside                                                                         |
|                                 | HSW timing generator                                        | Head-switching signals, FIFO 20 stages<br>Compatible with DFG counter soft-reset                                                                                                  |
|                                 | Four-head high-speed switching circuit for special playback | Chroma-rotary/head-amplifier switching output                                                                                                                                     |
|                                 | 12-bit PWM                                                  | Improved speed of carrier frequency                                                                                                                                               |
|                                 | Frequency division circuit                                  | With CFG mask, no CFG for phase or CTL mask                                                                                                                                       |
|                                 | Sync detection circuit                                      | Noise count, field discrimination, Hsync compensation, Hsync detection noise mask                                                                                                 |
| (2) Error detectors             | Drum speed error detector                                   | Lock detector function, pause at the counter overflow, R/W error latch register, limiter function                                                                                 |
|                                 | Drum phase error detector                                   | Latch signal selectable, R/W error latch register                                                                                                                                 |
|                                 | Capstan speed error detector                                | Lock detector function, pause at the counter overflow, R/W error latch register, limiter function                                                                                 |
|                                 | Capstan phase error detector                                | R/W error latch register                                                                                                                                                          |
|                                 | X-value adjustment and tracking adjustment circuit          | (Separate setting available)                                                                                                                                                      |
| (3) Phase and gain compensation | Digital filter computation circuit                          | Computations performed automatically by hardware<br>Output gain variable: $\times 2$ to $\times 64$ (exponents of 2)<br>(Partial write in $Z^{-1}$ (high-order 8 bits) available) |
| (4) Other circuits              | Additional V signal circuit                                 | Valid in special playback                                                                                                                                                         |
|                                 | CTL circuit                                                 | Duty discrimination circuit, CTL head R/W control, compatible with wide aspect                                                                                                    |

## 26.1.2 Block Diagram

Figure 26.1 shows a block diagram of the servo circuits.

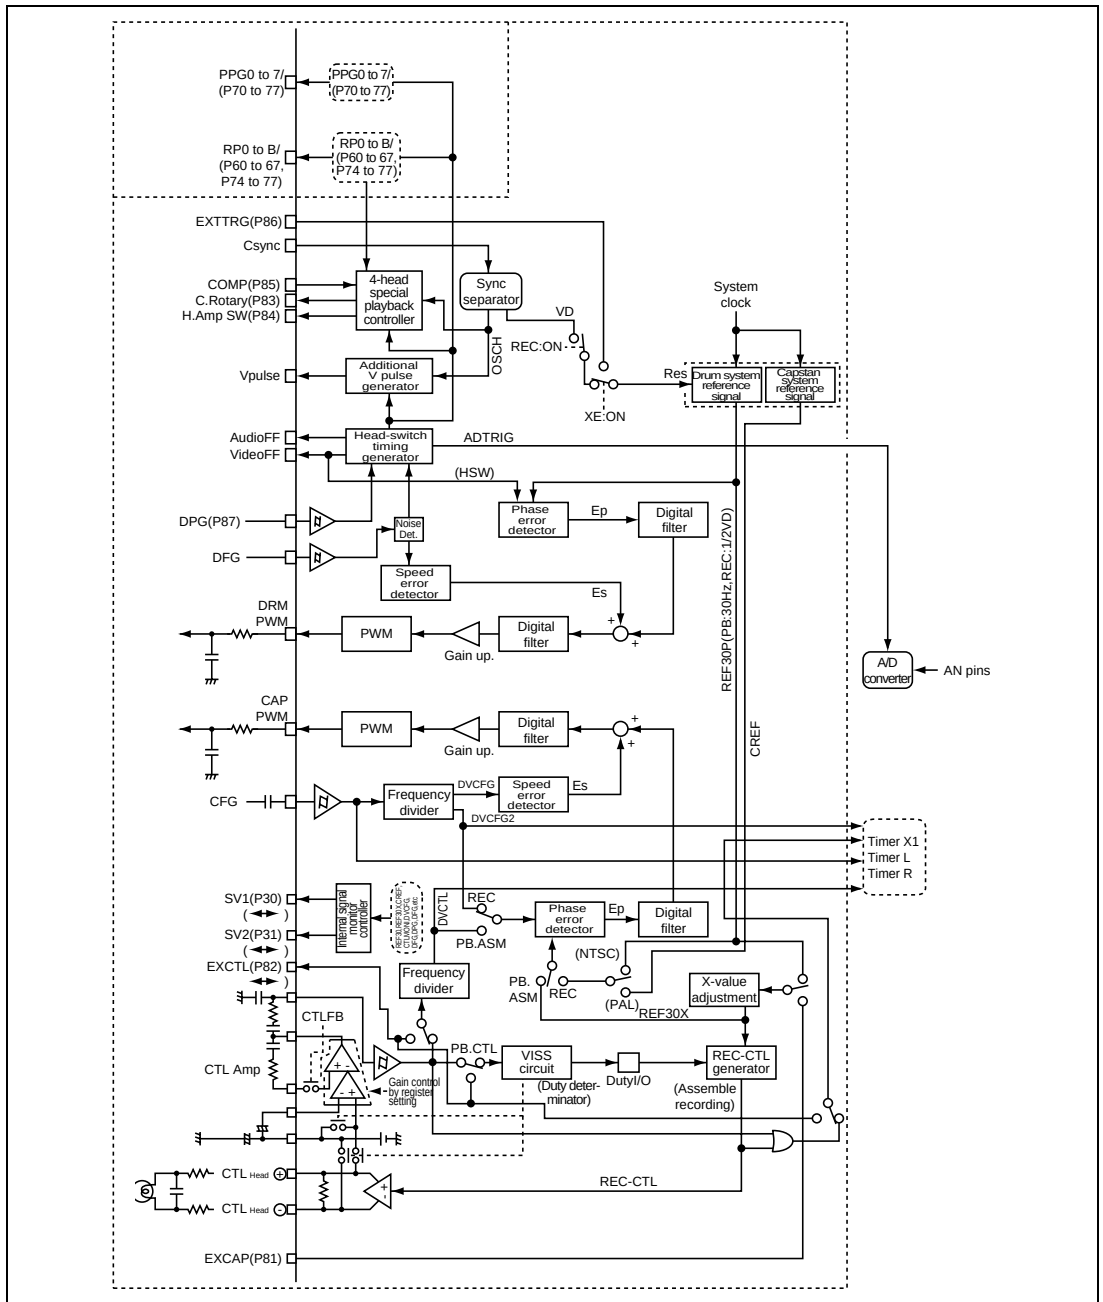


**Figure 26.1 Block Diagram of Servo Circuits**



## 26.2 Servo Port

### 26.2.1 Overview

This LSI is equipped with seventeen pins dedicated to the servo circuit and twenty-five pins multiplexed with general-purpose ports. It also has an input amplifier to amplify CTL signals, a CTL output amplifier, a CTL Schmitt comparator, and a CFG zero cross type comparator. The CTL input amplifier allows gain adjustment by software. DFG and DPG signals, which control the drum, can be input as separate signals or an overlapped signal.

SV1 and SV2 pins allow internal signals of the servo circuit to be output for monitoring. The signals to be output can be selected out of eight kinds of signals. See the description of Servo Monitor Control Register (SVMCR) in section 26.2.5, Register Description.

### 26.2.2 Block Diagram

#### 1. DFG and DPG Input Circuit

The DFG and DPG input pins have on-chip Schmitt circuits. Figure 26.2 shows the input circuit of DFG and DPG.

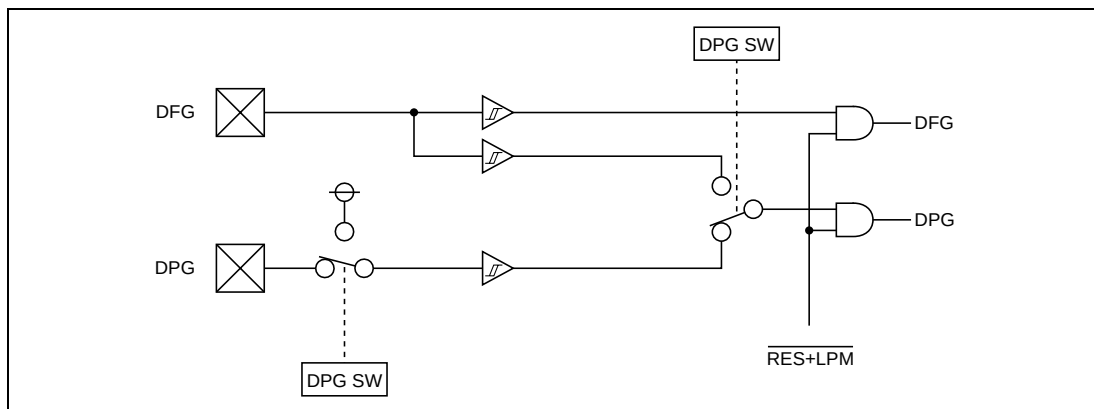


**Figure 26.2 Input Circuit of DFG and DPG**

## 2. CFG Input Circuit

The CFG input pin has an amplifier and a zero cross type comparator. Figure 26.3 shows the input circuit of CFG.

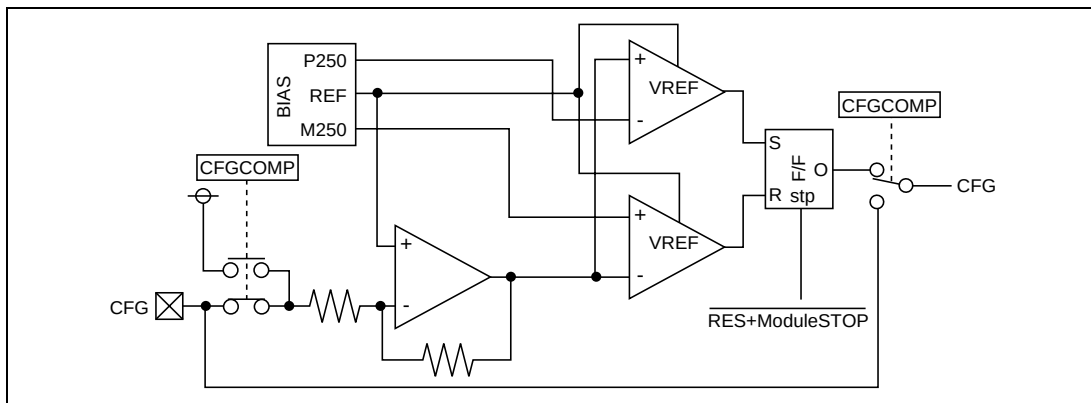


**Figure 26.3** CFG Input Circuit

### 3. CTL Input Circuit

The CTL input pin has an amplifier. Figure 26.4 shows the input circuit of CTL.

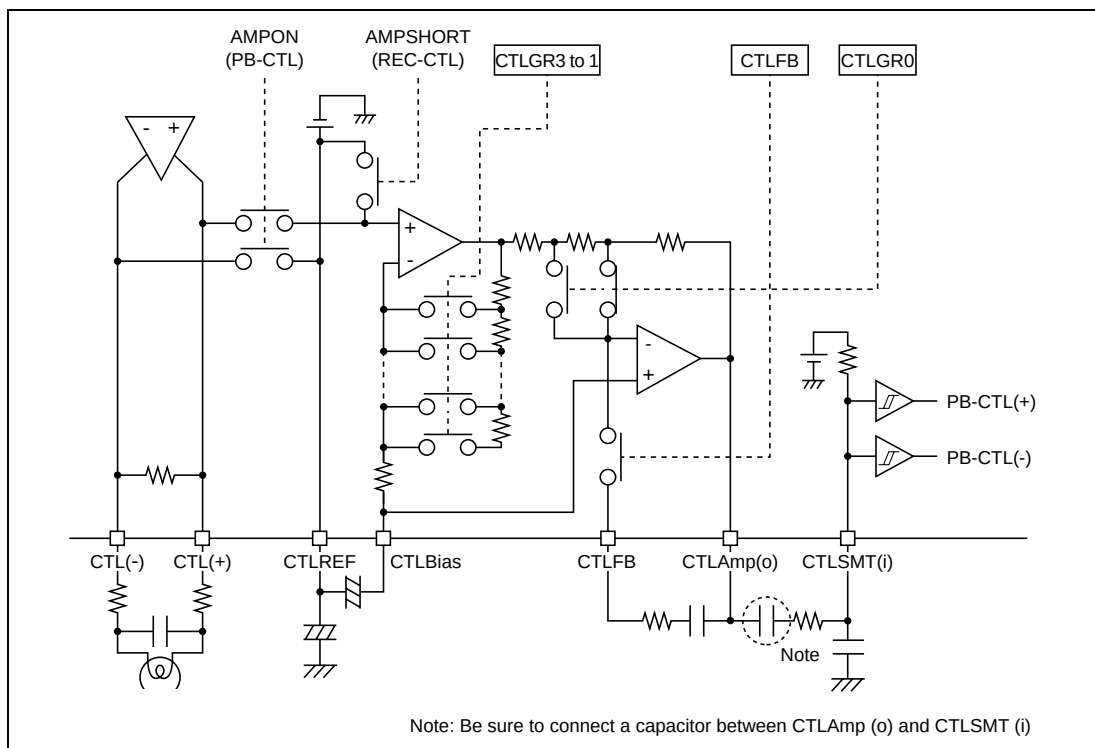


**Figure 26.4 CTL Input Circuit**

## 26.2.3 Pin Configuration

Table 26.2 shows the pin configuration of the servo circuit. P30, P31, and P81 to P87 are general-purpose ports. As for P3, P6, P7, and P8, see section 10, I/O Port.

**Table 26.2 Pin Configuration**

| Name                                | Abbrev.             | I/O            | Function                                                                     |
|-------------------------------------|---------------------|----------------|------------------------------------------------------------------------------|
| Servo $V_{cc}$ pin                  | $SV_{cc}$           | Input          | Power source pin for servo circuit                                           |
| Servo $V_{ss}$ pin                  | $SV_{ss}$           | Input          | Power source pin for servo circuit                                           |
| Audio head switching pin            | Audio FF            | Output         | Audio head switching signal output                                           |
| Video head switching pin            | Video FF            | Output         | Video head switching signal output                                           |
| Capstan mix pin                     | CAPPWM              | Output         | 12-bit PWM square wave output                                                |
| Drum mix pin                        | DRMPWM              | Output         | 12-bit PWM square wave output                                                |
| Additional V pulse pin              | Vpulse              | Output         | Additional V signal output                                                   |
| Color rotary signal output pin      | P83/C.Rotary        | I/O,<br>Output | General-purpose port/control signal output port for processing color signals |
| Head amplifier switching pin        | P84/H.Amp SW        | I/O,<br>Output | General-purpose port/pre-amplifier output selection signal input             |
| Compare signal input pin            | P85/COMP            | I/O, Input     | General-purpose port/pre-amplifier output result signal input                |
| CTL (+) I/O pin                     | CTL (+)             | I/O            | CTL signal input/output                                                      |
| CTL (-) I/O pin                     | CTL (-)             | I/O            | CTL signal input/output                                                      |
| CTL Bias input pin                  | CTLBias             | Input          | CTL primary amplifier bias supply                                            |
| CTL Amp (O) output pin              | CTLAMP (O)          | Output         | CTL amplifier output                                                         |
| CTL SMT (i) input pin               | CTLSMT (I)          | Input          | CTL Schmitt amplifier input                                                  |
| CTL FB input pin                    | CTLFB               | Input          | CTL amplifier high-range characteristics control                             |
| CTL REF output pin                  | CTLREF              | Output         | CTL amplifier reference voltage output                                       |
| Capstan FG amplifier input pin      | CFG                 | Input          | CFG signal amplifier input                                                   |
| Drum FG input pin                   | DFG                 | Input          | DFG signal input                                                             |
| Drum PG input pin                   | P87/DPG             | I/O, Input     | General-purpose port/DPG signal input                                        |
| External CTL signal input pin       | P82/EXCTL           | I/O, Input     | General-purpose port/external CTL signal input/                              |
| Composite sync signal input pin     | Csync               | Input          | Composite sync signal input                                                  |
| External reference signal input pin | P86/EXTTRG          | I/O, input     | General-purpose port/external reference signal input                         |
| External capstan signal input pin   | P81/EXCAP           | I/O, input     | General-purpose port/external capstan signal input                           |
| Servo monitor signal output pin 1   | P30/SV1             | I/O, output    | General-purpose port/servo monitor signal output                             |
| Servo monitor signal output pin 2   | P31/SV2             | I/O, output    | General-purpose port/servo monitor signal output                             |
| PPG output pin                      | P7n/PPGn            | I/O, output    | General-purpose port/PPG output                                              |
| RTP output pin                      | P6n/RPn,<br>P7n/RPn | I/O, output    | General-purpose port/RTP output                                              |

### 26.2.4 Register Configuration

Table 26.3 shows the register configuration of the servo port section.

**Table 26.3 Register Configuration**

| Name                           | Abbrev. | R/W | Size | Initial Value | Address |
|--------------------------------|---------|-----|------|---------------|---------|
| Servo port mode register       | SPMR    | R/W | Byte | H'5F          | H'D0A0  |
| Servo monitor control register | SVMCR   | R/W | Byte | H'C0          | H'D0A3  |
| CTL gain control register      | CTLGR   | R/W | Byte | H'C0          | H'D0A4  |

### 26.2.5 Register Description

#### Servo Port Mode Register (SPMR)

|                 |         |   |         |   |   |   |   |   |
|-----------------|---------|---|---------|---|---|---|---|---|
| Bit :           | 7       | 6 | 5       | 4 | 3 | 2 | 1 | 0 |
|                 | CTLSTOP | — | CFGCOMP | — | — | — | — | — |
| Initial value : | 0       | 1 | 0       | 1 | 1 | 1 | 1 | 1 |
| R/W :           | R/W     | — | R/W     | — | — | — | — | — |

SPMR is an 8-bit read/write register that switches the CFG input system. It is initialized to H'5F by a reset or in stand-by mode.

**Bit 7—CTLSTOP Bit (CTLSTOP) :** Controls whether the CTL circuit is operated or stopped.

#### Bit 7

| CTLSTOP | Description                          |
|---------|--------------------------------------|
| 0       | CTL circuit operates (Initial value) |
| 1       | CTL circuit stops operation          |

**Bit 6—Reserved:** Cannot be modified and is always read as 1.

**Bit 5—CFG Input System Switching Bit (CFGCOMP) :** Selects whether the CFG input signal system is set to the zero cross type comparator system or digital signal input system.

#### Bit 5

| CFGCOMP | Description                                                                              |
|---------|------------------------------------------------------------------------------------------|
| 0       | CFG signal input system is set to the zero cross type comparator system. (Initial value) |
| 1       | CFG signal input system is set to the digital signal input system.                       |

**Bits 4 to 0—Reserved:** Cannot be modified and are always read as 1.

Servo Monitor Control Register (SVMCR)

|                 |   |   |        |        |        |        |        |        |
|-----------------|---|---|--------|--------|--------|--------|--------|--------|
| Bit :           | 7 | 6 | 5      | 4      | 3      | 2      | 1      | 0      |
|                 | — | — | SVMCR5 | SVMCR4 | SVMCR3 | SVMCR2 | SVMCR1 | SVMCR0 |
| Initial value : | 1 | 1 | 0      | 0      | 0      | 0      | 0      | 0      |
| R/W :           | — | — | R/W    | R/W    | R/W    | R/W    | R/W    | R/W    |

SVMCR is an 8-bit read/write register that selects the monitor signal output from the SV1 and SV2 pins when the P30/SV1 pin is used as the SV1 monitor output pin or when the P31/SV2 pin is used as the SV2 monitor output pin. It is initialized to H'C0 by a reset or in stand-by mode.

**Bits 7 and 6—Reserved:** Cannot be modified and are always read as 1.

**Bits 5 to 3—SV2 Pin Servo Monitor Output Control(SVMCR5 to SVMCR3):** select the servo monitor signal output from the SV2 pin.

| Bit 5  | Bit 4  | Bit 3  | Description                                             |
|--------|--------|--------|---------------------------------------------------------|
| SVMCR5 | SVMCR4 | SVMCR3 |                                                         |
| 0      | 0      | 0      | Outputs REF30 signal to SV2 output pin. (Initial value) |
|        |        | 1      | Outputs CAPREF30 signal to SV2 output pin.              |
|        | 1      | 0      | Outputs CREF signal to SV2 output pin.                  |
|        |        | 1      | Outputs CTLMONI signal to SV2 output pin.               |
| 1      | 0      | 0      | Outputs DVCFG signal to SV2 output pin.                 |
|        |        | 1      | Outputs CFG signal to SV2 output pin.                   |
|        | 1      | 0      | Outputs DFG signal to SV2 output pin.                   |
|        |        | 1      | Outputs DPG signal to SV2 output pin.                   |

**Bits 2 to 0—SV1 Pin Servo Monitor Output Control (SVMCR2 to SVMCR0):** Select the servo monitor signal output from the SV1 pin.

| Bit 2  | Bit 1  | Bit 0  | Description                                             |
|--------|--------|--------|---------------------------------------------------------|
| SVMCR2 | SVMCR1 | SVMCR0 |                                                         |
| 0      | 0      | 0      | Outputs REF30 signal to SV1 output pin. (Initial value) |
|        |        | 1      | Outputs CAPREF30 signal to SV1 output pin.              |
|        | 1      | 0      | Outputs CREF signal to SV1 output pin.                  |
|        |        | 1      | Outputs CTLMONI signal to SV1 output pin.               |
| 1      | 0      | 0      | Outputs DVCFG signal to SV1 output pin.                 |
|        |        | 1      | Outputs CFG signal to SV1 output pin.                   |
|        | 1      | 0      | Outputs DFG signal to SV1 output pin.                   |
|        |        | 1      | Outputs DPG signal to SV1 output pin.                   |

**CTL Gain Control Register (CTLGR)**

|                 |   |   |                      |       |        |        |        |        |
|-----------------|---|---|----------------------|-------|--------|--------|--------|--------|
| Bit :           | 7 | 6 | 5                    | 4     | 3      | 2      | 1      | 0      |
|                 | — | — | CTLE/ $\overline{A}$ | CTLFB | CTLGR3 | CTLGR2 | CTLGR1 | CTLGR0 |
| Initial value : | 1 | 1 | 0                    | 0     | 0      | 0      | 0      | 0      |
| R/W :           | — | — | R/W                  | R/W   | R/W    | R/W    | R/W    | R/W    |

CTLGR is an 8-bit read/write register that turns on or off the CTLFB switch in the CTL amplifier circuit and specifying the CTL amplifier gain. It is initialized to H'C0 by a reset or in stand-by mode.

**Bits 7 and 6—Reserved:** Cannot be modified and are always read as 1.

**Bit 5—CTL Selection Bit (CTLE/ $\overline{A}$ ):** Controls whether the amplifier output or EXCTL is used as the CTLP signal supplied to the CTL circuit.

| Bit 5                | Description                |
|----------------------|----------------------------|
| CTLE/ $\overline{A}$ |                            |
| 0                    | AMP output (Initial value) |
| 1                    | EXCTL                      |

**Bit 4—SW Bit of the Feedback Section of CTL Amplifier (CTLFB):** Turns on or off the switch of the feedback section to adjust the gain. See figure 26.4.

#### Bit 4

| CTLFB | Description                        |
|-------|------------------------------------|
| 0     | Turns off CTLFB SW (Initial value) |
| 1     | Turns on CTLFB SW                  |

**Bits 3 to 0—CTL Amplifier Gain Setting Bits (CTLGR3 to CTLGR0):** Set the output gain of the CTL amplifier.

| Bit 3  | Bit 2  | Bit 1  | Bit 0  | CTL Output Gain         |
|--------|--------|--------|--------|-------------------------|
| CTLGR3 | CTLGR2 | CTLGR1 | CTLGR0 |                         |
| 0      | 0      | 0      | 0      | 34.0 dB (Initial value) |
|        |        |        | 1      | 36.5 dB                 |
|        |        | 1      | 0      | 39.0 dB                 |
|        |        |        | 1      | 41.5 dB                 |
|        | 1      | 0      | 0      | 44.0 dB                 |
|        |        |        | 1      | 46.5 dB                 |
|        |        | 1      | 0      | 49.0 dB                 |
|        |        |        | 1      | 51.5 dB                 |
| 1      | 0      | 0      | 0      | 54.0 dB                 |
|        |        |        | 1      | 56.5 dB                 |
|        |        | 1      | 0      | 59.0 dB                 |
|        |        |        | 1      | 61.5 dB                 |
|        | 1      | 0      | 0      | 64.0 dB                 |
|        |        |        | 1      | 66.5 dB*                |
|        |        | 1      | 0      | 69.0 dB*                |
|        |        |        | 1      | 71.5 dB*                |

Note: \* With a setting of 65.0 dB or more, the CTLAMP is in a very sensitive status. When configuring the set board, take a countermeasure against noise around the control head signal input port. Also, consider well the setting of the filter between the CTLAMP and the CTLSMT.



26.2.6 DFG/DPG Input Signals

DFG and DPG signals can be input either as separate signals or as an overlapped signal. When the latter is selected (PMR87 = 1), take care to control the input levels of DFG and DPG. Figure 26.5 shows DFG/DPG input signals.

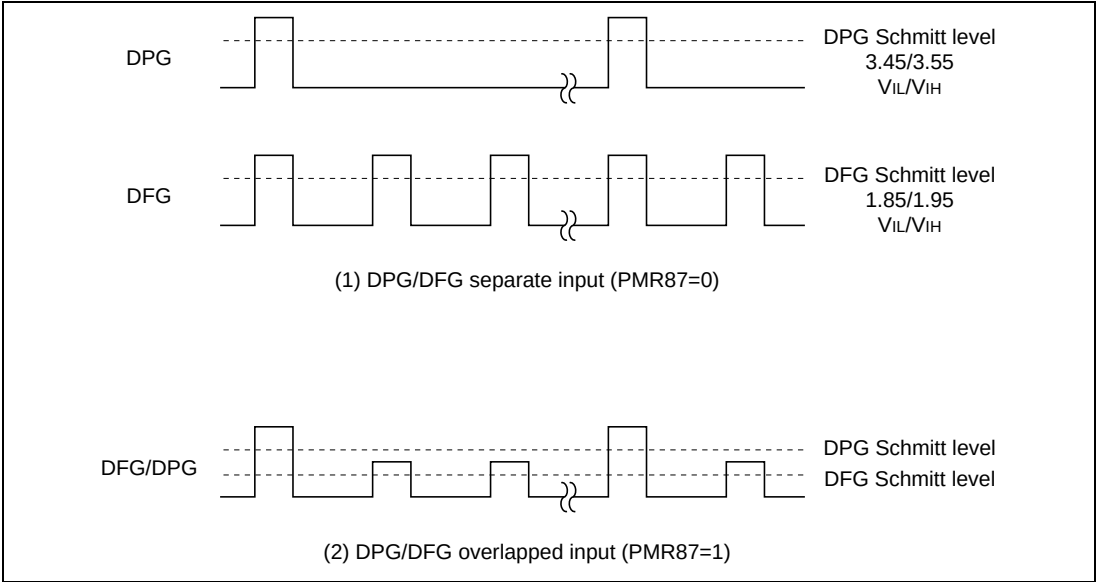


Figure 26.5 DFG/DPG Input Signals

## 26.3 Reference Signal Generators


### 26.3.1 Overview

The reference signal generators consist of a REF30 signal generator and a CREF signal generator and create the reference signals (REF30 and CREF signals) used in phase comparison, etc. The REF30 signal is used to control the phase of the drum and capstan. The CREF signal is used if REF30 signal cannot be used as the reference signal to control the phase of the capstan in REC mode. Each signal generator consists of a 16-bit counter which uses the servo clock  $\phi s/2$  (or  $\phi s/4$ ) as its clock source, a reference period register, and a comparator.

The value set in the reference period register should be 1/2 of the desired reference signal period.

### 26.3.2 Block Diagram

Figure 26.6 shows the block diagram of REF30 signal generator. Figure 26.7 shows that of CREF signal generator.

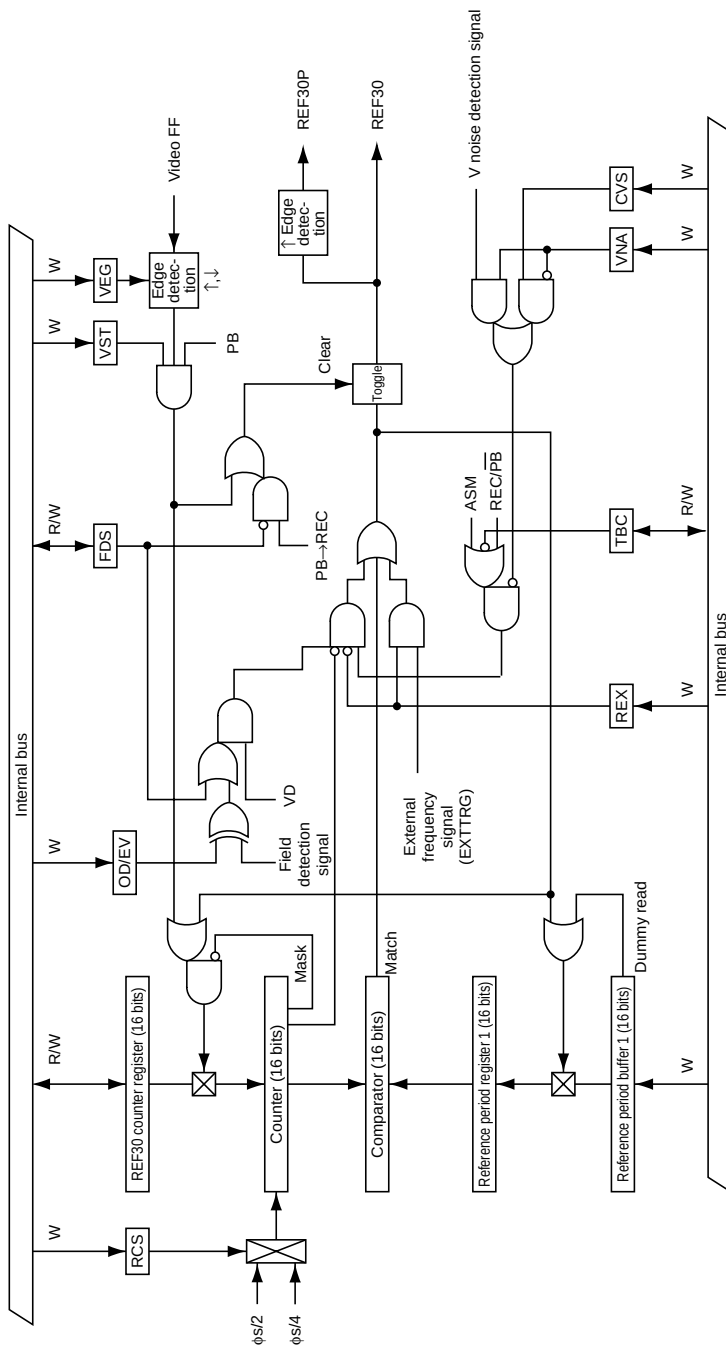

φs = fosc/2

Figure 26.6 REF30 Signal Generator



26.3.4 Register Description

Reference Period Mode Register (RFM)

|                 |     |     |     |     |     |       |     |     |
|-----------------|-----|-----|-----|-----|-----|-------|-----|-----|
| Bit :           | 7   | 6   | 5   | 4   | 3   | 2     | 1   | 0   |
|                 | RCS | VNA | CVS | REX | CRD | OD/EV | VST | VEG |
| Initial value : | 0   | 0   | 0   | 0   | 0   | 0     | 0   | 0   |
| R/W :           | W   | W   | W   | W   | W   | W     | W   | W   |

RFM is an 8-bit write-only register which determines the operational state of the reference signal generators. If a read is attempted, an undetermined value is read out.  
It is initialized to H'00 by a reset and in stand-by and module stop modes.  
RFM is accessible in byte units only. If accessed by a word, correct operation is not guaranteed.

**Bit 7—Clock Source Selection Bit (RCS):** Selects the clock source supplied to the counter.  
( $\phi_s = f_{osc}/2$ )

Bit 7

| RCS | Description                |
|-----|----------------------------|
| 0   | $\phi_s/2$ (Initial value) |
| 1   | $\phi_s/4$                 |

**Bit 6—Mode Selection Bit (VNA):** Selects the mode for controlling transition to free-run operation when the REF30 signal is generated synchronously with the VD signal in REC mode: automatic mode which controls the transition by the V noise detection signal detected by the sync signal detection circuit, or manual mode which controls the transition by software.

Bit 6

| VNA | Description                 |
|-----|-----------------------------|
| 0   | Manual mode (Initial value) |
| 1   | Automatic mode              |

**Bit 5—Manual Selection Bit (CVS):** Selects whether the REF30 signal is generated synchronously with VD or it is operated in free-run state in the manual mode (VNA = 0). (This selection is ignored in PB mode except in TBC mode.)

**Bit 5**

| CVS | Description                         |
|-----|-------------------------------------|
| 0   | Synchronous with VD (Initial value) |
| 1   | Free-run operation                  |

**Bit 4—External Signals Sync Selection Bit (REX):** Selects whether the REF30 signal is generated synchronously with VD, in free-run state or synchronously with the external signal. (Valid in both PB and REC modes.)

**Bit 4**

| REX | Description                           |
|-----|---------------------------------------|
| 0   | VD signal or free-run (Initial value) |
| 1   | Synchronous with external signal      |

**Bit 3—DVCFG2 Sync Selection Bit (CRD):** Selects whether the reset timing in the CREF signal generation is immediately after switching the mode or it is synchronous with the DVCFG2 signal immediately after the mode switching.

**Bit 3**

| CRD | Description                           |
|-----|---------------------------------------|
| 0   | On switching the mode (Initial value) |
| 1   | Synchronous with DVCFG2 signal        |

**Bit 2—ODD/EVEN Edge Switching Selection Bit (OD/EV):** Selects whether the REF30P signal is generated by the rising edge (even) or falling edge (odd) of the field signal in REC mode.

**Bit 2**

| OD/EV | Description                                                      |
|-------|------------------------------------------------------------------|
| 0     | Generated at the rising edge of the field signal (Initial value) |
| 1     | Generated at the falling edge of the field signal                |

**Bit 1—Video FF Counter Set (VST):** Selects whether the REF30 counter register value is set on or off by the Video FF signal when the drum phase is in FIX on in the PB mode.

#### Bit 1

| VST | Description                                        |
|-----|----------------------------------------------------|
| 0   | Counter set off by Video FF signal (Initial value) |
| 1   | Counter set on by Video FF signal                  |

**Bit 0—Video FF Edge Selection Bit (VEG):** Selects the edge at which REF30 counter is set (VST = 1) by the Video FF signal.

#### Bit 0

| VEG | Description                                               |
|-----|-----------------------------------------------------------|
| 0   | Set at the rising edge of Video FF signal (Initial value) |
| 1   | Set at the falling edge of Video FF signal                |

### Reference Period Register 1 (RFD)

|                 |       |       |       |       |       |       |      |      |      |      |      |      |      |      |      |      |
|-----------------|-------|-------|-------|-------|-------|-------|------|------|------|------|------|------|------|------|------|------|
| Bit :           | 15    | 14    | 13    | 12    | 11    | 10    | 9    | 8    | 7    | 6    | 5    | 4    | 3    | 2    | 1    | 0    |
|                 | REF15 | REF14 | REF13 | REF12 | REF11 | REF10 | REF9 | REF8 | REF7 | REF6 | REF5 | REF4 | REF3 | REF2 | REF1 | REF0 |
| Initial value : | 1     | 1     | 1     | 1     | 1     | 1     | 1    | 1    | 1    | 1    | 1    | 1    | 1    | 1    | 1    | 1    |
| R/W :           | W     | W     | W     | W     | W     | W     | W    | W    | W    | W    | W    | W    | W    | W    | W    | W    |

The reference period register 1 (RFD) is a buffer register which generates the reference signal (REF30) for playback, VD compensation for recording, and the reference signals for free-running. It is an 16-bit write-only register accessible in word units only. If a read is attempted, an undetermined value is read out.

The value set in RFD should be 1/2 of the desired reference signal period. Care is required when VD is unstable, such as when the field is weak (synchronization with VD cannot be acquired if a value less than 1/2 is set in REC). When data is written in RFD, it is stored in the buffer once, and then fetched into RFD by a match signal of the comparator. (The data which generates the reference signal is updated by the match signal.) A forcible write, such as initial setting, etc., should be done by a dummy read of RFD.

If a byte-write in RFD is attempted, correct operation is not guaranteed. RFD is initialized to H'FFFF by a reset, and in stand-by and module stop modes.

Use bit 7 (ASM) and bit 6 (REC/PB) in the CTL mode register (CTLM) in the CTL circuit to switch between record and playback modes. Use bit 4 (CR/RF bit) in the capstan phase error detection control register (CPGCR) to switch between REF30 and CREF for capstan phase control.

## Reference Period Register 2 (CRF)

|                 |       |       |       |       |       |       |      |      |      |      |      |      |      |      |      |      |
|-----------------|-------|-------|-------|-------|-------|-------|------|------|------|------|------|------|------|------|------|------|
| Bit :           | 15    | 14    | 13    | 12    | 11    | 10    | 9    | 8    | 7    | 6    | 5    | 4    | 3    | 2    | 1    | 0    |
|                 | CRF15 | CRF14 | CRF13 | CRF12 | CRF11 | CRF10 | CRF9 | CRF8 | CRF7 | CRF6 | CRF5 | CRF4 | CRF3 | CRF2 | CRF1 | CRF0 |
| Initial value : | 1     | 1     | 1     | 1     | 1     | 1     | 1    | 1    | 1    | 1    | 1    | 1    | 1    | 1    | 1    | 1    |
| R/W :           | W     | W     | W     | W     | W     | W     | W    | W    | W    | W    | W    | W    | W    | W    | W    | W    |

The reference period register 2 (CRF) is an 16-bit write-only buffer register which generates the reference signals to control the capstan phase (CREF). CRF is accessible in word units only. If a read is attempted, an undetermined value is read out. The value set in CRF should be 1/2 of the desired reference signal period.

When data is written in CRF, it is stored in the buffer once, and then fetched into CRF by a match signal of the comparator. (The data which generates the reference signal is updated by the match signal.) A forcible write, such as initial setting, etc., should be done by a dummy read of CRF.

If a byte-write in CRF is attempted, correct operation is not guaranteed. CRF is initialized to H'FFFF by a reset and in stand-by and module stop modes.

Use bit 4 (CR/RF bit) in the capstan phase error detection control register (CPGCR) to switch between REF30 and CREF for capstan phase control. See section 26.9, Capstan Phase Error Detector.

## REF30 Counter Register (RFC)

|                 |       |       |       |       |       |       |      |      |      |      |      |      |      |      |      |      |
|-----------------|-------|-------|-------|-------|-------|-------|------|------|------|------|------|------|------|------|------|------|
| Bit :           | 15    | 14    | 13    | 12    | 11    | 10    | 9    | 8    | 7    | 6    | 5    | 4    | 3    | 2    | 1    | 0    |
|                 | RFC15 | RFC14 | RFC13 | RFC12 | RFC11 | RFC10 | RFC9 | RFC8 | RFC7 | RFC6 | RFC5 | RFC4 | RFC3 | RFC2 | RFC1 | RFC0 |
| Initial value : | 0     | 0     | 0     | 0     | 0     | 0     | 0    | 0    | 0    | 0    | 0    | 0    | 0    | 0    | 0    | 0    |
| R/W :           | R/W   | R/W   | R/W   | R/W   | R/W   | R/W   | R/W  | R/W  | R/W  | R/W  | R/W  | R/W  | R/W  | R/W  | R/W  | R/W  |

The REF30 counter register (RFC) is a register which determines the initial value of the free-run counter when it generates REF30 signals in playback. When data is written in RFC, its value is written in the counter by a match signal of the comparator. If the bit 1 (VST) of RFM is set to 1, the counter is set by the Video FF signal when the drum phase is in FIX ON. The counter setting by the Video FF signal should be done by setting bit 1 (VST) and bit 0 (VEG) of the RFM. Do not set the RFC to a value greater than 1/2 of the reference period register 1 (RFD) value.

RFC is a read/write register. If a read is attempted, the value of the counter is read out. If a byte-access is attempted, correct operation is not guaranteed. RFC is initialized to H'0000 by a reset and in stand-by and module stop modes.



Reference Period Mode Register 2 (RFM2)

|                 |     |   |   |   |   |   |   |     |
|-----------------|-----|---|---|---|---|---|---|-----|
| Bit :           | 7   | 6 | 5 | 4 | 3 | 2 | 1 | 0   |
|                 | TBC | — | — | — | — | — | — | FDS |
| Initial value : | 1   | 1 | 1 | 1 | 1 | 1 | 1 | 0   |
| R/W :           | R/W | — | — | — | — | — | — | R/W |

REM2 is an 8-bit read/write register which determines the operational state of the reference signal generators.

It is initialized to H'FE by a reset and in stand-by and module stop modes. RFM2 is a byte access-only register; if accessed by a word, correct operation is not guaranteed.

**Bit 7—TBC Selection Bit (TBC):** Selects whether the reference signal in PB mode is generated by the VD signal or by the free-run counter.

Bit 7

| TBC | Description                                       |
|-----|---------------------------------------------------|
| 0   | Generated by the VD signal                        |
| 1   | Generated by the free-run counter (Initial value) |

**Bits 6 to 1—Reserved:** Cannot be modified and are always read as 1.

**Bit 0—Field Selection Bit (FDS):** Determines whether selection between ODD or EVEN is made for the field signal when PB mode was switched over to REC mode, or these signals are synchronized with VD signals within a phase error of 90° immediately after the switching over.

Bit 0

| FDS | Description                                                          |
|-----|----------------------------------------------------------------------|
| 0   | Generated by the VD signal of ODD or EVEN selected (Initial value)   |
| 1   | Generated by the VD signal within mode transition phase error of 90° |

### 26.3.5 Operation

- Operation of REF30 Signal Generator

The REF30 signal generator generates the reference signals required to control the phase of the drum and capstan.

To generate the REF30 signal, set the 1/2 the reference period to the reference period register 1 (RFD) corresponding to the 50 percent duty cycle. In playback mode, the REF30 signal is generated by free-running the REF30 signal generator. The generator has the external signal synchronization function, and if the bit 4 (REX) of the reference period mode register (RFM) is set to 1, it generates the REF30 signal from the external signal (EXTTGR).

In record mode, the reference signal is generated from the VD signal generated in the sync detector. Any VD drop-out caused by weak field intensity, etc., is compensated by a value set in RFD. To cope with the VD noises, the generator automatically masks the VD for a period about 75% of the RFD setting after REF30 signal was changed due to VD. In record mode, the generation of the reference signal either by VD or free-run operation can be controlled automatically using the V noise detection signal detected in the sync signal detection circuit or manually by software. Select which is used by setting bit 6 (VNA) or 5 (CVS) of RFM.

The phase of the toggle output of the REF30 signal is cleared to L level when the mode shifts from PB to REC (ASM). Also the frame servo function can be set, allowing for control of the phase of REF30 signals with the field signal detected in the sync signal detection circuit. Use bit 2 (OD/EV) of RFM for such control.

See the description of CTL mode register (CTLM) in section 26.13.5, Register Description, as for switching over between PB, ASM and REC.

- Operation of the Mask Circuit

The REF30 signal generator has a toggle mask circuit and a counter mask (counter set signal mask) circuit built-in. Each mask circuit masks irregular VD signals which may occur when the VD signal is unstable because of weak field intensity, etc., in record mode.

The toggle mask and counter mask circuits mask the VD automatically for about 75% of double the period set in the reference period register 1 (RFD) after VD signal was detected (see figure 26.9). If a VD signal dropped out and V was compensated, the toggle mask circuit begins masking, but the counter mask circuit does not begin masking for about 25% of the period. If VD signal was detected during such a period, the circuit does masking for about 75% of the period after the VD detection. If not detected, it does masking for about 75% of the period after V was compensated (see figures 26.10 and 26.11).

- Timing of the REF30 Signal Generation

Figures 26.8 to 26.12 show the timing of the generation of REF30 and REF30P signals.

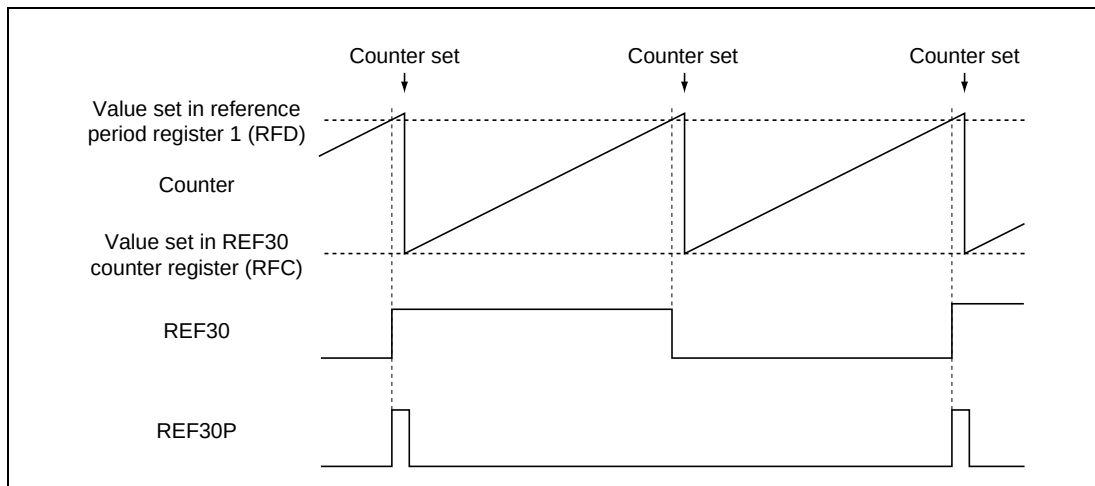


**Figure 26.8 REF30 Signals in Playback Mode**

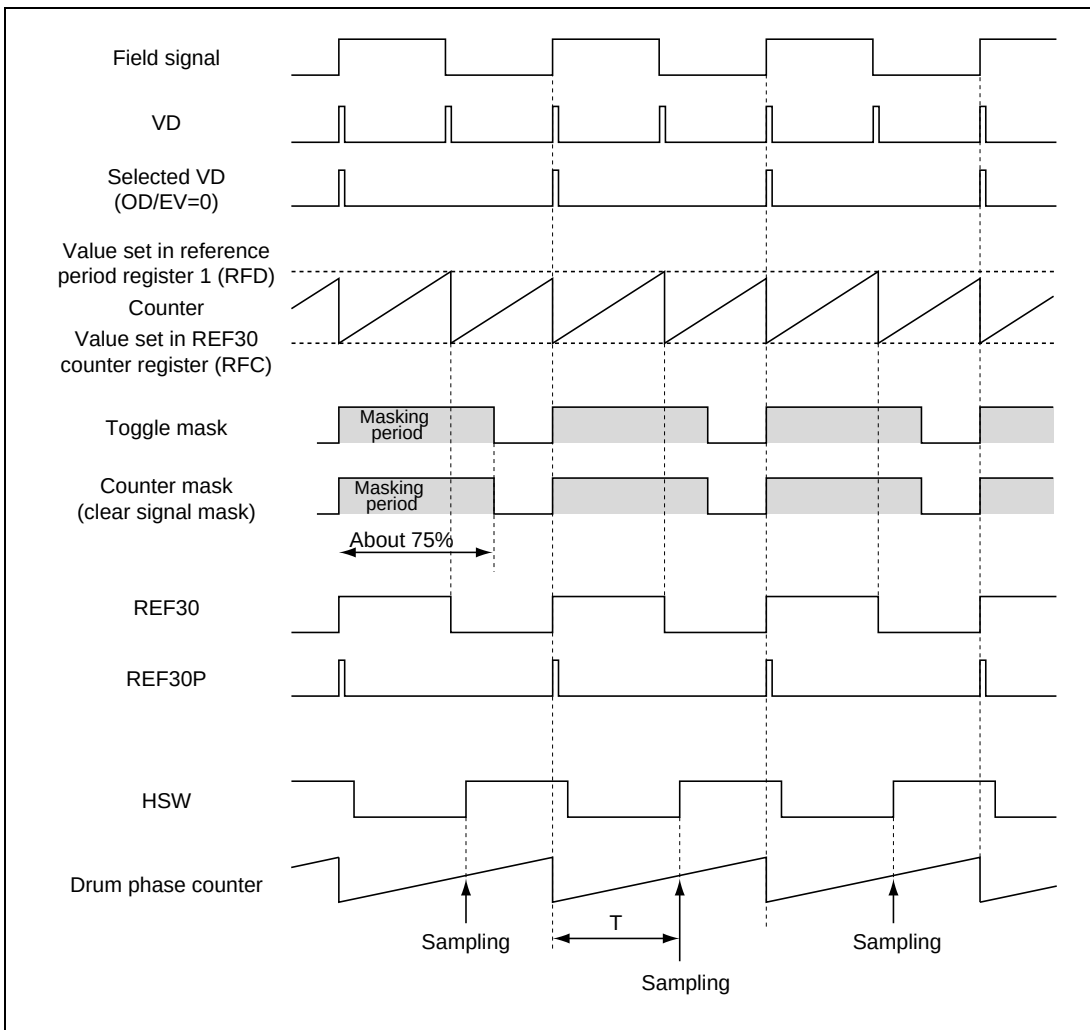


**Figure 26.9 Generation of Reference Signal in Record Mode (Normal Operation)**

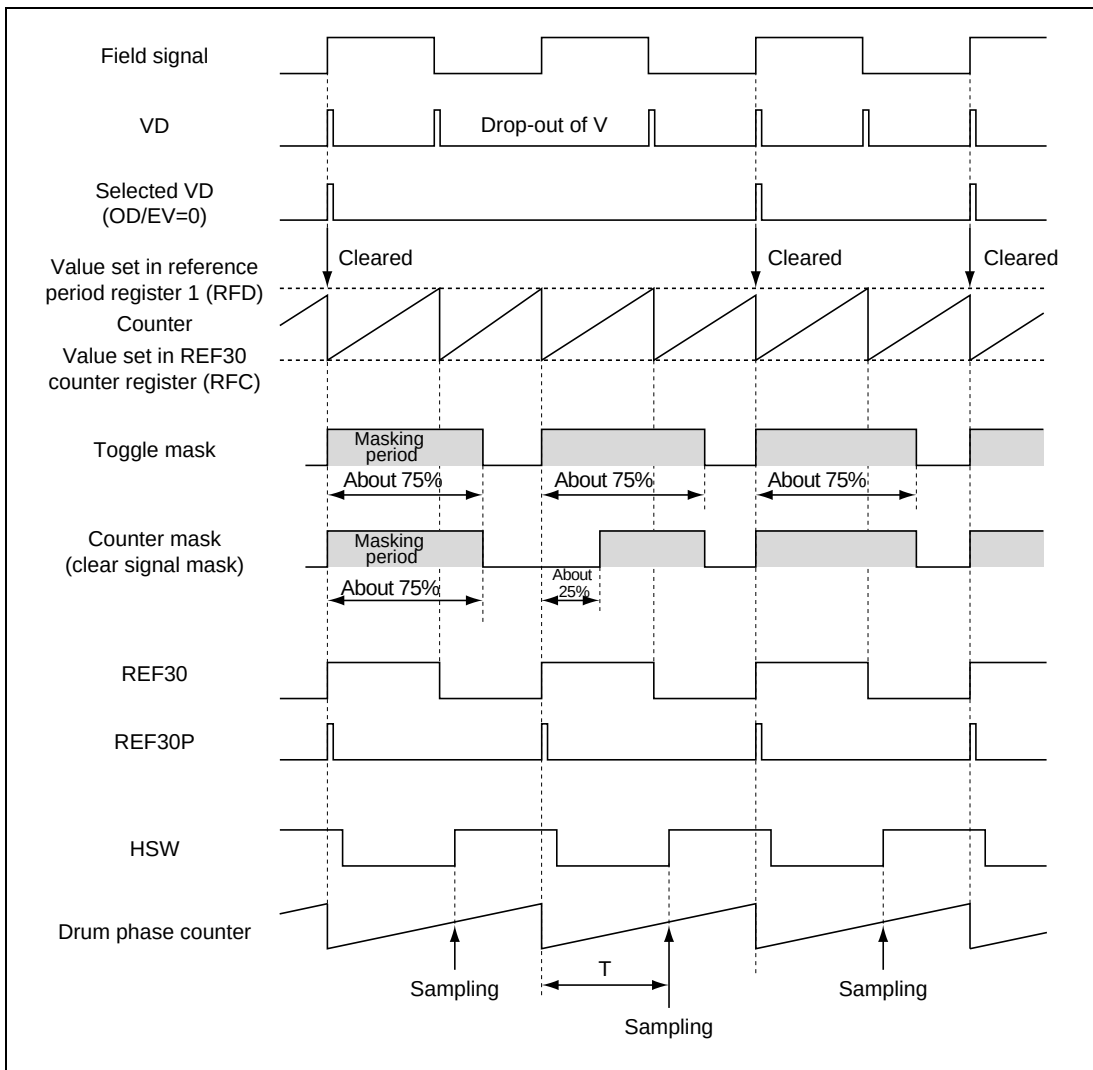


**Figure 26.10 Generation of the Reference Signal when in REC (V Dropped Out)**

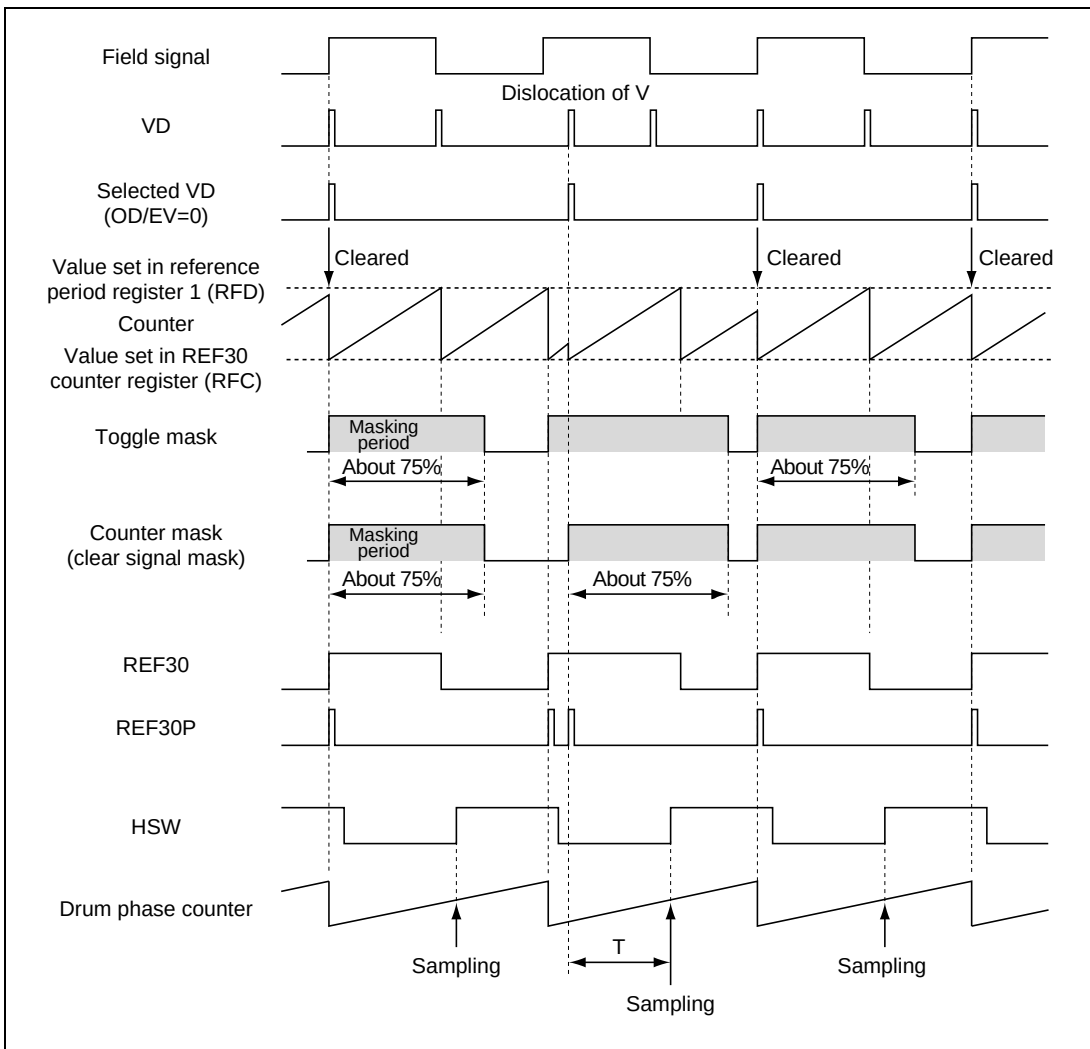


**Figure 26.11 Generation of the Reference Signal when in REC (V Dislocated)**

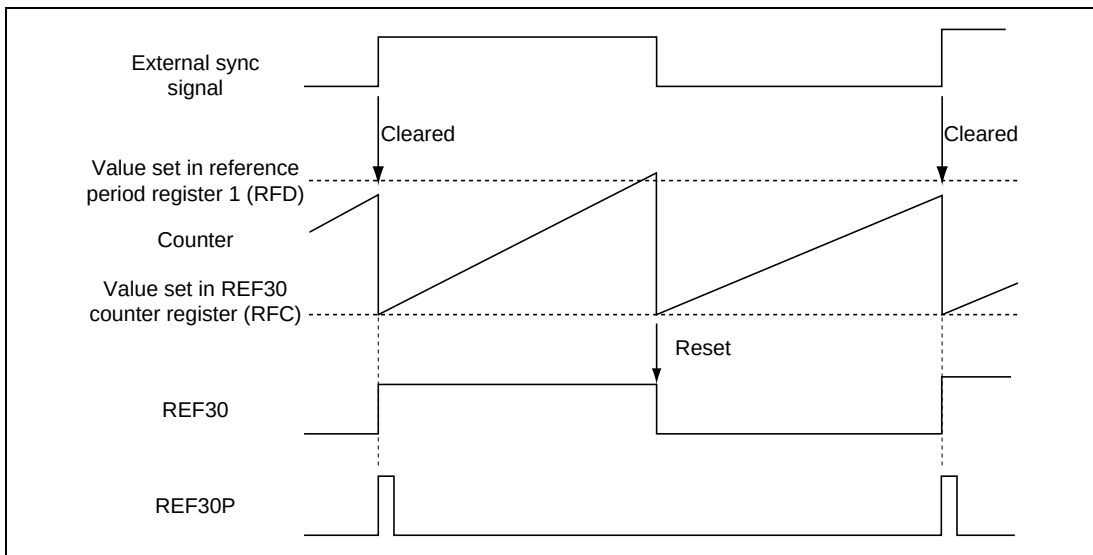


**Figure 26.12 Generation of REF30 Signal by the External Sync Signal**

- CREF Signal Generator

The CREF signal generator generates the CREF signal which is the reference signal to control the phase of capstan.

To generate the CREF signal, set the 1/2 the reference period to the reference period register 2 (CRF). If the set value matches the counter value, a toggle waveform is generated corresponding to the 50 percent duty cycle, and a one-shot pulse is output at each rising edge of the waveform. The counter of CREF signal generator is initialized to H'0000 and the phase of the toggle is cleared to L level when the mode shifts from PB (ASM) to REC. The timing of clearing is selectable between immediately after the transition from PB (ASM) to REC and the timing of DVCFG2 after the transition. Use bit 3 (CRD) of the reference period mode register (RFM) for this selection.

In the capstan phase error detection circuit, either REF30 signal or CREF signal can be selected for the reference signal. Use either of them according to the use of the system.

Use the CREF signal to control the phase of the capstan at a period which is different from the period used to control the phase of the drum. For the switching between REF30 and CREF in the capstan phase control, see the description of capstan phase error detection control register (CPGCR) in section 26.9.4, Register Description.

- Timing Chart of the CREF Signal Generation

Figures 26.13 to 26.15 show the generation of CREF signal.

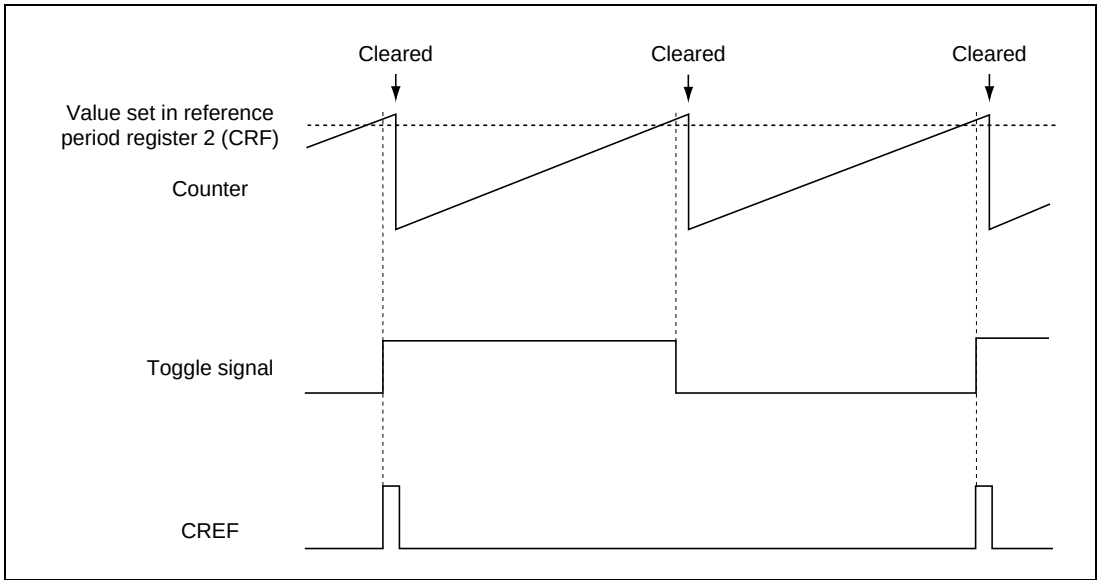


**Figure 26.13 Generation of CREF Signal**



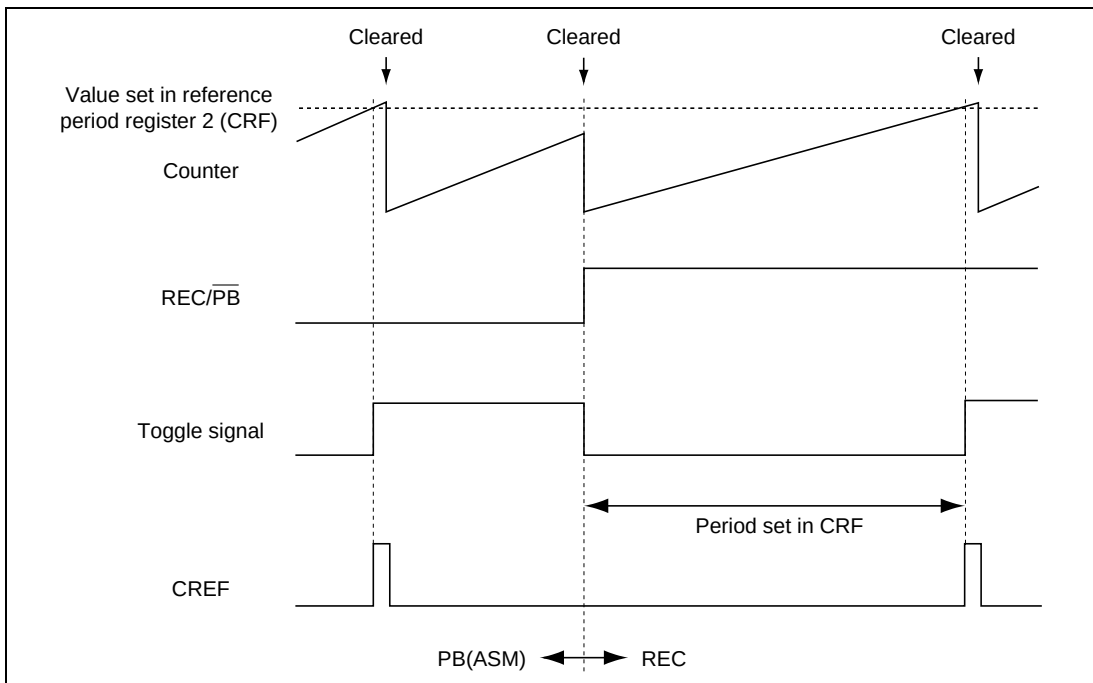


**Figure 26.14 CREF Signal when PB is Switched to REC (when CRD Bit = 0)**

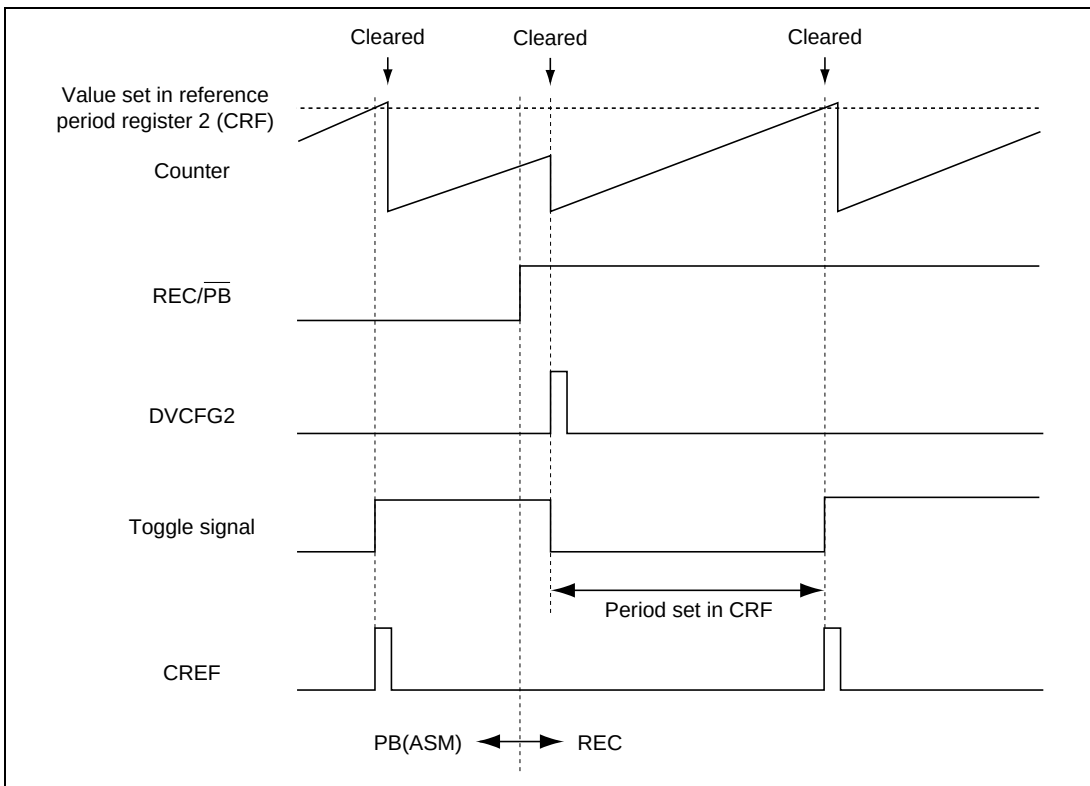


**Figure 26.15 CREF Signal when PB is Switched to REC (when CRD Bit = 1)**

Figures 26.16 and 26.17 show REF30 (REF30P) when PB is switched to REC.

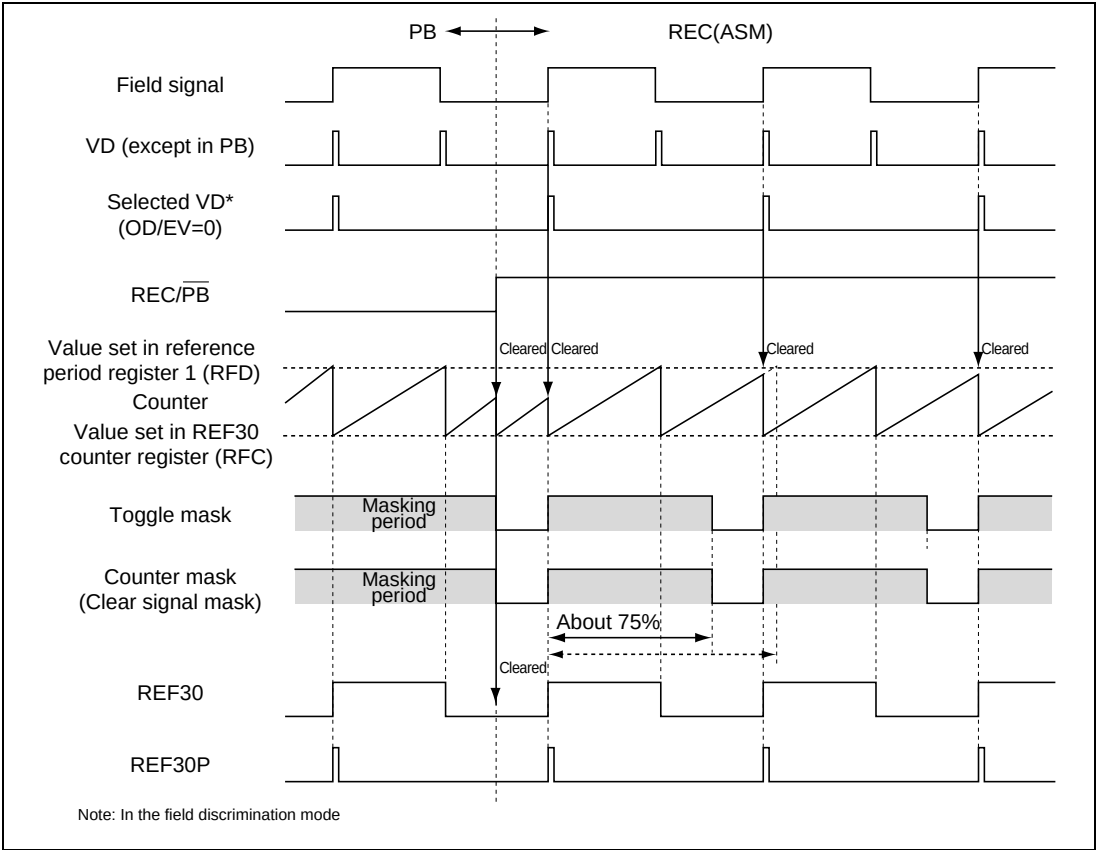


**Figure 26.16** Generation of the Reference Signal when PB is Switched to REC (1)

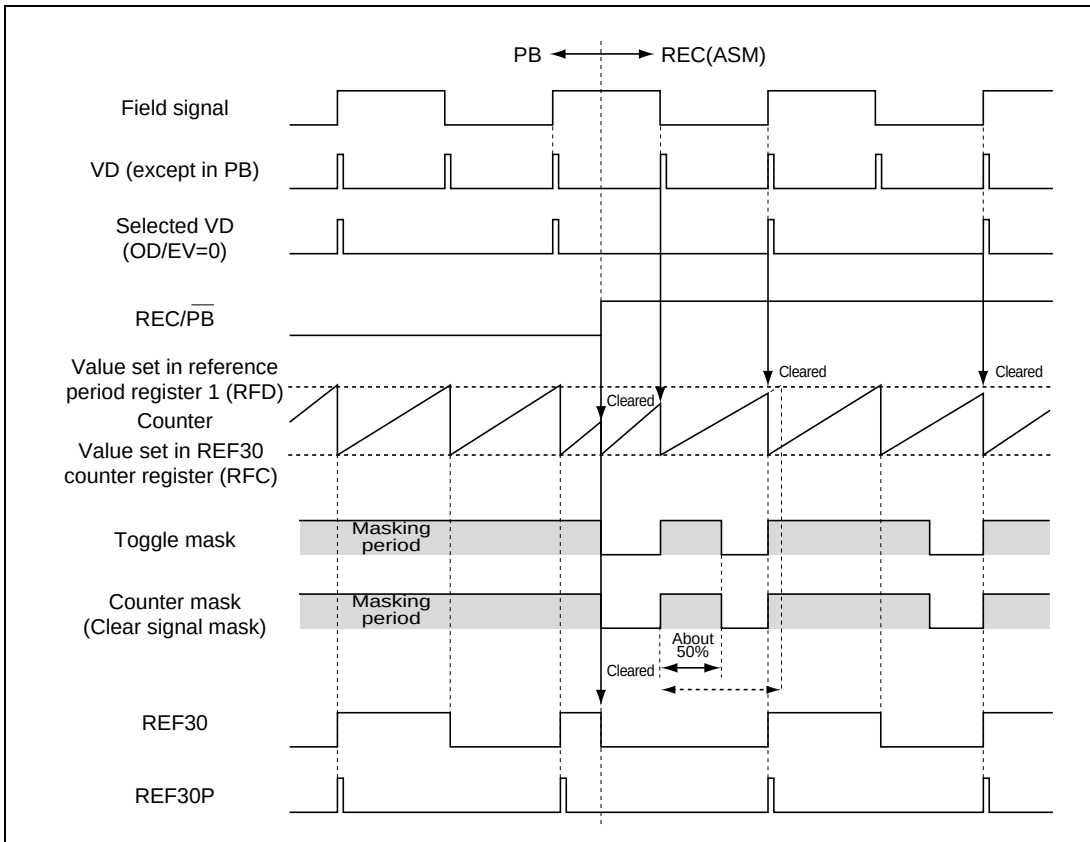


**Figure 26.17 Generation of the Reference Signal when PB is Switched to REC (2)**

Figures 26.18 to 26.21 show REF30 (REF30P) when PB is switched to REC (where FDS bit = 1).

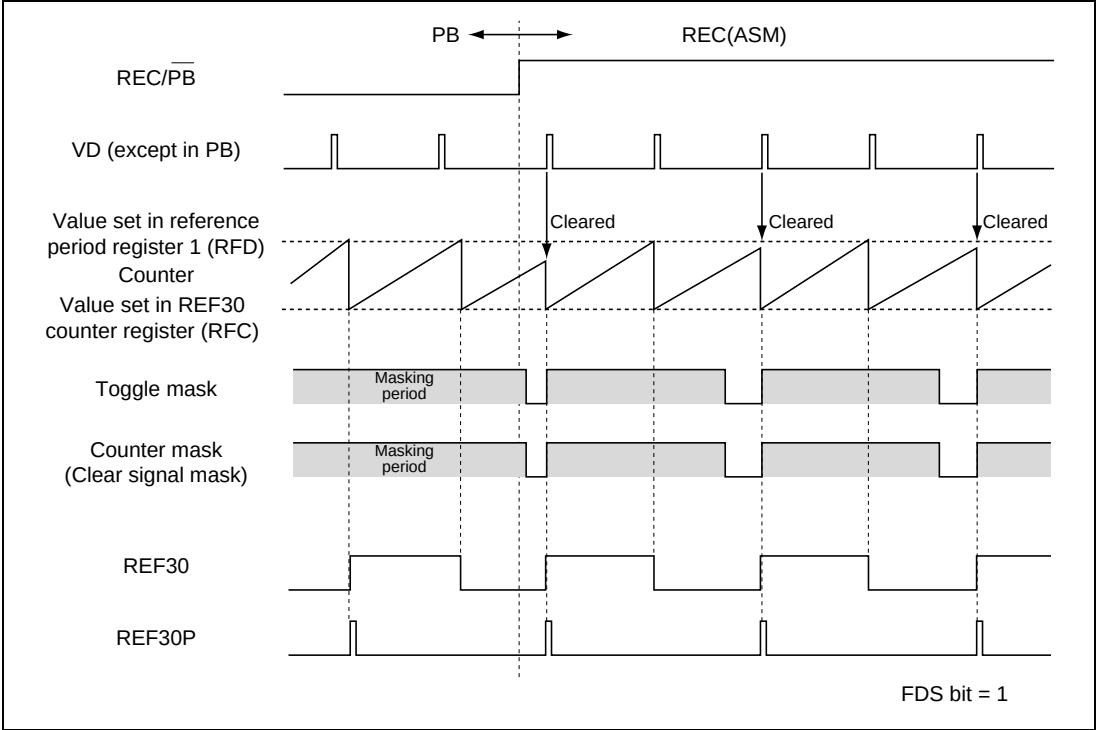


**Figure 26.18 Generation of the Reference Signal when PB is Switched to REC where RFD Bit is 1 (1)**

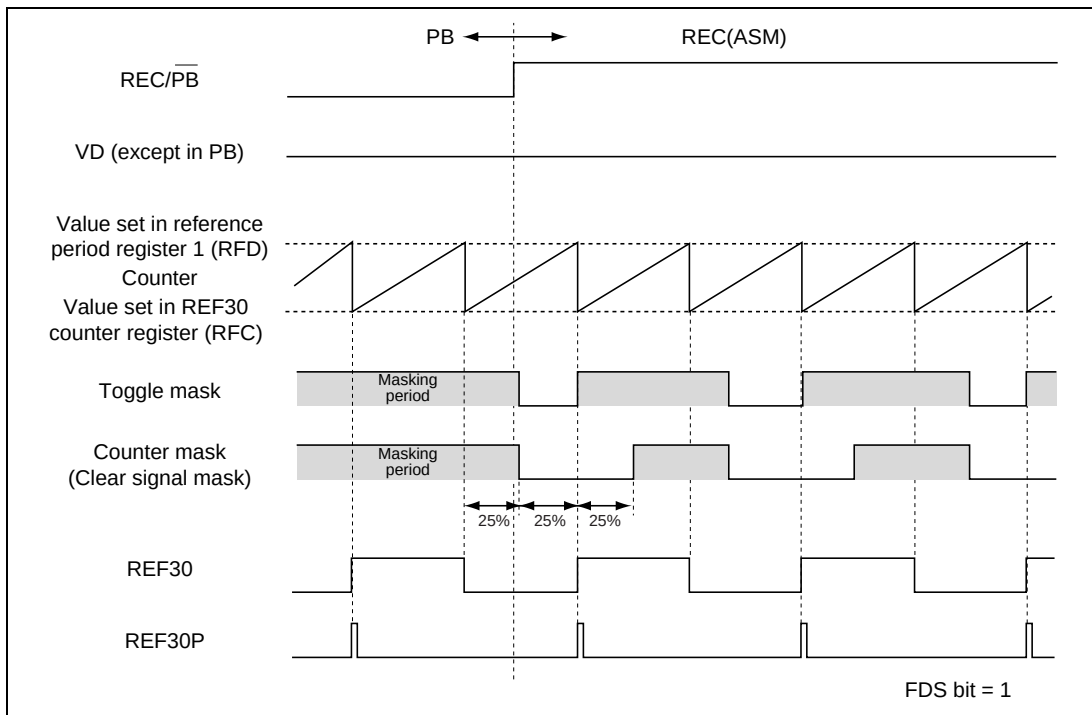


**Figure 26.19 Generation of the Reference Signal when PB is Switched to REC where RFD Bit is 1 (when VD Signal is Not Detected) (2)**



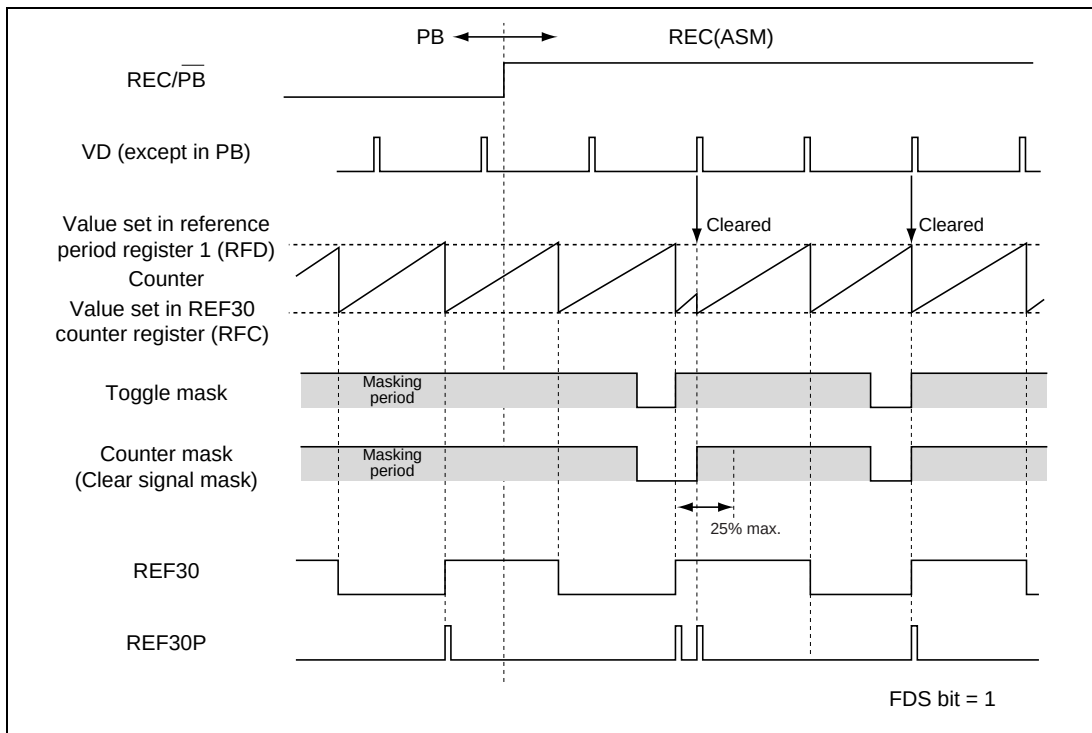


**Figure 26.21 Generation of the Reference Signal when PB is Switched to REC where RFD Bit is 1 (4)**



## 26.4 HSW (Head-switch) Timing Generator

### 26.4.1 Overview

The HSW timing generator consists of a 5-bit DFG counter, a 16-bit timer counter, a matching circuit, and two 31-bit 10-stage FIFOs.

The 5-bit counter counts the DFG pulses following a DPG pulse. Each of them determines the timing to reset the 16-bit timer counter for each field. The 16-bit timer counter is a timer clocked by a  $\phi$  s/4 clock source, and can be used as a programmable pattern generator (PPG) as well as a free-running counter (FRC). If used as a free-running counter, it is cleared by overflow of the prescaler unit. Accordingly, two FRCs operate synchronously. The matching circuit compares the timing data in the most significant 16 bits of FIFO with the 16-bit timer counter, and controls the output of the pattern data set in the least significant 15 bits of FIFO.

### 26.4.2 Block Diagram

Figure 26.22 shows a block diagram of the HSW timing generator.



## 26.4.3 HSW Timing Generator Configuration

The HSW timing generator is composed of the elements shown in table 26.5.

**Table 26.5 Configuration of the HSW Timing Generator**

| Element                                       | Function                                                      |
|-----------------------------------------------|---------------------------------------------------------------|
| HSW mode register 1 (HSM1)                    | Confirmation/determination of this circuits' operating status |
| HSW mode register 2 (HSM2)                    | Confirmation/determination of this circuits' operating status |
| HSW loop stage number setting register (HSLP) | Setting of number of loop stages in loop mode                 |
| FIFO output pattern register 1 (FPDRA)        | Output pattern register of FIFO1                              |
| FIFO output pattern register 2 (FPDRB)        | Output pattern register of FIFO2                              |
| FIFO timing pattern register 1 (FTPRA)        | Output timing register of FIFO1                               |
| FIFO timing pattern register 2 (FTPRB)        | Output timing register of FIFO2                               |
| DFG reference register 1 (DFCRA)              | Setting of reference DFG edge for FIFO1                       |
| DFG reference register 2 (DFCRB)              | Setting of reference DFG edge for FIFO2                       |
| FIFO timer capture register (FTCTR)           | Capture register of timer counter                             |
| DFG reference count register (DFCTR)          | DFG edge count                                                |
| FIFO control circuit                          | FIFO status control                                           |
| DFG count compare circuit (×2)                | Detection of match between DFCR and DFG counters              |
| 16-bit timer counter                          | 16-bit free-run timer counter                                 |
| 31-bit x 20 stage FIFO                        | First In First Out data buffer                                |
| 31-bit FIFO data buffer                       | Data storing buffer for the first stage of FIFO               |
| 16-bit compare circuit                        | Detection of match between timer counter and FIFO data buffer |

FPDRA and FPDRB are intermediate buffers; an FTPRA and FTPRB write results in simultaneous writing of all 31 bits to the FIFO. The FIFO has two 31-bit x 10-stage data buffers; its operating status is controlled by HSM1 and HSM2. Data is stored in the 31-bit data buffer. The values of FTPRA/FTPRB and the timer counter are compared, and if they match, the 15-bit pattern data is output to each function. AudioFF, VideoFF, and PPG (P70 to P77) are outputs from the corresponding pins, ADTRG is the A/D converter hardware start signal, Vpulse and Mlevel signals are the signals for generating the additional V pulses, and HSW and NHSW signals are the same as VideoFF signals used for the phase control of the drum. The 16-bit timer counter is initialized by the overflow of the prescaler unit in the free-run mode (FRT bit of HSM2 = 1), or by a signal indicating a match between DFCRA/DFCRB and the 5-bit DFG counter in DFG reference mode.

## 26.4.4 Register Configuration

Table 26.6 shows the register configuration of the HSW timing generator.

**Table 26.6 Register Configuration**

| Name                                   | Abbrev. | R/W | Size | Initial Value | Address |
|----------------------------------------|---------|-----|------|---------------|---------|
| HSW mode register 1                    | HSM1    | R/W | Byte | H'30          | H'D060  |
| HSW mode register 2                    | HSM2    | R/W | Byte | H'00          | H'D061  |
| HSW loop stage number setting register | HSLP    | R/W | Byte | Undetermined  | H'D062  |
| FIFO output pattern register 1         | FPDRA   | W   | Word | Undetermined  | H'D064  |
| FIFO timing pattern register 1*        | FTPRA   | W   | Word | Undetermined  | H'D066  |
| FIFO output pattern register 2         | FPDRB   | W   | Word | Undetermined  | H'D068  |
| FIFO timing pattern register 2         | FTPRB   | W   | Word | H'FFFF        | H'D06A  |
| DFG reference register 1*              | DFCRA   | W   | Byte | Undetermined  | H'D06C  |
| DFG reference register 2               | DFCRB   | W   | Byte | Undetermined  | H'D06D  |
| FIFO timer capture register*           | FTCTR   | R   | Word | H'0000        | H'D066  |
| DFG reference count register*          | DFCTR   | R   | Byte | H'E0          | H'D06C  |

Note: \*FTPRA and FTCTR, as well as DFCRA and DFCTR, are allocated to the same addresses.

## 26.4.5 Register Description

### HSW Mode Register 1 (HSM1)

|                 |     |     |      |      |        |        |      |      |
|-----------------|-----|-----|------|------|--------|--------|------|------|
| Bit :           | 7   | 6   | 5    | 4    | 3      | 2      | 1    | 0    |
|                 | FLB | FLA | EMPB | EMPA | OVWB   | OVWA   | CLRB | CLRA |
| Initial value : | 0   | 0   | 1    | 1    | 0      | 0      | 0    | 0    |
| R/W :           | R   | R   | R    | R    | R/(W)* | R/(W)* | R/W  | R/W  |

Note: \* Only 0 can be written

HSM1 is an 8-bit register which confirms and determines the operational state of the HSW timing generator.

Bits 7 to 4 are read-only bits, and write is disabled. All the other bits accept both read and write. It is initialized to H'30 by a reset or in stand-by mode.

**Bit 7—FIFO2 Full Flag (FLB):** When the FLB bit is 1, it indicates that the FIFO2 is full of the timing pattern data and the output pattern data. If a write is attempted in this state, the write operation becomes invalid, an interrupt is generated, the OVWB flag (bit 3) is set to 1, and the write data is lost. Wait until space becomes available in the FIFO2, then write again.

#### Bit 7

| FLB | Description                                                   |
|-----|---------------------------------------------------------------|
| 0   | FIFO2 is not full, and can accept data input. (Initial value) |
| 1   | FIFO2 is full of data.                                        |

**Bit 6—FIFO1 Full Flag (FLA):** When the FLA bit is 1, it indicates that the FIFO1 is full of the timing pattern data and the output pattern data. If a write is attempted in this state, the write operation becomes invalid, an interrupt is generated, the OVWA flag (bit 2) is set to 1, and the write data is lost. Wait until space becomes available in the FIFO1, then write again.

#### Bit 6

| FLA | Description                                                   |
|-----|---------------------------------------------------------------|
| 0   | FIFO1 is not full, and can accept data input. (Initial value) |
| 1   | FIFO1 is full of data.                                        |

**Bit 5—FIFO2 Empty Flag (EMPB):** Indicates that FIFO2 has no data, or that all the data has been output in single mode.

#### Bit 5

| EMPB | Description                             |
|------|-----------------------------------------|
| 0    | FIFO2 contains data.                    |
| 1    | FIFO2 contains no data. (Initial value) |

**Bit 4—FIFO1 Empty Flag (EMPA):** Indicates that FIFO1 has no data, or that all the data has been output in single mode.

#### Bit 4

| EMPA | Description                             |
|------|-----------------------------------------|
| 0    | FIFO1 contains data.                    |
| 1    | FIFO1 contains no data. (Initial value) |

**Bit 3—FIFO2 Overwrite Flag (OVWB):** If a write is attempted when the FIFO2 is full of the timing pattern data and the output pattern data (FLB bit = 1), the write operation becomes invalid, an interrupt is generated, the OVWB flag is set to 1, and the write data is lost. Wait until space becomes available in the FIFO2, then write again.

Write 0 to clear the OVWB flag, because it is not cleared automatically.

#### Bit 3

| OVWB | Description                                                                                                          |
|------|----------------------------------------------------------------------------------------------------------------------|
| 0    | Normal operation. (Initial value)                                                                                    |
| 1    | Indicates that a write in FIFO2 was attempted when FIFO2 was full of data. Clear this flag by writing 0 to this bit. |

**Bit 2—FIFO1 Overwrite Flag (OVWA):** If a write is attempted when the FIFO1 is full of the timing pattern data and the output pattern data (FLA bit = 1), the write operation becomes invalid, an interrupt is generated, the OVWA flag is set to 1, and the write data is lost. Wait until space becomes available in the FIFO1, then write again.

Write 0 to clear the OVWA flag, because it is not cleared automatically.

#### Bit 2

| OVWA | Description                                                                                                  |
|------|--------------------------------------------------------------------------------------------------------------|
| 0    | Normal operation. (Initial value)                                                                            |
| 1    | Indicates that a write in FIFO1 was attempted when FIFO1 was full. Clear this flag by writing 0 to this bit. |

**Bit 1—FIFO2 Pointer Clear (CLRB):** Clears the FIFO2 write position pointer. After 1 is written, the bit immediately reverts to 0. Writing 0 in this bit has no effect.

#### Bit 1

| CLRB | Description                       |
|------|-----------------------------------|
| 0    | Normal operation. (Initial value) |
| 1    | Clears the FIFO2 pointer.         |

**Bit 0—FIFO1 Pointer Clear (CLRA):** Clears the FIFO1 write position pointer. After 1 is written, the bit immediately reverts to 0. Writing 0 in this bit has no effect.

#### Bit 0

| CLRA | Description                       |
|------|-----------------------------------|
| 0    | Normal operation. (Initial value) |
| 1    | Clears the FIFO1 pointer          |

## HSW Mode Register 2 (HSM2)

|                 |     |         |     |     |       |      |     |         |
|-----------------|-----|---------|-----|-----|-------|------|-----|---------|
| Bit :           | 7   | 6       | 5   | 4   | 3     | 2    | 1   | 0       |
|                 | FRT | FGR2OFF | LOP | EDG | ISEL1 | SOFG | OFG | VFF/NFF |
| Initial value : | 0   | 0       | 0   | 0   | 0     | 0    | 0   | 0       |
| R/W :           | R/W | R       | R/W | R/W | R/W   | R/W  | R   | W       |

HSM2 is an 8-bit register which confirms and determines the operational state of the HSW timing generator.

Bit 1 is a read-only bit, and write is disabled. Bit 0 is a write-only bit, and if a read is attempted, an undetermined value is read out. All the other bits accept both read and write. It is initialized to H'00 by a reset or in stand-by mode.

**Bit 7—Free-run Bit (FRT):** Selects whether the matching timing is determined by the DPG counter and timer, or by the FRC.

### Bit 7

| FRT | Description                                              |
|-----|----------------------------------------------------------|
| 0   | 5-bit DFG counter + 16-bit timer counter (Initial value) |
| 1   | 16-bit FRC                                               |

**Bit 6—FRG2 Clear Stop Bit (FGR2OFF):** Disables clearing of the counter by the DFG register 2. The FIFO group, including both FIFO1 and FIFO2, is available.

### Bit 6

| FGR2OFF | Description                                                                    |
|---------|--------------------------------------------------------------------------------|
| 0       | Enables clearing of the 16-bit timer counter by DFG register 2 (Initial value) |
| 1       | Disables clearing of the 16-bit timer counter by DFG register 2                |

**Bit 5—Mode Selection Bit (LOP):** Selects the output mode of FIFO. If the loop mode is selected, LOB3 to LOB0 bits and LOA3 to LOA0 bits become valid. If the LOP bit is modified, the pointer which counts the writing position of FIFO is cleared. In this case, the last output data is kept.

### Bit 5

| LOP | Description                 |
|-----|-----------------------------|
| 0   | Single mode (Initial value) |
| 1   | Loop mode                   |

**Bit 4—DFG Edge Selection Bit (EDG):** Selects the edge by which to count DFG pulses.

**Bit 4**

| EDG | Description                                      |
|-----|--------------------------------------------------|
| 0   | Counts by the rising edge of DFG (Initial value) |
| 1   | Counts by the falling edge of DFG                |

**Bit 3—Interrupt Selection Bit (ISEL1):** Selects the interrupt source. (IRRHSW1)

**Bit 3**

| ISEL1 | Description                                                                                   |
|-------|-----------------------------------------------------------------------------------------------|
| 0     | Generates an interrupt request by the rising edge of the STRIG signal of FIFO (Initial value) |
| 1     | Generates an interrupt request by the matching signal of FIFO                                 |

**Bit 2—FIFO Output Group Selection Bit (SOFG):** Selects whether 20 stages of FIFO1 + FIFO2 or only 10 stages of FIFO1 are used.

If 20-stage output mode is used in single mode, data must be written to FIFO1 and FIFO2.

Monitor the output FIFO group flag (OFG) and control data writing by software. All the data of FIFO1 is output, then all the data of FIFO2 is output. These steps are repeated. If 10-stage output mode is used, the data of FIFO2 is not reflected.

Modifying the SOFG bit from 0 to 1, then again to 0 initializes the control signal of the FIFO output stage to the FIFO1 side.

**Bit 2**

| SOFG | Description                                      |
|------|--------------------------------------------------|
| 0    | 20-stage output of FIFO1 + FIFO2 (Initial value) |
| 1    | 10-stage output of FIFO1 only                    |

**Bit 1—Output FIFO Group Flag (OFG):** Indicates the FIFO group which is outputting.

**Bit 1**

| OFG | Description                                      |
|-----|--------------------------------------------------|
| 0   | Pattern is being output by FIFO1 (Initial value) |
| 1   | Pattern is being output by FIFO2                 |



**Bit 0—Output Switching Bit Between VideoFF and NarrowFF (VFF/NFF):** Switches the signal output from the VideoFF pin.

**Bit 0**

| VFF/NFF | Description                    |
|---------|--------------------------------|
| 0       | VideoFF output (Initial value) |
| 1       | NarrowFF output                |

**HSW Loop Stage Number Setting Register (HSLP)**

|                 |      |      |      |      |      |      |      |      |
|-----------------|------|------|------|------|------|------|------|------|
| Bit :           | 7    | 6    | 5    | 4    | 3    | 2    | 1    | 0    |
|                 | LOB3 | LOB2 | LOB1 | LOB0 | LOA3 | LOA2 | LOA1 | LOA0 |
| Initial value : | *    | *    | *    | *    | *    | *    | *    | *    |
| R/W :           | R/W  | R/W  | R/W  | R/W  | R/W  | R/W  | R/W  | R/W  |

HSLP is an 8-bit read/write register that sets the number of the loop stages when the HSW timing generator is in loop mode. It is valid when bit 5 (LOP) of HSM2 is 1. Bits 7 to 4 set the number of FIFO2 stages. Bits 3 to 0 set the number of FIFO1 stages. It is not initialized by a reset or in stand-by or module stop mode; accordingly be sure to set the number of the stages when the loop mode is used.

**Bits 7 to 4—FIFO2 Stage Number Setting Bits (LOB3 to LOB0):** Set the number of FIFO2 stages in loop mode. They are valid only when the loop mode is set (LOP bit of HSM2 is 1).

| HSM2  |       | HSLP  |       |       | Description                            |
|-------|-------|-------|-------|-------|----------------------------------------|
| Bit 5 | Bit 7 | Bit 6 | Bit 5 | Bit 4 |                                        |
| LOP   | LOB3  | LOB2  | LOB1  | LOB0  |                                        |
| 0     | *     | *     | *     | *     | Single mode (Initial value)            |
| 1     | 0     | 0     | 0     | 0     | Only 0th stage of FIFO2 is output      |
|       |       |       |       | 1     | 0th and 1st stages of FIFO2 are output |
|       |       |       | 1     | 0     | 0th to 2nd stages of FIFO2 are output  |
|       |       |       |       | 1     | 0th to 3rd stages of FIFO2 are output  |
|       |       | 1     | 0     | 0     | 0th to 4th stages of FIFO2 are output  |
|       |       |       |       | 1     | 0th to 5th stages of FIFO2 are output  |
|       |       |       | 1     | 0     | 0th to 6th stages of FIFO2 are output  |
|       |       |       |       | 1     | 0th to 7th stages of FIFO2 are output  |
|       | 1     | 0     | 0     | 0     | 0th to 8th stages of FIFO2 are output  |
|       |       |       |       | 1     | 0th to 9th stages of FIFO2 are output  |
|       |       | 1     | 0     | 0     | Setting prohibited                     |
|       |       |       |       | 1     |                                        |
|       |       |       | 1     | 0     |                                        |
|       |       |       |       | 1     |                                        |
|       |       | 1     | 0     | 0     |                                        |
|       |       |       |       | 1     |                                        |
|       |       | 1     | 0     | 0     |                                        |
|       |       |       |       | 1     |                                        |

Note: \* Don't care.

**Bits 3 to 0—FIFO1 Stage Number Setting Bits (LOA3 to LOA0):** Set the number of FIFO1 stages in loop mode. They are valid only when the loop mode is set (LOP bit of HSM2 is 1).

| HSM2  |       | HSLP  |       |       | Description                            |
|-------|-------|-------|-------|-------|----------------------------------------|
| Bit 5 | Bit 3 | Bit 2 | Bit 1 | Bit 0 |                                        |
| LOP   | LOA3  | LOA2  | LOA1  | LOA0  |                                        |
| 0     | *     | *     | *     | *     | Single mode (Initial value)            |
| 1     | 0     | 0     | 0     | 0     | Only 0th stage of FIFO1 is output      |
|       |       |       |       | 1     | 0th and 1st stages of FIFO1 are output |
|       |       |       | 1     | 0     | 0th to 2nd stages of FIFO1 are output  |
|       |       |       |       | 1     | 0th to 3rd stages of FIFO1 are output  |
|       |       |       |       | 1     | 0th to 4th stages of FIFO1 are output  |
|       |       | 1     | 0     | 0     | 0th to 5th stages of FIFO1 are output  |
|       |       |       |       | 1     | 0th to 6th stages of FIFO1 are output  |
|       |       |       | 1     | 0     | 0th to 7th stages of FIFO1 are output  |
|       |       |       |       | 1     | 0th to 8th stages of FIFO1 are output  |
|       |       |       |       | 1     | 0th to 9th stages of FIFO1 are output  |
|       | 1     | 0     | 0     | 0     | Setting prohibited                     |
|       |       |       |       | 1     |                                        |
|       |       |       |       | 1     |                                        |
|       |       |       |       | 1     |                                        |
|       |       |       |       | 1     |                                        |

Note: \* Don't care.

## FIFO Output Pattern Register 1 (FPDRA)

|                 |    |        |        |           |      |      |         |         |
|-----------------|----|--------|--------|-----------|------|------|---------|---------|
| Bit :           | 15 | 14     | 13     | 12        | 11   | 10   | 9       | 8       |
|                 | —  | ADTRGA | STRIGA | NarrowFFA | VFFA | AFFA | VpulseA | MlevelA |
| Initial value : | 1  | *      | *      | *         | *    | *    | *       | *       |
| R/W :           | —  | W      | W      | W         | W    | W    | W       | W       |

|                 |       |       |       |       |       |       |       |       |
|-----------------|-------|-------|-------|-------|-------|-------|-------|-------|
| Bit :           | 7     | 6     | 5     | 4     | 3     | 2     | 1     | 0     |
|                 | PPGA7 | PPGA6 | PPGA5 | PPGA4 | PPGA3 | PPGA2 | PPGA1 | PPGA0 |
| Initial value : | *     | *     | *     | *     | *     | *     | *     | *     |
| R/W :           | W     | W     | W     | W     | W     | W     | W     | W     |

Note : \* Undefined

FPDRA is a buffer register for the FIFO1 output pattern register. The output pattern data written in FPDRA is written at the same time to the position of the FIFO1 pointed by the buffer pointer. Be sure to write the output pattern data in FPDRA before writing it in FTPRA.

FPDRA is an 16-bit write-only register. Only a word access is valid. If a byte access is attempted, correct operation is not guaranteed. No read is valid. If a read is attempted, an undetermined value is read out. It is not initialized by a reset, or in stand-by or module stop mode; accordingly be sure to write data before use.

**Bit 15—Reserved:** Cannot be read or modified.

**Bit 14—A/D Trigger A Bit (ADTRGA):** Indicates a hardware trigger signal for the A/D converter.

**Bit 13—S-TRIGA Bit (STRIGA):** Indicates a signal that generates an interrupt. When the STRIGA is selected by the ISEL, modifying this bit from 0 to 1 generates an interrupt.

**Bit 12—NarrowFFA Bit (NarrowFFA):** Controls the narrow video head.

**Bit 11—VideoFFA Bit (VFFA):** Controls the video head.

**Bit 10—AudioFFA Bit (AFFA):** Controls the audio head.

**Bit 9—VpulseA Bit (VpulseA):** Used for generating an additional V signal. For details, refer to section 26.12, Additional V Signal Generator.

**Bit 8—MlevelA Bit (MlevelA):** Used for generating an additional V signal. For details, refer to section 26.12, Additional V Signal Generator.

**Bits 7 to 0—PPG Output Signal A Bits (PPGA7 to PPGA0):** Used for outputting a timing control signal from port 7 (PPG).

## FIFO Output Pattern Register 2 (FPDRB)

|                 |    |        |        |           |      |      |         |         |
|-----------------|----|--------|--------|-----------|------|------|---------|---------|
| Bit :           | 15 | 14     | 13     | 12        | 11   | 10   | 9       | 8       |
|                 | —  | ADTRGB | STRIGB | NarrowFFB | VFFB | AFFB | VpulseB | MlevelB |
| Initial value : | 1  | *      | *      | *         | *    | *    | *       | *       |
| R/W :           | —  | W      | W      | W         | W    | W    | W       | W       |

|                 |       |       |       |       |       |       |       |       |
|-----------------|-------|-------|-------|-------|-------|-------|-------|-------|
| Bit :           | 7     | 6     | 5     | 4     | 3     | 2     | 1     | 0     |
|                 | PPGB7 | PPGB6 | PPGB5 | PPGB4 | PPGB3 | PPGB2 | PPGB1 | PPGB0 |
| Initial value : | *     | *     | *     | *     | *     | *     | *     | *     |
| R/W :           | W     | W     | W     | W     | W     | W     | W     | W     |

Note : \* Undefined

FPDRB is a buffer register for the FIFO2 output pattern register. The output pattern data written in FPDRB is written at the same time to the position of the FIFO2 pointed by the buffer pointer. Be sure to write the output pattern data in FPDRB before writing it in FTPRB.

FPDRB is an 16-bit write-only register. Only a word access is valid. If a byte access is attempted, correct operation is not guaranteed. No read is valid. If a read is attempted, an undetermined value is read out. It is not initialized by a reset, or in stand-by or module stop mode; accordingly be sure to write data before use.

**Bit 15—Reserved:** Cannot be read or modified.

**Bit 14—A/D Trigger B Bit (ADTRGB):** Indicates a hardware trigger signal for the A/D converter.

**Bit 13—S-TRIGB Bit (STRIGB):** Indicates a signal that generates an interrupt. When the STRIGA is selected by the ISEL, modifying this bit from 0 to 1 generates an interrupt.

**Bit 12—NarrowFFB Bit (NarrowFFB):** Controls the narrow video head.

**Bit 11—VideoFFB Bit (VFFB):** Controls the video head.

**Bit 10—AudioFFB Bit (AFFB):** Controls the audio head.

**Bit 9—VpulseB Bit (VpulseB):** Used for generating an additional V signal. For details, refer to section 26.12, Additional V Signal Generator.

**Bit 8—MlevelB Bit (MlevelB):** Used for generating an additional V signal. For details, refer to section 26.12, Additional V Signal Generator.

**Bits 7 to 0—PPG Output Signal B Bits (PPGB7 to PPGB0):** Used for outputting a timing control signal from port 7 (PPG).

## FIFO Timing Pattern Register 1 (FTPRA)

|                 |         |         |         |         |         |         |        |        |
|-----------------|---------|---------|---------|---------|---------|---------|--------|--------|
| Bit :           | 15      | 14      | 13      | 12      | 11      | 10      | 9      | 8      |
|                 | FTPRA15 | FTPRA14 | FTPRA13 | FTPRA12 | FTPRA11 | FTPRA10 | FTPRA9 | FTPRA8 |
| Initial value : | *       | *       | *       | *       | *       | *       | *      | *      |
| R/W :           | W       | W       | W       | W       | W       | W       | W      | W      |
| Bit :           | 7       | 6       | 5       | 4       | 3       | 2       | 1      | 0      |
|                 | FTPRA7  | FTPRA6  | FTPRA5  | FTPRA4  | FTPRA3  | FTPRA2  | FTPRA1 | FTPRA0 |
| Initial value : | *       | *       | *       | *       | *       | *       | *      | *      |
| R/W :           | W       | W       | W       | W       | W       | W       | W      | W      |

Note : \* Undefined

FTPRA is a register to write the timing pattern data of FIFO1. The timing data written in FTPRA is written at the same time to the position of the FIFO1 pointed by the buffer pointer together with the buffer data of FPDRA.

FTPRA is an 16-bit write-only register. Only a word access is valid. If a byte access is attempted, correct operation is not guaranteed. It is not initialized by a reset or in stand-by or module stop mode; accordingly be sure to write data before use.

Note: The same address is assigned to the FTPRA and the FIFO timer capture register (FTCTR). Accordingly, the value of FTCTR is read out if a read is attempted.

## FIFO Timing Pattern Register 2 (FTPRB)

|                 |         |         |         |         |         |         |        |        |
|-----------------|---------|---------|---------|---------|---------|---------|--------|--------|
| Bit :           | 15      | 14      | 13      | 12      | 11      | 10      | 9      | 8      |
|                 | FTPRB15 | FTPRB14 | FTPRB13 | FTPRB12 | FTPRB11 | FTPRB10 | FTPRB9 | FTPRB8 |
| Initial value : | *       | *       | *       | *       | *       | *       | *      | *      |
| R/W :           | W       | W       | W       | W       | W       | W       | W      | W      |
| Bit :           | 7       | 6       | 5       | 4       | 3       | 2       | 1      | 0      |
|                 | FTPRB7  | FTPRB6  | FTPRB5  | FTPRB4  | FTPRB3  | FTPRB2  | FTPRB1 | FTPRB0 |
| Initial value : | *       | *       | *       | *       | *       | *       | *      | *      |
| R/W :           | W       | W       | W       | W       | W       | W       | W      | W      |

Note : \* Undefined

FTPRB is a register to write the timing pattern data of FIFO2. The timing data written in FTPRB is written at the same time to the position of the FIFO2 pointed by the buffer pointer together with the buffer data of FPDRA.

FTPRB is an 16-bit write-only register. Only a word access is valid. If a byte access is attempted, correct operation is not guaranteed. If a read is attempted, an undetermined value is read out. It is not initialized by a reset or in stand-by or module stop mode; accordingly be sure to write data before use.

DFG Reference Register 1 (DFCRA)

|                 |       |      |      |        |        |        |        |        |
|-----------------|-------|------|------|--------|--------|--------|--------|--------|
| Bit :           | 7     | 6    | 5    | 4      | 3      | 2      | 1      | 0      |
|                 | ISEL2 | CCLR | CKSL | DFCRA4 | DFCRA3 | DFCRA2 | DFCRA1 | DFCRA0 |
| Initial value : | 0     | 0    | 0    | *      | *      | *      | *      | *      |
| R/W :           | W     | W    | W    | W      | W      | W      | W      | W      |

Note : \* Undefined

DFCRA is a register which determines the operation of the HSW timing generator as well as the starting point of the timing of FIFO1.

DFCRA is an 8-bit write-only register. It is not initialized by a reset or in stand-by or module stop mode; accordingly be sure to write data before use.

Note: The same address is assigned to the DFCRA and the DFG reference counter register (DFCTR). Accordingly, the value of DFCTR is read out in the low-order five bits if a read is attempted.

**Bit 7—Interrupt Selection Bit (ISEL2):** Selects the interrupt source. (IRRHSW2)

Bit 7

| ISEL2 | Description                                                                                       |
|-------|---------------------------------------------------------------------------------------------------|
| 0     | Generates an interrupt request by the clear signal of the 16-bit timer counter<br>(Initial value) |
| 1     | Generates an interrupt request by the VD signal in PB mode                                        |

**Bit 6—DFG Counter Clear Bit (CCLR):** Forcibly clears the 5-bit DFG counter by software. After 1 is written, the bit immediately reverts to 0. Writing 0 in this bit has no effect.

Bit 6

| CCLR | Description                         |
|------|-------------------------------------|
| 0    | Normal operation<br>(Initial value) |
| 1    | Clears the 5-bit DFG counter        |

**Bit 5—16-bit Timer Counter Clock Source Selection Bit (CKSL):** Selects the clock source of the 16-bit timer counter.

#### Bit 5

| CKSL | Description                |
|------|----------------------------|
| 0    | $\phi S/4$ (Initial value) |
| 1    | $\phi S/8$                 |

**Bits 4 to 0—FIFO1 Output Timing Setting Bits (DFCRA4 to DFCRA0):** Determines the starting point of the timing of FIFO1. The initial value is undetermined. Be sure to set a value after a reset or stand-by. It is valid only if bit 7 (FRT bit) of HSM2 is 0.

#### DFG Reference Register 2 (DFCRB)

|                 |   |   |   |        |        |        |        |        |
|-----------------|---|---|---|--------|--------|--------|--------|--------|
| Bit :           | 7 | 6 | 5 | 4      | 3      | 2      | 1      | 0      |
|                 | — | — | — | DFCRB4 | DFCRB3 | DFCRB2 | DFCRB1 | DFCRB0 |
| Initial value : | 1 | 1 | 1 | *      | *      | *      | *      | *      |
| R/W :           | — | — | — | W      | W      | W      | W      | W      |

Note : \* Undefined

DFCRB is a register which determines the starting point of the timing of FIFO2.

DFCRB is an 8-bit write-only register. If a read is attempted, an undetermined value is read out. Bits 7 to 5 are reserved; they cannot be modified and are always read as 1. It is not initialized by a reset or in stand-by or module stop mode; accordingly be sure to write data before use.

**Bits 4 to 0—FIFO2 Output Timing Setting Bits (DFCRB4 to DFCRB0):** Sets the starting point of the timing of FIFO2. The value after reset or after stand-by mode is entered is undetermined; be sure to write data before use.

It is valid only if bit 7 (FRT bit) of HSM2 is 0.



## FIFO Timer Capture Register (FTCTR)

|                 |         |         |         |         |         |         |        |        |
|-----------------|---------|---------|---------|---------|---------|---------|--------|--------|
| Bit :           | 15      | 14      | 13      | 12      | 11      | 10      | 9      | 8      |
|                 | FTCTR15 | FTCTR14 | FTCTR13 | FTCTR12 | FTCTR11 | FTCTR10 | FTCTR9 | FTCTR8 |
| Initial value : | 0       | 0       | 0       | 0       | 0       | 0       | 0      | 0      |
| R/W :           | R       | R       | R       | R       | R       | R       | R      | R      |

|                 |        |        |        |        |        |        |        |        |
|-----------------|--------|--------|--------|--------|--------|--------|--------|--------|
| Bit :           | 7      | 6      | 5      | 4      | 3      | 2      | 1      | 0      |
|                 | FTCTR7 | FTCTR6 | FTCTR5 | FTCTR4 | FTCTR3 | FTCTR2 | FTCTR1 | FTCTR0 |
| Initial value : | 0      | 0      | 0      | 0      | 0      | 0      | 0      | 0      |
| R/W :           | R      | R      | R      | R      | R      | R      | R      | R      |

FTCRT is a register to display the count of the 16-bit timer counter.

FTCRT is an 16-bit read-only register. It captures the counter value when the VD signal is detected in PB mode. Only a word access is accepted. If a byte access is attempted, correct operation is not guaranteed. It is initialized to H'0000 by a reset or in stand-by mode.

Note: The same address is assigned to the FTCTR and the FIFO timing pattern register 1 (FTPRA). Accordingly, if a write is attempted, the value is written in FTPRA.

## DFG Reference Count Register (DFCTR)

|                 |   |   |   |        |        |        |        |        |
|-----------------|---|---|---|--------|--------|--------|--------|--------|
| Bit :           | 7 | 6 | 5 | 4      | 3      | 2      | 1      | 0      |
|                 | — | — | — | DFCTR4 | DFCTR3 | DFCTR2 | DFCTR1 | DFCTR0 |
| Initial value : | 1 | 1 | 1 | 0      | 0      | 0      | 0      | 0      |
| R/W :           | — | — | — | R      | R      | R      | R      | R      |

DFCTR is a register to count DFG pulses.

DFCTR is an 8-bit read-only register. Bits 7 to 5 are reserved; they cannot be modified and are always read as 1. It is initialized to H'E0 by a reset or in stand-by mode.

Note: The same address is assigned to the DFCTR and the DFG reference register 1 (DFCRA). Accordingly, if a write is attempted, the value is written in DFCRA.

**Bits 4 to 0—DFG Pulse Count Bits (DFCTR4 to DFCTR0):** These bits count DFG pulses.

## 26.4.6 Operation

**5-Bit DFG Counter:** The 5-bit DFG counter increments the count at the DFG edges selected by the EDG bit of HSW Mode Register 2. The DFG counter is cleared by a DPG rising edge, or by writing to the CCLR bit of the DFG reference register 1.

**16-Bit Timer Counter:** The 16-bit timer counter can operate in DFG reference mode or in free-running mode.

- DFG Reference Mode

The timer counter operates by referencing the DFG signal. When the 5-bit DFG counter value matches the value specified in the DFG reference register 1 or 2, the 16-bit timer counter is initialized; this is the start point of the FIFO output timing.

In DFG reference mode, the start point specifying method can be selected by the FGR2OFF bit of the HSW mode register 2: one way is to specify both FIFO1 and FIFO2 by only one register (DFG reference register 1), and the other is to specify FIFO1 and FIFO2 by DFG reference registers 1 and 2, respectively. When only the DFG reference register 1 is used, the continuous values must be set to FIFO1 and FIFO2 as the timing patterns.

- Free-Running Mode

The timer counter operates in association with the prescaler unit. When the 18-bit free-running counter in the prescaler unit overflows, the 16-bit timer counter in the HSW timing generator is initialized; this is the start point of the FIFO output timing.

**Compare Circuit:** The compare circuit compares the 16-bit timer counter value with the FIFO timing pattern, and when they match, the compare circuit generates a trigger signal for outputting the next-stage FIFO data.

**FIFO:** The FIFO generates a head switch signal for VCR and patterns for servo control. Data is set to FIFO by using the FIFO timing pattern registers 1 and 2, and FIFO output pattern registers 1 and 2.

The FIFO operates in single mode and loop mode. In these two modes, the number of output stages can be selected by the FIFO output group selection bit: 20-stage output using both FIFO1 and FIFO2 or 10-stage output using only FIFO1.

- Single Mode

The output pattern data is output when the timing pattern matches the counter value. The data, once output, is lost, and the internal pointer is decremented by 1. After the last data is output, the FIFO stops operation until data is written again. When 20-stage output is used, writing in FIFO1 and FIFO2 must be controlled by software.


- Loop Mode

The data output cycle is repeated from stage 0 to the final stage selected in the HSW loop number setting register. As in single mode, the output pattern data is output when the timing pattern matches the counter value. In loop mode, the FIFO data is retained.

Data in each FIFO group can be modified in loop mode. The FIFO group currently outputting data can be checked by the OFG bit of the HSW mode register 2; after checking the outputting FIFO group, clear the FIFO group which is not outputting data, then write new data to it.

Writing new data must be completed before the FIFO group starts operation. The FIFO cannot be modified partially because the write pointer is outside the loop stages.

Figures 26.23 and 26.24 show examples of the timing waveform and operation of the HSW timing generator.

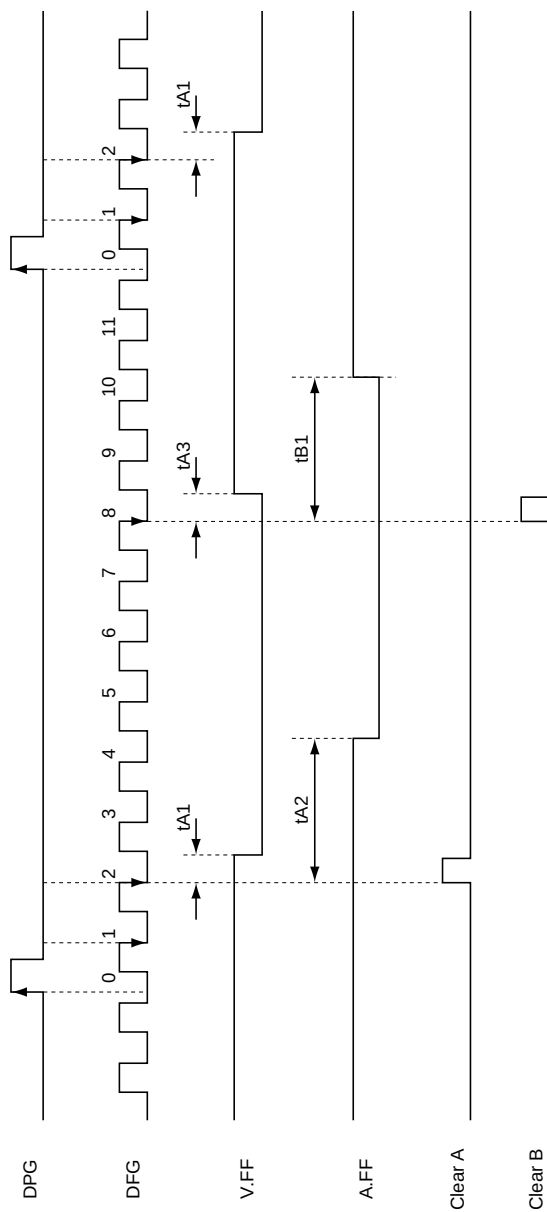

Example of setting: DFCR=H'02, DFCRB=H'08, HSLP=H'21, DFG falling edge

**Figure 26.23 Example of Timing Waveform of HSW (for 12 DFG Pulses)**

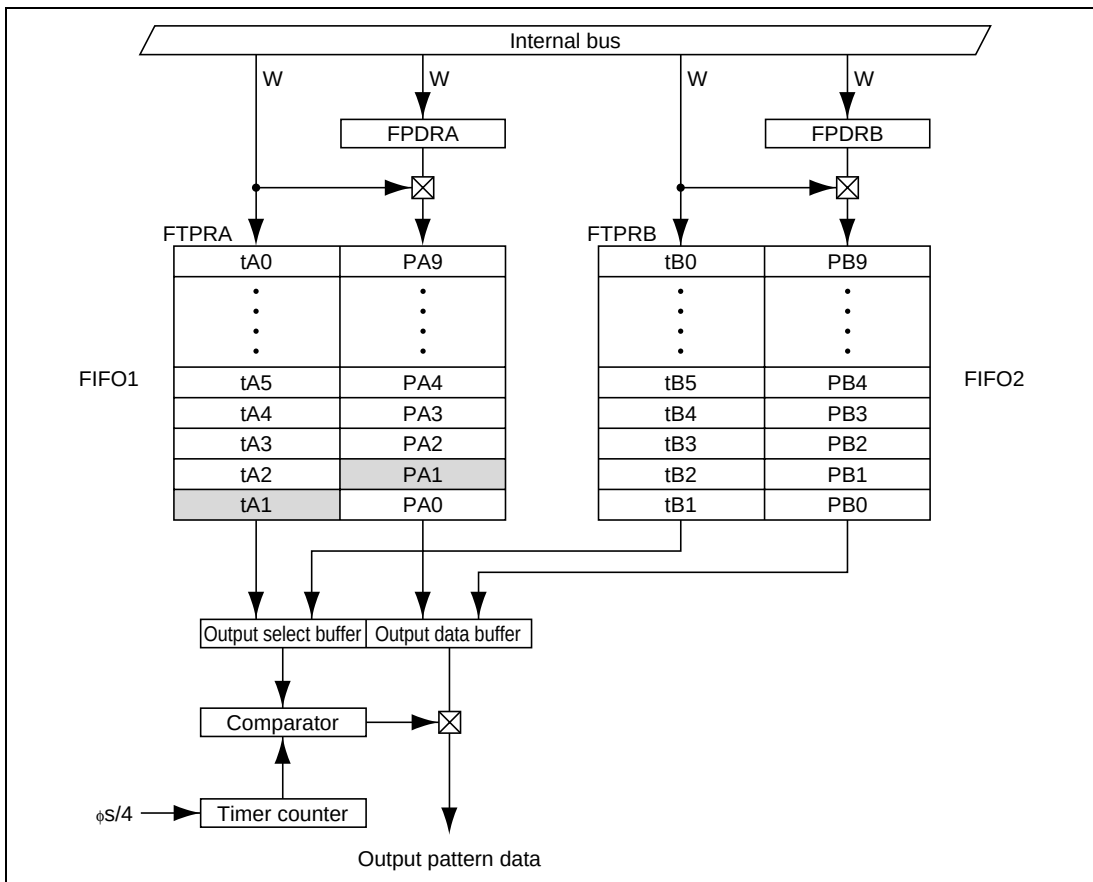


**Figure 26.24 Example of Operation of the HSW Timing Generator**

- Example of operation in single mode (20 stages of FIFO used)
  - 1 Set to single mode ( $LOP = 0$ )
  - 2 Write the output pattern data (PA0) to FPDRA.
  - 3 Write the output timing ( $t_{A1}$ ) to FTPRA.  $t_{A1}$  is written in FIFO1 together with PA0. This initializes the output pattern data to PA0.
  - 4 Repeat the steps in the same way, until PA1, PA2, etc., are set.
  - 5 Write the output pattern data (PB0) to FPDRB.
  - 6 Write the output timing ( $t_{B1}$ ) to FTPRB.  $t_{B1}$  is written in FIFO2 together with PB0. This initializes the output pattern data to PB0.
  - 7 Repeat these steps in the same way, until PB1, PB2, etc., are set.

By step 3, the pattern data of PA0 is output.

If  $t_{A1}$  matches with the timer counter, the pattern data of PA1 is output.

If  $t_{A2}$  matches with the timer counter, the pattern data of PA2 is output.

.

.

.

After this sequence is repeated and all the pattern data set in FIFO1 is output, the pattern data of FIFO2 is output. After the pattern data is output, the pointer is decremented by 1. Care is required, however, because matching of  $t_{A0}$  is not detected until data is written in FIFO2. Matching of  $t_{B0}$  also is not detected until data is written in FIFO1 again.

- Example of the operation in loop mode mode
  - 1 Set the number of loop stages in HSLP register (e.g. HSLP = H'44)
  - 2 Write the output pattern data (PA0) to FPDRA.
  - 3 Write the output timing ( $t_{A1}$ ) to FTPRA.  $t_{A1}$  is written in FIFO1 together with PA0. This initializes the output pattern data to PA0.
  - 4 Repeat the steps in the same way, until PA1, PA2, etc., are set.
  - 5 Write the output pattern data (PB0) to FPDRB.
  - 6 Write the output timing ( $t_{B1}$ ) to FTPRB.  $t_{B1}$  is written in FIFO2 together with PB0. This initializes the output pattern data to PB0.
  - 7 Repeat the steps in the same way, until PB1, PB2, etc., are set.

By step 3, the pattern data PA0 is output.

If  $t_{A1}$  matches the timer counter, the pattern data PA1 is output.

If  $t_{A2}$  matches the timer counter, the pattern data PA2 is output.

.

.

.

If  $t_{A4}$  matches the timer counter, the pattern data PA4 is output.

If  $t_{A5}$  matches the timer counter, the pattern data PB0 is output.

If  $t_{B1}$  matches the timer counter, the pattern data PB1 is output.

.

.

.

If  $t_{B4}$  matches the timer counter, the pattern data PB4 is output.

If  $t_{B5}$  matches the timer counter, the pattern data PA0 is output.

.

.

.

## 26.4.7 Interrupts

The HSW timing generator generates interrupts under the following conditions.

- 1 IRRHSW1 occurs when pattern data is written (OVWA, OVWB = 1) while FIFO is full (FULL).
- 2 IRRHSW1 occurs when matching is detected while the STRIG bit of FIFO is 1.
- 3 IRRHSW1 occurs when the values of the 16-bit timer counter and 16-bit timing pattern register match.
- 4 IRRHSW2 occurs when the 16-bit timer counter is cleared.
- 5 IRRHSW2 occurs when a VD signal (capture signal of the timer capture register) is received in PB mode.

Condition 2 or 3, as well as 4 or 5, are selected by ISEL1 and ISEL2.



## 26.4.8 Cautions

- When both the 5-bit DFG counter and 16-bit timer counter are operating, the latter is not cleared if input of DPG and DFG signals is stopped. This leads to free-running of the 16-bit timer counter, and periodical detection of matching by the 16-bit timer counter. In such a case, the period of the output from the HSW timing generator is independent from DPG or DFG.
- Specify the mode setting bit (LOP) of the HSW mode register 2 (HSM2) immediately before writing the FIFO data.
- Input the rising edge of DPG and DFG count edge at different timings. If they are input at the same timing, counting up DFG and clearing the 5-bit DFG counter occur simultaneously. In this case, the latter will take precedence. This leads to the DFG counter lag by 1. Figure 26.25 shows the input timing of DPG and DFG.
- If stop of the drum system is required when FIFO output is being used in the 20-stage output mode, modify the SOFG bit of HSM2 register from 0 to 1, then again to 0 by software, and be sure to initialize the FIFO output stage to the FIFO1 side. Also clear and rewrite the data of FIFO1 and FIFO2.

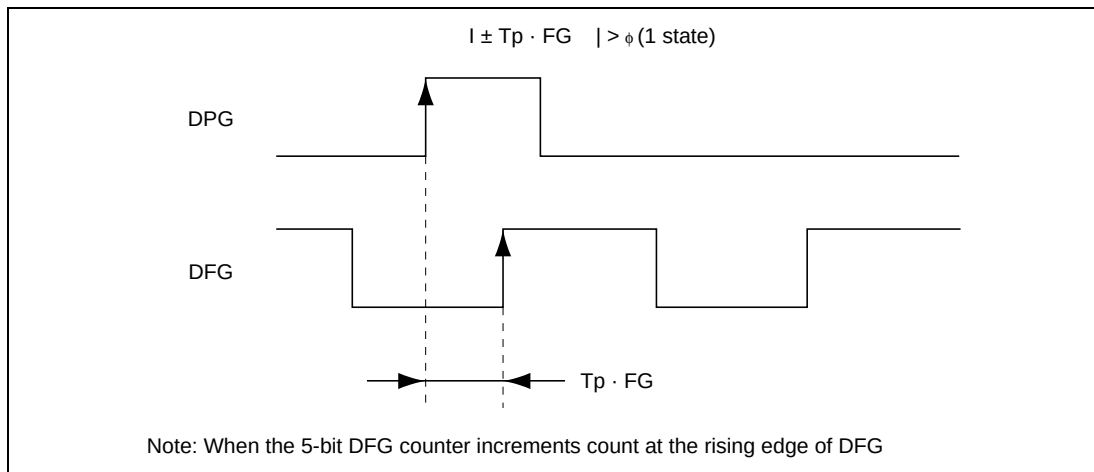


**Figure 26.25 Input Timing of DPG and DFG**

## 26.5 High-Speed Switching Circuit for Four-Head Special Playback

### 26.5.1 Overview

This high-speed switching circuit generates a color rotary signal (C.Rotary) and head-amplifier switching signal (H.Amp SW) for use in four-head special playback.

A pre-amplifier output comparison result signal is input from the COMP pin. The signal output to the C.Rotary pin is a chroma signal processing control signal. The signal output at the H.Amp SW pin is a pre-amplifier output select signal. To reduce the width of noise bars, the C.Rotary and H.Amp SW signals are synchronized to the horizontal sync signal (OSCH). OSCH is made by adding supplemented H, which has been separated from Csync signal in the sync signal detector circuit. For more details of OSCH, see section 26.15, Sync Signal Detector.

If the VCR system does not require this circuit, C.Rotary, H.Amp SW, and COMP pins can be used as the I/O port.

### 26.5.2 Block Diagram

Figure 26.26 shows the block diagram of this circuit.

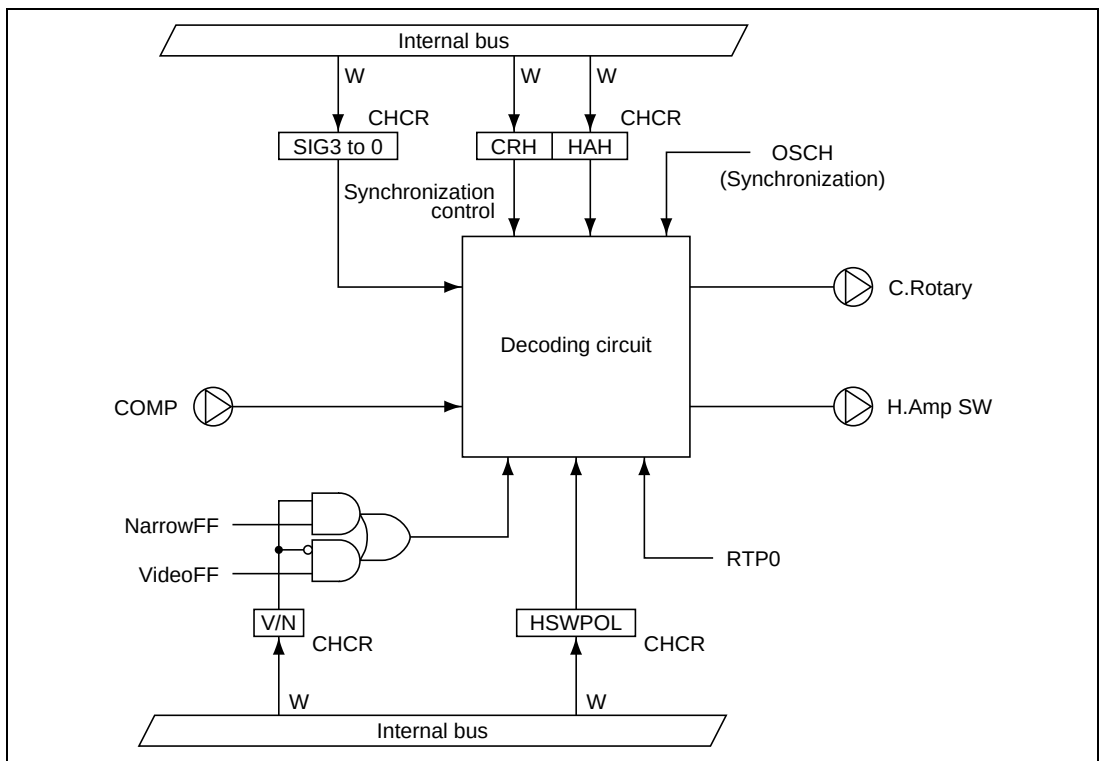


**Figure 26.26 High-Speed Switching Circuit for Four-Head Special Playback**

### 26.5.3 Pin Configuration

Table 26.7 summarizes the pin configuration of the high-speed switching circuit for four-head special playback. If this circuit is not used, the pins can be used as I/O port. See section 26.2, Servo Port.

**Table 26.7 Pin Configuration**

| Name                           | Abbrev.  | I/O    | Function                                     |
|--------------------------------|----------|--------|----------------------------------------------|
| Compare input pin              | COMP     | Input  | Input of pre-amplifier output result signal  |
| Color rotary signal output pin | C.Rotary | Output | Output of chroma processing control signal   |
| Head amplifier switch pin      | H.Amp SW | Output | Output of pre-amplifier output select signal |

### 26.5.4 Register Description

#### Register Configuration

Table 26.8 shows the register configuration of the high-speed switching circuit for four-head special playback.

**Table 26.8 Register Configuration**

| Name                              | Abbrev. | R/W | Size | Initial Value | Address |
|-----------------------------------|---------|-----|------|---------------|---------|
| Special playback control register | CHCR    | W   | Byte | H'00          | H'D06E  |

## Special Playback Control Register (CHCR)

|                 |     |        |     |     |      |      |      |      |
|-----------------|-----|--------|-----|-----|------|------|------|------|
| Bit :           | 7   | 6      | 5   | 4   | 3    | 2    | 1    | 0    |
|                 | V/N | HSWPOL | CRH | HAH | SIG3 | SIG2 | SIG1 | SIG0 |
| Initial value : | 0   | 0      | 0   | 0   | 0    | 0    | 0    | 0    |
| R/W :           | W   | W      | W   | W   | W    | W    | W    | W    |

CHCR is an 8-bit write-only register. It cannot be read. It is initialized to H'00 by a reset, or in standby or module stop mode.

**Bits 7—HSW Signal Select Bit (V/N):** Selects the HSW signal to be used at special playback.

### Bit 7

| V/N | Description                            |
|-----|----------------------------------------|
| 0   | Video FF signal output (Initial value) |
| 1   | Narrow FF signal output                |

**Bit 6—COMP Polarity Select Bit (HSWPOL):** Selects the polarity of the COMP signal.

### Bit 6

| HSWPOL | Description              |
|--------|--------------------------|
| 0      | Positive (Initial value) |
| 1      | Negative                 |

**Bit 5—C.Rotary Synchronization Control Bit (CRH):** Synchronizes C.Rotary signal with the OSCH signal.

### Bit 5

| CRH | Description                 |
|-----|-----------------------------|
| 0   | Synchronous (Initial value) |
| 1   | Asynchronous                |

**Bit 4—H.AmpSW Synchronization Control Bit (HAH):** Synchronizes H.AmpSW signal with the OSCH signal.

**Bit 4**

| HAH | Description                 |
|-----|-----------------------------|
| 0   | Synchronous (Initial value) |
| 1   | Asynchronous                |

**Bits 3 to 0—Signal Control (SIG3 to SIG0):** These bits, combined with the state of the COMP input pin, control the outputs at the C.Rotary and H.AmpSW pins.

| Bit 3 | Bit 2 | Bit 1 | Bit 0 | Output pins             |                         |
|-------|-------|-------|-------|-------------------------|-------------------------|
| SIG3  | SIG2  | SIG1  | SIG0  | C.Rotary                | H.Amp SW                |
| 0     | 0     | *     | *     | L                       | L (Initial value)       |
|       |       |       | *     | L                       | L                       |
|       |       | 0     | 0     | HSW                     | L                       |
|       |       |       | 1     | $\overline{\text{HSW}}$ | H                       |
|       | 1     | 1     | 0     | L                       | HSW                     |
|       |       |       | 1     | H                       | $\overline{\text{HSW}}$ |
| 1     | 0     | 0     | *     | HSW EX-OR COMP          | COMP                    |
|       |       |       |       | HSW EX-NOR COMP         | COMP                    |
|       |       | 1     | 0     | HSW E-OR RTP0           | RTP0                    |
|       |       |       |       | HSW EX-NOR RTP0         | RTP0                    |

Note: \* Don't care.

## 26.6 Drum Speed Error Detector

### 26.6.1 Overview

Drum speed error control holds the drum at a constant revolution speed, by measuring the period of the DFG signal. A digital counter detects the speed error against a preset value. The speed error data is processed and added to phase error data in a digital filter. This filter controls a pulse-width modulated (PWM) output, which controls the revolution speed and phase of the drum. The DFG input signal is reshaped into a square wave by a reshaping circuit, and sent to the speed error detector as the DFG signal.

The speed error detector uses the system clock to measure the period of the DFG signal, and detects the error against a preset data value. The preset data is the value that results from measuring the DFG signal period with the clock signal when the drum motor is running at the correct speed.

The error detector operates by latching a counter value when it detects an edge of the DFG signal. The latched count provides 16 bits of speed error data for the digital filter to operate on. The digital filter processes and adds the speed error data to phase error data from the drum phase control system, then sends the result to the PWM as drum error data.

### 26.6.2 Block Diagram

Figure 26.27 shows a block diagram of the drum speed error detector.



### 26.6.3 Register Configuration

Table 26.9 shows the register configuration of the drum speed error detector.

**Table 26.9 Register Configuration**

| <b>Name</b>                                 | <b>Abbrev.</b> | <b>R/W</b> | <b>Size</b> | <b>Initial Value</b> | <b>Address</b> |
|---------------------------------------------|----------------|------------|-------------|----------------------|----------------|
| Specified DFG speed preset data register    | DFPR           | W          | Word        | H'0000               | H'D030         |
| DFG speed error data register               | DFER           | R/W        | Word        | H'0000               | H'D032         |
| DFG lock upper data register                | DFRUDR         | W          | Word        | H'7FFF               | H'D034         |
| DFG lock lower data register                | DFRLDR         | W          | Word        | H'8000               | H'D036         |
| Drum speed error detection control register | DFVCR          | R/W        | Byte        | H'00                 | H'D038         |



## 26.6.4 Register Description

### Specified DFG Speed Preset Data Register (DFPR)

|                 |        |        |        |        |        |        |       |       |
|-----------------|--------|--------|--------|--------|--------|--------|-------|-------|
| Bit :           | 15     | 14     | 13     | 12     | 11     | 10     | 9     | 8     |
|                 | DFPR15 | DFPR14 | DFPR13 | DFPR12 | DFPR11 | DFPR10 | DFPR9 | DFPR8 |
| Initial value : | 0      | 0      | 0      | 0      | 0      | 0      | 0     | 0     |
| R/W :           | W      | W      | W      | W      | W      | W      | W     | W     |
| Bit :           | 7      | 6      | 5      | 4      | 3      | 2      | 1     | 0     |
|                 | DFPR7  | DFPR6  | DFPR5  | DFPR4  | DFPR3  | DFPR2  | DFPR1 | DFPR0 |
| Initial value : | 0      | 0      | 0      | 0      | 0      | 0      | 0     | 0     |
| R/W :           | W      | W      | W      | W      | W      | W      | W     | W     |

The DFG speed preset data is set in DFPR. When data is written, the 16-bit preset data is sent to the preset circuit. The preset data can be calculated from the following equation by using H'8000\* as the reference value.

$$\text{Specified DFG speed preset data} = \text{H}'8000 - \left( \frac{\phi s/n}{\text{DFG frequency}} - 2 \right)$$

$\phi$  s: Servo clock frequency (fosc/2) in Hz

DFG frequency: In Hz

Constant 2 is the presetting interval (see Figure 26.28).

$\phi$  s/n Clock source of the selected counter

DFPR is a 16-bit write-only register. Only a word access is valid. If a byte access is attempted, correct operation is not guaranteed. DFPR cannot be read. If a read is attempted, an undetermined value is read. DFPR is initialized to H'0000 by a reset, and in standby mode and module stop mode.

Note: The preset data value is calculated so that the counter will reach H'8000 when the error is zero. When the counter value is latched as error data in the DFG speed error data register (DFER), however, it is converted to a value referenced to H'0000.

## DFG Speed Error Data Register (DFER)

|                 |        |        |        |        |        |        |       |       |
|-----------------|--------|--------|--------|--------|--------|--------|-------|-------|
| Bit :           | 15     | 14     | 13     | 12     | 11     | 10     | 9     | 8     |
|                 | DFER15 | DFER14 | DFER13 | DFER12 | DFER11 | DFER10 | DFER9 | DFER8 |
| Initial value : | 0      | 0      | 0      | 0      | 0      | 0      | 0     | 0     |
| R/W :           | R*/W   | R*/W   | R*/W   | R*/W   | R*/W   | R*/W   | R*/W  | R*/W  |
| Bit :           | 7      | 6      | 5      | 4      | 3      | 2      | 1     | 0     |
|                 | DFER7  | DFER6  | DFER5  | DFER4  | DFER3  | DFER2  | DFER1 | DFER0 |
| Initial value : | 0      | 0      | 0      | 0      | 0      | 0      | 0     | 0     |
| R/W :           | R*/W   | R*/W   | R*/W   | R*/W   | R*/W   | R*/W   | R*/W  | R*/W  |

Note: \* Note that only detected error data can be read.

DFER is a 16-bit read/write register that stores 16-bit DFG speed error data. When the drum motor speed is correct, the data latched in DFER is H'0000. Negative data will be latched if the speed is faster than the specified speed, and positive data if the speed is slower than the specified speed. The DFER value is sent to the digital filter either automatically or by software.

Only a word access is valid. If a byte access is attempted, correct operation is not guaranteed.

DFER is initialized to H'0000 by a reset, and in standby mode and module stop mode.

Refer to the note Specified DFG Speed Preset Data Register (DFPR) in 26.6.4 Register Description.

## DFG Lock Upper Data Register (DFRUDR)

|                 |          |          |          |          |          |          |         |         |
|-----------------|----------|----------|----------|----------|----------|----------|---------|---------|
| Bit :           | 15       | 14       | 13       | 12       | 11       | 10       | 9       | 8       |
|                 | DFRUDR15 | DFRUDR14 | DFRUDR13 | DFRUDR12 | DFRUDR11 | DFRUDR10 | DFRUDR9 | DFRUDR8 |
| Initial value : | 0        | 1        | 1        | 1        | 1        | 1        | 1       | 1       |
| R/W :           | W        | W        | W        | W        | W        | W        | W       | W       |
| Bit :           | 7        | 6        | 5        | 4        | 3        | 2        | 1       | 0       |
|                 | DFRUDR7  | DFRUDR6  | DFRUDR5  | DFRUDR4  | DFRUDR3  | DFRUDR2  | DFRUDR1 | DFRUDR0 |
| Initial value : | 1        | 1        | 1        | 1        | 1        | 1        | 1       | 1       |
| R/W :           | W        | W        | W        | W        | W        | W        | W       | W       |

DFRUDR is a 16-bit write-only register used to set the lock range on the UPPER side when drum speed lock is detected, and to set the limit value on the UPPER side when limiter function is in use. Set a signed data to DFRUDR (bit 15 is a sign-setting bit).

When lock is being detected, if the drum speed is detected within the lock range, the lock counter which has been set by DFRCS 1 and 0 bits of DFVCR register decrements the count. If the set value of DFRCS 1 and 0 matches the number of times of occurrence of locking, the computation of the digital filter in the drum phase system can be controlled automatically. Also, if the DFG speed error data exceeds the DFRUDR value within the limiter function is in use, the DFRUDR value can be used as the data for computation by the digital filter.

Only a word access is valid. If a byte access is attempted, correct operation is not guaranteed. No read is valid. If a read is attempted, an undetermined value is read out. It is initialized to H'7FFF by a reset, or in stand-by or module-stop mode.

## DFG Lock LOWER Data Register (DFRLDR)

|                 |          |          |          |          |          |          |         |         |
|-----------------|----------|----------|----------|----------|----------|----------|---------|---------|
| Bit :           | 15       | 14       | 13       | 12       | 11       | 10       | 9       | 8       |
|                 | DFRLDR15 | DFRLDR14 | DFRLDR13 | DFRLDR12 | DFRLDR11 | DFRLDR10 | DFRLDR9 | DFRLDR8 |
| Initial value : | 1        | 0        | 0        | 0        | 0        | 0        | 0       | 0       |
| R/W :           | W        | W        | W        | W        | W        | W        | W       | W       |

|                 |         |         |         |         |         |         |         |         |
|-----------------|---------|---------|---------|---------|---------|---------|---------|---------|
| Bit :           | 7       | 6       | 5       | 4       | 3       | 2       | 1       | 0       |
|                 | DFRLDR7 | DFRLDR6 | DFRLDR5 | DFRLDR4 | DFRLDR3 | DFRLDR2 | DFRLDR1 | DFRLDR0 |
| Initial value : | 0       | 0       | 0       | 0       | 0       | 0       | 0       | 0       |
| R/W :           | W       | W       | W       | W       | W       | W       | W       | W       |

DFRLDR is a 16-bit write-only register used to set the lock range on the LOWER side when drum speed lock is detected, and to set the limit value on LOWER side when limiter function is in use. Set a signed data to DFRLDR (bit 15 is a sign-setting bit).

When lock is being detected, if the drum speed is detected within the lock range, the lock counter which has been set by DFRCS 1 and 0 bits of DFVCR register decrements the count. If the set value of DFRCS 1 and 0 matches the number of times of occurrence of locking, the computation of the digital filter in the drum phase system can be controlled automatically. Also, if the DFG speed error data is under the DFRLDR value when the limiter function is in use, the DFRLDR value can be used as the data for computation by the digital filter.

Only a word access is valid. If a byte access is attempted, correct operation is not guaranteed. No read is valid. If a read is attempted, an undetermined value is read out. It is initialized to H'8000 by a reset, or in stand-by or module-stop mode.

## Drum Speed Error Detection Control Register (DFVCR)

|                 |       |       |         |        |          |       |         |         |
|-----------------|-------|-------|---------|--------|----------|-------|---------|---------|
| Bit :           | 7     | 6     | 5       | 4      | 3        | 2     | 1       | 0       |
|                 | DFCS1 | DFCS0 | DFOVF   | DFRFON | DF-R/UNR | DPCNT | DFRCS1  | DFRCS0  |
| Initial value : | 0     | 0     | 0       | 0      | 0        | 0     | 0       | 0       |
| R/W :           | R/W   | R/W   | R/(W)*1 | R/W    | R        | R/W   | (R)*2/W | (R)*2/W |

- Notes:
1. Only 0 can be written.
  2. If read-accessed, the counter value is read out.

DFVCR is an 8-bit read/write register that controls the operation of drum speed error detection. Bit 3 accepts only read, and bit 5 accepts only read and 0 write. It is initialized to H'00 by a reset, or in stand-by or module-stop mode.

**Bits 7 and 6—Clock Source Selection Bits (DFCS1, DFCS0):** DFCS1 and DFCS0 select the clock to be supplied to the counter. ( $\phi_s = f_{osc}/2$ )

| Bit 7 | Bit 6 | Description              |
|-------|-------|--------------------------|
| DFCS1 | DFCS0 |                          |
| 0     | 0     | $\phi_S$ (Initial value) |
|       | 1     | $\phi_S/2$               |
| 1     | 0     | $\phi_S/4$               |
|       | 1     | $\phi_S/8$               |

**Bit 5—Counter Overflow Flag (DFOVF):** DFOVF flag indicates the overflow of the 16-bit timer counter. It is cleared by writing 0. Write 0 after reading 1. Setting has the highest priority in this flag. If a flag set and 0 write occurs simultaneously, the latter is invalid.

| Bit 5 |                                                      |
|-------|------------------------------------------------------|
| DFOVF | Description                                          |
| 0     | Normal state. (Initial value)                        |
| 1     | Indicates that overflow has occurred in the counter. |

**Bit 4—Error Data Limit Function Selection Bit (DFRFON):** Enables the error data limit function. (Limit values are the values set in the lock range data registers (DFRUUDR and DFRLDR)).

| Bit 4  |                          |                 |
|--------|--------------------------|-----------------|
| DFRFON | Description              |                 |
| 0      | Disables limit function. | (Initial value) |
| 1      | Enables limit function.  |                 |

**Bit 3—Drum Lock Flag (DF-R/UNR):** Sets a flag if an underflow occurred in the drum lock counter.

| Bit 3    |                                                     |                 |
|----------|-----------------------------------------------------|-----------------|
| DF-R/UNR | Description                                         |                 |
| 0        | Indicates that the drum speed system is not locked. | (Initial value) |
| 1        | Indicates that the drum speed system is locked.     |                 |

**Bit 2—Drum Phase System Filter Computation Automatic Start Bit (DPCNT):** Enables the filter computation of the phase system if an underflow occurred in the drum lock counter.

#### Bit 2

| DPCNT | Description                                                                    |
|-------|--------------------------------------------------------------------------------|
| 0     | Disables the filter computation by detection of the drum lock. (Initial value) |
| 1     | Enables the filter computation of the phase system when drum lock is detected. |

**Bits 1 and 0—Drum Lock Counter Setting Bits (DFRCS1, DFRCS0):** Set the number of times to detect drum locks (which means the number of times DFG is detected in the range set by the lock range data register). The drum lock flag is set when the specified number of drum locks is detected. If the NCDFG signal is detected outside the lock range after data is written in DFRCS1 and DFRCS0, the data will be stored in the lock counter.

Note: If DFRCS1 or DFRCS0 is read-accessed, the counter value is read out. If bit 3 (drum lock flag) is 1 and the drum lock counter's value is 3, it indicates that the drum speed system is locked. The drum lock counter stops until lock is released after underflow.

| Bit 1  | Bit 0  | Description                                                    |
|--------|--------|----------------------------------------------------------------|
| DFRCS1 | DFRCS0 |                                                                |
| 0      | 0      | Underflow occurs after lock was detected once. (Initial value) |
|        | 1      | Underflow occurs after lock was detected twice.                |
| 1      | 0      | Underflow occurs after lock was detected three times.          |
|        | 1      | Underflow occurs after lock was detected four times.           |

## 26.6.5 Operation

The drum speed error detector detects the speed error based on the reference value set in the DFG specified speed preset register (DFPR). The reference value set in DFPR is preset in the counter by NCDFG signal, and the counter decrements the count by the selected clock. The timing of the counter presetting and the error data latching can be selected between the rising or falling edge of NCDFG signal. See section 26.14.4, FG Control Register (FGCR) in 26.14.4 DFG Noise Removal Circuit. The error data detected is sent to the digital filter circuit. The error data is signed binaries. The data takes a positive number (+) if the speed is slower than the specified speed, a negative number (-) if the speed is faster, or 0 if it had no error (revolving at the specified speed). Figure 26.28 shows an example of operation to detect the drum speed.

- Setting the error data limit

A limit can be set to the error data sent to the digital filter circuit using the DFG lock data register (DFRUDR, DFRLDR). Set the upper limit of the error data in DFRUDR and the lower limit in DFRLDR, and write 1 in DFRFON bit. If the error data is outside the limit range, the DFRLDR value is sent to the digital filter circuit if a negative number is latched, or the DFRUDR value if a positive number is latched, as a limit value. Be sure to turn off the limit setting (DFRFON = 0) when you set the limit value. If the limit was set with the limit setting on (DFRFON = 1), result of computation is not assured.

- Lock detection

If an error data is detected within the lock range set in the lock data register, the drum lock flag (DF-R/UNR) is set by the number of the times of locking set by DFRCS1 and DFRCS0 bits, and an interrupt is requested (IRRDRM2) at the same time. The number of the occurrence of locking (once to 4 times) before the flag is set can be specified. Use DFRCS1 and DFRCS0 bits for this purpose. The on/off status of the phase system digital filter computation can be controlled automatically by the status of lock detection when bit 5 (DPHA bit) of the drum system digital filter control register (DFIC) is 0 (phased system digital filter computation off) and DPCNT bit is 1.

- Drum system speed error detection counter

The drum system speed error detection counter stops the counter and sets the overflow flag (DFOVF) when an overflow occurs. At the same time, it generates an interrupt request (IRRDRM1). To clear DFOVF, write 0 after reading 1. If setting the flag and writing 0 take place simultaneously, the latter is invalid.

- Interrupt request

IRRDRM1 is generated by the NCDFG signal latch and the overflow of the error detection counter. IRRDRM2 is generated by detection of lock (after the detection of the specified number of times of locking).

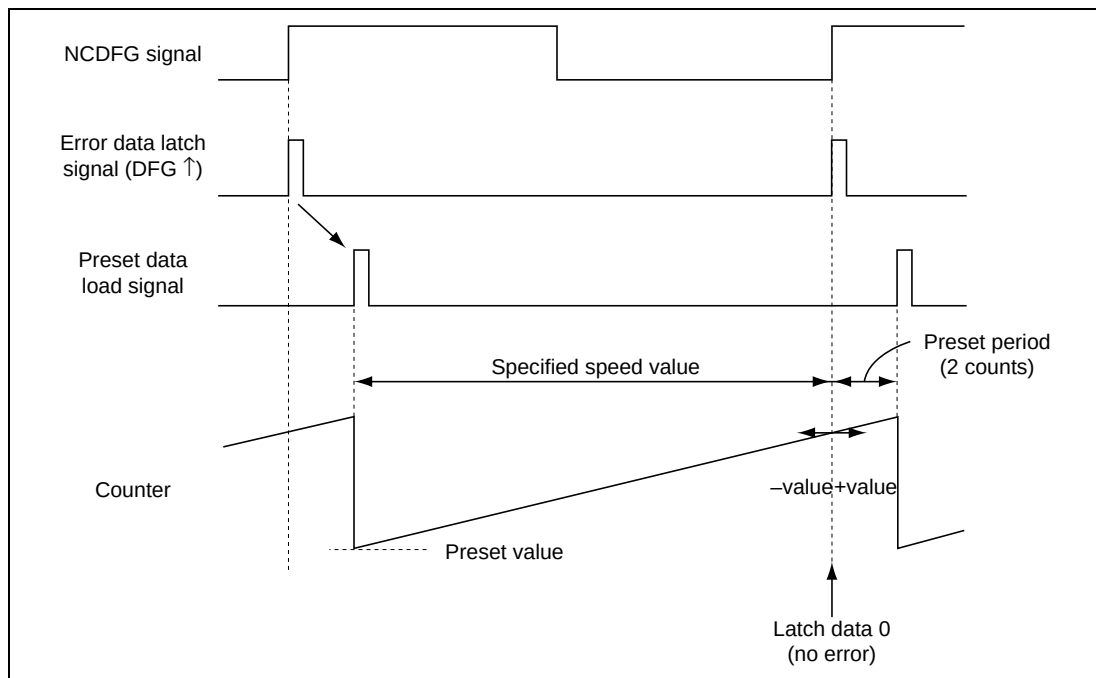


**Figure 26.28 Example of the Drum Speed Error Detection  
(When the Rising Edge of DFG is Selected)**

## 26.6.6 $f_H$ Correction in Trick Play Mode

In trick play mode, the tape speed relative to the video head changes. This change alters the horizontal sync signal ( $f_H$ ), causing skew. To correct the skew, the drum motor speed must be shifted to a different speed in each trick play mode, so as to obtain the normal horizontal sync frequency. To shift the drum motor speed, software should modify the value written in the specified DFG speed preset data register in the speed error detector.

This  $f_H$  correction can be expressed in terms of the basic frequency  $f_F$  of the drum as follows.

$$f_F = \frac{N_0}{N_0 + \alpha_H (1-n)} \times f_{F0}$$

Legend:

- n: Speed multiplier (FWD = positive, REV = negative)
- $\alpha_H$ : H alignment (1.5H in standard mode, 0.75H in 2x mode, and 0.5H in 3x mode for VHS and  $\beta$  systems; 1H for an 8-mm VCR)
- $N_0$ : Standard H numbers within field
- $f_{F0}$ : Field frequency
- NTSC:  $N_0 = 262.5$ ,  $f_{F0} = 59.94$
- PAL:  $N_0 = 312.5$ ,  $f_{F0} = 50.00$



## 26.7 Drum Phase Error Detector

### 26.7.1 Overview

The drum phase control system must start after the drum motor has reached the specified revolution speed by the speed control system. Drum phase control works as follows in record and playback mode.

- **Record Mode:** Phase is controlled so that the vertical blanking intervals of the video signal to be recorded will line up along the bottom edge of the tape.
- **Playback Mode:** Phase is controlled so as to trace the recorded tracks accurately. A counter detects the phase error against a preset value. The phase error data is processed and added to speed error data in a digital filter. This filter controls a pulse-width modulated (PWM) output, which controls the revolution phase and speed of the drum. The DPG signal from the drum motor is reshaped into a square wave by a reshaping circuit, and sent to the phase error detector. The phase error detector compares the phase of the DPG pulse (tach pulse), which contains video head phase information, with a reference signal. In the actual circuit, the comparison is carried out by comparing the head-switching (HSW) signal, which is delayed by a counter that is reset by DPG, with a reference signal value. The reference signal is the REF30 signal, which differs between record and playback as follows:
  - **Record:** Vsync signal extracted from the video signal to be recorded (frame rate signal, actually 1/2 Vsync).
  - **Playback:** 30 Hz or 25 Hz signal divided from the system clock.

26.7.2 Block Diagram

Figure 26.29 shows a block diagram of the drum phase error detector.

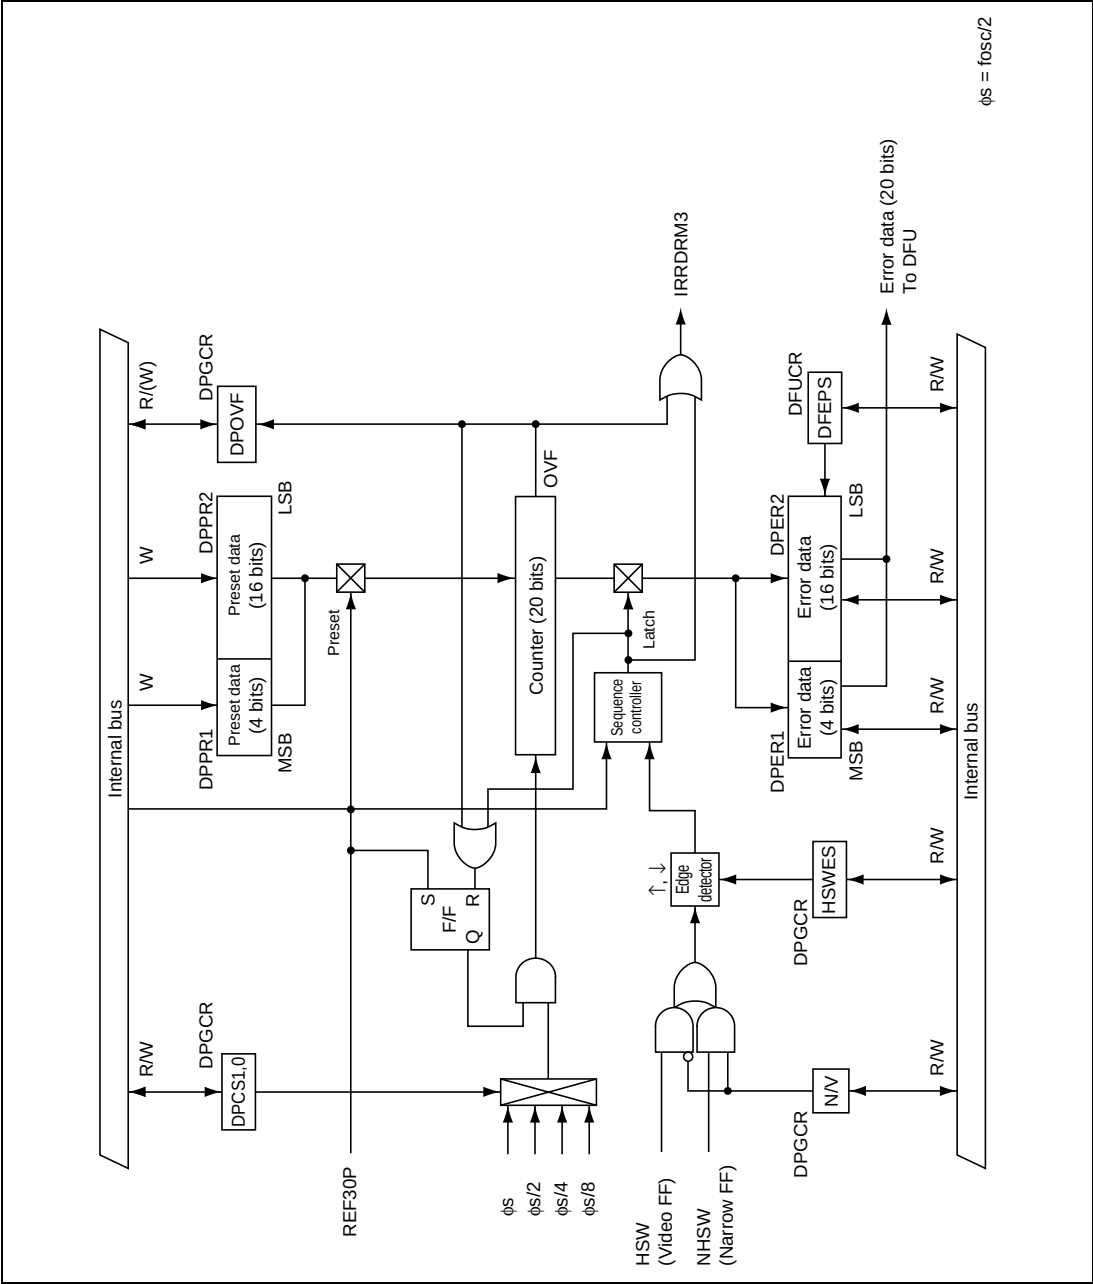


Figure 26.29 Block Diagram of Drum Phase Error Detector

### 26.7.3 Register Configuration

Table 26.10 shows the register configuration of the drum phase error detector.

**Table 26.10 Register Configuration**

| <b>Name</b>                                 | <b>Abbrev.</b> | <b>R/W</b> | <b>Size</b> | <b>Initial Value</b> | <b>Address</b> |
|---------------------------------------------|----------------|------------|-------------|----------------------|----------------|
| Specified drum phase preset data register 1 | DPPR1          | W          | Byte        | H'F0                 | H'D03C         |
| Specified drum phase preset data register 2 | DPPR2          | W          | Word        | H'0000               | H'D03A         |
| Drum phase error data register 1            | DPER1          | R/W        | Byte        | H'F0                 | H'D03D         |
| Drum phase error data register 2            | DPER2          | R/W        | Word        | H'0000               | H'D03E         |
| Drum phase error detection control register | DPGCR          | R/W        | Byte        | H'07                 | H'D039         |

## 26.7.4 Register Description

### Drum Phase Preset Data Registers (DPPR1, DPPR2)

#### DPPR1

|                 |   |   |   |   |        |        |        |        |
|-----------------|---|---|---|---|--------|--------|--------|--------|
| Bit :           | 7 | 6 | 5 | 4 | 3      | 2      | 1      | 0      |
|                 | — | — | — | — | DPPR19 | DPPR18 | DPPR17 | DPPR16 |
| Initial value : | 1 | 1 | 1 | 1 | 0      | 0      | 0      | 0      |
| R/W :           | — | — | — | — | W      | W      | W      | W      |

#### DPPR2

|                 |        |        |        |        |        |        |       |       |
|-----------------|--------|--------|--------|--------|--------|--------|-------|-------|
| Bit :           | 15     | 14     | 13     | 12     | 11     | 10     | 9     | 8     |
|                 | DPPR15 | DPPR14 | DPPR13 | DPPR12 | DPPR11 | DPPR10 | DPPR9 | DPPR8 |
| Initial value : | 0      | 0      | 0      | 0      | 0      | 0      | 0     | 0     |
| R/W :           | W      | W      | W      | W      | W      | W      | W     | W     |
| Bit :           | 7      | 6      | 5      | 4      | 3      | 2      | 1     | 0     |
|                 | DPPR7  | DPPR6  | DPPR5  | DPPR4  | DPPR3  | DPPR2  | DPPR1 | DPPR0 |
| Initial value : | 0      | 0      | 0      | 0      | 0      | 0      | 0     | 0     |
| R/W :           | W      | W      | W      | W      | W      | W      | W     | W     |

The 20-bit preset data that defines the specified drum phase is set in DPPR1 and DPPR2. The 20 bits are weighted as follows: bit 3 of DPPR1 is the MSB, and bit 0 of DPPR2 is the LSB. When data is written to DPPR2, the 20-bit preset data, including DPPR1, is loaded into the preset circuit. Write to DPPR1 first, and DPPR2 next. The preset data can be calculated from the following equation by using H'8000\* as the reference value.

Target phase difference = (reference signal frequency/2) – 6.5H

Drum phase preset data = H'80000 - ( $\phi_s/n \times$  target phase difference)

$\phi_s$ : Servo clock frequency in Hz ( $f_{osc}/2$ )

$\phi_s/n$ : Clock source of selected counter

Only a word access is valid. If a byte access is attempted, correct operation is not guaranteed. No read is valid. If a read is attempted, an undetermined value is read out. DPPR1 and DPPR2 are initialized to H'F0 and H'0000 by a reset, and in standby mode.

Note: The preset data value is calculated so that the counter will reach H'80000 when the error value is zero. When the counter value is latched as error data in the drum phase error data registers (DPER1 and DPER2), however, it is converted to a value referenced to H'00000.

## Drum Phase Error Data Registers (DPER1, DPER2)

### DPER1

|                 |   |   |   |   |        |        |        |        |
|-----------------|---|---|---|---|--------|--------|--------|--------|
| Bit :           | 7 | 6 | 5 | 4 | 3      | 2      | 1      | 0      |
|                 | — | — | — | — | DPER19 | DPER18 | DPER17 | DPER16 |
| Initial value : | 1 | 1 | 1 | 1 | 0      | 0      | 0      | 0      |
| R/W :           | — | — | — | — | R*/W   | R*/W   | R*/W   | R*/W   |

### DPER2

|                 |        |        |        |        |        |        |       |       |
|-----------------|--------|--------|--------|--------|--------|--------|-------|-------|
| Bit :           | 15     | 14     | 13     | 12     | 11     | 10     | 9     | 8     |
|                 | DPER15 | DPER14 | DPER13 | DPER12 | DPER11 | DPER10 | DPER9 | DPER8 |
| Initial value : | 0      | 0      | 0      | 0      | 0      | 0      | 0     | 0     |
| R/W :           | R*/W   | R*/W   | R*/W   | R*/W   | R*/W   | R*/W   | R*/W  | R*/W  |
| Bit :           | 7      | 6      | 5      | 4      | 3      | 2      | 1     | 0     |
|                 | DPER7  | DPER6  | DPER5  | DPER4  | DPER3  | DPER2  | DPER1 | DPER0 |
| Initial value : | 0      | 0      | 0      | 0      | 0      | 0      | 0     | 0     |
| R/W :           | R*/W   | R*/W   | R*/W   | R*/W   | R*/W   | R*/W   | R*/W  | R*/W  |

Note: \* Note that only detected error data can be read.

DPER1 and DPER2 constitute a 20-bit drum phase error data register. The 20 bits are weighted as follows: bit 3 of DPER1 is the MSB, and bit 0 of DPER2 is the LSB. When the rotational phase is correct, the data H'00000 is latched. Negative data will be latched if the drum leads the correct phase, and positive data if it lags. Values in DPER1 and DPER 2 are transferred to the digital filter circuit.

DPER1 and DPER are 20-bit read/write registers. When writing data to DPER 1 and DPER2, write to DPER1 first, and then write to DPER2. Only a word access is valid. If a byte access is attempted, correct operation is not guaranteed. DPER1 and DPER2 are initialized to H'F0 and H'0000 by a reset, and in standby mode.

See the note on the drum phase preset data registers (DPPR1 and DPPR2).

## Drum Phase Error Detection Control Register (DPGCR)

|                 |       |       |        |     |       |   |   |   |
|-----------------|-------|-------|--------|-----|-------|---|---|---|
| Bit :           | 7     | 6     | 5      | 4   | 3     | 2 | 1 | 0 |
|                 | DPCS1 | DPCS0 | DPOVF  | N/V | HSWES | — | — | — |
| Initial value : | 0     | 0     | 0      | 0   | 0     | 1 | 1 | 1 |
| R/W :           | R/W   | R/W   | R/(W)* | R/W | R/W   | — | — | — |

Note: \* Only 0 can be written.

DPGCR is an 8-bit read/write register that controls the operation of drum phase error detection. Bits 2-0 are reserved, bit 5 accepts only read and 0 write. It is initialized to H'07 by a reset or in stand-by mode.

**Bits 7 and 6—Clock Source Selection Bit (DPCS1, DPCS0):** These bits select the clock supplied to the counter. ( $\phi_s = f_{osc}/2$ )

| Bit 7 | Bit 6 | Description              |
|-------|-------|--------------------------|
| DPCS1 | DPCS0 |                          |
| 0     | 0     | $\phi_s$ (Initial value) |
|       | 1     | $\phi_s/2$               |
| 1     | 0     | $\phi_s/4$               |
|       | 1     | $\phi_s/8$               |

**Bit 5—Counter Overflow Flag (DPOVF):** DPOVF flag indicates the overflow of the 20-bit counter. It is cleared by writing 0. Write 0 after reading 1. Setting has the highest priority in this flag. If a flag set and 0 write occurs simultaneously, the latter is invalid.

| Bit 5 | Description                                           |
|-------|-------------------------------------------------------|
| DPOVF |                                                       |
| 0     | Normal state (Initial value)                          |
| 1     | Indicates that a overflow has occurred in the counter |

**Bit 4—Error Data Latch Signal Selection Bit (N/V):** Selects the latch signal of error data.

| Bit 4 | Description                          |
|-------|--------------------------------------|
| N/V   |                                      |
| 0     | HSW (VideoFF) signal (Initial value) |
| 1     | NHSW (NarrowFF) signal               |

**Bit 3—Edge Selection Bit (HSWES):** Selects the edge of the error data latch signal (HSW or NHSW).

#### Bit 3

| HSWES | Description                                |
|-------|--------------------------------------------|
| 0     | Latches at the rising edge (Initial value) |
| 1     | Latches at the falling edge                |

**Bits 2 to 0—Reserved:** Cannot be modified and are always read as 1.

### 26.7.5 Operation

The drum phase error detector detects the phase error based on the reference value set in the drum specified phase preset data registers 1 and 2 (DPPR1 and DPPR2). The reference values set in DPPR1 and DPPR2 are preset in the counter by REF30P signal, and counted up by the clock selected. The latch of the error data can be selected between the rising or falling edge of HSW (NHSW). The error data detected in the error data automatic transmission mode (DFEPS bit of DFUCR = 0) is sent to the digital filter circuits automatically. In soft transmission mode (DFEPS bit of DFUCR = 1), the data written in DPER1 and DPER2 is sent to the digital filter circuit. The error data is signed binary. It takes a positive number (+) if the phase is behind the specified phase, a negative number (-) if in advance of the specified phase, or 0 if it had no phase error (revolving at the specified phase). Figures 26.30 and 26.31 show examples of operation to detect a drum phase error.

**Drum Phase Error Detection Counter:** The drum phase error detection counter stops counting when an overflow or latch occurs. At the same time, it generates an interrupt request (IRRDRM3), and sets the overflow flag (DPOVF) if an overflow occurred. To clear DPOVF, write 0 after reading 1. If setting the flag and writing 0 take place simultaneously, the latter is invalid.

**Interrupt Request:** IRRDRM3 is generated by the HSW (NHSW) signal latch and the overflow of the error detection counter.

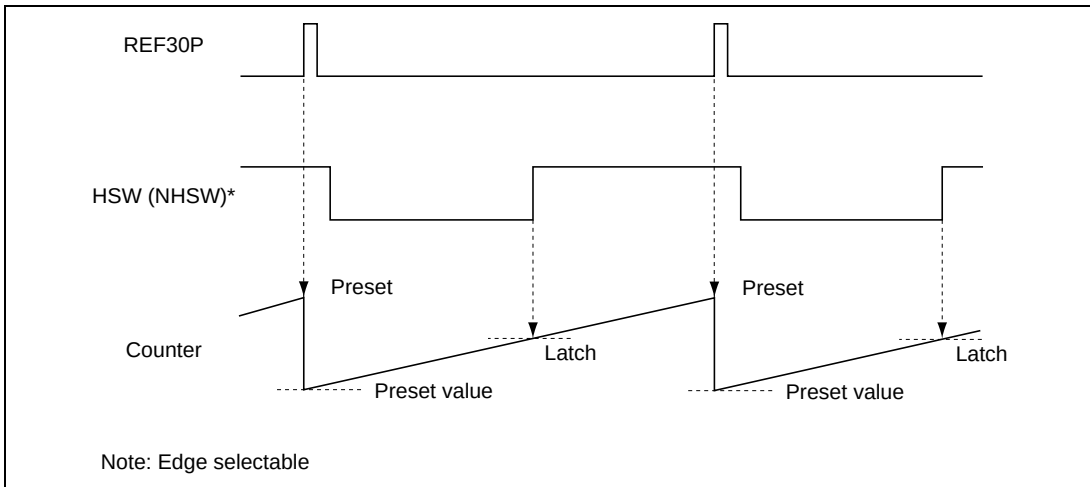


**Figure 26.30 Drum Phase Control in Playback Mode (HSW Rising Edge Selected)**

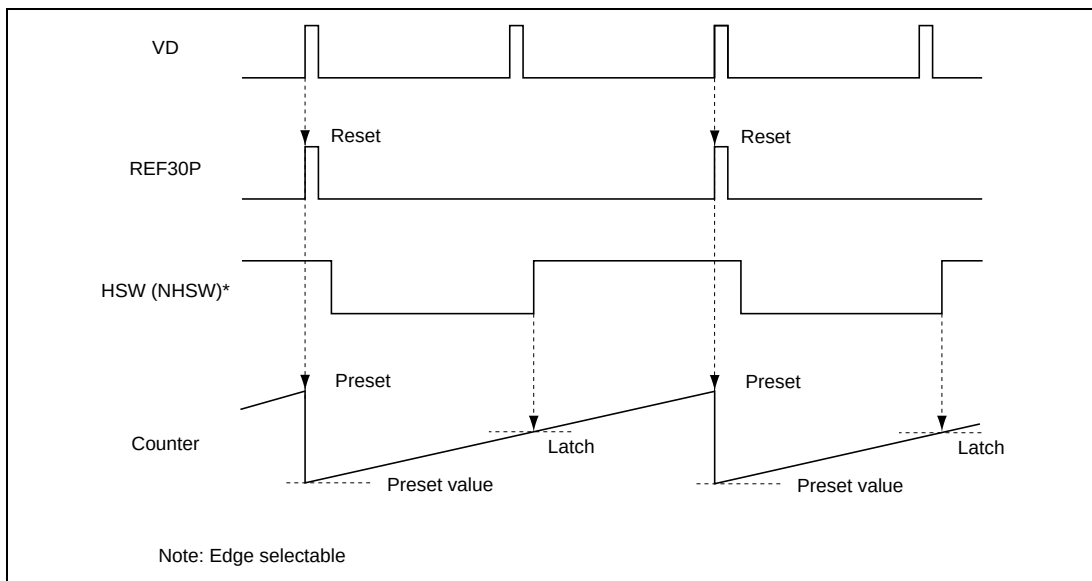


**Figure 26.31 Drum Phase Control in Record Mode (HSW Rising Edge Selected)**



## 26.7.6 Phase Comparison

The phase comparison circuit measures the difference of time between the reference signal and the comparing signal with a digital counter. REF30 signal is used for the reference signal, and HSW signal (VideoFF) or NHSW signal (NarrowFF) from the HSW timing generator is used for the comparing signal. In record mode, however, the phase of REF30 signal is the same as that of the vertical sync signal (Vsync) because the reference signal generator (REF30 generator) is reset by the vertical sync signal (Vsync) in the video signals.

The error detection counter latches data at the rising or falling edge of HSW signal. The digital filter circuit performs computation using this data as 20-bit phase error data. After processing and adding the phase error data and the speed error data from the drum speed control system, the digital filter circuit sends the data as the error data of the drum system to the PWM modulation circuit.

## 26.8 Capstan Speed Error Detector

### 26.8.1 Overview

Capstan speed control holds the capstan motor at a constant revolution speed, by measuring the period of the CFG signal. A digital counter detects the speed error against a preset value. The speed error data is added to phase error data in a digital filter. This filter controls a pulse-width modulated (PWM) output, which controls the revolution speed and phase of the capstan motor. The CFG input signal is downloaded by the comparator circuit, then reshaped into a square wave by a reshaping circuit, divided by the CFG divider, and sent to the speed error detector as the DVCFG signal.

The speed error detector uses the system clock to measure the period of the DVCFG signal, and detects the error against a preset data value. The preset data is the value that results from measuring the DVCFG signal period with the clock signal when the capstan motor is running at the correct speed.

The error detector operates by latching a counter value when it detects an edge of the DVCFG signal. The latched count provides 16 bits of speed error data for the digital filter to operate on. The digital filter adds the speed error data to phase error data from the capstan phase control system, then sends the result to the PWM as capstan error data.

### 26.8.2 Block Diagram

Figure 26.32 shows a block diagram of the capstan speed error detector.

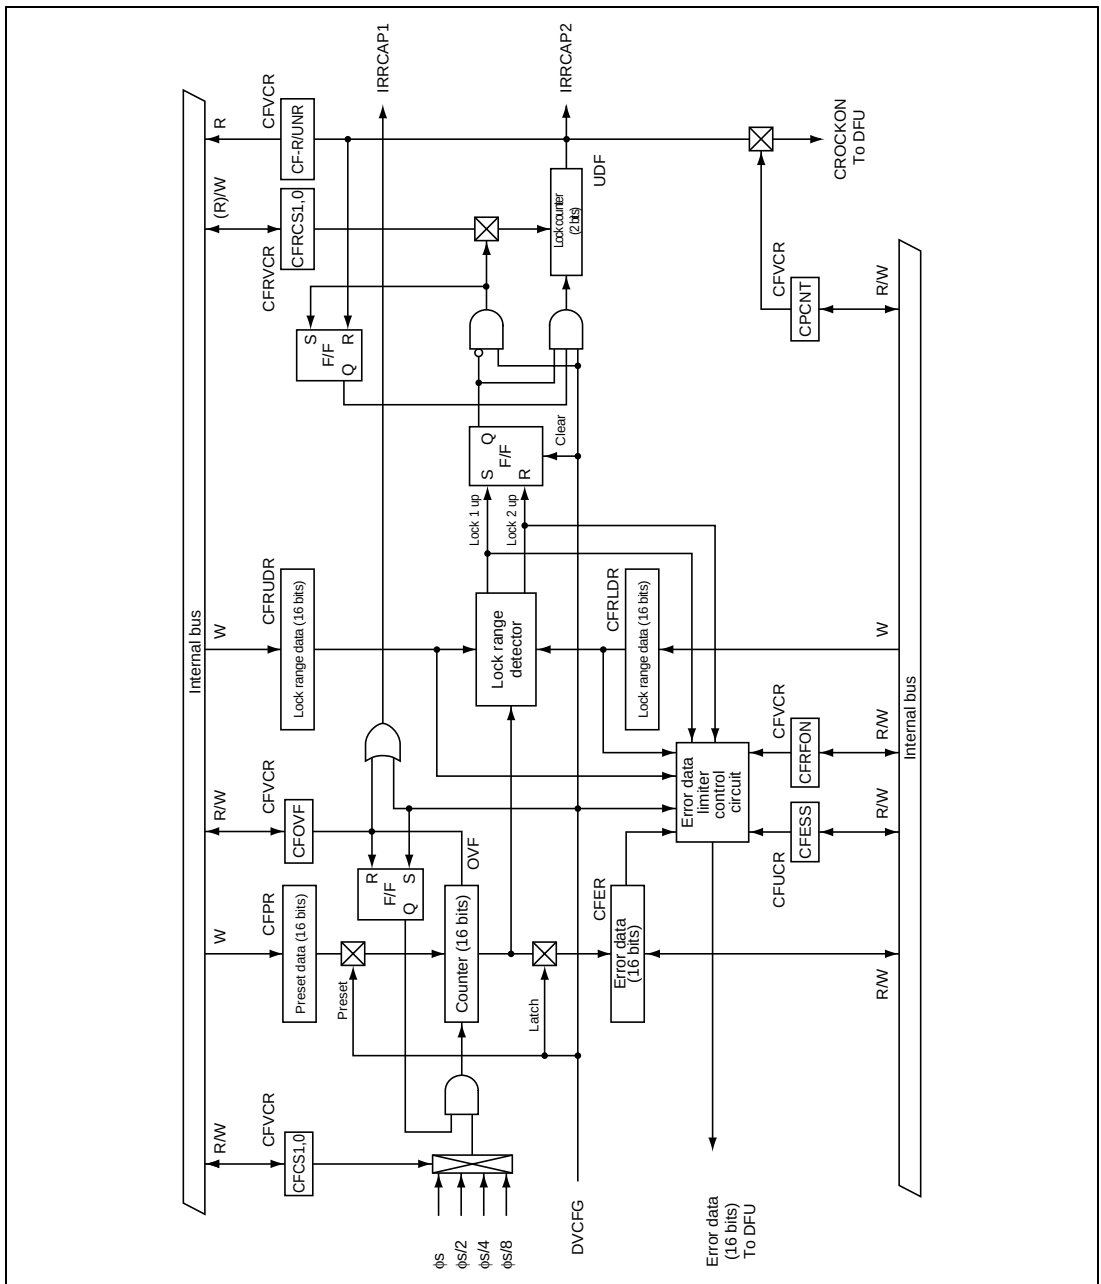


**Figure 26.32 Block Diagram of Capstan Speed Error Detector**

### 26.8.3 Register Configuration

Table 26.11 shows the register configuration of the capstan speed error detector.

**Table 26.11 Register Configuration**

| Name                                           | Abbrev. | R/W | Size | Initial Value | Address |
|------------------------------------------------|---------|-----|------|---------------|---------|
| Specified CFG speed preset data register       | CFPR    | W   | Word | H'0000        | H'D050  |
| CFG speed error data register                  | CFER    | R/W | Word | H'0000        | H'D052  |
| CFG lock upper data register                   | CFRUDR  | W   | Word | H'7FFF        | H'D054  |
| CFG lock lower data register                   | CFRLDR  | W   | Word | H'8000        | H'D056  |
| Capstan speed error detection control register | CFVCR   | R/W | Byte | H'00          | H'D058  |

26.8.4 Register Description

Specified CFG Speed Preset Data Register (CFPR)

|                 |        |        |        |        |        |        |       |       |
|-----------------|--------|--------|--------|--------|--------|--------|-------|-------|
| Bit :           | 15     | 14     | 13     | 12     | 11     | 10     | 9     | 8     |
|                 | CFPR15 | CFPR14 | CFPR13 | CFPR12 | CFPR11 | CFPR10 | CFPR9 | CFPR8 |
| Initial value : | 0      | 0      | 0      | 0      | 0      | 0      | 0     | 0     |
| R/W :           | W      | W      | W      | W      | W      | W      | W     | W     |

|                 |       |       |       |       |       |       |       |       |
|-----------------|-------|-------|-------|-------|-------|-------|-------|-------|
| Bit :           | 7     | 6     | 5     | 4     | 3     | 2     | 1     | 0     |
|                 | CFPR7 | CFPR6 | CFPR5 | CFPR4 | CFPR3 | CFPR2 | CFPR1 | CFPR0 |
| Initial value : | 0     | 0     | 0     | 0     | 0     | 0     | 0     | 0     |
| R/W :           | W     | W     | W     | W     | W     | W     | W     | W     |

The 16-bit preset data that defines the specified CFG speed is set in CFPR. When data is written, the 16-bit preset data is sent to the preset circuit. The preset data can be calculated from the following equation by using H'8000\* as the reference value.

CFG speed preset data = H'8000 – (  $\frac{\phi s/n}{\text{DVCFG frequency}}$  – 2)

$\phi s$ : Servo clock frequency in Hz ( $f_{osc}/2$ )

DVCFG frequency: In Hz

The constant 2 is the preset interval (see figure 26.33).

$\phi s/n$ : Clock source of the selected counter

CFPR is a 16-bit write-only register. Only a word acces is valid. If a byte access is attempted, correct operation is not guaranteed. CFPR is initialized to H'0000 by a reset.

Note: The preset data value is calculated so that the counter will reach H'8000 when the error is zero. When the counter value is latched as error data in the CFG speed error data register (CFER), however, it is converted to a value referenced to H'0000.

## CFG Speed Error Data Register (CFER)

|                 |        |        |        |        |        |        |       |       |
|-----------------|--------|--------|--------|--------|--------|--------|-------|-------|
| Bit :           | 15     | 14     | 13     | 12     | 11     | 10     | 9     | 8     |
|                 | CFER15 | CFER14 | CFER13 | CFER12 | CFER11 | CFER10 | CFER9 | CFER8 |
| Initial value : | 0      | 0      | 0      | 0      | 0      | 0      | 0     | 0     |
| R/W :           | R*/W   | R*/W   | R*/W   | R*/W   | R*/W   | R*/W   | R*/W  | R*/W  |

|                 |       |       |       |       |       |       |       |       |
|-----------------|-------|-------|-------|-------|-------|-------|-------|-------|
| Bit :           | 7     | 6     | 5     | 4     | 3     | 2     | 1     | 0     |
|                 | CFER7 | CFER6 | CFER5 | CFER4 | CFER3 | CFER2 | CFER1 | CFER0 |
| Initial value : | 0     | 0     | 0     | 0     | 0     | 0     | 0     | 0     |
| R/W :           | R*/W  | R*/W  | R*/W  | R*/W  | R*/W  | R*/W  | R*/W  | R*/W  |

Note: \* Note that only detected error data can be read.

CFER is a 16-bit read/write register that stores 16-bit CFG speed error data. When the speed of the capstan motor is correct, the data latched in CFER is H'0000. Negative data will be latched if the speed is faster than the specified speed, and positive data if the speed is slower than the specified speed. The CFER value is sent to the digital filter either automatically or by software. Only a word access is valid. If a byte access is attempted, correct operation is not guaranteed. CFER is initialized to H'0000 by a reset, and in module stop mode and standby mode. See the note on the specified CFG speed preset data register (CFPR) in section 26.8.4.

## CFG Lock UPPER Data Register (CFRUDR)

|                 |          |          |          |          |          |          |         |         |
|-----------------|----------|----------|----------|----------|----------|----------|---------|---------|
| Bit :           | 15       | 14       | 13       | 12       | 11       | 10       | 9       | 8       |
|                 | CFRUDR15 | CFRUDR14 | CFRUDR13 | CFRUDR12 | CFRUDR11 | CFRUDR10 | CFRUDR9 | CFRUDR8 |
| Initial value : | 0        | 1        | 1        | 1        | 1        | 1        | 1       | 1       |
| R/W :           | W        | W        | W        | W        | W        | W        | W       | W       |

|                 |         |         |         |         |         |         |         |         |
|-----------------|---------|---------|---------|---------|---------|---------|---------|---------|
| Bit :           | 7       | 6       | 5       | 4       | 3       | 2       | 1       | 0       |
|                 | CFRUDR7 | CFRUDR6 | CFRUDR5 | CFRUDR4 | CFRUDR3 | CFRUDR2 | CFRUDR1 | CFRUDR0 |
| Initial value : | 1       | 1       | 1       | 1       | 1       | 1       | 1       | 1       |
| R/W :           | W       | W       | W       | W       | W       | W       | W       | W       |

CFRUDR is a 16-bit write-only register used to set the lock range on the UPPER side when capstan speed lock is detected, and to set the limit value on the UPPER side when limiter function is in use.

When lock is being detected, if the capstan speed is detected within the lock range, the lock counter which has been set by CFRCS1 and CFRCS0 bits of CFVCR register decrements the count. If the set value of CFRCS1 and CFRCS0 matches the number of times of occurrence of locking, the computation of the digital filter in the capstan phase system can be controlled automatically. Also, if the CFG speed error data exceeds the CFRUDR value when the limiter function is in use, the DFRUDR value can be used as the data for computation by the digital filter. Only a word access is valid. If a byte access is attempted, correct operation is not guaranteed. A read is invalid. If a read is attempted, an undetermined value is read out. It is initialized to H'7FFF by a reset, or in stand-by or module-stop mode.

## CFG Lock LOWER Data Register (CFRLDR)

|                 |          |          |          |          |          |          |         |         |
|-----------------|----------|----------|----------|----------|----------|----------|---------|---------|
| Bit :           | 15       | 14       | 13       | 12       | 11       | 10       | 9       | 8       |
|                 | CFRLDR15 | CFRLDR14 | CFRLDR13 | CFRLDR12 | CFRLDR11 | CFRLDR10 | CFRLDR9 | CFRLDR8 |
| Initial value : | 1        | 0        | 0        | 0        | 0        | 0        | 0       | 0       |
| R/W :           | W        | W        | W        | W        | W        | W        | W       | W       |

|                 |         |         |         |         |         |         |         |         |
|-----------------|---------|---------|---------|---------|---------|---------|---------|---------|
| Bit :           | 7       | 6       | 5       | 4       | 3       | 2       | 1       | 0       |
|                 | CFRLDR7 | CFRLDR6 | CFRLDR5 | CFRLDR4 | CFRLDR3 | CFRLDR2 | CFRLDR1 | CFRLDR0 |
| Initial value : | 0       | 0       | 0       | 0       | 0       | 0       | 0       | 0       |
| R/W :           | W       | W       | W       | W       | W       | W       | W       | W       |

CFRLDR is a 16-bit write-only register used to set the lock range on the LOWER side when capstan speed lock is detected, and to set the limit value on LOWER side when limiter function is in use.

When lock is being detected, if the drum speed is detected within the lock range, the lock counter that has been set by CFRCS 1 and 0 bits of CFVCR register decrements the count. If the set value of CFRCS 1 and 0 matches the number of times of occurrence of locking, the computation of the digital filter in the drum phase system can be controlled automatically. Also, if the CFG speed error data is under the CFRLDR value when the limiter function is in use, the CFRLDR value can be used as the data for computation by the digital filter.

Only a word access is valid. If a byte access is attempted, correct operation is not guaranteed. No read is valid. If a read is attempted, an undetermined value is read out. It is initialized to H'8000 by a reset, or in stand-by or module-stop mode.

## Capstan Speed Error Detection Control Register (CFVCR)

|                 |       |       |         |        |          |       |         |         |
|-----------------|-------|-------|---------|--------|----------|-------|---------|---------|
| Bit :           | 7     | 6     | 5       | 4      | 3        | 2     | 1       | 0       |
|                 | CFCS1 | CFCS0 | CFOVF   | CFRFON | CF-R/UNR | CPCNT | CFRCS1  | CFRCS0  |
| Initial value : | 0     | 0     | 0       | 0      | 0        | 0     | 0       | 0       |
| R/W :           | R/W   | R/W   | R/(W)*1 | R/W    | R        | R/W   | (R)*2/W | (R)*2/W |

- Notes: 1. Only 0 can be written.  
2. If read-accessed, the counter value is read out.

CFVCR is an 8-bit read/write register that controls the operation of capstan speed error detection. Bit 3 accepts only read, and bit 5 accepts only read and 0 write. It is initialized to H'00 by a reset, or in stand-by or module-stop mode.

**Bits 7 and 6—Clock Source Selection Bits (CFCS1, CFCS0):** CFCS1 and CFCS0 select the clock to be supplied to the counter. ( $\phi_s = f_{osc}/2$ )

| Bit 7 | Bit 6 | Description              |
|-------|-------|--------------------------|
| CFCS1 | CFCS0 |                          |
| 0     | 0     | $\phi_s$ (Initial value) |
|       | 1     | $\phi_s/2$               |
| 1     | 0     | $\phi_s/4$               |
|       | 1     | $\phi_s/8$               |

**Bit 5—Counter Overflow Flag (CFOVF):** CFOVF flag indicates overflow of the 16-bit counter. It is cleared by writing 0. Write 0 after reading 1. Setting has the highest priority in this flag. If a flag set and 0 write occurs simultaneously, the latter is invalid.

| Bit 5 |                                                        |
|-------|--------------------------------------------------------|
| CFOVF | Description                                            |
| 0     | Normal state. (Initial value)                          |
| 1     | Indicates that a overflow has occurred in the counter. |

**Bit 4—Error Data Limit Function Selection Bit (CFRFON):** Enables the error data limit function. (Limit values are the values set in the lock range data register (CFRUDR, CFRLDR)).

| Bit 4  |                                          |
|--------|------------------------------------------|
| CFRFON | Description                              |
| 0      | Disables limit function. (Initial value) |
| 1      | Enables limit function.                  |

**Bit 3—Capstan Lock Flag (CF-R/UNR):** Sets a flag if an underflow occurred in the capstan lock counter.

| Bit 3    |                                                        |                 |
|----------|--------------------------------------------------------|-----------------|
| CF-R/UNR | Description                                            |                 |
| 0        | Indicates that the capstan speed system is not locked. | (Initial value) |
| 1        | Indicates that the capstan speed system is locked.     |                 |



**Bit 2—Capstan Phase System Filter Computation Automatic Start Bit (CPCNT):** Enables the filter computation of the phase system if an underflow occurred in the capstan lock counter.

**Bit 2**

| CPCNT | Description                                                                          |
|-------|--------------------------------------------------------------------------------------|
| 0     | Disables the filter computation by detection of the capstan lock.<br>(Initial value) |
| 1     | Enables the filter computation of the phase system when capstan lock is detected.    |

**Bits 1 and 0—Capstan Lock Counter Setting Bits (CFRCS1, CFRCS0):** Sets the number of times to detect capstan locks (DVCFG has been detected in the rage set by the lock range data register). The capstan lock flag is set when the specified number of capstan lock is detected. If the DVCFG signal is detected outside the lock range after data is written in CFRCS1 and CFRCS0, the data will be stored in the lock counter.

Note: If CFRCS1 or CFRCS0 is read-accessed, the counter value is read out. If bit 3 (capstan lock flag) is 1 and the capstan lock counter's value is 3, it indicates that the capstan speed system is locked. The capstan lock counter stops until lock is released after underflow.

| Bit 1 | Bit 0 | Description                                                      |
|-------|-------|------------------------------------------------------------------|
| 0     | 0     | Underflow occurs after lock was detected once<br>(Initial value) |
|       | 1     | Underflow occurs after lock was detected twice                   |
| 1     | 0     | Underflow occurs after lock was detected three times             |
|       | 1     | Underflow occurs after lock was detected four times              |

### 26.8.5 Operation

The capstan speed error detector detects the speed error based on the reference value set in the CFG specified speed preset register (CFPR). The reference value set in CFPR is preset in the counter by the DVCFG signal, and the counter decrements the count by the selected clock. The timing of the counter presetting and the error data latching can be selected between the rising or falling edge of DVCFG signal. See DVCFG Control Register (CDVC) in section 26.14.3, CFG Frequency Divider. The error data detected is sent to digital filter circuit. The error data is signed binaries. The data takes a positive number (+) if the speed is slower than the specified speed, a negative number (-) if the speed is faster, or 0 if it had no error (revolving at the specified speed). Figure 26.33 shows an example of operation to detect the capstan speed.

**Setting the Error Data Limit:** A limit can be set to the error data sent to the digital filter circuit using the CFG lock data register (CFRUDR, CFRLDR). Set the upper limit of the error data in CFRUDR and the lower limit in CFRLDR, and write 1 in CFRFON bit. If the error data is outside the limit range, the CFRLDR value is sent to the digital filter circuit if a negative number is latched, or the CFRUDR value if a positive number is latched, as a limit value. Be sure to turn off the limit setting (CFRFON = 0) when you set the limit value. If the limit was set with the limit setting on (CFRFON = 1), result of computation is not assured.

**Lock Detection:** If an error data is detected within the lock range set in the lock data register, the capstan lock flag (CF-R/UNR) is set by the number of the times of locking set by CFRCS1 and CFRCS0 bits, and an interrupt is requested (IRRCAP2) at the same time. The number of the occurrence of locking (once to 4 times) before the flag is set can be specified. Use CFRCS1 and CFRCS0 bits for this purpose. The on/off state of the phase system digital filter computation can be controlled automatically by the status of lock detection when bit 5 (CPHA bit) of the capstan system digital filter control register (CFIC) is 0 (phased system digital filter computation off) and DPCNT bit is 1.

**Capstan System Speed Error Detection Counter:** The capstan system speed error detection counter stops the counter and sets the overflow flag (CFOVF) when an overflow occurs. At the same time, it generates an interrupt request (IRRCAP1). To clear CFOVF, write 0 after reading 1. If setting the flag and writing 0 take place simultaneously, the latter is invalid.

**Interrupt Request:** IRRCAP1 is generated by the DVCFG signal latch and the overflow of the error detection counter. IRRCAP2 is generated by detection of lock (after the detection of the specified number of times of locking).

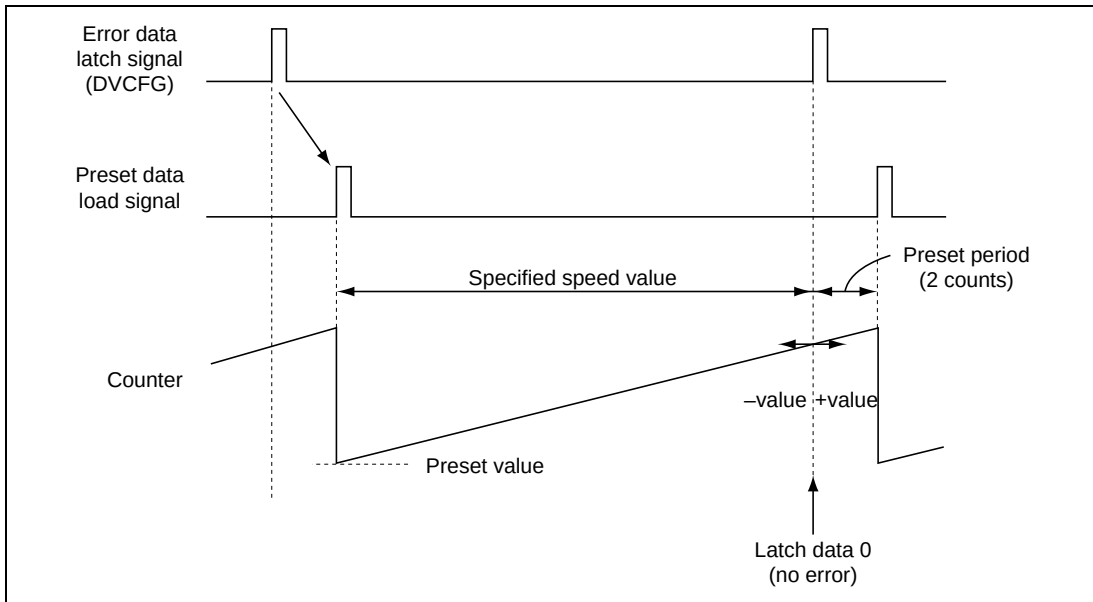


**Figure 26.33 Example of the Capstan Speed Error Detection**

## 26.9 Capstan Phase Error Detector

### 26.9.1 Overview

The capstan phase control system must start operation after the capstan motor has reached the specified speed by the speed control system. The capstan phase control system operates as follows in record/playback mode:

- Record mode: Controls the tape running so that it may run at a specified speed together with the speed control system.
- Playback mode: Controls the tape running so that the recorded track may be traced correctly.

Any error deviated from the reference phase is detected by the digital counter. This phase error data and the speed error data is processed and added by the digital filter circuit to control the PWM output. The phase and speed of the capstan, in turn, is control this PWM output.

The control signal of the capstan phase control in the record mode differ from that in playback mode. In record mode, the control is performed by the DVCFG2 signal which is generated by dividing the frequencies of the reference signal (REF30P or CREF) and the CFG signal. In playback mode, it is performed by divided rising signal (DVCTL) of the reference signal (CAPREF30) and the playback control pulse (PB-CTL).

The reference signal in record and playback modes are as follows:

- Record mode:  $1/2V_{sync}$  signal extracted from the video signal to be recorded.
- Playback mode: Signal generated by dividing the PB-CTL signal (DVCTL) at its rising edge.

### 26.9.2 Block Diagram

Figure 26.34 shows the block diagram of the capstan phase error detector.



### 26.9.3 Register Configuration

Table 26.12 shows the register configuration of the capstan phase error detector.

**Table 26.12 Register Configuration**

| <b>Name</b>                                    | <b>Abbrev.</b> | <b>R/W</b> | <b>Size</b> | <b>Initial Value</b> | <b>Address</b> |
|------------------------------------------------|----------------|------------|-------------|----------------------|----------------|
| Specified Capstan phase preset data register 1 | CPPR1          | W          | Byte        | H'F0                 | H'D05C         |
| Specified Capstan phase preset data register 2 | CPPR2          | W          | Word        | H'0000               | H'D05A         |
| Capstan phase error data register 1            | CPER1          | R/W        | Byte        | H'F0                 | H'D05D         |
| Capstan phase error data register 2            | CPER2          | R/W        | Word        | H'0000               | H'D05E         |
| Capstan phase error detection control register | CPGCR          | R/W        | Byte        | H'07                 | H'D059         |

## 26.9.4 Register Description

### Specified Capstan Phase Preset Data Registers (CPPR1, CPPR2)

#### CPPR1

|                 |   |   |   |   |        |        |        |        |
|-----------------|---|---|---|---|--------|--------|--------|--------|
| Bit :           | 7 | 6 | 5 | 4 | 3      | 2      | 1      | 0      |
|                 | — | — | — | — | CPPR19 | CPPR18 | CPPR17 | CPPR16 |
| Initial value : | 1 | 1 | 1 | 1 | 0      | 0      | 0      | 0      |
| R/W :           | — | — | — | — | W      | W      | W      | W      |

#### CPPR2

|                 |        |        |        |        |        |        |       |       |
|-----------------|--------|--------|--------|--------|--------|--------|-------|-------|
| Bit :           | 15     | 14     | 13     | 12     | 11     | 10     | 9     | 8     |
|                 | CPPR15 | CPPR14 | CPPR13 | CPPR12 | CPPR11 | CPPR10 | CPPR9 | CPPR8 |
| Initial value : | 0      | 0      | 0      | 0      | 0      | 0      | 0     | 0     |
| R/W :           | W      | W      | W      | W      | W      | W      | W     | W     |

|                 |       |       |       |       |       |       |       |       |
|-----------------|-------|-------|-------|-------|-------|-------|-------|-------|
| Bit :           | 7     | 6     | 5     | 4     | 3     | 2     | 1     | 0     |
|                 | CPPR7 | CPPR6 | CPPR5 | CPPR4 | CPPR3 | CPPR2 | CPPR1 | CPPR0 |
| Initial value : | 0     | 0     | 0     | 0     | 0     | 0     | 0     | 0     |
| R/W :           | W     | W     | W     | W     | W     | W     | W     | W     |

The 20-bit preset data that defines the specified capstan phase is set in CPPR1 and CPPR2. The 20 bits are weighted as follows: bit 3 of CPPR1 is the MSB. Bit 0 of CPPR2 is the LSB. When CPPR2 is written to, the 20-bit preset data, including CPPR1, is loaded into the preset circuit. Write to CPPR1 first, and CPPR2 next. The preset data can be calculated from the following equation by using H'80000\* as the reference value.

Target phase difference = Reference signal frequency/2

Capstan phase preset data = H'80000 – ( $\phi$ s/n × target phase difference)

$\phi$ s: Servo clock frequency in Hz ( $f_{osc}/2$ )

$\phi$ s/n: Clock source of selected counter

Only a word access is valid. If a byte access is attempted, correct operation is not guaranteed. No read is valid. If a read is attempted, an undetermined value is read out. CPPR1 and CPPR2 are initialized to H'F0 and H'0000 by a reset, and in standby mode.

Note: The preset data value is calculated so that the counter will reach H'80000 when the error is zero. When the counter value is latched as error data in the capstan phase error data registers (CPER1 and CPER2), however, it is converted to a value referenced to H'00000.

## Capstan Phase Error Data Registers (CPER1, CPER2)

|                 |   |   |   |   |        |        |        |        |
|-----------------|---|---|---|---|--------|--------|--------|--------|
| Bit :           | 7 | 6 | 5 | 4 | 3      | 2      | 1      | 0      |
|                 | — | — | — | — | CPER19 | CPER18 | CPER17 | CPER16 |
| Initial value : | 1 | 1 | 1 | 1 | 0      | 0      | 0      | 0      |
| R/W :           | — | — | — | — | R*/W   | R*/W   | R*/W   | R*/W   |

|                 |        |        |        |        |        |        |       |       |
|-----------------|--------|--------|--------|--------|--------|--------|-------|-------|
| Bit :           | 15     | 14     | 13     | 12     | 11     | 10     | 9     | 8     |
|                 | CPER15 | CPER14 | CPER13 | CPER12 | CPER11 | CPER10 | CPER9 | CPER8 |
| Initial value : | 0      | 0      | 0      | 0      | 0      | 0      | 0     | 0     |
| R/W :           | R*/W   | R*/W   | R*/W   | R*/W   | R*/W   | R*/W   | R*/W  | R*/W  |

|                 |       |       |       |       |       |       |       |       |
|-----------------|-------|-------|-------|-------|-------|-------|-------|-------|
| Bit :           | 7     | 6     | 5     | 4     | 3     | 2     | 1     | 0     |
|                 | CPER7 | CPER6 | CPER5 | CPER4 | CPER3 | CPER2 | CPER1 | CPER0 |
| Initial value : | 0     | 0     | 0     | 0     | 0     | 0     | 0     | 0     |
| R/W :           | R*/W  | R*/W  | R*/W  | R*/W  | R*/W  | R*/W  | R*/W  | R*/W  |

Note: \* Note that only detected error data can be read.

CPER1 and CPER2 constitute a 20-bit capstan phase error data register. The 20 bits are weighted as follows: bit 3 of CPER1 is the MSB. Bit 0 of CPER2 is the LSB. When the rotational phase is correct, the data H'00000 is latched. Negative data will be latched if the phase leads the correct phase, and positive data if it lags. Values in CPER1 and CPER 2 are transferred to the digital filter circuit.

CPER1 and CPER are 20-bit read/write registers. When writing data to CPER 1 and CPER2, write to CPER1 first, and then write to CPER2. Only a word access is valid. If a byte access is attempted, correct operation is not guaranteed. CPER1 and CPER2 are initialized to H'F0 and H'0000 by a reset, and in standby mode.

See the note on the capstan phase preset data registers (CPPER1 and CPPER2) in section 26.9.4.



Capstan Phase Error Detection Control Register (CPGCR)

|                 |       |       |        |       |         |   |   |   |
|-----------------|-------|-------|--------|-------|---------|---|---|---|
| Bit :           | 7     | 6     | 5      | 4     | 3       | 2 | 1 | 0 |
|                 | CPCS1 | CPCS0 | CPOVF  | CR/RF | SELCFG2 | — | — | — |
| Initial value : | 0     | 0     | 0      | 0     | 0       | 1 | 1 | 1 |
| R/W :           | R/W   | R/W   | R/(W)* | R/W   | R/W     | — | — | — |

Note: \* Only 0 can be written

CPGCR is an 8-bit read/write register that controls the operation of capstan phase error detection. Bits 2-0 are reserved, and bit 5 accepts only read and 0 write. It is initialized to H'07 by a reset or in stand-by mode.

**Bits 7 and 6—Clock Source Selection Bit (CPCS1, CPCS0):** These bits select the clock supplied to the counter. ( $\phi_s = f_{osc}/2$ )

| Bit 7 | Bit 6 | Description              |
|-------|-------|--------------------------|
| CPCS1 | CPCS0 |                          |
| 0     | 0     | $\phi_s$ (Initial value) |
|       | 1     | $\phi_s/2$               |
| 1     | 0     | $\phi_s/4$               |
|       | 1     | $\phi_s/8$               |

**Bit 5—Counter Overflow Flag (CPOVF):** CPOVF flag indicates the overflow of the 20-bit counter. It is cleared by writing 0. Write 0 after reading 1. Setting has the highest priority in this flag. If a flag set and 0 write occurs simultaneously, the latter is invalid.

| Bit 5 | Description                                           |
|-------|-------------------------------------------------------|
| CPOVF |                                                       |
| 0     | Normal state (Initial value)                          |
| 1     | Indicates that a overflow has occurred in the counter |

**Bit 4—Preset Signal Selection Bit (CR/RF):** Selects the preset signal.

| Bit 4 | Description                    |
|-------|--------------------------------|
| CR/RF |                                |
| 0     | Presets REF30P (Initial value) |
| 1     | Presets CREF signal            |

**Bit 3—Latch Signal Selection Bit (SELCFG2):** Selects the counter preset signal and the error data latch signal data in PB (ASM) mode.

### Bit 3

| SELCFG2 | Description                                                   |
|---------|---------------------------------------------------------------|
| 0       | Presets CAPREF30 signal; latches DVCTL signal (Initial value) |
| 1       | Presets REF30P (CREF) signal; latches DVCFG2 signal           |

**Bits 2 to 0—Reserved:** Cannot be modified and are always read as 1.

## 26.9.5 Operation

The capstan phase error detector detects the phase error based on the reference value set in the capstan specified phase preset data registers 1 and 2 (CPPR1 and CPPR2). The reference values set in CPPR1 and CPPR2 are preset in the counter by REF30P (CREF) signal or CAPREF signal, and counted up by the clock selected. The latching of the error data is performed by DVCTL or DVCFG2.

The error data detected in the error data automatic transmission mode (CFEPS bit of DFUCR = 0) is sent to the digital filter circuit automatically. In soft transmission mode (CFEPS bit of DFUCR = 1), the data written in CPER1 and CPPR2 is sent to the digital filter circuit. The error data is signed binary. It takes a positive number (+) if the phase is behind the specified phase, a negative number (-) if in advance of the specified phase, or 0 if it had no phase error (revolving at the specified phase). Figures 26.35 and 26.36 show examples of operation to detect a capstan phase error.

**Capstan Phase Error Detection Counter:** The capstan phase error detection counter stops counting when an overflow or latch occurs. At the same time, it generates an interrupt request (IRRCAP3), and sets the overflow flag (CPOVF) if overflow occurred. To clear CPOVF, write 0 after reading 1. If setting the flag and writing 0 take place simultaneously, the latter is invalid.

**Interrupt Request:** IRRCAP3 is generated by the DVCTL or DVCFG2 signal latch and the overflow of the error detection counter.

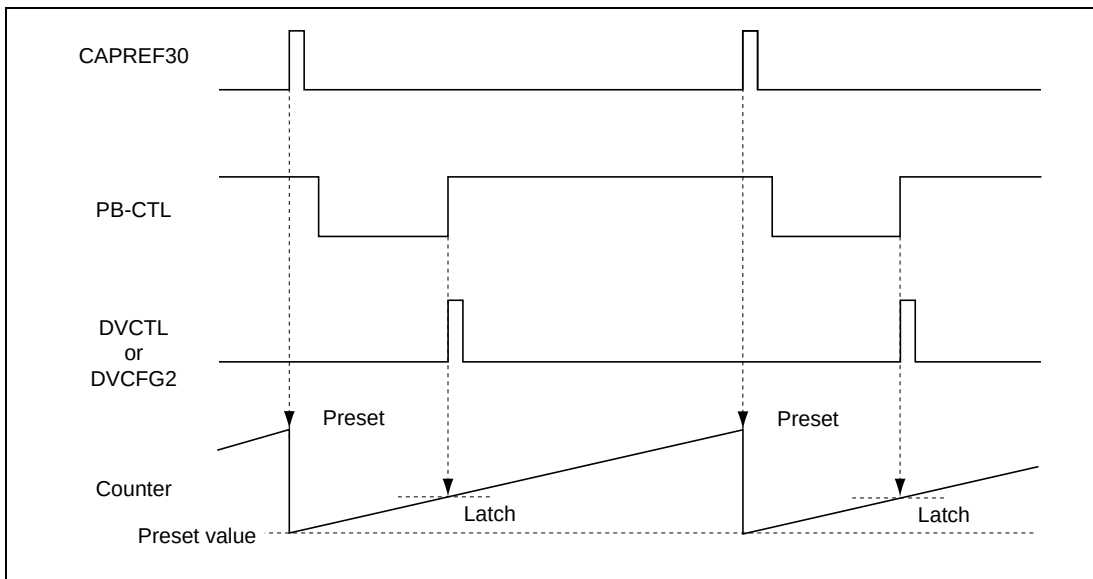


**Figure 26.35 Capstan Phase Control in Playback Mode**

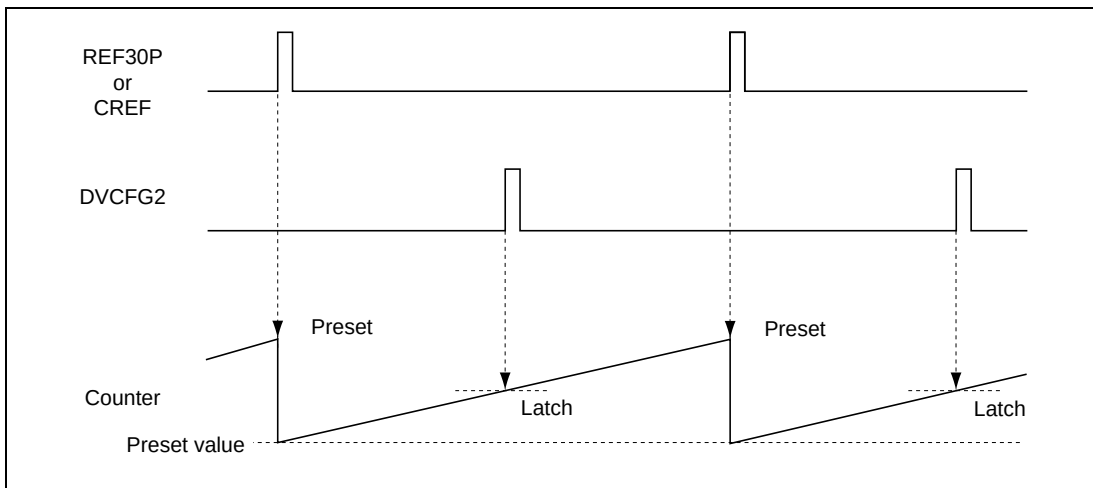


**Figure 26.36 Capstan Phase Control in Record Mode**


## 26.10 X-Value and Tracking Adjustment Circuit

### 26.10.1 Overview

To maintain compatibility with other VCRs, an on-chip adjustment circuit adjusts the phase of the reference signal (internal reference signal (REF30) or external reference signal (EXCAP)) during playback. Because of manufacturing tolerances, the physical distance between the video head and control head (the X-value: 79.244 mm) may vary from set to set, so when a tape that was recorded on a different set is played back, the phase of the reference signal may need to be adjusted. The adjustment can be made by a register setting. The same setting can adjust the rotational phase of the capstan motor to maintain positional alignment (tracking alignment) of the video head with the recorded tracks in autotracking, or when tracks that were recorded with an EP head are traced by a wider head. These tracking adjustments can be made by the acquisition of the envelope signal by the A/D converter.

### 26.10.2 Block Diagram

The adjustment circuit consists of a 10-bit counter clocked by the system clock ( $\phi$ s or  $\phi$ s/2), and two down-counters with load registers. Individual setting of X-value adjustment can be made by X-value data register (XDR) and tracking adjustment by TRK data register (TRDR). The reference signal clears the 10-bit counter and sets the load register value in the down-counter with two load registers. After the adjusted reference signal is generated, clock supply stops and the circuit halts until the next reference signal is input. REF30 signal can be divided as necessary. Figure 26.37 shows a block diagram.

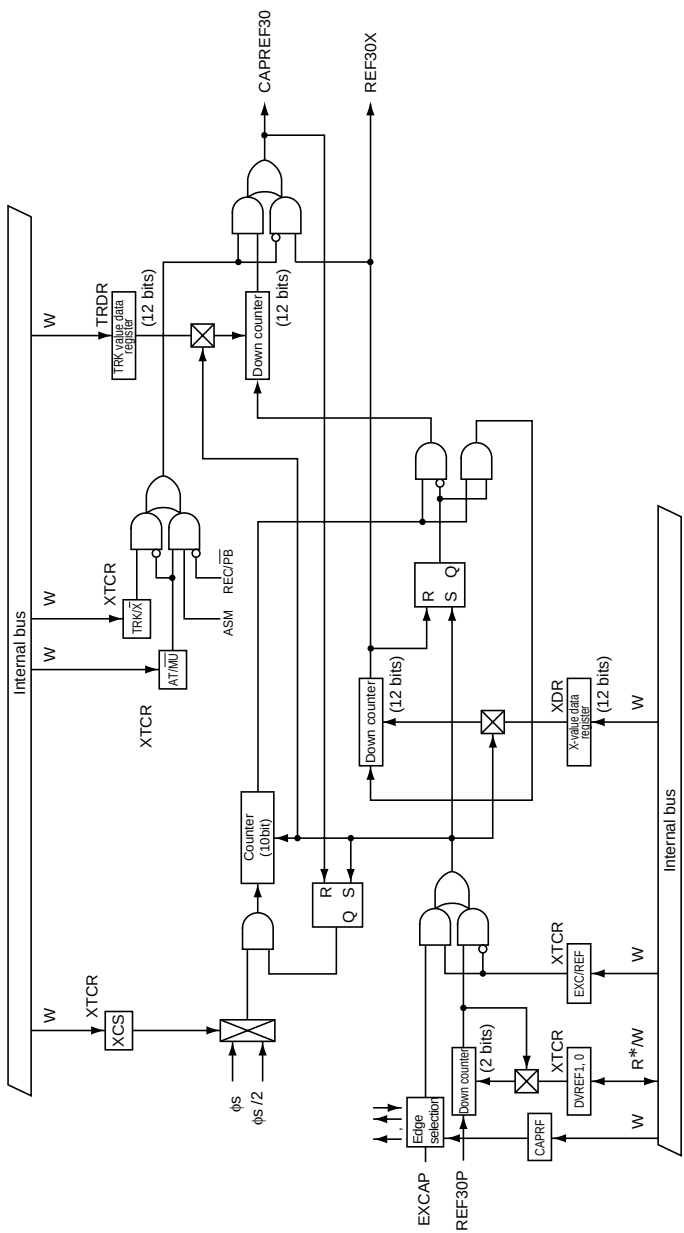

Note: \* When DVREF1 and DVREF0 are read, values in the down counter (2 bits) are readout.  
 $\phi S = f_{osc}/2$

Figure 26.37 Block Diagram of X-Value Adjustment Circuit

### 26.10.3 Register Description

#### Register Configuration

Table 26.13 shows the register configuration of X-value correction and tracking correction circuits.

**Table 26.13 Register Configuration**

| Name                                   | Abbrev. | R/W | Size | Initial Value | Address |
|----------------------------------------|---------|-----|------|---------------|---------|
| X-value and TRK-value control register | XTCR    | R/W | Byte | H'80          | H'D074  |
| X-value data register                  | XDR     | W   | Word | H'F000        | H'D070  |
| TRK-value data register                | TRDR    | W   | Word | H'F000        | H'D072  |

#### X-Value and TRK-Value Control Register (XTCR)

|                 |   |       |       |                     |         |     |        |        |
|-----------------|---|-------|-------|---------------------|---------|-----|--------|--------|
| Bit :           | 7 | 6     | 5     | 4                   | 3       | 2   | 1      | 0      |
|                 | — | CAPRF | AT/MU | TRK/ $\overline{X}$ | EXC/REF | XCS | DVREF1 | DVREF0 |
| Initial value : | 1 | 0     | 0     | 0                   | 0       | 0   | 0      | 0      |
| R/W :           | — | W     | W     | W                   | W       | W   | R/W    | R/W    |

XTCR is an 8-bit register to determine the X-value and TRK-value correction circuits. Bits 6 to 2 are write-only bits. No read is valid. If a read is attempted, an undetermined value is read out. Bits 1 and 0 are read/write bits. Only a byte access is valid for XTCR. If a word access is attempted, correct operation is not guaranteed.

It is initialized to H'80 by a reset, or in stand-by or module stop mode.

**Bit 7—Reserved:** Cannot be modified and is always read as 1.

**Bit 6—External Sync Signal Edge Selection Bit (CAPRF):** Selects the EXCAP edge when a selection is made to generate external sync signals.

#### Bit 6

| CAPRF | Description                                                   |
|-------|---------------------------------------------------------------|
| 0     | Signal generated at the rising edge of EXCAP. (Initial value) |
| 1     | Signal generated at both edges of EXCAP.                      |

**Bit 5—Capstan Phase Correction Auto/Manual Selection Bit (AT/ $\overline{\text{MU}}$ ):** Selects whether the generation of the correction reference signal (CAPREF30) for capstan phase control is controlled automatically or manually depending on the status of the ASM and REC/ $\overline{\text{PB}}$  bits of CTL mode register.

**Bit 5**

| AT/ $\overline{\text{MU}}$ | Description                 |
|----------------------------|-----------------------------|
| 0                          | Manual mode (Initial value) |
| 1                          | Auto mode                   |

**Bit 4—Capstan Phase Correction Register Selection Bit (TRK/ $\overline{\text{X}}$ ):** Determines the method to generate the CAPREF30 signal when AT/ $\overline{\text{MU}}$  bit is 0.

**Bit 4**

| TRK/ $\overline{\text{X}}$ | Description                                                      |
|----------------------------|------------------------------------------------------------------|
| 0                          | Generates CAPREF30 only by the set value of XDR. (Initial value) |
| 1                          | Generates CAPREF30 by the set value of XDR and TRDR.             |

**Bit 3—Reference Signal Selection Bit (EXC/REF):** Selects the reference signal to generate the correction reference signal (CAPREF30).

**Bit 3**

| EXC/REF | Description                                                  |
|---------|--------------------------------------------------------------|
| 0       | Generates the signal based on REF30P. (Initial value)        |
| 1       | Generates the signal based on the external reference signal. |

**Bit 2—Clock Source Selection Bit (XCS):** Selects the clock source to be supplied to the 10-bit counter.

**Bit 2**

| XCS | Description              |
|-----|--------------------------|
| 0   | $\phi_s$ (Initial value) |
| 1   | $\phi_s/2$               |

**Bits 1 and 0—REF30P Division Ratio Selection Bit (DVREF1, DVREF0):** Select the division value of REF30P. If they are read-accessed, the counter value is read out. (The selected division value is set by the UDF of the counter.)

| Bit 1  | Bit 0  | Description                   |
|--------|--------|-------------------------------|
| DVREF1 | DVREF0 |                               |
| 0      | 0      | Division in 1 (Initial value) |
|        | 1      | Division in 2                 |
| 1      | 0      | Division in 3                 |
|        | 1      | Division in 4                 |

**X-Value Data Register (XDR)**

|                 |    |    |    |    |      |      |     |     |     |     |     |     |     |     |     |     |
|-----------------|----|----|----|----|------|------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| Bit :           | 15 | 14 | 13 | 12 | 11   | 10   | 9   | 8   | 7   | 6   | 5   | 4   | 3   | 2   | 1   | 0   |
|                 | —  | —  | —  | —  | XD11 | XD10 | XD9 | XD8 | XD7 | XD6 | XD5 | XD4 | XD3 | XD2 | XD1 | XD0 |
| Initial value : | 1  | 1  | 1  | 1  | 0    | 0    | 0   | 0   | 0   | 0   | 0   | 0   | 0   | 0   | 0   | 0   |
| R/W :           | —  | —  | —  | —  | W    | W    | W   | W   | W   | W   | W   | W   | W   | W   | W   | W   |

The X-value data register (XDR) is an 16-bit write-only register. No read is valid. If a read is attempted, an undetermined value is read out. Only a word access is valid. If a byte access is attempted, correct operation is not guaranteed.

Set an X-value correction data to XDR, except a value which is beyond the cycle of the CTL pulse. If  $AT/\overline{MU} = 0$ ,  $TRK/\overline{X} = 0$  is set, CAPREF30 can be generated only by setting the XDR. Set an X-value and TRK correction value in PB mode, and X- value in REC mode.

It is initialized to H'F000 by a reset, or in stand-by or module stop mode.

**TRK-Value Data Register (TRDR)**

|                 |    |    |    |    |       |       |      |      |      |      |      |      |      |      |      |      |
|-----------------|----|----|----|----|-------|-------|------|------|------|------|------|------|------|------|------|------|
| Bit :           | 15 | 14 | 13 | 12 | 11    | 10    | 9    | 8    | 7    | 6    | 5    | 4    | 3    | 2    | 1    | 0    |
|                 | —  | —  | —  | —  | TRD11 | TRD10 | TRD9 | TRD8 | TRD7 | TRD6 | TRD5 | TRD4 | TRD3 | TRD2 | TRD1 | TRD0 |
| Initial value : | 1  | 1  | 1  | 1  | 0     | 0     | 0    | 0    | 0    | 0    | 0    | 0    | 0    | 0    | 0    | 0    |
| R/W :           | —  | —  | —  | —  | W     | W     | W    | W    | W    | W    | W    | W    | W    | W    | W    | W    |

The TRK-value data register (TRDR) is an 16-bit write-only register. No read is valid. If a read is attempted, an undetermined value is read out. Only a word access is valid. If a byte access is attempted, correct operation is not guaranteed.

Set an TRK-value correction data to TRDR, except a value which is beyond the cycle of the CTL pulse. It is initialized to H'F000 by a reset, or in stand-by or module stop mode.



## 26.11 Digital Filters

### 26.11.1 Overview

The digital filters required in servo control make extensive use of multiply-accumulate operations on signed integers (error data) and coefficients. A filter computation circuit (digital filter computation circuit) is provided in on-chip hardware to reduce the load on software, and to improve processing efficiency. Figure 26.38 shows a block diagram of the filter circuit configuration.

The filter circuit includes a high-speed 24-bit  $\times$  16-bit multiplier-accumulator, an arithmetic buffer, and an I/O processor. The digital filter computations are carried out by the high-speed multiplier-accumulator. The arithmetic buffer stores coefficients and gain constants needed in the filter computations, which are referenced by the high-speed multiplier-accumulator.

The I/O processor is activated by a frequency generator signal, and determines what operation is carried out. When activated, it reads the speed error and phase error from the speed and phase error detectors and sends them to the accumulator.

When the filter computation is completed, the I/O processor reads the result from the accumulator and sends it to a 12-bit PWM. At this time, the accumulation result gain can be controlled.

## 26.11.2 Block Diagram

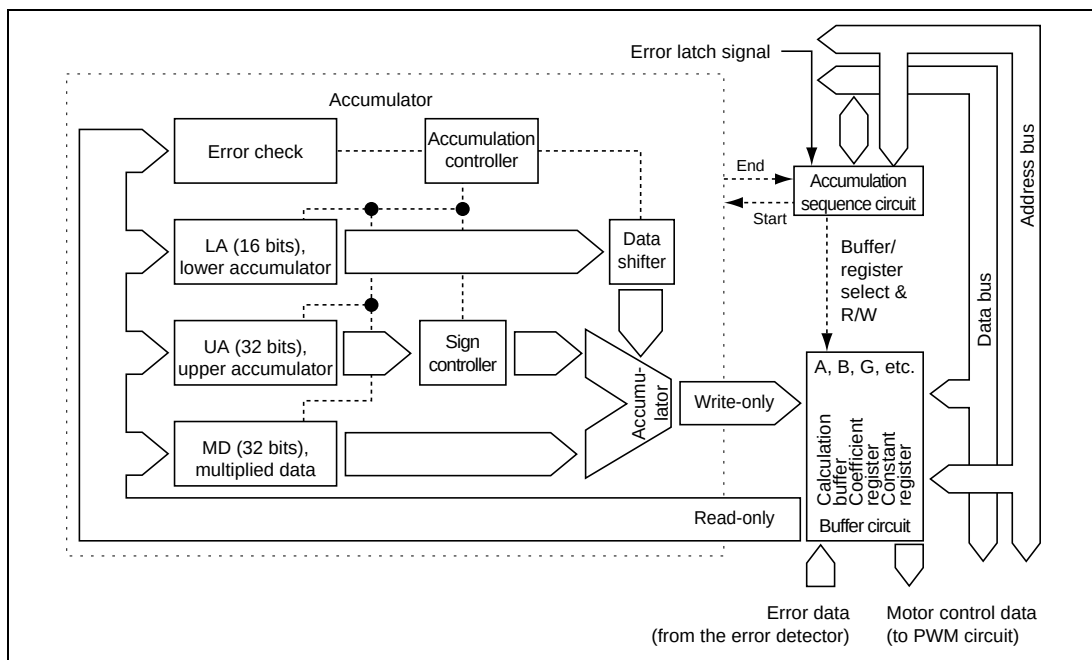


**Figure 26.38 Block Diagram of Digital Filter Circuit**



26.11.3 Arithmetic Buffer

This buffer stores computational data used in the digital filters. See table 26.14. Write access is limited to the gain and coefficient data ( $Z^{-1}$ ). The other data is used by hardware. None of the data can be read.

Table 26.14 Arithmetic Buffer Register Configuration

|              |                     |                     | Buffer Data Length |         |         |               |
|--------------|---------------------|---------------------|--------------------|---------|---------|---------------|
|              | Arithmetic Data     | Gain or Coefficient | Processing Data    | 16 bits | 16 bits | 16 bits       |
|              |                     |                     |                    | ←       | → ←     | → ←           |
| Phase system | Ep                  |                     |                    |         |         |               |
|              | Upn                 |                     |                    |         |         |               |
|              | Upn-1 ( $Zp^{-1}$ ) |                     |                    |         |         |               |
|              | Vpn                 |                     |                    |         |         |               |
|              | Tp                  |                     |                    |         |         |               |
|              | Y                   |                     |                    |         |         |               |
|              |                     | Ap                  |                    |         |         |               |
|              |                     | Bp                  |                    |         |         |               |
|              |                     | GKp                 |                    |         |         |               |
|              |                     | Ofp                 |                    |         |         |               |
|              |                     |                     | Ap × Epn           |         |         |               |
|              |                     |                     | Bp × Vpn           |         |         |               |
| Speed system | Es                  |                     |                    |         |         |               |
|              | Xsn                 |                     |                    |         |         |               |
|              | Usn                 |                     |                    |         |         |               |
|              | Usn-1 ( $Zs^{-1}$ ) |                     |                    |         |         |               |
|              | Vsn                 |                     |                    |         |         |               |
|              | Ws                  |                     |                    |         |         |               |
|              |                     | As                  |                    |         |         |               |
|              |                     | Bs                  |                    |         |         |               |
|              |                     | GKs                 |                    |         |         |               |
|              |                     | Ofs                 |                    |         |         |               |
|              |                     |                     | As × Xsn           |         |         |               |
|              |                     |                     | Bs × Vsn           |         |         |               |
| Error output | PWM                 |                     |                    |         |         |               |
| Legend:      |                     |                     | Valid bits         |         | ↑       |               |
|              |                     |                     | Non-existent bits  |         |         | Decimal point |

## 26.11.4 Register Configuration

Table 26.15 shows the register configuration of the digital circuit.

**Table 26.15 Register Configuration**

| Name                                               | Abbrev. | R/W | Size | Initial Value | Address |
|----------------------------------------------------|---------|-----|------|---------------|---------|
| Capstan phase gain constant                        | CGKp    | W   | Word | Undetermined  | H'D010  |
| Capstan speed gain constant                        | CGKs    | W   | Word | Undetermined  | H'D012  |
| Capstan phase coefficient A                        | CAp     | W   | Word | Undetermined  | H'D014  |
| Capstan phase coefficient B                        | CBp     | W   | Word | Undetermined  | H'D016  |
| Capstan speed coefficient A                        | CAs     | W   | Word | Undetermined  | H'D018  |
| Capstan speed coefficient B                        | CBs     | W   | Word | Undetermined  | H'D01A  |
| Capstan phase offset                               | COfp    | W   | Word | Undetermined  | H'D01C  |
| Capstan speed offset                               | COfs    | W   | Word | Undetermined  | H'D01E  |
| Drum phase gain constant                           | DGKp    | W   | Word | Undetermined  | H'D000  |
| Drum speed gain constant                           | DGKs    | W   | Word | Undetermined  | H'D002  |
| Drum phase coefficient A                           | DAp     | W   | Word | Undetermined  | H'D004  |
| Drum phase coefficient B                           | DBp     | W   | Word | Undetermined  | H'D006  |
| Drum speed coefficient A                           | DAs     | W   | Word | Undetermined  | H'D008  |
| Drum speed coefficient B                           | DBs     | W   | Word | Undetermined  | H'D00A  |
| Drum phase offset                                  | DOfp    | W   | Word | Undetermined  | H'D00C  |
| Drum speed offset                                  | DOfs    | W   | Word | Undetermined  | H'D00E  |
| Drum system speed delay initialization register    | DZs     | W   | Word | H'F000        | H'D020  |
| Drum system phase delay initialization register    | DZp     | W   | Word | H'F000        | H'D022  |
| Capstan system speed delay initialization register | CZs     | W   | Word | H'F000        | H'D024  |
| Capstan system phase delay initialization register | CZp     | W   | Word | H'F000        | H'D026  |
| Drum system digital filter control register        | DFIC    | R/W | Byte | H'80          | H'D028  |
| Capstan system digital filter control register     | CFIC    | R/W | Byte | H'80          | H'D029  |
| Digital filter control register                    | DFUCR   | R/W | Byte | H'C0          | H'D02A  |

## 26.11.5 Register Description

### Gain Constants (CGKp, CGKs, DGKp, DGKs)

|                 |    |    |    |    |    |    |   |   |   |   |   |   |   |   |   |   |
|-----------------|----|----|----|----|----|----|---|---|---|---|---|---|---|---|---|---|
| Bit :           | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
|                 |    |    |    |    |    |    |   |   |   |   |   |   |   |   |   |   |
| Initial value : | *  | *  | *  | *  | *  | *  | * | * | * | * | * | * | * | * | * | * |
| R/W :           | W  | W  | W  | W  | W  | W  | W | W | W | W | W | W | W | W | W | W |

Note: \* Initial value is uncertain.

These registers are 16-bit write-only buffers that set accumulation gain of the digital filter. Only a word access is valid. Accumulation gain can be set to gain 1 value as maximum value. If a byte access is attempted, correct operation is not guaranteed. If a read is attempted, an undetermined value is read out.

These registers are not initialized by a reset or in standby mode. Be sure to write data in them before processing starts.

In the digital filter, output gain and accumulation gain can be adjusted separately. Take output gain into account when setting accumulation gain.

### Coefficients (CAp, CBp, CAs, CBs, DAp, DBp, DAs, DBs)

|                 |    |    |    |    |    |    |   |   |   |   |   |   |   |   |   |   |
|-----------------|----|----|----|----|----|----|---|---|---|---|---|---|---|---|---|---|
| Bit :           | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
|                 |    |    |    |    |    |    |   |   |   |   |   |   |   |   |   |   |
| Initial value : | *  | *  | *  | *  | *  | *  | * | * | * | * | * | * | * | * | * | * |
| R/W :           | W  | W  | W  | W  | W  | W  | W | W | W | W | W | W | W | W | W | W |

Note: \* Initial value is uncertain.

These registers are 16-bit write-only buffers that determine the cutoff frequency f1 and f2. Only a word access is valid. If a byte access is attempted, correct operation is not guaranteed. If a read is attempted, an undetermined value is read out.

These registers are not initialized by a reset or in standby mode. Be sure to write data in them before processing starts.

In the digital filter, output gain and accumulation gain can be adjusted separately. Take output gain into account when setting accumulation gain.

## Offset (COfp, Cofs, DOfp, DOfs)

|                 |    |    |    |    |    |    |   |   |   |   |   |   |   |   |   |   |
|-----------------|----|----|----|----|----|----|---|---|---|---|---|---|---|---|---|---|
| Bit :           | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
|                 |    |    |    |    |    |    |   |   |   |   |   |   |   |   |   |   |
| Initial value : | *  | *  | *  | *  | *  | *  | * | * | * | * | * | * | * | * | * | * |
| R/W :           | W  | W  | W  | W  | W  | W  | W | W | W | W | W | W | W | W | W | W |

Note: \* Initial value is uncertain.

These registers are 16-bit write-only buffers that set offset level of digital filter output. Only a word access is valid. If a byte access is attempted, correct operation is not guaranteed. If a read is attempted, an undetermined value is read out.

These registers are not initialized by a reset or in standby mode. Be sure to write data in them before processing starts.

In this digital filter, output gain adjustment ( $\times 1, 2, 4, 8, 16, 32, 64$ ) after offset adding is enabled. Take output gain into account when setting accumulation gain.

## Delay Initialization Register (CZp, CZs, DZp, DZs)

|                 |    |    |    |    |    |    |   |   |   |   |   |   |   |   |   |   |
|-----------------|----|----|----|----|----|----|---|---|---|---|---|---|---|---|---|---|
| Bit :           | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
|                 |    |    |    |    |    |    |   |   |   |   |   |   |   |   |   |   |
| Initial value : | 1  | 1  | 1  | 1  | 0  | 0  | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| R/W :           | —  | —  | —  | —  | W  | W  | W | W | W | W | W | W | W | W | W | W |

The delay initialization register is a 16-bit write-only register. Only a word access is valid. If a byte access is attempted, correct operation is not guaranteed. If a read is attempted, an undetermined value is read out.

It is initialized to H'F000 by a reset, or in stand-by or module stop mode. The MSB of 12-bit data (bit 11) is a sign bit.

Loading to  $Z^{-1}$  is performed automatically by bits 4 and 3 of CFIC and DFIC (CZPON, CZSON, DZPON, DZSON). Writing in register is always available, but loading in  $Z^{-1}$  is not possible when the digital filter is performing computation in relation to such register. In such a case, loading to  $Z^{-1}$  will be done the next time computation begins.

Drum System Digital Filter Control Register (DFIC)

|                 |   |        |       |       |       |      |      |      |
|-----------------|---|--------|-------|-------|-------|------|------|------|
| Bit :           | 7 | 6      | 5     | 4     | 3     | 2    | 1    | 0    |
|                 | — | DROV   | DPHA  | DZPON | DZSON | DSG2 | DSG1 | DSG0 |
| Initial value : | 1 | 0      | 0     | 0     | 0     | 0    | 0    | 0    |
| R/W :           | — | R/(W)* | R/(W) | R/W   | R/W   | R/W  | R/W  | R/W  |

Note: \* Only 0 can be written

DFIC is an 8-bit read/write register that controls the status of the drum digital filter and operating mode. Only a byte access is valid. If a word access is attempted, correct operation is not guaranteed. DFIC is initialized to H'80 by a reset, and in standby mode and module stop mode.

**Bit 7—Reserved:** Cannot be modified and is always read as 1.

**Bit 6—Drum System Range Over Flag (DROV):** This flag is set to 1 when the result of a filter computation exceeds 12 bits in width. To clear this flag, write 0 after reading 1.

Bit 6

| DROV | Description                                                                         |
|------|-------------------------------------------------------------------------------------|
| 0    | Indicates that the filter computation result did not exceed 12 bits (Initial value) |
| 1    | Indicates that the filter computation result exceeded 12 bits                       |

**Bit 5—Drum Phase System Filter Computation Start Bit (DPHA):** Starts or stops filter processing for drum phase system.

Bit 5

| DPHA | Description                                                                                                                         |
|------|-------------------------------------------------------------------------------------------------------------------------------------|
| 0    | Phase system filter computations are disabled<br>Phase computation result (Y) is not added to Es (see figure 26.34) (Initial value) |
| 1    | Phase system filter computations are enabled                                                                                        |



**Bit 4—Drum Phase System  $Z^{-1}$  Initialization Bit (DZPON):** Reflects the DZp value on  $Z^{-1}$  of the phase system when computation processing of the drum phase system begins. If 1 is written, it is reflected on the computation, and then cleared to 0. Set this bit after writing data to DZp.

**Bit 4**

| DZPON | Description                                                                |
|-------|----------------------------------------------------------------------------|
| 0     | DZp value is not reflected on $Z^{-1}$ of the phase system (Initial value) |
| 1     | DZp value is reflected on $Z^{-1}$ of the phase system                     |

**Bit 3—Drum Speed System  $Z^{-1}$  Initialization Bit (DZSON):** Reflects the DZs value on  $Z^{-1}$  of the speed system when computation processing of the drum speed system begins. If 1 is written, it is reflected on the computation, and then cleared to 0. Set this bit after writing data to DZs.

**Bit 3**

| DZSON | Description                                                                |
|-------|----------------------------------------------------------------------------|
| 0     | DZs value is not reflected on $Z^{-1}$ of the speed system (Initial value) |
| 1     | DZs value is reflected on $Z^{-1}$ of the speed system                     |

**Bits 2 to 0—Drum System Output Gain Control Bits (DSG2 to DSG0):** Control the gain output to DRMPWM.

| Bit 2 | Bit 1 | Bit 0 | Description                       |
|-------|-------|-------|-----------------------------------|
| DSG2  | DSG1  | DSG0  |                                   |
| 0     | 0     | 0     | $\times 1$ (Initial value)        |
|       |       | 1     | $\times 2$                        |
|       | 1     | 0     | $\times 4$                        |
|       |       | 1     | $\times 8$                        |
| 1     | 0     | 0     | $\times 16$                       |
|       |       | 1     | $(\times 32)^*$                   |
|       | 1     | 0     | $(\times 64)^*$                   |
|       |       | 1     | Invalid (Do not use this setting) |

Note: \* Setting optional.

## Capstan System Digital Filter Control Register (CFIC)

|                 |   |        |       |       |       |      |      |      |
|-----------------|---|--------|-------|-------|-------|------|------|------|
| Bit :           | 7 | 6      | 5     | 4     | 3     | 2    | 1    | 0    |
|                 | — | DROV   | DPHA  | DZPON | DZSON | DSG2 | DSG1 | DSG0 |
| Initial value : | 1 | 0      | 0     | 0     | 0     | 0    | 0    | 0    |
| R/W :           | — | R/(W)* | R/(W) | R/W   | R/W   | R/W  | R/W  | R/W  |

Note: \* Only 0 can be written

CFIC is an 8-bit read/write register that controls the status of the capstan digital filter and operating mode. Only a byte access is valid. If a word access is attempted, correct operation is not guaranteed. CFIC is initialized to H'80 by a reset, and in standby mode and module stop mode.

**Bit 7—Reserved:** Cannot be modified and is always read as 1.

**Bit 6—Capstan System Range Over Flag (CROV):** This flag is set to 1 when the result of a filter computation exceeds 12 bits in width. To clear this flag, write 0 after reading 1.

### Bit 6

| DROV | Description                                                                          |
|------|--------------------------------------------------------------------------------------|
| 0    | Indicates that the filter computation result did not exceed 12 bits. (Initial value) |
| 1    | Indicates that the filter computation result exceeded 12 bits.                       |

**Bit 5—Capstan Phase System Filter Start (CPHA):** Starts or stops filter processing for capstan phase system.

### Bit 5

| CPHA | Description                                                                                                                    |
|------|--------------------------------------------------------------------------------------------------------------------------------|
| 0    | Phase filter computations are disabled.<br>Phase computation result (Y) is not added to Es (see figure 26.39). (Initial value) |
| 1    | Phase filter computations are enabled.                                                                                         |

**Bit 4—Capstan Phase System  $Z^{-1}$  Initialization Bit (CZPON):** Reflects the CZp value on  $Z^{-1}$  of the capstan phase system when computation processing of the phase system begins. If 1 is written, it is reflected on the computation, and then cleared to 0. Set this bit after writing data to CZp.

**Bit 4**

| CZPON | Description                                                                |
|-------|----------------------------------------------------------------------------|
| 0     | CZp value is not reflected on $Z^{-1}$ of the phase system (Initial value) |
| 1     | CZp value is reflected on $Z^{-1}$ of the phase system                     |

**Bit 3—Capstan Speed System  $Z^{-1}$  Initialization Bit (CZSON):** Reflects the CZs value on  $Z^{-1}$  of the capstan speed system when computation processing of the speed system begins. If 1 is written, it is reflected on the computation, and then cleared to 0. Set this bit after writing data to CZs.

**Bit 3**

| CZSON | Description                                                                |
|-------|----------------------------------------------------------------------------|
| 0     | CZs value is not reflected on $Z^{-1}$ of the speed system (Initial value) |
| 1     | CZs value is reflected on $Z^{-1}$ of the speed system                     |

**Bits 2 to 0—Capstan System Gain Control Bits (CSG2 to CSG0):** Control the gain output to CAPPWM.

| Bit 1 | Bit 2 | Bit 0 | Description                       |
|-------|-------|-------|-----------------------------------|
| CSG2  | CSG1  | CSG0  |                                   |
| 0     | 0     | 0     | $\times 1$ (Initial value)        |
|       |       | 1     | $\times 2$                        |
|       | 1     | 0     | $\times 4$                        |
|       |       | 1     | $\times 8$                        |
| 1     | 0     | 0     | $\times 16$                       |
|       |       | 1     | $(\times 32)^*$                   |
|       | 1     | 0     | $(\times 64)^*$                   |
|       |       | 1     | Invalid (Do not use this setting) |

Note: \* Setting optional

## Digital Filter Control Register (DFUCR)

|                 |   |   |      |       |       |       |       |       |
|-----------------|---|---|------|-------|-------|-------|-------|-------|
| Bit :           | 7 | 6 | 5    | 4     | 3     | 2     | 1     | 0     |
|                 | — | — | PTON | CP/DP | CFEPS | DFEPS | CFESS | DFESS |
| Initial value : | 1 | 1 | 0    | 0     | 0     | 0     | 0     | 0     |
| R/W :           | — | — | R/W  | R/W   | R/W   | R/W   | R/W   | R/W   |

DFUCR is an 8-bit read/write register which controls the operation of the digital filter. Only a byte access is valid. If a word access is attempted, correct operation is not guaranteed. It is initialized to H'00 by a reset, or in stand-by or module stop mode.

**Bits 7 and 6—Reserved:** Cannot be modified and are always read as 1.

**Bit 5—Phase System Computation Result PWM Output Bit (PTON):** Outputs the computation results of only the phase system to PWM. (The computation results of the drum phase system is output to CAPPWM pin, and that of the capstan phase system is output to DRMPWM pin.)

### Bit 5

| PTON | Description                                                                          |
|------|--------------------------------------------------------------------------------------|
| 0    | Outputs the results of ordinary computation of the filter to PWM pin (Initial value) |
| 1    | Outputs the computation results of only the phase system to PWM pin                  |

**Bit 4—PWM Output Selection Bit (CP/DP):** Selects whether the phase system computation results when PTON was set to 1 is output to the drum or capstan. The PWM of the selected side outputs ordinary filter computation results (speed system of MIX).

### Bit 4

| CP/DP | Description                                                                |
|-------|----------------------------------------------------------------------------|
| 0     | Outputs the drum phase system computation results (DRMPWM) (Initial value) |
| 1     | Outputs the capstan phase system computation results (CAPPWM)              |

**Bit 3—Capstan Phase System Error Data Transfer Bit (CFEPS):** Transfers the capstan phase system error data to the digital filter when the data write is enforced.

**Bit 3**

| CFEPS | Description                                                          |
|-------|----------------------------------------------------------------------|
| 0     | Error data is transferred by DVCFG2 signal latching. (Initial value) |
| 1     | Error data is transferred when the data is written.                  |

**Bit 2—Drum Phase System Error Data Transfer Bit (DFEPS):** Transfers the drum phase system error data to the digital filter when the data write is enforced.

**Bit 2**

| DFEPS | Description                                                              |
|-------|--------------------------------------------------------------------------|
| 0     | Error data is transferred by HSW (NHSW) signal latching. (Initial value) |
| 1     | Error data is transferred when the data is written.                      |

**Bit 1—Capstan Speed System Error Data Transfer Bit (CFESS):** Transfers the capstan phase system error data to the digital filter when the data write is enforced.

**Bit 1**

| CFESS | Description                                                         |
|-------|---------------------------------------------------------------------|
| 0     | Error data is transferred by DVCFG signal latching. (Initial value) |
| 1     | Error data is transferred when the data is written.                 |

**Bit 0—Drum Speed System Error Data Transfer Bit (DFESS):** Transfers the drum speed system error data to the digital filter when the data write is enforced.

**Bit 0**

| DFESS | Description                                                          |
|-------|----------------------------------------------------------------------|
| 0     | Error data is transferred by NCDFFG signal latching. (Initial value) |
| 1     | Error data is transferred when the data is written.                  |

### 26.11.6 Filter Characteristics

- Lag-Lead Filter

A filter required for a servo loop is built in the hardware. This filter uses IIR (infinite impulse response) type digital filter (another type of the digital filter is FIR, i.e. finite impulse response type). This digital filter circuit implements a lag-lead filter, as shown in figure 26.40.

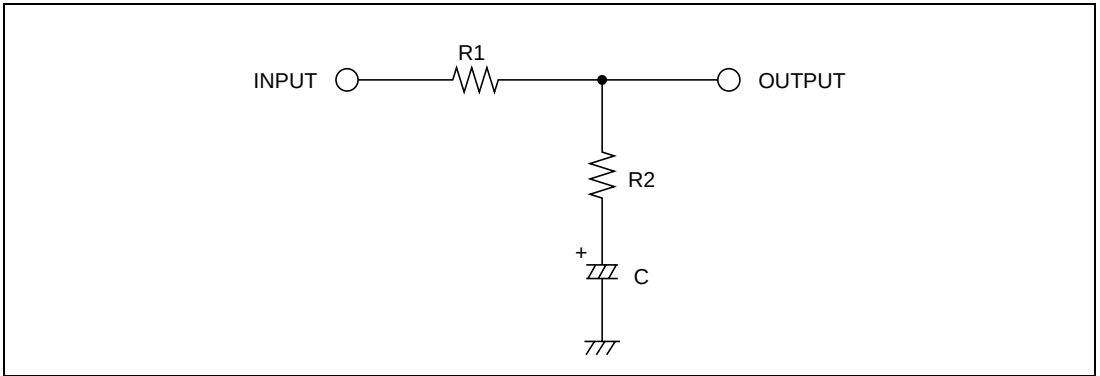


**Figure 26.40 Lag-Lead Filter**

The transfer function is expressed by the following equation:

$$\text{Transfer function } G(S) = \frac{1 + \frac{S}{2\pi f_2}}{1 + \frac{S}{2\pi f_1}}$$

$$f_1 = 1/2\pi C (R1 + R2)$$

$$f_2 = 1/2\pi C R2$$

- Frequency Characteristics

The computation circuit repeats computation of the function, which is obtained by s-z conversion according to bi-linear approximation of the transfer function on the s-plane. Figure 26.41 shows the frequency characteristics of the lag-lead filter.

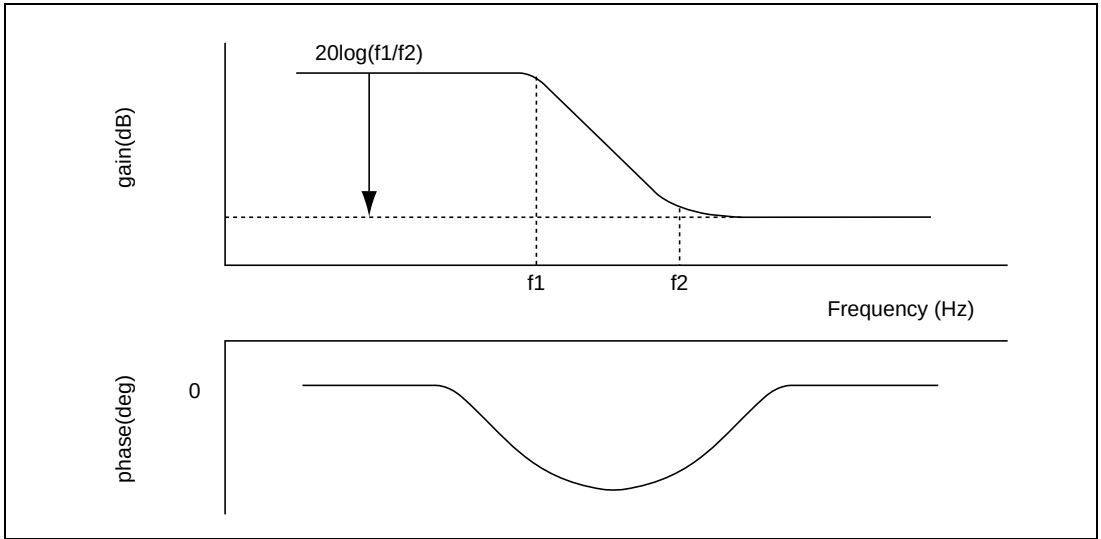


**Figure 26.41 Frequency Characteristics of the Lag-Lead Filter**

The pulse transfer function  $G(Z)$  is obtained by the bi-linear approximation of the transfer  $G(S)$ . In the transfer  $G(S)$ ,

$$S = \frac{2}{T_s} \cdot \frac{1-Z^{-1}}{1+Z^{-1}}$$

Where, assumed that  $Z^{-1} = e^{-j\omega T_s}$ ,

$$G(Z) = G \cdot \frac{2}{T_s} \cdot \frac{1+AZ^{-1}}{1+BZ^{-1}}$$

$$G(Z) = \frac{T_s + \frac{1}{\pi f_2}}{T_s + \frac{1}{\pi f_1}} \quad A = \frac{T_s - \frac{1}{\pi f_2}}{T_s + \frac{1}{\pi f_2}} \quad B = \frac{T_s - \frac{1}{\pi f_1}}{T_s + \frac{1}{\pi f_1}}$$

$T_s$ : Sampling cycle (sec)


26.11.7 Operations in Case of Transient Response

In case of transient response when the motor is activated, the digital filter computation circuit must prevent computation due to a large error. The convergence of the computations becomes slow and servo retraction deteriorates if a large error is input to the filter circuit when it is performing repeated computations. To prevent them from occurring, operate the filter (set constants A and B) after pulling in the speed and phase within a certain range of error, initialize the  $Z^{-1}$  (set initial values in CZp, CZs, DZp, DZs)(see section 26.11.8, Initialization of  $Z^{-1}$ ), or use the error data limit function (see section 26.6, Drum Speed Error Detector, and section 26.8, Capstan Speed Error Detector).

26.11.8 Initialization of  $Z^{-1}$

$Z^{-1}$  can be initialized by its delay initialization register (CZp, CZs, DZp, DZs). Loading to  $Z^{-1}$  is performed automatically by bits 4 and 3 of CFIC and DFIC (CZPON, CZSON, DZPON, DZSON). Writing in register is always available, but loading in  $Z^{-1}$  is not possible when the digital filter is performing computation in relation to such register. In such a case, loading to  $Z^{-1}$  will be done when the next time computation begins. Figure 26.42 shows the initialization circuit of  $Z^{-1}$ .

The delay initialization register sets 12-bit data. The MSB (bit 11) is a sign bit.  $Z^{-1}$  has 24 bits for integrals and 8 bits for decimals. Accordingly, the same value as the sign bit should be set in the 13 bits on the MSB side of  $Z^{-1}$ , and 0 in the entire decimal section.

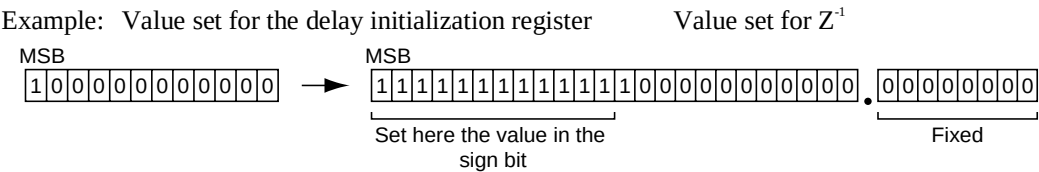





## 26.12 Additional V Signal Generator

### 26.12.1 Overview

The additional V signal generator outputs an additional vertical sync signal to take the place of Vsync in special playback. It is activated at both edges of the HSW signal output by the head-switch timing generator. The head-switch timing generator also outputs a V pulse signal containing the additional vertical sync pulse itself, and an M level signal that defines the width of the additional vertical sync signal including the equalizing pulses.

The additional V signal is output at a three-level output pin (V pulse).

Figure 26.43 shows the additional V signal control circuit.

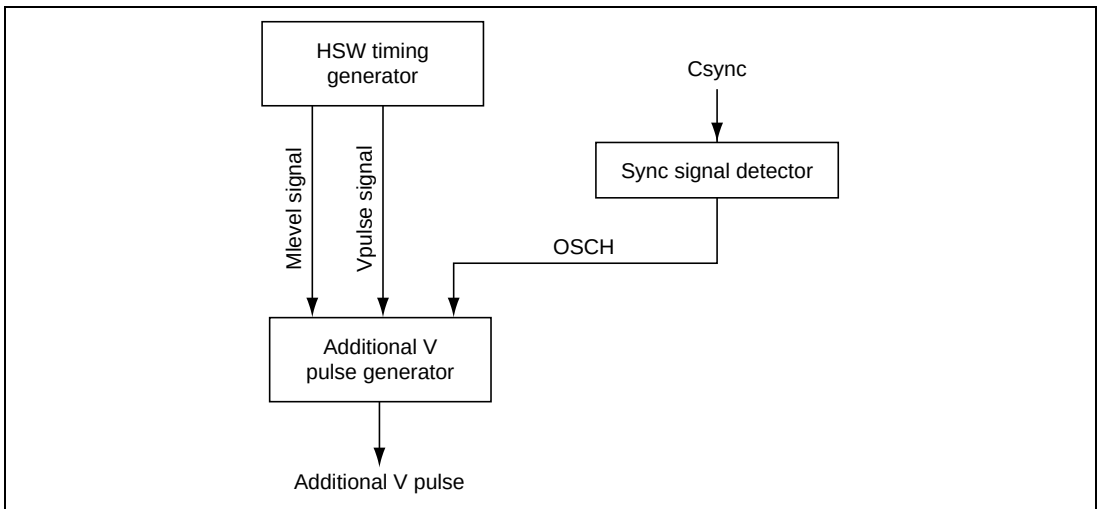


**Figure 26.43 Additional V Pulse Control Circuit**

**HSW Timing Generator:** This circuit generates signals that are synchronized with head switching. It should be programmed to generate the Mlevel and Vpulse signals at edges of the HSW signal (VideoFF). For details, see section 26.4, HSW (Head-switch) Timing Generator.

**Sync Signal Detector:** This circuit detects pulses of the width specified by VTR or HTR from the signal input at the Csyntax pin and generates an internal horizontal sync signal (OSCH). The sync signal detector has an interpolation function, so OSCH has a regular period even if there are horizontal sync dropouts in the signal received at the pin. For details, see section 26.15, Sync Signal Detector.

## 26.12.2 Pin Configuration

Table 26.16 summarizes the pin configuration of the additional V signal.

**Table 26.16 Pin Configuration**

| Name                   | Abbrev. | I/O    | Function                                               |
|------------------------|---------|--------|--------------------------------------------------------|
| Additional V pulse pin | Vpulse  | Output | Output of additional V signal synchronized to video FF |

## 26.12.3 Register Configuration

Table 26.17 summarizes the register that controls the additional V signal.

**Table 26.17 Register Configuration**

| Name                          | Abbrev. | R/W | Size | Initial Value | Address |
|-------------------------------|---------|-----|------|---------------|---------|
| Additional V control register | ADDVR   | R/W | Byte | H'E0          | H'D06F  |

## 26.12.4 Register Description

Additional V Control Register (ADDVR)

|                 |   |   |   |      |     |     |      |     |
|-----------------|---|---|---|------|-----|-----|------|-----|
| Bit :           | 7 | 6 | 5 | 4    | 3   | 2   | 1    | 0   |
|                 | — | — | — | HMSK | HiZ | CUT | VPON | POL |
| Initial value : | 1 | 1 | 1 | 0    | 0   | 0   | 0    | 0   |
| R/W :           | — | — | — | R/W  | R/W | R/W | R/W  | R/W |

ADDVR is an 8-bit read/write register. It is initialized to H'E0 by a reset, and in standby mode.

**Bits 7 to 5—Reserved:** Cannot be modified and are always read as 1.

**Bit 4—OSCH Mask (HMSK):** Masks the OSCH signal in the additional V signal.

### Bit 4

| HMSK | Description                      |
|------|----------------------------------|
| 0    | OSCH is added in (Initial value) |
| 1    | OSCH is not added in             |

**Bit 3—High Impedance (HiZ):** Set to 1 when the intermediate level is generated by an external circuit.

#### Bit 3

| HiZ | Description                                                       |
|-----|-------------------------------------------------------------------|
| 0   | Vpulse is a three-level output pin (Initial value)                |
| 1   | Vpulse is a three-state output pin (high, low, or high-impedance) |

**Bits 2 to 0—Additional V Output Control (CUT, VPON, POL):** These bits control the output at the additional V pin.

| Bit 2 | Bit 1 | Bit 0 | Description                                        |
|-------|-------|-------|----------------------------------------------------|
| CUT   | VPON  | POL   |                                                    |
| 0     | 0     | *     | Low level (Initial value)                          |
|       | 1     | 0     | Negative polarity (see figure 26.46)               |
|       |       | 1     | Positive polarity (see figure 26.45)               |
| 1     | *     | 0     | Intermediate level (high impedance if HiZ bit = 1) |
|       |       | 1     | High level                                         |

Note: \*Don't care.

## 26.12.5 Additional V Pulse Signal

Figure 26.44 shows the additional V pulse signal. The M level and V pulse signals are generated by the head-switch timing generator. The OSCH signal is combined with these to produce equalizing pulses. The polarity can be selected by the POL bit in the additional V control register (ADDVR). V pulse pin outputs a low level by a reset, and in standby mode and module stop mode.

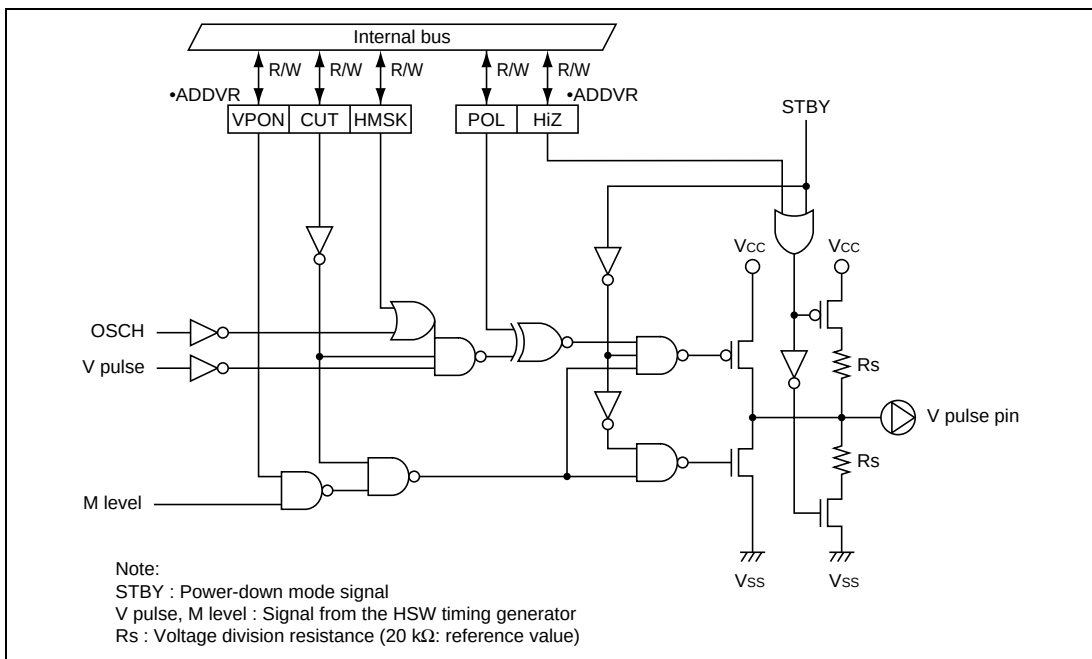


**Figure 26.44 Additional V Pulse Pin**

**Additional V Pulses When Sync Signal is Not Detected:** With additional V pulses, the pulse signal (OSCH) detected by the sync signal detector is superimposed on the V pulse and Mlevel signals generated by the head-switch timing generator. If there is a lot of noise in the input sync signal (Csync), or a pulse is missing, OSCH will be a complementary pulse, and therefore an H pulse of the period set in HRTR and HPWR will be superimposed. In this case, there may be slight timing drift compared with the normal sync signal, depending on the HRTR and HPWR setting, with resultant discontinuity.

If no sync signal is input, the additional V pulse is generated as a complementary pulse. Set the sync signal detector registers and activate the sync signal detector by manipulating the SYCT bit in the sync signal control register (SYNCR). See section 26.15.7, Activation of the Sync Signal Detector.

Figures 26.45 and 26.46 show the additional V pulse timing charts.

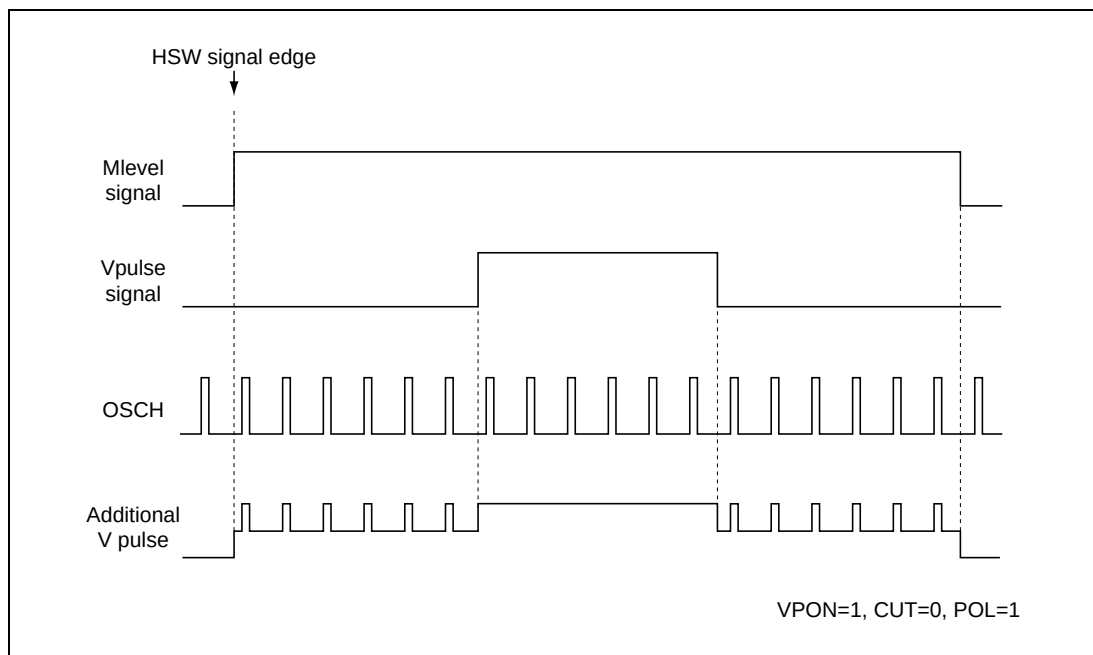


**Figure 26.45 Additional V Pulse when Positive Polarity Is Specified**

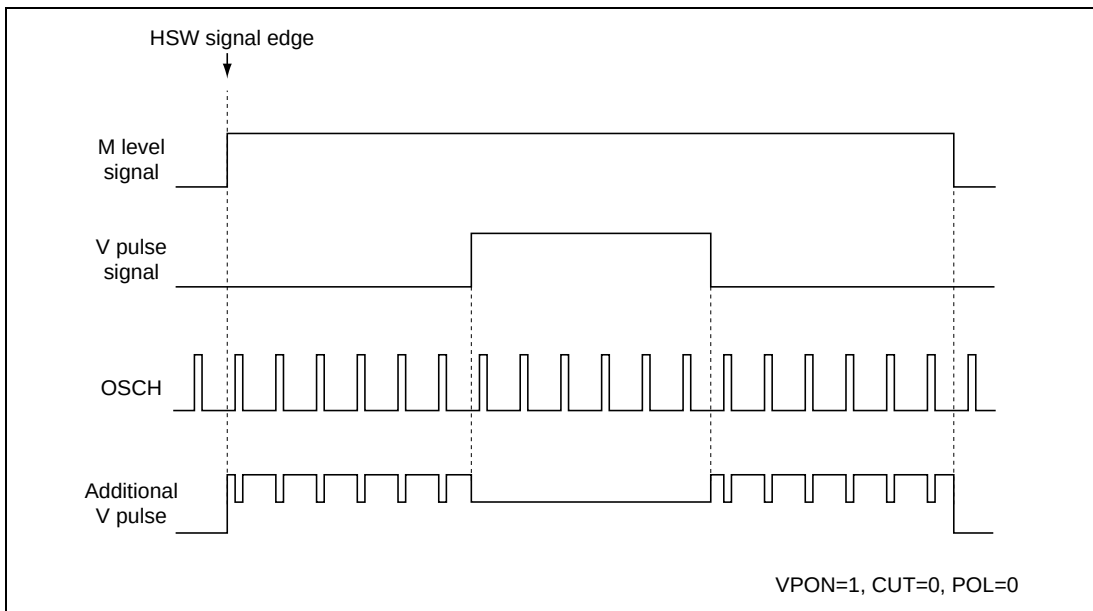


**Figure 26.46 Additional V Pulse When Negative Polarity Is Specified**

## 26.13 CTL Circuit

### 26.13.1 Overview

The CTL circuit includes a Schmitt amplifier that amplifies and reshapes the CTL input, then outputs it as the PB-CTL signal to the servo, linear time counter, and other circuits.

The PB-CTL signal is also sent to a duty discriminator in the CTL circuit that detects and records VISS, ASM, and VASS marks. A REC-CTL amplifier is included in the record circuits.

Detection and recording whether the CTL pulse pattern is long or short can also be enabled to correspond to the wide-aspect.

The following operating modes can be selected by settings in the CTL mode register:

- Duty discrimination  
VISS detect, ASM detect, VASS detect, L/S bit pattern detect
- CTL record  
VISS record, ASM record, VASS record, L/S bit pattern record
- Rewrite  
Trapezoid waveform generator



26.13.2 Block Diagram

Figure 26.47 shows a block diagram of the CTL circuit.

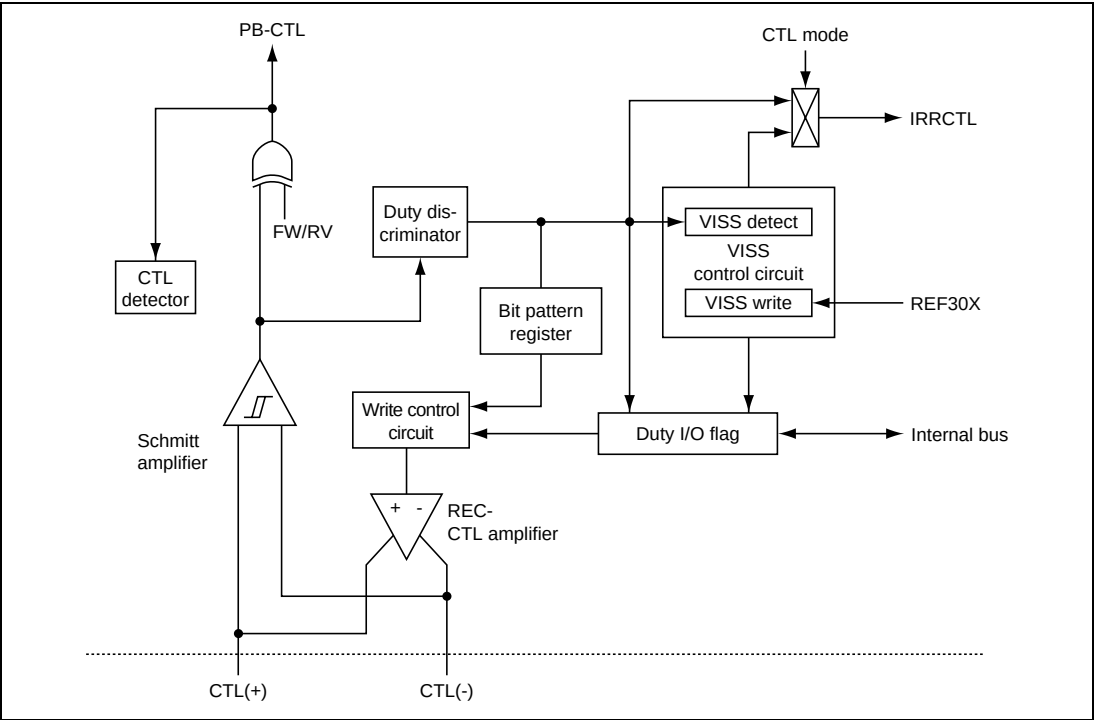


Figure 26.47 Block Diagram of CTL Circuit

### 26.13.3 Pin Configuration

Table 26.18 summarizes the pin configuration of the CTL circuit.

**Table 26.18 Pin Configuration**

| Name                   | Abbrev.    | I/O    | Function                                         |
|------------------------|------------|--------|--------------------------------------------------|
| CTL (+) I/O pin        | CTL (+)    | I/O    | CTL signal input/output                          |
| CTL (–) I/O pin        | CTL (–)    | I/O    | CTL signal input/output                          |
| CTL bias input pin     | CTL Bias   | Input  | CTL primary amplifier bias supply                |
| CTL Amp (O) output pin | CTLamp (O) | Output | CTL amplifier output                             |
| CTL SMT (i) input pin  | CTLSMT (i) | Input  | CTL Schmitt amplifier input                      |
| CTL FB input pin       | CTL FB     | Input  | CTL amplifier high-range characteristics control |
| CTL REF output pin     | CTL REF    | Output | CTL amplifier reference voltage output           |

### 26.13.4 Register Configuration

Table 26.19 shows the register configuration of the CTL circuit.

**Table 26.19 Register Configuration**

| Name                         | Abbrev. | R/W | Size | Initial Value | Address |
|------------------------------|---------|-----|------|---------------|---------|
| CTL control register         | CTCR    | R/W | Byte | H'30          | H'D080  |
| CTL mode register            | CTLM    | R/W | Byte | H'00          | H'D081  |
| REC-CTL duty data register 1 | RCDR1   | W   | Word | H'F000        | H'D082  |
| REC-CTL duty data register 2 | RCDR2   | W   | Word | H'F000        | H'D084  |
| REC-CTL duty data register 3 | RCDR3   | W   | Word | H'F000        | H'D086  |
| REC-CTL duty data register 4 | RCDR4   | W   | Word | H'F000        | H'D088  |
| REC-CTL duty data register 5 | RCDR5   | W   | Word | H'F000        | H'D08A  |
| Duty I/O register            | DI/O    | R/W | Byte | H'F1          | H'D08C  |
| Bit pattern register         | BTPR    | R/W | Byte | H'FF          | H'D08D  |

26.13.5 Register Description

CTL Control Register (CTCR)

|                 |       |      |      |      |     |      |       |      |
|-----------------|-------|------|------|------|-----|------|-------|------|
| Bit :           | 7     | 6    | 5    | 4    | 3   | 2    | 1     | 0    |
|                 | NT/PL | FSLC | FSLB | FSLA | CCS | LCTL | UNCTL | SLWM |
| Initial value : | 0     | 0    | 1    | 1    | 0   | 0    | 0     | 0    |
| R/W :           | W     | W    | W    | W    | W   | W    | R     | W    |

CTCR is an 8-bit read/write register that controls PB-CTL rewrite and sets the slow mode. When CTL pulse cannot be detected with the input amplifier gain set at the CTL gain control register (CTLGR) in PB-CTL circuit, bit 1 (UNCTL) of CTCR is set to 1. It is automatically cleared to 0 when CTL pulse is detected.

Bit 1 is read-only, and the rest are write-only. If a read is attempted to a write-only bit, an undetermined value is read out.

CTCR is initialized to H'30 by a reset, and in standby and module stop mode.

**Bit 7—NTSC/PAL Select (NT/PL):** Selects the period of the rewrite circuit.

Bit 7

| NT/PL | Description                                   |
|-------|-----------------------------------------------|
| 0     | NTSC mode (frame rate: 30 Hz) (Initial value) |
| 1     | PAL mode (frame rate: 25 Hz)                  |

**Bits 6 to 4—Frequency Select (FSLA, FSLB, FSLC);** These bits select the operating frequency of the CTL write circuit. They should be set according to fOSC.

| Bit 6 | Bit 5 | Bit 3 | Description                        |
|-------|-------|-------|------------------------------------|
| FSLC  | FSLB  | FSLA  |                                    |
| 0     | 0     | 0     | Reserved (do not use this setting) |
|       |       | 1     | Reserved (do not use this setting) |
|       | 1     | 0     | fosc = 8 MHz                       |
|       |       | 1     | fosc = 10 MHz (Initial value)      |
| 1     | *     | *     | Reserved (do not use this setting) |

Note: \* Don't care.

**Bits 3—Clock Source Select Bit (CCS):** Selects clock source of CTL.

**Bit 3**

| CCS | Description              |
|-----|--------------------------|
| 0   | $\phi S$ (Initial value) |
| 1   | $\phi S/2$               |

**Bit 2—Long CTL Bit (LCTL):** Sets the long CTL detection mode.

**Bit 2**

| LCTL | Description                                                                             |
|------|-----------------------------------------------------------------------------------------|
| 0    | Clock source (CCS) operates at the setting value (Initial value)                        |
| 1    | Clock source (CCS) operates for further 8-division after operating at the setting value |

**Bit 1—CTL Undetected Bit (UNCTL):** Indicates the CTL pulse detection status at the CTL input amplifier sensitivity set at the CTL gain control register.

**Bit 1**

| UNCTL | Description              |
|-------|--------------------------|
| 0     | Detected (Initial value) |
| 1     | Undetected               |

**Bit 0—Mode Select Bit (SLWM):** Selects CTL mode.

**Bit 0**

| SLWM | Description                 |
|------|-----------------------------|
| 0    | Normal mode (Initial value) |
| 1    | Slow mode                   |

CTL Mode Register (CTLM)

|                 |     |                             |       |     |     |     |     |     |
|-----------------|-----|-----------------------------|-------|-----|-----|-----|-----|-----|
| Bit :           | 7   | 6                           | 5     | 4   | 3   | 2   | 1   | 0   |
|                 | ASM | REC/ $\overline{\text{PB}}$ | FW/RV | MD4 | MD3 | MD2 | MD1 | MD0 |
| Initial value : | 0   | 0                           | 0     | 0   | 0   | 0   | 0   | 0   |
| R/W :           | R/W | R/W                         | R/W   | R/W | R/W | R/W | R/W | R/W |

CTLM is an 8-bit read/write register that controls the operating state of the CTL circuit. If 1 is written in bits MD3 and MD2, they will be cleared to 0 one cycle ( $\phi$ ) later.  
CTLM is initialized to H'00 by a reset, and in standby mode and module stop mode. When CTL is being stopped, only bits 7, 6 and 5 operate.

Note: Do not set any value other than the setting value for each mode (see table 26.20, CTL Mode Functions).

**Bits 7 and 6—Record/Playback Mode Bits (ASM, REC/ $\overline{\text{PB}}$ ):** These bits switch between record and playback. Combined with bits 4 to 0 (MD4 to MD0), they support the VISS, VASS, and ASM mark functions.

| Bit 7 | Bit 6                       | Description                   |
|-------|-----------------------------|-------------------------------|
| ASM   | REC/ $\overline{\text{PB}}$ |                               |
| 0     | 0                           | Playback mode (Initial value) |
|       | 1                           | Record mode                   |
| 1     | 0                           | Assemble mode                 |
|       | 1                           | Invalid (do not set)          |

**Bit 5—Direction (FW/RV):** Selects the direction in playback. Clear this bit to 0 during record. Figure 26.48 shows the PB-CTL signal.

| Bit 5 | Description             |
|-------|-------------------------|
| FW/RV |                         |
| 0     | Forward (Initial value) |
| 1     | Reverse                 |

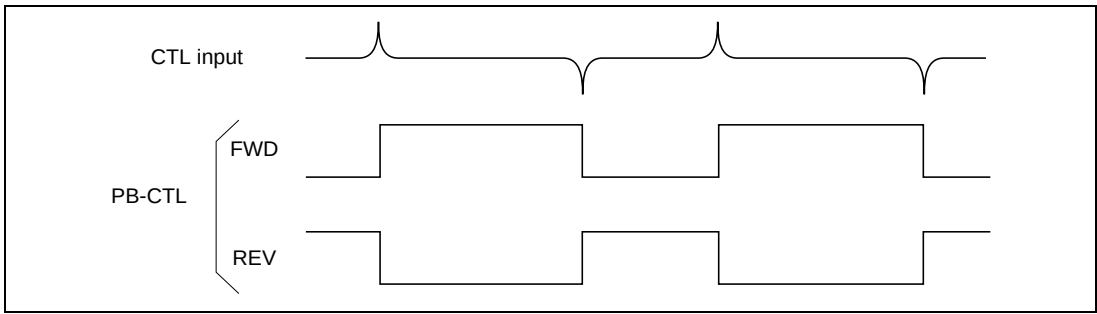


**Figure 26.48 Internal PB-CTL Signal in Forward and Reverse**

**Bits 4 to 0—CTL Mode Select (MD4 to MD0):** These bits select the detect, record, and rewrite modes for VISS, VASS, and ASM marks. If 1 is written in bits MD3 and MD2, they will be cleared to 0 one cycle ( $\phi$ ) later.

The 5 bits from MD4 to MD0 are used in combination with bits 7 and 6 (ASM and REC/ $\overline{\text{PB}}$ ). Table 26.20 describes the modes.

**Table 26.20 CTL Mode Functions**

| Bit |                          |     |     |     |     |     |     | Mode                      | Description                                                                                                                                                                                                                                                                                                                |
|-----|--------------------------|-----|-----|-----|-----|-----|-----|---------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| ASM | R/ $\overline{\text{P}}$ | F/R | MD4 | MD3 | MD2 | MD1 | MD0 |                           |                                                                                                                                                                                                                                                                                                                            |
| 0   | 0                        | 0/1 | 0   | 0   | 0   | 0   | 0   | VASS detect (duty detect) | PB-CTL duty discrimination (Initial value) <ul style="list-style-type: none"><li>Duty I/O flag is set to 1 if duty <math>\geq</math> 44% is detected</li><li>Duty I/O flag is cleared to 0 if duty <math>&lt;</math> 44% is detected</li><li>Interrupt request is generated when one CTL pulse has been detected</li></ul> |
| 0   | 1                        | 0   | 0   | 0   | 0   | 0   | 0   | VASS record               | <ul style="list-style-type: none"><li>If 0 is written in the duty I/O flag, REC-CTL is generated and recorded with the duty cycle set by register RCDR2 or RCDR3</li><li>If 1 is written in the duty I/O flag, REC-CTL is generated and recorded with the duty cycle set by register RCDR4 or RCDR5</li></ul>              |
| 0   | 0                        | 0   | 1   | 0   | 0   | 1   | 0   | VASS rewrite              | Same as above (VASS record); trapezoid waveform circuit operation                                                                                                                                                                                                                                                          |

| Bit |                   |     |     |     |     |     |     | Mode                       | Description                                                                                                                                                                                                                                                                                                                                                                                                                                  |
|-----|-------------------|-----|-----|-----|-----|-----|-----|----------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| ASM | R/ $\overline{P}$ | F/R | MD4 | MD3 | MD2 | MD1 | MD0 |                            |                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| 0   | 0                 | 0/1 | 0   | 1   | 0   | 0   | 1   | VISS detect (index detect) | <ul style="list-style-type: none"> <li>The duty I/O flag is set to 1 at the point of write access to register CTLM</li> <li>The 1 pulses recognized by the duty discrimination circuit are counted in the VISS control circuit</li> <li>The duty I/O flag is cleared to 0, indicating VISS detection, when the value set at VCTR register is repeatedly detected</li> <li>An interrupt request is generated when VISS is detected</li> </ul> |
| 0   | 1                 | 0   | 0   | 0   | 1   | 0   | 1   | VISS record (index record) | <ul style="list-style-type: none"> <li>64 pulse data with 0 pulse data at both edge are written (index record)</li> <li>The index bit string is written through the duty I/O flag</li> <li>An interrupt request is generated at the end of VISS recording</li> </ul>                                                                                                                                                                         |
| 0   | 0                 | 0   | 0   | 0   | 1   | 0   | 1   | VISS rewrite               | Same as above (VISS record; trapezoid waveform circuit operation)                                                                                                                                                                                                                                                                                                                                                                            |
| 0   | 0                 | 0   | 1   | 0   | 0   | 0   | 0   | VISS initialize            | VISS write is forcibly aborted                                                                                                                                                                                                                                                                                                                                                                                                               |
| 1   | 0                 | 0/1 | 0   | 0   | 0   | 0   | 0   | ASM mark detect            | ASM mark detection <ul style="list-style-type: none"> <li>The duty I/O flag is cleared to 0 when PB-CTL duty <math>\geq 66\%</math> is detected</li> <li>An interrupt request is generated when an ASM mark is detected</li> </ul>                                                                                                                                                                                                           |
| 0   | 1                 | 0   | 1   | 0   | 0   | 0   | 0   | ASM mark record            | <ul style="list-style-type: none"> <li>An ASM mark is recorded by writing 0 in the duty I/O flag</li> <li>An interrupts is requested for every one CTL pulse</li> <li>REC-CTL is generated and recorded with the duty cycle set by register RCDR3</li> </ul>                                                                                                                                                                                 |

## REC-CTL Duty Data Register 1 (RCDR1)

|                 |    |    |    |    |       |       |       |       |       |       |       |       |       |       |       |       |
|-----------------|----|----|----|----|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| Bit :           | 15 | 14 | 13 | 12 | 11    | 10    | 9     | 8     | 7     | 6     | 5     | 4     | 3     | 2     | 1     | 0     |
|                 | —  | —  | —  | —  | CMT1B | CMT1A | CMT19 | CMT18 | CMT17 | CMT16 | CMT15 | CMT14 | CMT13 | CMT12 | CMT11 | CMT10 |
| Initial value : | 1  | 1  | 1  | 1  | 0     | 0     | 0     | 0     | 0     | 0     | 0     | 0     | 0     | 0     | 0     | 0     |
| R/W :           | —  | —  | —  | —  | W     | W     | W     | W     | W     | W     | W     | W     | W     | W     | W     | W     |

RCDR1 is a 12-bit write-only register that sets the REC-CTL rising timing. This setting is valid only for recording and rewriting, and is not used in detection.

Only a word access is valid. If a byte access is attempted, correct operation is not guaranteed. If a read is attempted, an undetermined value is read out. Bits 15 to 12 are reserved and are not affected by write access.

RCDR1 is initialized to H'F000 by a reset, and in standby mode, module stop mode and CTL stop mode.

The value to set in RCDR1 can be calculated from the transition timing T1 and the servo clock frequency  $\phi_s$  by the equation given below. See figure 26.60, REC-CTL Signal Generation Timing. Any transition timing can be set. The timing should be selected with attention to playback tracking compensation and the latch timing for phase control.

$$\text{RCDR1} = T1 \times \phi_s / 64$$

$\phi_s$  is the servo clock frequency ( $= f_{\text{OSC}}/2$ ) in Hz, and T1 is the set timing (s).

Note: 0 cannot be set to RCDR1. Set a value 1 or above.



## REC-CTL Duty Data Register 2 (RCDR2)

|                 |    |    |    |    |       |       |       |       |       |       |       |       |       |       |       |       |
|-----------------|----|----|----|----|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| Bit :           | 15 | 14 | 13 | 12 | 11    | 10    | 9     | 8     | 7     | 6     | 5     | 4     | 3     | 2     | 1     | 0     |
|                 | —  | —  | —  | —  | CMT2B | CMT2A | CMT29 | CMT28 | CMT27 | CMT26 | CMT25 | CMT24 | CMT23 | CMT22 | CMT21 | CMT20 |
| Initial value : | 1  | 1  | 1  | 1  | 0     | 0     | 0     | 0     | 0     | 0     | 0     | 0     | 0     | 0     | 0     | 0     |
| R/W :           | —  | —  | —  | —  | W     | W     | W     | W     | W     | W     | W     | W     | W     | W     | W     | W     |

RCDR2 is a 12-bit write-only register that sets 1 pulse (short) falling timing of REC-CTL at recording and rewriting, and detects long/short pulses at detecting.

Only a word access is valid. If a byte access is attempted, correct operation is not guaranteed. If a read is attempted, an undetermined value is read out. Bits 15 to 12 are reserved and are not affected by write access.

RCDR2 is initialized to H'F000 by a reset, and in standby mode, module stop mode, and CTL stop mode.

At recording, the value to set in RCDR2 can be calculated from the transition timing T2 and the servo clock frequency  $\phi_s$  by the equation given below, and the set value should be 25% of the duty obtained by the equation. See figure 26.60, REC-CTL Signal Generation Timing.

$$\text{RCDR2} = T2 \times \phi_s / 64$$

$\phi_s$  is the servo clock frequency ( $= f_{\text{osc}}/2$ ) in Hz, and T2 is the set timing (s).

At bit pattern detection, set the 1 pulse long/short threshold value at FWD. See figure 26.56, Duty Discriminator.

$$\text{RCDR2} = T2' \times \phi_s / 64$$

$\phi_s$  is the servo clock frequency ( $= f_{\text{osc}}/2$ ) in Hz, and T2' is the 1 pulse long/short threshold value at FWD (s).

## REC-CTL Duty Data Register 3 (RCDR3)

|                 |    |    |    |    |       |       |       |       |       |       |       |       |       |       |       |       |
|-----------------|----|----|----|----|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| Bit :           | 15 | 14 | 13 | 12 | 11    | 10    | 9     | 8     | 7     | 6     | 5     | 4     | 3     | 2     | 1     | 0     |
|                 | —  | —  | —  | —  | CMT3B | CMT3A | CMT39 | CMT38 | CMT37 | CMT36 | CMT35 | CMT34 | CMT33 | CMT32 | CMT31 | CMT30 |
| Initial value : | 1  | 1  | 1  | 1  | 0     | 0     | 0     | 0     | 0     | 0     | 0     | 0     | 0     | 0     | 0     | 0     |
| R/W :           | —  | —  | —  | —  | W     | W     | W     | W     | W     | W     | W     | W     | W     | W     | W     | W     |

RCDR3 is a 12-bit write-only register that sets 1 pulse (long) and assemble mark falling timing of REC-CTL at recording and rewriting, and detects long/short pulses at detecting.

Only a word access is valid. If a byte access is attempted, correct operation is not guaranteed. If a read is attempted, an undetermined value is read out. Bits 15 to 12 are reserved and are not affected by write access.

RCDR3 is initialized to H'F000 by a reset, and in standby mode, module stop mode, and CTL stop mode.

At recording, the value to set in RCDR3 can be calculated from the transition timing T3 and the servo clock frequency  $\phi_s$  by the equation given below. The set value should be 30 percent of the duty when the RCDR3 is used for REC-CTL 1 pulse, and 67 to 70 percent when used for assemble mark. The set value must not exceed the frequency of REF30X. See figure 26.60, REC-CTL Signal Generation Timing.

$$\text{RCDR3} = T3 \times \phi_s / 64$$

$\phi_s$  is the servo clock frequency ( $= f_{\text{osc}}/2$ ) in Hz, and T3 is the set timing (s).

At bit pattern detection, set the 0 pulse long/short threshold value at FWD. See figure 26.56, Duty Discriminator.

$$\text{RCDR3} = T3' \times \phi_s / 64$$

$\phi_s$  is the servo clock frequency ( $= f_{\text{osc}}/2$ ) in Hz, and T3' is the 0 pulse long/short threshold value at FWD (s).

## REC-CTL Duty Data Register 4 (RCDR4)

|                 |    |    |    |    |       |       |       |       |       |       |       |       |       |       |       |       |
|-----------------|----|----|----|----|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| Bit :           | 15 | 14 | 13 | 12 | 11    | 10    | 9     | 8     | 7     | 6     | 5     | 4     | 3     | 2     | 1     | 0     |
|                 | —  | —  | —  | —  | CMT4B | CMT4A | CMT49 | CMT48 | CMT47 | CMT46 | CMT45 | CMT44 | CMT43 | CMT42 | CMT41 | CMT40 |
| Initial value : | 1  | 1  | 1  | 1  | 0     | 0     | 0     | 0     | 0     | 0     | 0     | 0     | 0     | 0     | 0     | 0     |
| R/W :           | —  | —  | —  | —  | W     | W     | W     | W     | W     | W     | W     | W     | W     | W     | W     | W     |

RCDR4 is a 12-bit write-only register that sets the timing of falling edge of the 0 pulse (short) of REC-CTL in record or rewrite mode. In detection mode, it is used to detect the long/short pulse. Only a word access is valid. If a byte access is attempted, correct operation is not guaranteed. If a read is attempted, an undetermined value is read out. Bits 15 to 12 are reserved, and no write in them is valid.

It is initialized to H'F000 by a reset, stand-by or module stop.

In record mode, set a value with the 57.5 percent duty cycle obtained from the set time T4 corresponding to the frequency  $\phi$ s according to the following equation. See figure 26.60, REC-CTL Signal Generation Timing.

$$RCDR4 = T4 \times \phi / 64$$

$\phi$  is the servo clock frequency ( $= f_{osc}/2$ ) in Hz, and T4 is the set timing (s).

At bit pattern detection, set the 0 pulse long/short threshold value at REV. See figure 26.56, Duty Discriminator.

$$RCDR4 = H'FFF - (T4' \times \phi / 80)$$

$\phi$ s is the servo clock frequency ( $= f_{osc}/2$ ) in Hz, and T4' is the 0 pulse long/short threshold value at REV (s).

## REC-CTL Duty Data Register 5 (RCDR5)

|                 |    |    |    |    |       |       |       |       |       |       |       |       |       |       |       |       |
|-----------------|----|----|----|----|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| Bit :           | 15 | 14 | 13 | 12 | 11    | 10    | 9     | 8     | 7     | 6     | 5     | 4     | 3     | 2     | 1     | 0     |
|                 | —  | —  | —  | —  | CMT5B | CMT5A | CMT59 | CMT58 | CMT57 | CMT56 | CMT55 | CMT54 | CMT53 | CMT52 | CMT51 | CMT50 |
| Initial value : | 1  | 1  | 1  | 1  | 0     | 0     | 0     | 0     | 0     | 0     | 0     | 0     | 0     | 0     | 0     | 0     |
| R/W :           | —  | —  | —  | —  | W     | W     | W     | W     | W     | W     | W     | W     | W     | W     | W     | W     |

RCDR5 is a 12-bit write-only register that sets the timing of falling edge of the 0 pulse (short) of REC-CTL in record or rewrite mode. In detection mode, it is used to detect the long/short pulse. Only a word access is valid. If a byte access is attempted, correct operation is not guaranteed. If a read is attempted, an undetermined value is read out. Bits 15 to 12 are reserved, and no write in them is valid.

It is initialized to H'F000 by a reset, stand-by or module stop.

In record mode, set a value with the 62.5 percent duty cycle obtained from the set time  $T_5$  corresponding to the frequency  $\phi$ s according to the following equation. See figure 26.60, REC-CTL Signal Generation Timing.

$$RCDR5 = T_5 \times \phi / 64$$

$\phi$  is the servo clock frequency ( $= f_{osc}/2$ ) in Hz, and  $T_5$  is the set timing (s).

At bit pattern detection, set the 1 pulse long/short threshold value at REV. See figure 26.56, Duty Discriminator.

$$RCDR5 = H'FFF - (T_5' \times \phi / 80)$$

$\phi$  is the servo clock frequency ( $= f_{osc}/2$ ) in Hz, and  $T_5'$  is the 1 pulse long/short threshold value at REV (s).

## Duty I/O Register (DI/O)

|                 |       |       |       |   |      |     |        |      |
|-----------------|-------|-------|-------|---|------|-----|--------|------|
| Bit :           | 7     | 6     | 5     | 4 | 3    | 2   | 1      | 0    |
|                 | VCTR2 | VCTR1 | VCTR0 | — | BPON | BPS | BPF    | DI/O |
| Initial value : | 1     | 1     | 1     | 1 | 0    | 0   | 0      | 1    |
| R/W :           | W     | W     | W     | — | W    | W   | R/(W)* | R/W  |

Note: \* Only 0 can be written

DI/O is an 8-bit register that confirms and determines the operating status of the CTL circuit. It is initialized to H'F1 by a reset, and in standby mode, module stop mode, and CTL stop mode.

**Bits 7 to 5—VISS Interrupt Setting Bit (VCTR2 to VCTR0):** Combination of VCTR2, VCTR1 and VCTR0 sets number of 1 pulse detection in VISS detection mode. Detecting the set number of pulse detection is considered as VISS detection, and an interrupt request is generated.

Note: When changing the detection pulse number during VISS detection, initialize VISS first, then resume the VISS detection setting.

| Bit 7 | Bit 6 | Bit 5 |                                 |
|-------|-------|-------|---------------------------------|
| VCTR2 | VCTR1 | VCTR0 | Number of 1-Pulse for Detection |
| 0     | 0     | 0     | 2                               |
|       |       | 1     | 4 (SYNC mark)                   |
|       | 1     | 0     | 6                               |
|       |       | 1     | 8 (mark A, short)               |
| 1     | 0     | 0     | 12 (mark A, long)               |
|       |       | 1     | 16                              |
|       | 1     | 0     | 24 (mark B)                     |
|       |       | 1     | 32                              |

**Bit 4—Reserved:** Cannot be modified and is always read as 1.

**Bit 3—Bit Pattern Detection ON/OFF Bit (BPON):** Determines ON or OFF of bit pattern detection.

Note: When writing 1 to BPON bit, be sure to set appropriate data to RCDR 2 to 5 beforehand.

#### Bit 3

| BPON | Description                               |
|------|-------------------------------------------|
| 0    | Bit pattern detection off (Initial value) |
| 1    | Bit pattern detection on                  |

**Bit 2—Bit Pattern Detection Start Bit (BPS):** Starts 8-bit bit pattern detection. When 1 is written to this bit, it returns to 0 after one cycle. Writing 0 to this bit does not affect operation.

#### Bit 2

| BPS | Description                        |
|-----|------------------------------------|
| 0   | Normal status (Initial value)      |
| 1   | Starts 8-bit bit pattern detection |

**Bit 1—Bit Pattern Detection Flag (BPF):** Sets flag every time 8-bit PB-CTL is detected in PB or ASM mode. To clear flag, write 0 after reading 1.

#### Bit 1

| BPF | Description                                         |
|-----|-----------------------------------------------------|
| 0   | Bit pattern (8-bit) is not detected (Initial value) |
| 1   | Bit pattern (8-bit) is detected                     |

**Bit 0—Duty I/O Register (DI/O):** This flag has different functions for record and playback. In VISS detect mode, VASS detect mode, and ASM mark detect mode, this flag indicates the detection result.

In VISS record or rewrite mode, this flag controls the write control circuit so as to write an index code, operating according to a control signal from the VISS control circuit.

In VASS record or rewrite mode and ASM mark record mode, this flag is used for write control, one CTL pulse at a time.

This bit can always be written to, but this does not affect the write control circuit in modes other than VISS record, rewrite, and ASM record.

- VISS Detect Mode and VASS Detect Mode: The duty I/O flag indicates the result of duty discrimination. The duty I/O flag is 1 when the duty cycle of the PB-CTL signal is above 44% (a 0 pulse in the CTL signal). The duty I/O flag is 0 when the duty cycle of the PB-CTL signal is below 43% (a 1 pulse in the CTL signal).
- ASM Mark Detect Mode: The duty I/O flag indicates the result of duty discrimination. The duty I/O flag is 0 when the duty cycle of the PB-CTL signal is above 66% (when an ASM mark is detected).  
The duty I/O flag is 1 when the duty cycle of the PB-CTL signal is below 66% (when an ASM mark is not detected).
- VISS Record Mode and VISS Rewrite Mode: The duty I/O flag operates according to a control signal from the VISS control circuit, and controls the write control circuit so as to write an index code. The write timing is set in the REC-CTL duty data registers (RCDR1 to RCDR5). For VISS recording, registers RCDR1 to RCDR5 are set with reference to REF30X. For VISS rewrite, RCDR2 to RCDR5 are set with reference to the low-to-high transition of the previously recorded CTL signal, and the write is carried out through the trapezoid waveform generator.  
Set the duty timing for a 1 pulse (short) in RCDR2, for a 1 pulse (long) in RCDR3, for a 0 pulse (short) in RCDR4, and for a 0 pulse (long) in RCDR5.  
While an index code is being written, the value of the bit being written can be read by reading the duty I/O flag. If the CTL signal currently being written is a 0 pulse, the duty I/O flag will read 1. If the CTL signal currently being written is a 1 pulse, the duty I/O flag will read 0.
- VASS Record Mode and VASS Rewrite Mode: The duty I/O flag is used for write control, one CTL pulse at a time. The write timing is set in the REC-CTL duty data registers (RCDR1 to RCDR5). For VASS recording, registers RCDR1 to RCDR5 are set with reference to REF30X. For VASS rewrite, RCDR2 to RCDR5 are set with reference to the low-to-high transition of the previously recorded CTL signal, and the write is carried out through the trapezoid waveform generator.  
Set the duty timing for a 1 pulse (short) in RCDR2, for a 1 pulse (long) in RCDR3, for a 0 pulse (short) in RCDR4, and for 0 pulse (long) in RCDR5.  
If 0 is written in the duty I/O flag, a CTL pulse will be written with a duty cycle set in RCDR2 and RCDR3, referenced to the immediately following REF30X. If 1 is written in the duty I/O flag, a CTL pulse will be written with a duty cycle set in RCDR4 and RCDR5, referenced to the immediately following REF30X.
- ASM Record Mode: The duty I/O flag is used for write control, one CTL pulse at a time. The write timing is set in the REC-CTL duty data registers (RCDR1 and RCDR3). If 0 is written in the duty I/O flag, a CTL pulse will be written with a duty cycle of 67% to 70% as set in RCDR3, referenced to the immediately following REF30X.

## Bit Pattern Register (BTPR)

|                 |      |      |      |      |      |      |      |      |
|-----------------|------|------|------|------|------|------|------|------|
| Bit :           | 7    | 6    | 5    | 4    | 3    | 2    | 1    | 0    |
|                 | LSP7 | LSP6 | LSP5 | LSP4 | LSP3 | LSP2 | LSP1 | LSP0 |
| Initial value : | 1    | 1    | 1    | 1    | 1    | 1    | 1    | 1    |
| R/W :           | R/W* | R/W* | R/W* | R/W* | R/W* | R/W* | R/W* | R/W* |

Note: \* Write is prohibited when bit pattern detection is selected.

BTPR is an 8-bit shift register which detects and records the bit pattern of the CTL pulses. If a CTL pulse is detected in PB or ASM mode, the register is shifted leftward at the rising edge of PB-CTL, and reflects the determined result of long/short on the bit 0 (long pulse = 1, short pulse = 0).

If BPON bit is set to 1 in PB mode, the register starts detection of bit pattern immediately after the CTL pulse. To exit the bit pattern detection, set the BPON bit at 0.

If 1 was written in the BPS bit when the bit pattern is being detected, the BPF bit is set at 1 when an 8-bit bit pattern was detected. If continuous detection of 8-bits is required, write 0 in the BPF bit, and then write 1 in BPS bit.

At the time of VISS detection, the bit pattern detection is disabled. Set the BPON bit to 0 at the time of VISS detection.

In REC mode, the register record the long/shorts in the bit pattern set in BTPR. The pulse in record mode is determined always by bit 7 (LSP7) of BTPR. BTPR records one pulse, shifts leftward, and stores the data of bit 7 to bit 0.

BTPR is initialized to H'FF by a reset, in stand-by, module stop, or CTL stop mode.



## 26.13.6 Operation

**CTL Circuit Operation:** As shown in figure 26.49, the CTL discrimination/record circuit is composed of a 16-bit up/down counter and 12-bit registers (×5).

In playback (PB) mode, the 16-bit up/down counter counts on a  $\phi s/4$  clock when the PB-CTL pulse is high, and on a  $\phi s/5$  clock when low. In record or slow mode, this counter increments the count on a  $\phi s/4$  clock. In ASM mode, this counter increments the count on a  $\phi s/8$  clock when the pulse is high, and on a  $\phi s/4$  clock when low.

This counter always counts up in record and slow modes.

In playback or slow mode, it is cleared on the rise of PB-CTL signal. In record mode, it is cleared on the rise of REF30X signal.


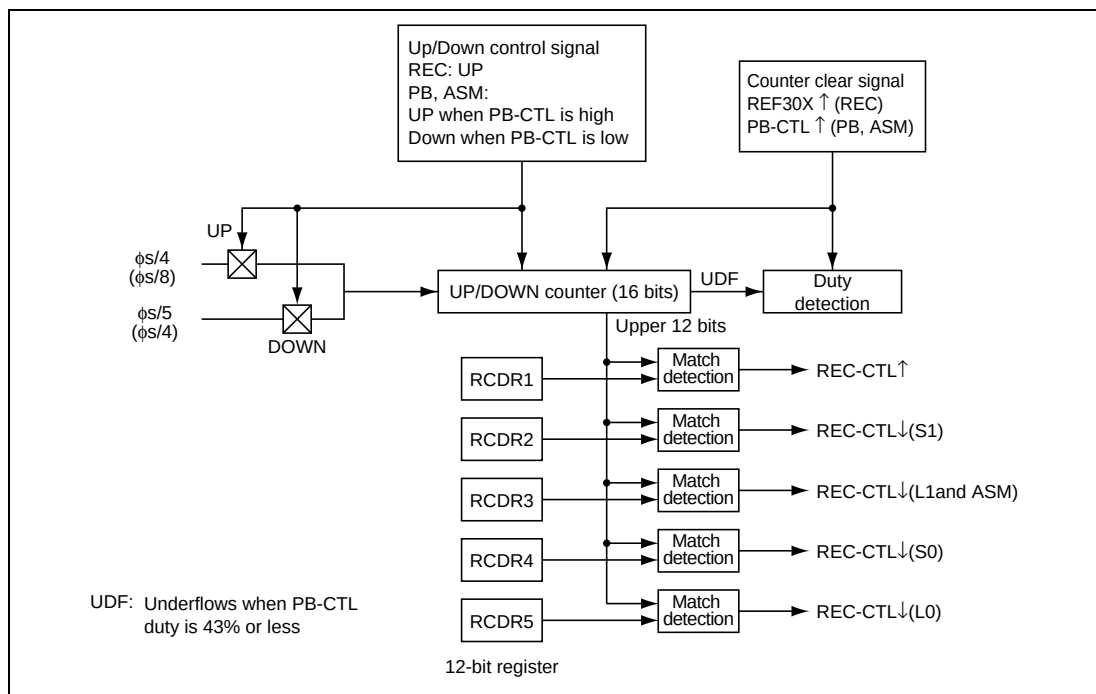


**Figure 26.49 CTL Discrimination/Record Circuit**

**CTL Mode Register (CTLM) Switchover Timing:** CTLM is enabled immediately after data is written to the register. Care must be taken with changes in the operating state.

Capstan phase control is performed by the VD sync REF30X (X-value + tracking value) and PB-CTL in ASM mode, and by the REF30P or CREF and CFG division signal (DVCFG2) in REC mode. If CAPREF30 signal to be used for capstan phase control is always generated by XDR, the value of XDR must be overwritten when switching between PB and REC modes. Figures 26.50 and 26.51 show examples of switch timing of CTLM and XDR.


The X-value is updated by REF30P. Modification of XDR must be performed before REF30P in the cycle in which the X-value is changed.

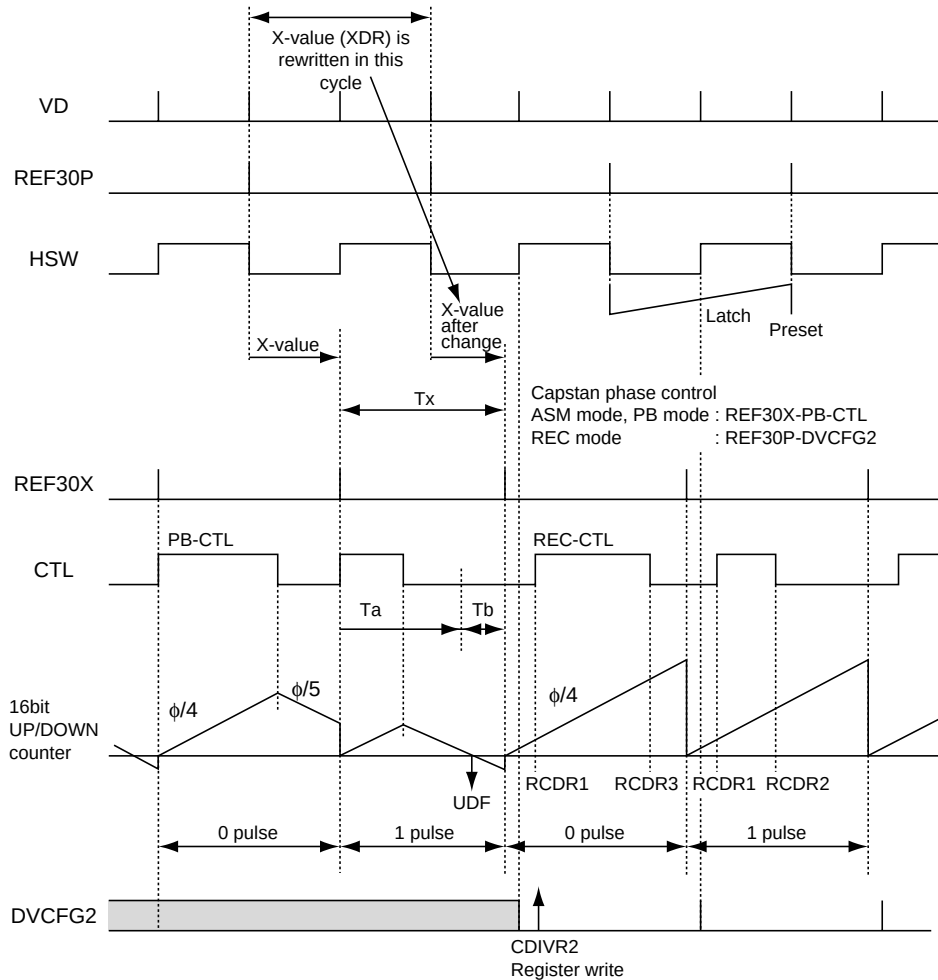

- Notes:
1.  $T_a$  is the interval calculated from RCDR3.
  2.  $T_b$  is the interval in which switchover is performed from ASM mode to REC mode.
  3.  $T_x$  is the cycle in which the REF30X period is shortened due to the change of XDR.

**Figure 26.50 Example of CTLM Switchover Timing  
(When Phase Control Is Performed by REF30P and DVCFG2 in REC Mode)**

The X-value is updated by REF30P. Modification of XDR must be performed before REF30P in the cycle in which the X-value is changed.

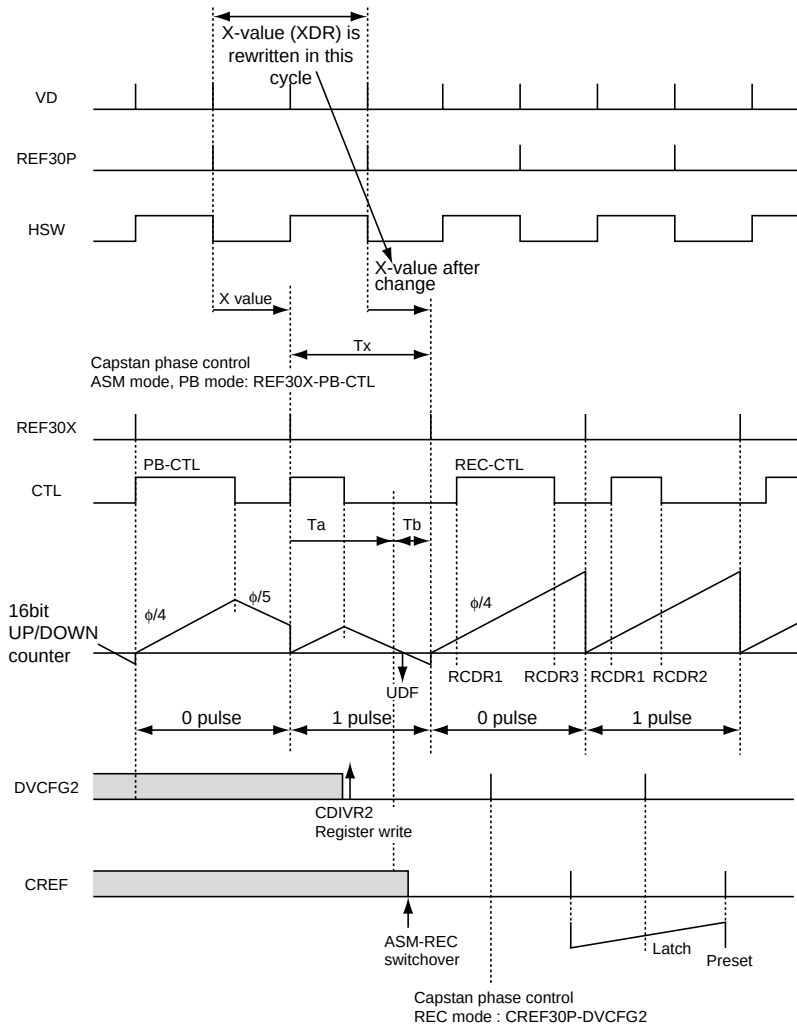

- Notes:
1.  $T_a$  is the interval calculated from RCDR3.
  2.  $T_b$  is the interval in which switchover is performed from ASM mode to REC mode.
  3.  $T_x$  is the cycle in which the REF30X period is shortened due to the change of XDR.
  4. With CREF and DVCFG2 phase alignment, the frequency need not be 25 Hz or 30 Hz.

**Figure 26.51 Example of CTLM Switchover Timing**  
(When Phase Control Is Performed by CREF and DVCFG2 in Rec Mode)

## 26.13.7 CTL Input Section

The CTL input section consists of an input amplifier of which gain can be controlled by the register setting and a Schmitt amplifier. Figure 26.52 shows a block diagram of the CTL input section.

Trivial CTL pulse signal is received from the CTL head, amplified by the input amplifier, reshaped into a square wave by the Schmitt amplifier, and sent to the servo circuits, and the Timer L as the PB-CTL signal. Control the CTL input amplifier gain by bits 3 to 0 in CTL gain control register (CTLGR) of the servo port.

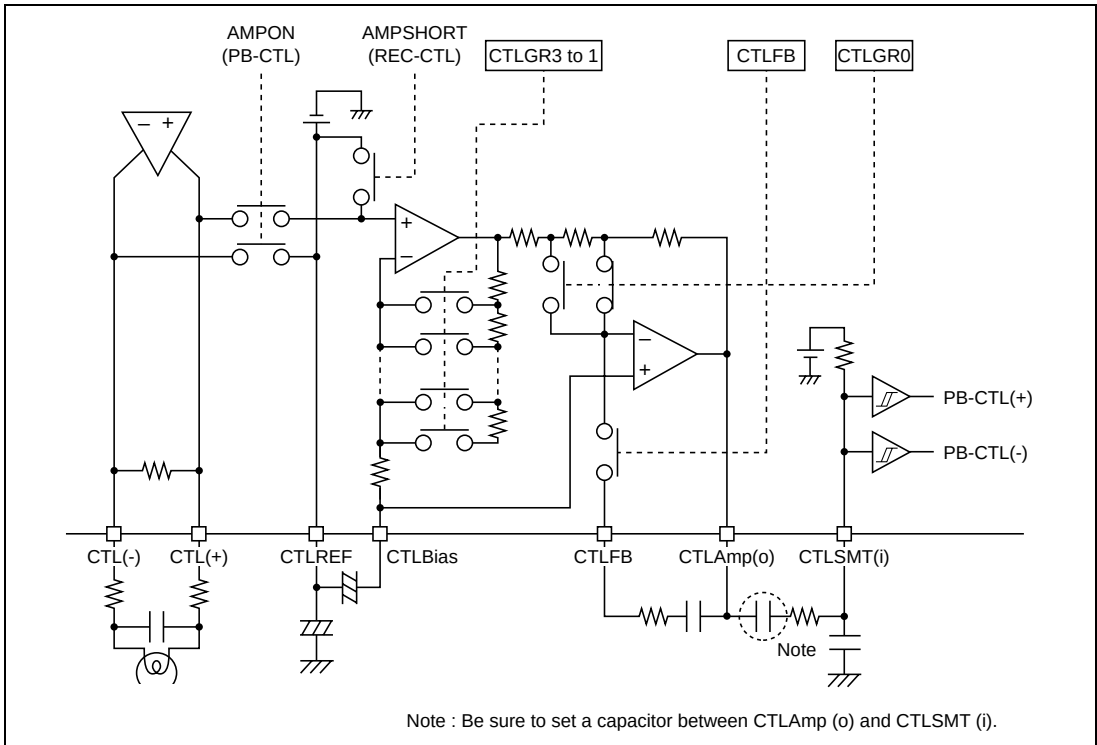


**Figure 26.52 Block Diagram of CTL Input Amplifier**

**CTL Detector:** If the CTL detector fails to detect a CTL pulse, it sets the CTL control register (CTCR) bit 1 to 1 indicating that the pulse has not been detected. If a CTL pulse is detected after that, the bit is automatically cleared to 0. Duration used for determining detection or non-detection of the pulse depends on magnitude of phase shift of the last detected pulse from the reference phase (phase difference between REF30 and CTL signal). Typically, detection or non-detection is determined within 3 to 4 cycles of the reference period.

If settings of the CTL gain control register are maintained in a table format, you can refer to it when the CTL detector failed to detect CTL pulses. From the table, you can control amplifier gain of the CTL according to state of UNCTL bit, thereby selecting an optimum CTL amplifier gain depending on state of the pulse recorded.

Figure 26.53 illustrates concept of gain control for detecting the CTL input pulse.

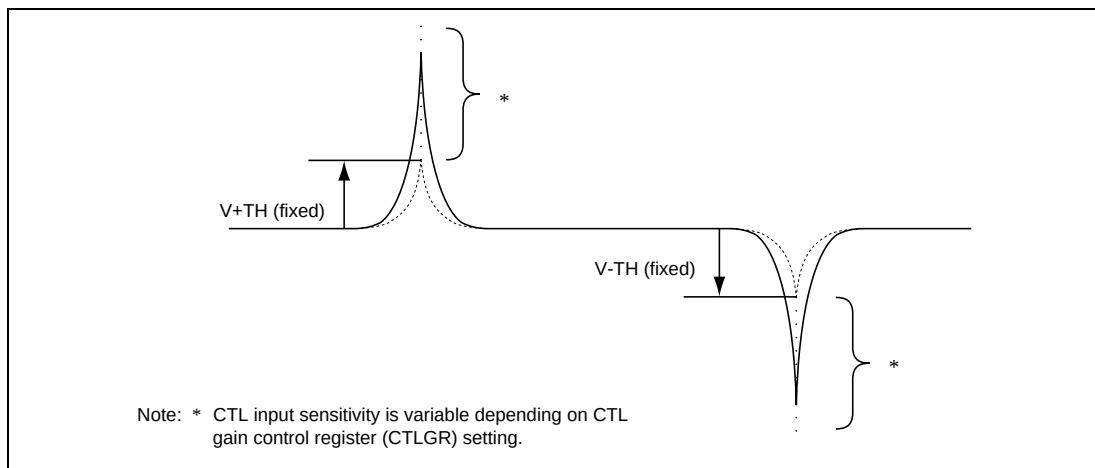


**Figure 26.53 CTL Input Pulse Gain Control**

**PB-CTL Waveform Shaper in Slow Mode Operation:** If bit 0 in CTL control register (CTCR) is set to slow mode, slow reset function is activated. In slow mode, if falling edge is not detected within the specified time from rising edge detection, PB-CTL is forcibly shut down (slow reset).

The time  $T_{FS}$  (s) until the signal falls is the following interval after the rising edge of the internal CTL signal is detected:

$$T_{FS} = 16384 \times 4/\phi \text{ s} \quad (\phi s = f_{OSC}/2)$$

When  $f_{OSC} = 10 \text{ MHz}$ ,  $T_{FS} = 13.1 \text{ ms}$ .

Figure 26.54 shows the PB-CTL waveform in slow mode.

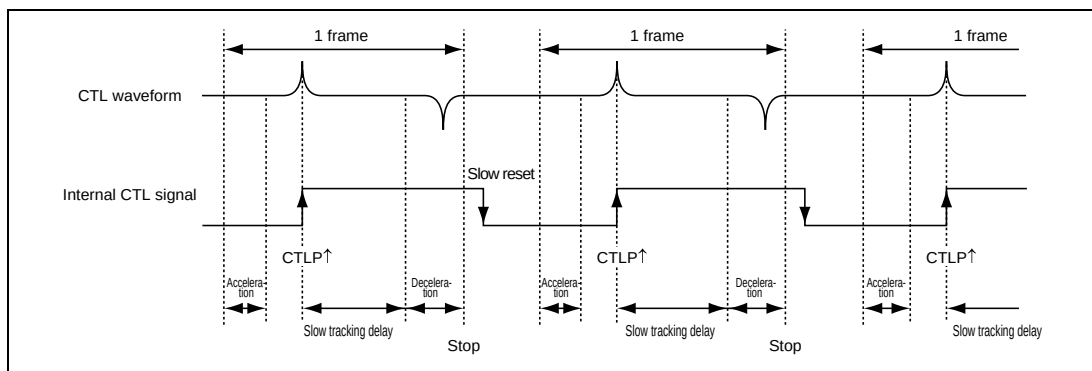


**Figure 26.54 PB-CTL Waveform in Slow Mode Operation**

### 26.13.8 Duty Discriminator

The duty discriminator circuit measures the period of the control signal recorded on the tape (PB-CTL signal) and discriminates its duty cycle. In VISS or VASS detection, the duty I/O flag is set or cleared according to the result of duty discrimination. The duty I/O flag is set to 1 when the duty cycle of the PB-CTL signal is above 44%, and is cleared to 0 when the duty cycle is below 43%.

In ASM detection, an ASM mark is recognized (and the duty I/O flag is cleared to 0) when the duty cycle is above 66%. When the duty cycle is below 65%, no ASM mark is recognized and the duty I/O flag is set to 1.

The detection direction can be switched between forward and reverse by bit 5 (FW/RV) in the CTL mode register.

Long or short pulse can be detected by comparing REC-CTL duty data register (RCDR2 to RCDR5) and UP/DOWN counter. Long or short pulse is discriminated at PB-CTL signal falling. Discrimination result is stored in bit 0 of bit pattern register (BTPR). At the same time, BTPR is shifted to the left. LSP0 indicates 0 when short pulse is detected, and 1 when long pulse is detected.

Set the threshold value of long/short pulse in RCDR2 to RCDR5. See the description on the detection of the long/short pulse.

Figure 26.55 shows the duty cycle of the PB-CTL signal.

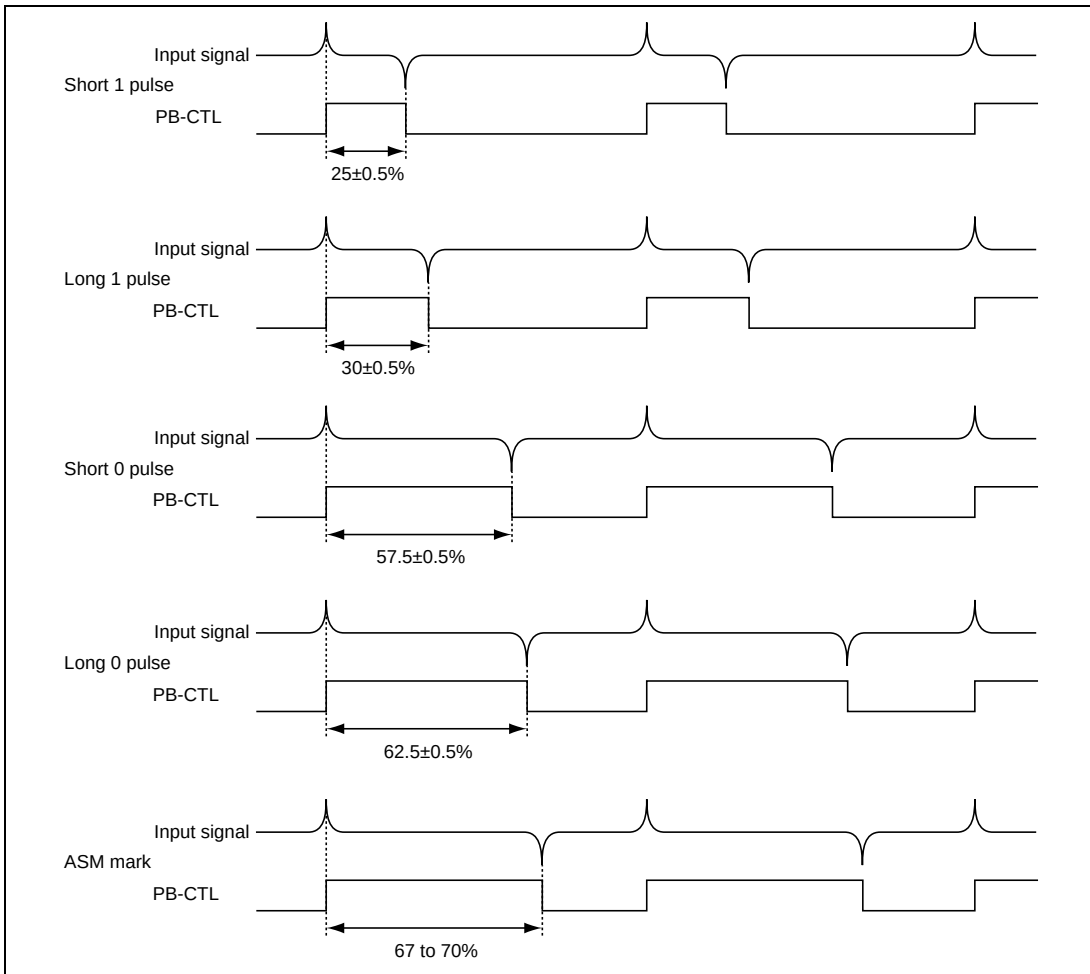


**Figure 26.55 PB-CTL Signal Duty Cycle**



Figure 26.56 shows the duty discrimination circuit. A 44% duty cycle is discriminated by counting with the 16-bit up/down counter, using a  $\phi s/4$  clock for the up-count and a  $\phi s/5$  clock for the down-count. An up-count is performed when the PB-CTL signal is high, and a down-count when low. Long or short pulse is discriminated by comparing with RCDR2 to RCDR5.



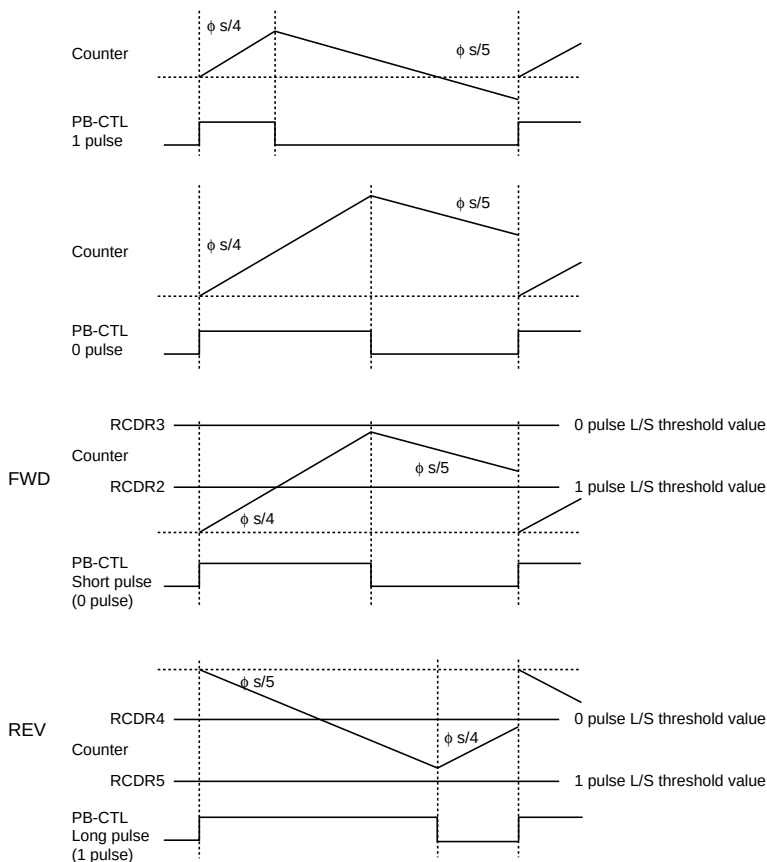


**Figure 26.56 Duty Discriminator**


**VISS (Index) Detect Mode:** VISS detection is carried out by the VISS control circuit, which counts 1 pulses in the PB-CTL signal. If the pulse count detects any value set in the VISS interrupt setting bits (bits 5, 6, or 7 in the duty I/O register), an interrupt request is generated and the duty I/O flag is cleared to 0.

At VISS record or rewrite, INDEX code is automatically written. INDEX code is composed of 0 continuous 62-bit data with 0 pulse data at both edge.

Examples of bit strings and the duty I/O flag at VISS detection/record is illustrated in figure 26.57.

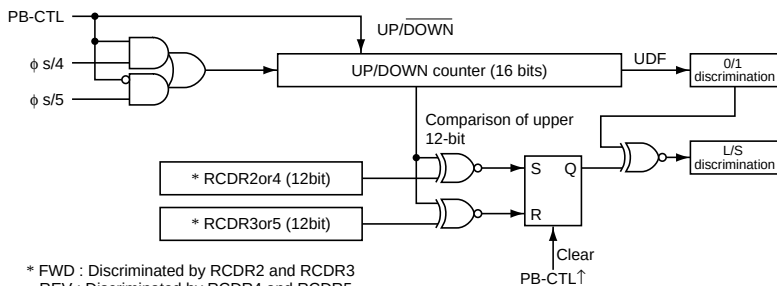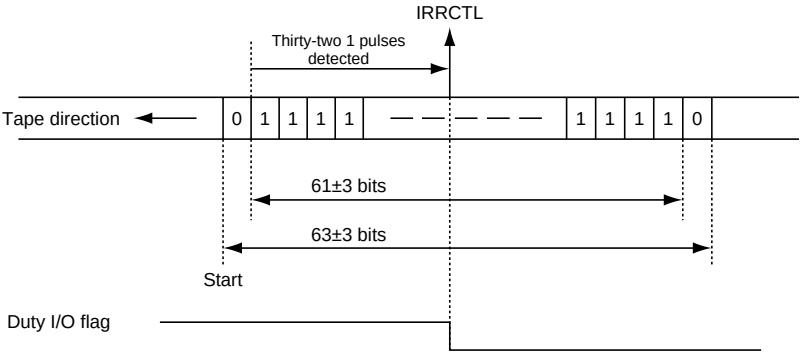

(a) VISS detection (INDEX: Thirty-two 1 pulse setting)

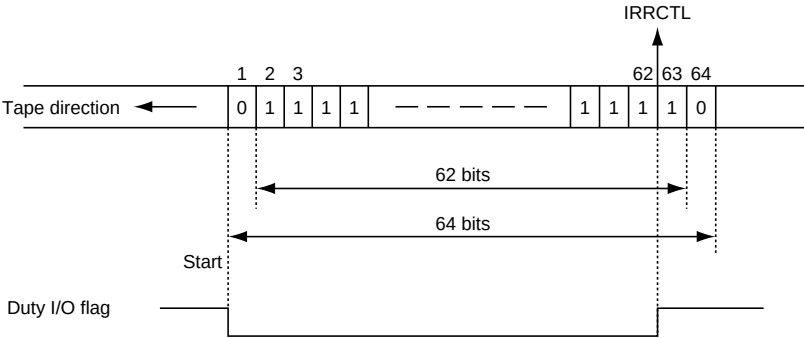

(b) VISS record

**Figure 26.57 Examples of VISS Bit Strings and Duty I/O Flag**

**Duty Detection Mode (VASS):** VASS detection is carried out by the duty discriminator. Software can detect index sequences by reading the duty I/O flag at each CTL pulse. At each CTL pulse, the duty discriminator sends the result of duty discrimination to the duty I/O flag, and simultaneously generates an interrupt request. The duty I/O flag is cleared to 0 if the CTL pulse is a 1 (duty cycle below 43%), and is set to 1 if the CTL pulse is a 0 (duty cycle above 44%).

The duty I/O flag is modified at each CTL pulse. It should be read by the interrupt-handling routine within the period of the PB-CTL signal. VASS detection format is illustrated in figure 26.58.

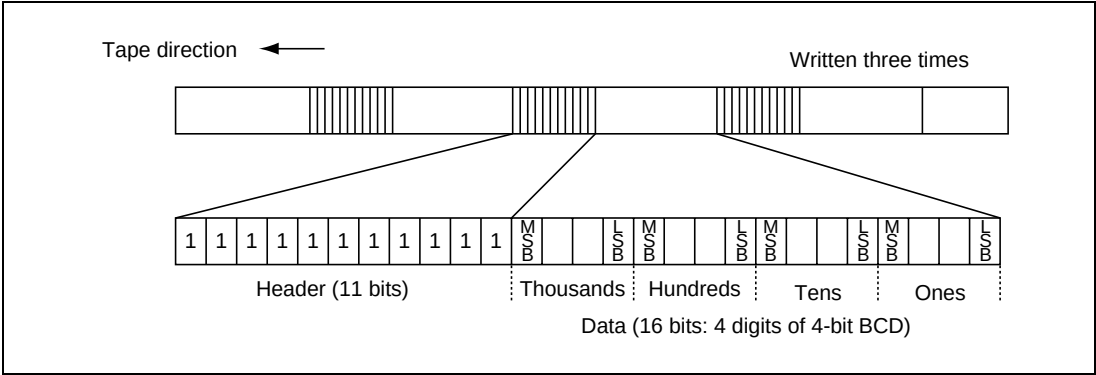


**Figure 26.58 VASS (Index) Format**

**Assemble (ASM) Mark Detect Mode:** ASM mark detection is carried out by the duty discriminator. If the duty discriminator detects that the duty cycle of the PB-CTL signal is 66% or higher, it generates an interrupt request, and simultaneously clears the duty I/O flag to 0. The duty I/O flag is updated at every CTL pulse. It should be read by the interrupt-handling routine within the period of the PB-CTL signal.

**Detection of the Long/Short Pulse:** The long/short pulse is detected in PB mode by the L/S determination based on the comparison of the REC-CTL duty register (RCDR2 to RCDR5) with the up/down counter and the results of the duty I/O flag. The results of the determination is stored in bit 0 (LSP0) of the bit pattern register (BTPR) at the rising edge of PB-CTL, shifting at the same time BTPR leftward.

RCDR2-5 set the L/S thresholds for each of FWD/REV. Set to RCDR2 a threshold of 1 pulse L/S for FWD, to RCDR3 a threshold of 0 pulse L/S for FWD, to RCDR4 a threshold of 0 pulse L/S for REV, and to RCDR5 a threshold of 1 pulse L/S for REV. Figure 26.59 shows the detection of long/short pulse.

Also, the bit pattern of 8-bit can be detected by BTPR. Check that an 8-bit detection has been done by bit 1 (BPF bit) of the duty I/O register, and then read BTPR.

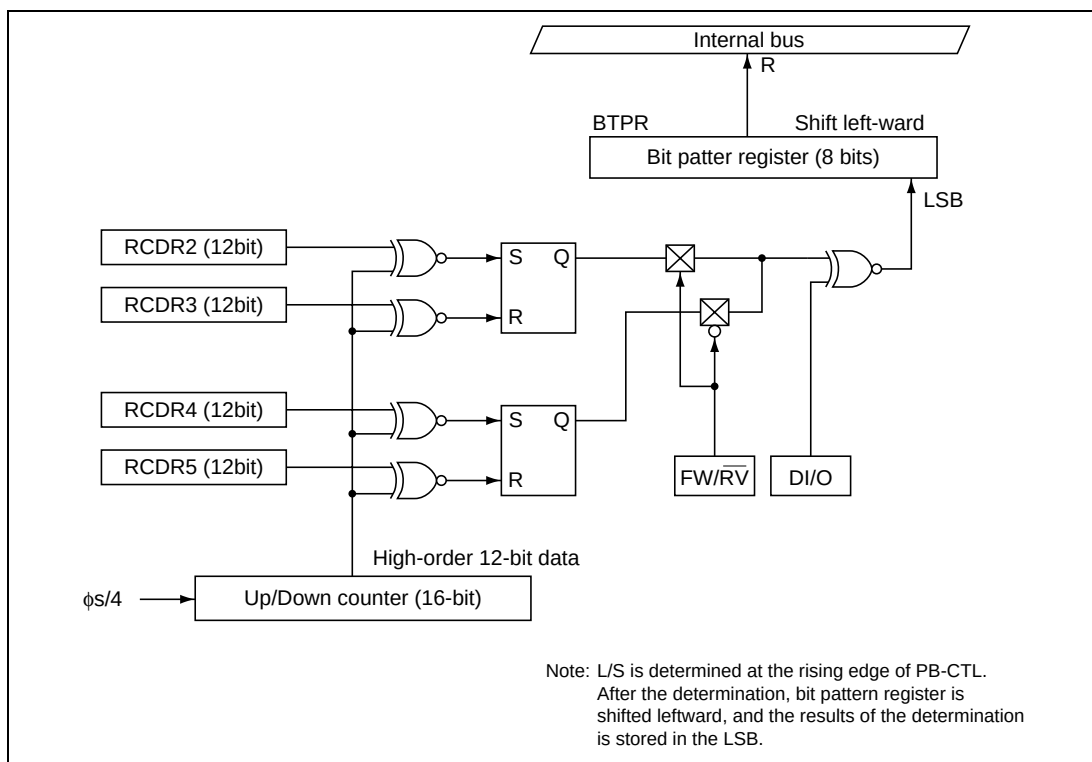


**Figure 26.59 Detection of Long/Short Pulse**

26.13.9 CTL Output Section

An on-chip control head amplifier is provided for writing the REC-CTL signal generated by the write control circuit onto the tape.

The write control circuit controls the duty cycle of the REC-CTL signal in the writing of VISS and VASS sequences and ASM marks and the rewriting of VISS and VASS sequences. The duty cycle of the REC-CTL signal is set in REC-CTL duty data registers 1 to 5 (RCDR1 to RCDR5). Times calculated in terms of  $\phi_s (= f_{osc}/2)$  should be converted to appropriate data to be set in these registers. In VISS or VASS mode, set RCDR2 for a duty cycle of  $25\% \pm 0.5\%$ , RCDR3 for a duty cycle of  $30\% \pm 0.5\%$ , RCDR4 for a duty cycle of  $57.5 \pm 0.5\%$ , and RCDR5 for a duty cycle of  $62.5 \pm 0.5\%$ . When 1 is written in the duty I/O flag, the REC-CTL signal will be written on the tape with a  $25\% \pm 0.5\%$  duty cycle when 0 is written in bit 7 (LSP7) in the bit pattern register (BTPR) and with a  $30 \pm 0.5\%$  duty cycle when 1 is written. Table 26.21 shows the relationship between the REC-CTL duty register and CTL outputs.

In ASM mark write mode, set RCDR3 for a duty cycle of 67% to 70%. An ASM mark will be written when 0 is written in the duty I/O flag.

An interrupt request is generated at the rise of the reference signal after one CTL pulse has been written. The reference signal is derived from the output signal (REF30X) of the X-value adjustment circuit, and has a period of one frame.

Figure 26.60 shows the timings that generate the REC-CTL signal.

Table 26.21 REC-CTL Duty Register and CTL Outputs

| MODE             | D/I/O | LSP7 | Pulse | RCDR  | Duty             |
|------------------|-------|------|-------|-------|------------------|
| VISS, VASS modes | 0     | 0    | S1    | RCDR2 | $25 \pm 0.5\%$   |
|                  |       | 1    | L1    | RCDR3 | $30 \pm 0.5\%$   |
|                  | 1     | 0    | S0    | RCDR4 | $57.5 \pm 0.5\%$ |
|                  |       | 1    | L0    | RCDR5 | $62.5 \pm 0.5\%$ |
| ASM mode         | 0     | *    | —     | RCDR3 | 67 to 70%        |

Note: \* Don't care.

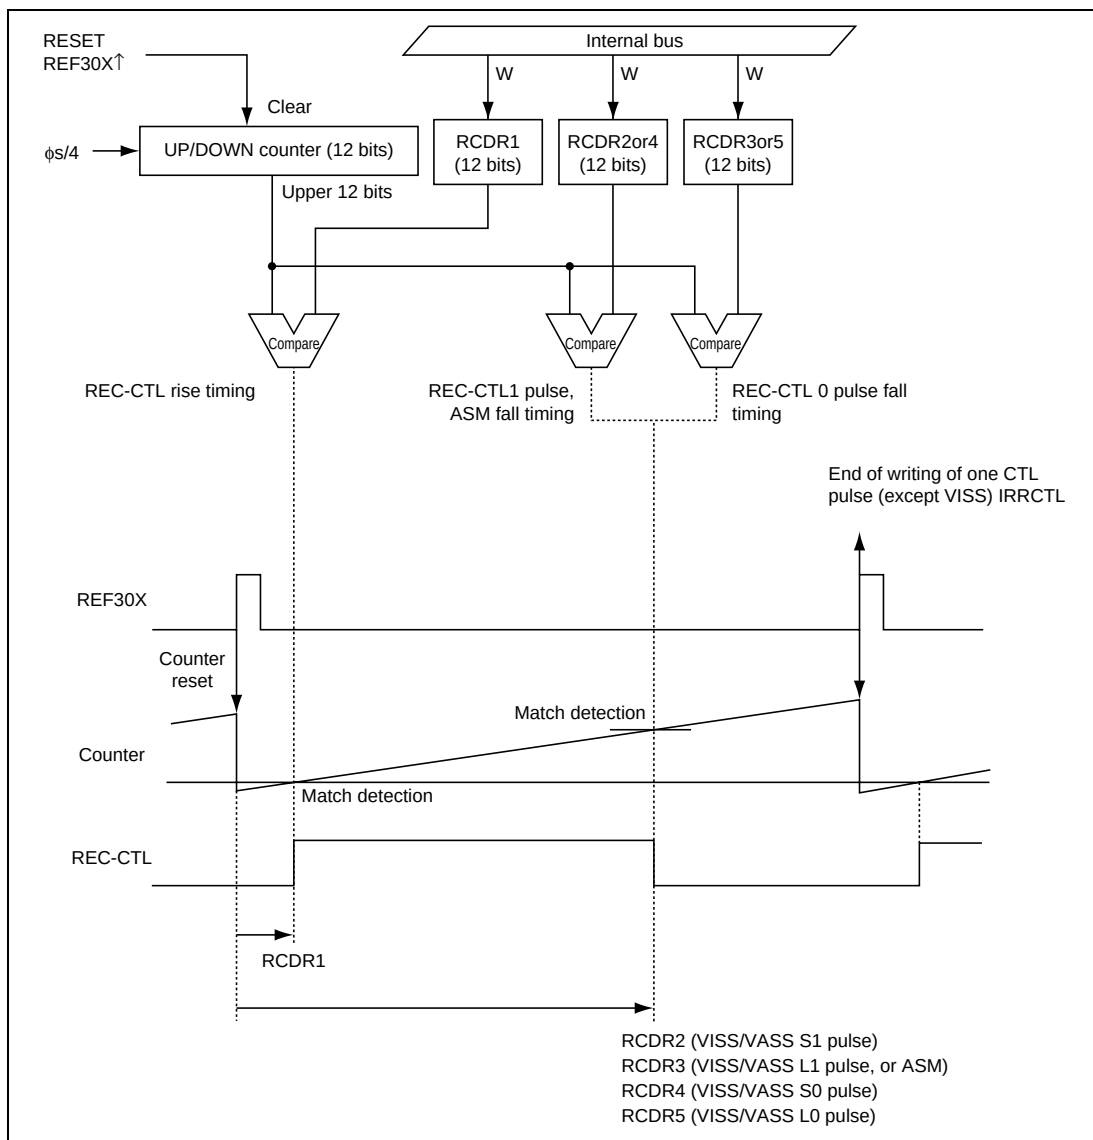


**Figure 26.60 REC-CTL Signal Generation Timing**

The 16-bit counter in the REC-CTL circuit continues counting on a clock derived by dividing the system clock  $\phi_s$  ( $= f_{OSC}/2$ ) by 4. The counter is cleared on the rise of REF30X in record mode, and on the rise of PB-CTL in rewrite mode. REC-CTL match detection is carried out by comparing the counter value with each RCDR value.

RCDR1 to RCDR5 can be written to by software at all times. If RCDR is changed before the respective match detection is performed, match detection is performed using the new value. The value changed after match detection becomes valid on the rise of REF30X following the change. Figure 26.61 shows examples of RCDR change timing.

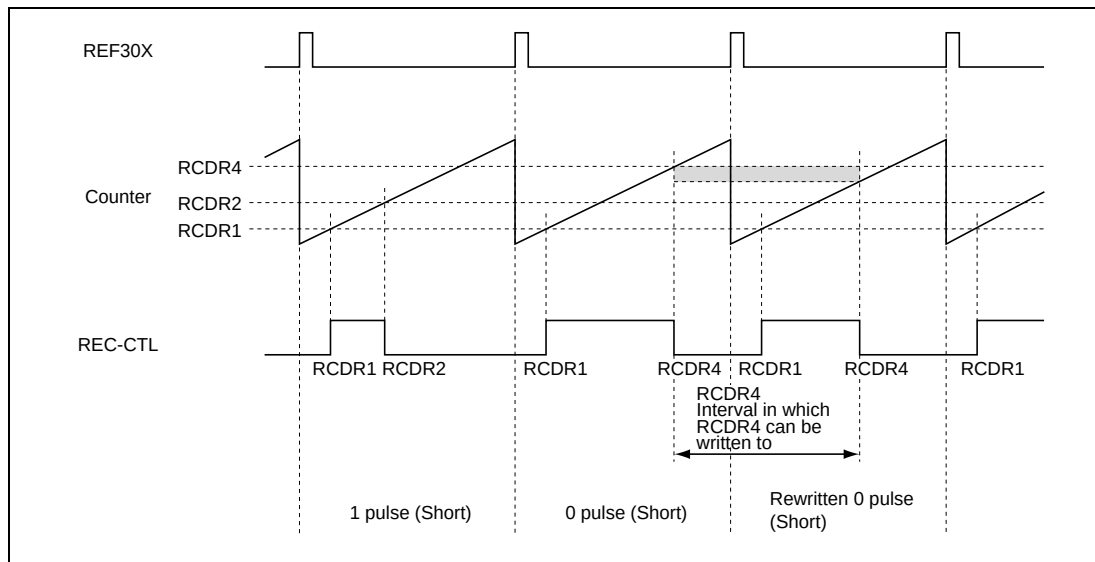


**Figure 26.61 Example of RCDR Change Timing (Example Showing RCDR4)**

### 26.13.10 Trapezoid Waveform Circuit

In rewriting, the trapezoid waveform circuit leaves the rising edge of the already-recorded PB-CTL signal intact, but changes the duty cycle.

In rewriting, the CTL pulse is written with reference to the rise of PB-CTL. The CTL duty cycle for a rewrite is set in the REC-CTL duty data registers (RCDR2 to RCDR5). Time values T2 to T5 are referenced to the rise of PB-CTL.

Figure 26.62 shows the rewrite waveform.

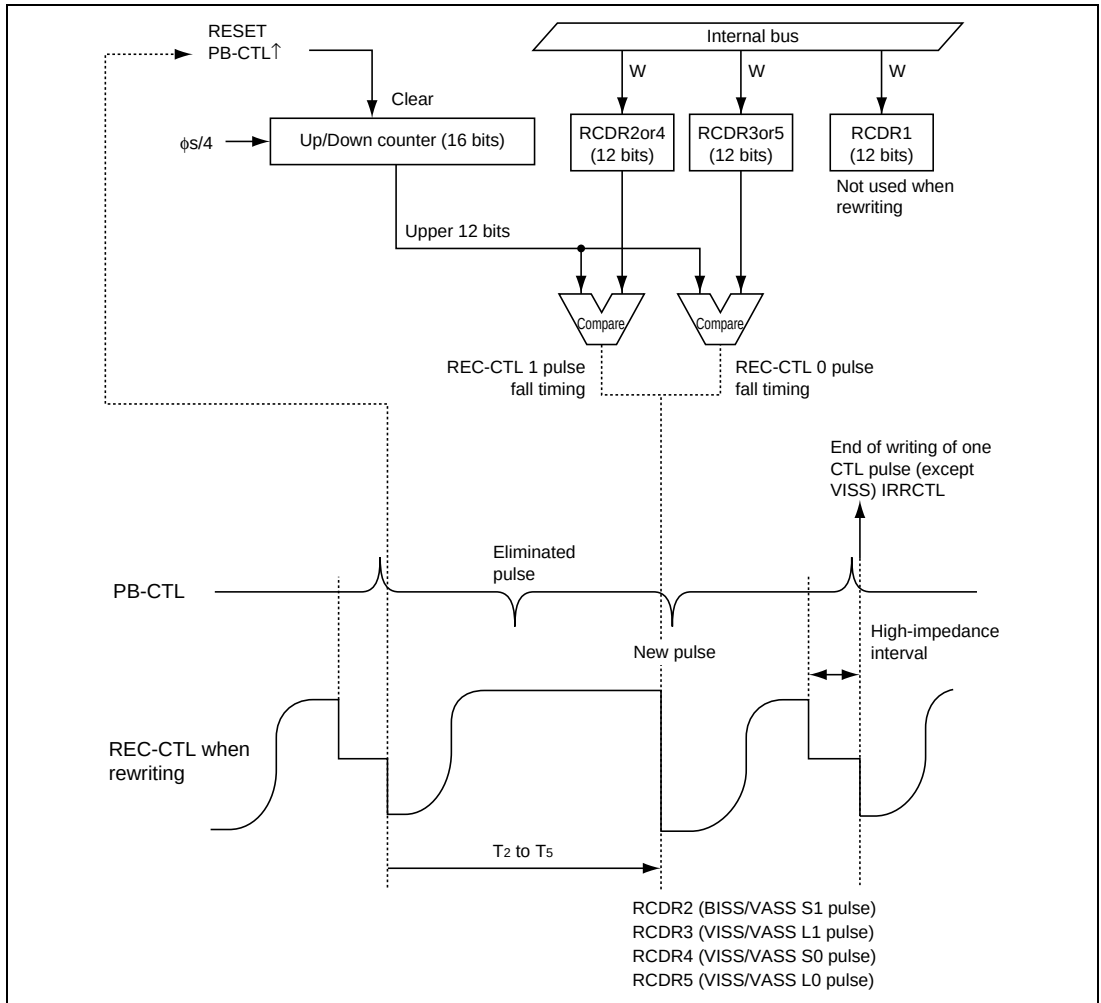


**Figure 26.62 Relationship between REC-CTL and RCDR2 to RCDR5 when Rewriting**



### **26.13.11 Note on CTL Interrupt**

After a reset, the CTL circuit is in the VISS discrimination input mode.

Depending on the CTL pin states, a false PB-CTL input pulse may be recognized and an interrupt request generated. If the interrupt request will be enabled, first clear the CTL interrupt request flag.

# 26.14 Frequency Dividers

## 26.14.1 Overview

On-chip frequency dividers are provided for the pulse signal picked up from the control track during playback (the PB-CTL signal), and the pulse signal received from the capstan motor (CFG signal). The CTL frequency divider generates a CTL divided control signal (DVCTL) from the PB-CTL signal, for use in capstan phase control during high-speed search, for example. The CFG frequency divider generates two divided CFG signals (DVCFG for speed control and DVCFG2 for phase control) from the CFG signal. The DFG noise canceller is a circuit which considers signal less than  $2\phi$  as noise and mask it.

## 26.14.2 CTL Frequency Divider

**Block Diagram:** Figure 26.63 shows a block diagram of the CTL frequency divider.

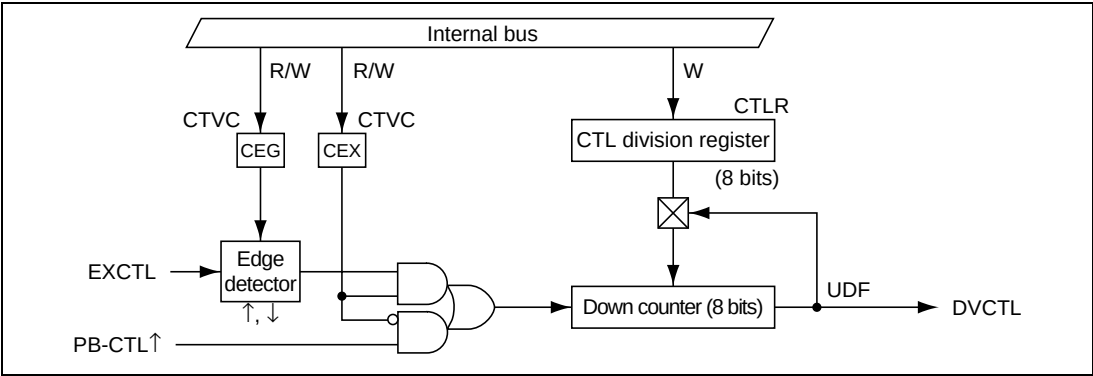


Figure 26.63 CTL Frequency Divider

### Register Description

– Register configuration

Table 26.22 shows the register configuration of the CTL frequency dividers.

Table 26.22 Register Configuration

| Name                            | Abbrev. | R/W | Size | Initial Value | Address |
|---------------------------------|---------|-----|------|---------------|---------|
| DVCTL control register          | CTVC    | R/W | Byte | Undefined     | H'D098  |
| CTL frequency division register | CTLR    | W   | Byte | H'00          | H'D099  |

## DVCTL Control Register (CTVC)

|                 |     |     |   |   |   |     |     |     |
|-----------------|-----|-----|---|---|---|-----|-----|-----|
| Bit :           | 7   | 6   | 5 | 4 | 3 | 2   | 1   | 0   |
|                 | CEX | CEG | — | — | — | CFG | HSW | CTL |
| Initial value : | 0   | 0   | 1 | 1 | 1 | *   | *   | *   |
| R/W :           | W   | W   | — | — | — | R   | R   | R   |

Note: \* Undefined

CTVC consists of the external input signal selection bits and the flags which show the CFG, HSW, and CTL levels.

Note: It has an undetermined value by a reset or in stand-by mode.

**Bit 7—DVCTL Signal Generation Selection Bit (CEX):** Selects which of the PB-CTL signal or the external input signal is used to generate the DVCTL signal.

### Bit 7

| CEX | Description                                               |
|-----|-----------------------------------------------------------|
| 0   | Generates DVCTL signal with PB-CTL signal (Initial value) |
| 1   | Generates DVCTL signal with external input signal         |

**Bit 6—External Sync Signal Edge Selection Bit (CEG):** Selects the edge of the external signal at which the frequency division is made when the external signal was selected to generate DVCTL signal.

### Bit 6

| CEG | Description                 |
|-----|-----------------------------|
| 0   | Rising edge (Initial value) |
| 1   | Falling edge                |

**Bits 5 to 3—Reserved:** Cannot be modified and are always read as 1.

**Bit 2—CFG Flag (CFG):** Shows the CFG level.

### Bit 2

| CFG | Description                         |
|-----|-------------------------------------|
| 0   | CFG is at low level (Initial value) |
| 1   | CFG is at high level                |

**Bit 1—HSW Flag (HSW):** Shows the level of the HSW signal selected by the VFF/NFF bit of the HSW mode register 2 (HSM2).

**Bit 1**

| HSW | Description                         |
|-----|-------------------------------------|
| 0   | HSW is at low level (Initial value) |
| 1   | HSW is at high level                |

**Bit 0—CTL Flag (CTL):** Shows the CTL level.

**Bit 0**

| CTL | Description                                   |
|-----|-----------------------------------------------|
| 0   | REC or PB-CTL is at low level (Initial value) |
| 1   | REC or PB-CTL is at high level                |

**CTL Frequency Division Register (CTLR)**

|                 |      |      |      |      |      |      |      |      |
|-----------------|------|------|------|------|------|------|------|------|
| Bit :           | 7    | 6    | 5    | 4    | 3    | 2    | 1    | 0    |
|                 | CTL7 | CTL6 | CTL5 | CTL4 | CTL3 | CTL2 | CTL1 | CTL0 |
| Initial value : | 0    | 0    | 0    | 0    | 0    | 0    | 0    | 0    |
| R/W :           | W    | W    | W    | W    | W    | W    | W    | W    |

CTLR is an 8-bit write-only register to set the frequency dividing value (N-1 if divided by N) for PB-CTL. If a read is attempted, an undetermined value is read out.

PB-CTL is divided by N at its rising edge. If the register value is 0, no division operation is performed, and the DVCTL signal with the same cycle with PB-CTL is output. It is initialized by a reset or in stand-by mode.

**Operation:** During playback, control pulses recorded on the tape are picked up by the control head and input to the CTL pin. The control pulse signal is amplified by a Schmitt amplifier, reshaped, then input to the CTL frequency divider as the PB-CTL signal.

This circuit is employed when the control pulse (PB-CTL signal) is used for phase control of the capstan motor. The divided signal is sent as the DVCTL signal to the capstan phase system in the servo circuits and timer R.

The CTL frequency divider is an 8-bit reload timer consisting of a reload register and a down-counter. Frequency division is obtained by setting frequency-division data in bits 7 to 0 in the CTL frequency division register (CTLR), which is the reload register. When a frequency division value is written in this reload register, it is also written into the down-counter. The down-counter is decremented on rising edges of the PB-CTL signal.

Figure 26.64 shows examples of the PB-CTL and DVCTL waveforms.

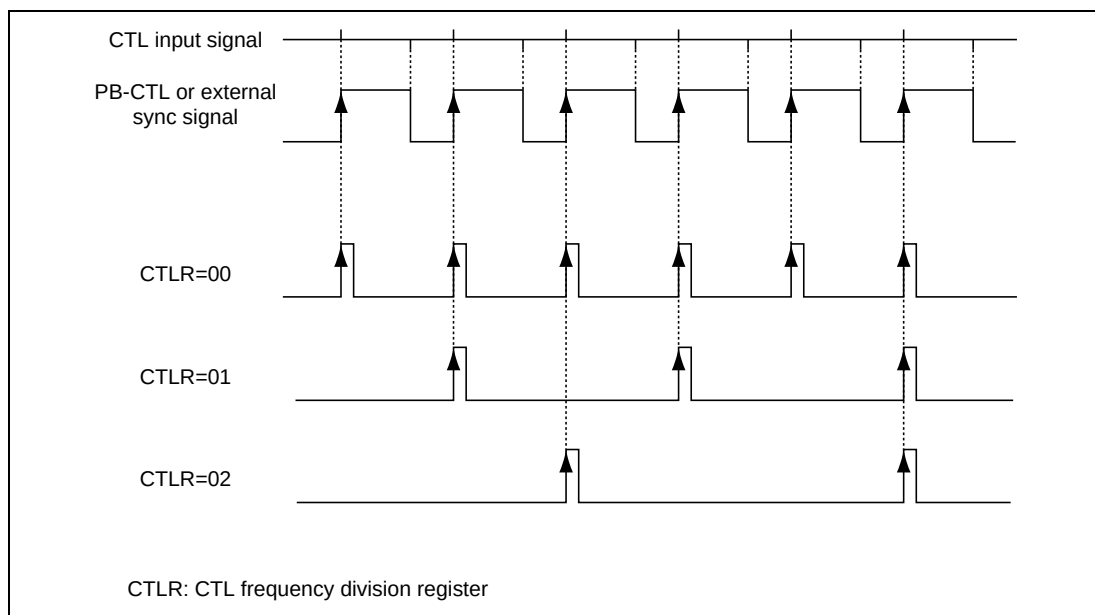


**Figure 26.64 CTL Frequency Division Waveforms**

### 26.14.3 CFG Frequency Divider

**Block Diagram:** Figure 26.65 shows a block diagram of the 7-bit CFG frequency divider and its mask timer.

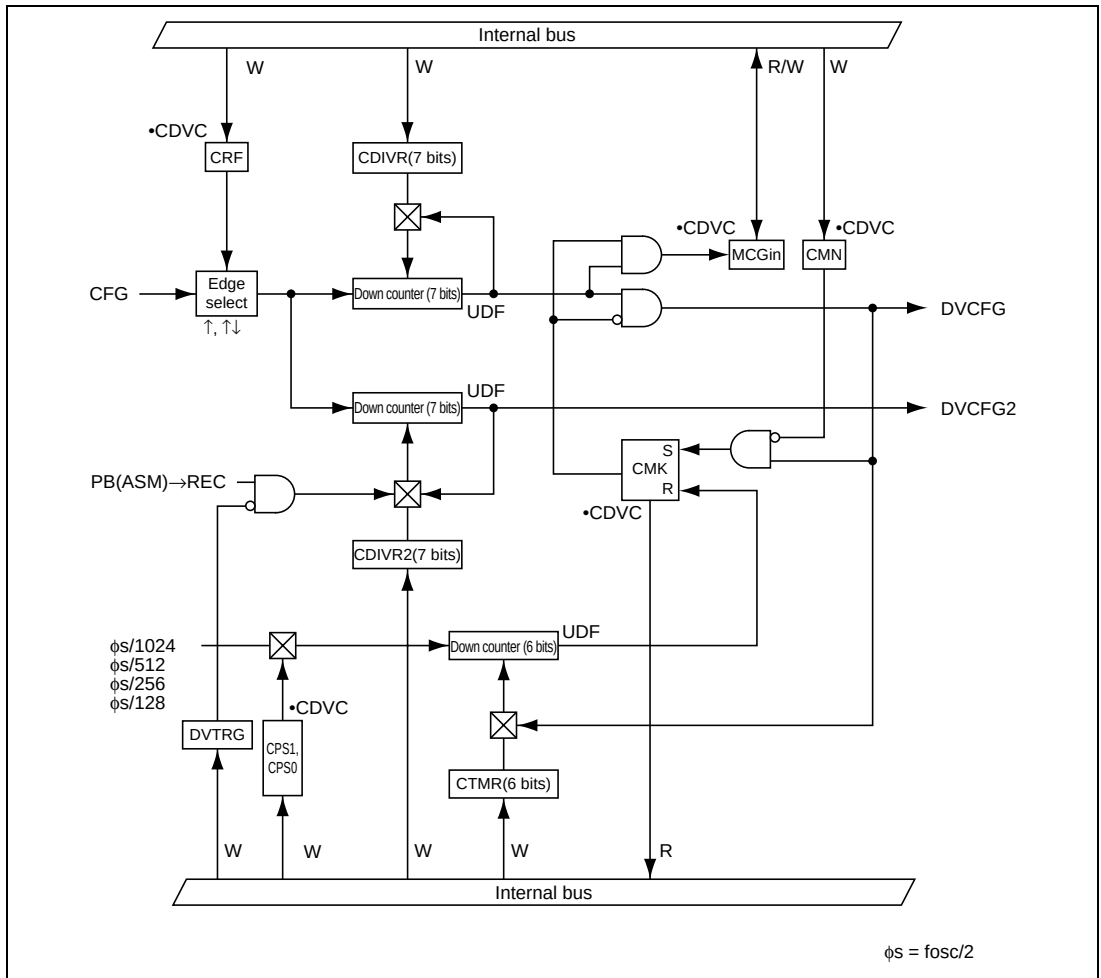


**Figure 26.65 CFG Frequency Divider**

## Register Description:

- Register configuration

Table 26.23 shows the register configuration of the CFG frequency division circuit.

**Table 26.23 Register Configuration**

| Name                              | Abbrev. | R/W | Size | Initial Value | Address |
|-----------------------------------|---------|-----|------|---------------|---------|
| DVCFG control register            | CDVC    | R/W | Byte | H'60          | H'D09A  |
| CFG frequency division register 1 | CDIVR1  | W   | Byte | H'80          | H'D09B  |
| CFG frequency division register 2 | CDIVR2  | W   | Byte | H'80          | H'D09C  |
| DVCFG mask period register        | CTMR    | W   | Byte | H'FF          | H'D09D  |

### DVCFG Control Register (CDVC)

|                 |       |   |     |     |       |     |      |      |
|-----------------|-------|---|-----|-----|-------|-----|------|------|
| Bit :           | 7     | 6 | 5   | 4   | 3     | 2   | 1    | 0    |
|                 | MCGin | — | CMK | CMN | DVTRG | CRF | CPS1 | CPS0 |
| Initial value : | 0     | 1 | 1   | 0   | 0     | 0   | 0    | 0    |
| R/W :           | R/W*  | — | R   | W   | W     | W   | W    | W    |

Note: \* Only 0 can be written

CDVC is an 8-bit register to control the capstan frequency division circuit.

It is initialized to H'60 by a reset, or in stand-by or module stop mode.

**Bit 7—Mask CFG Flag (MCGin):** MCGin is a flag to indicate occurrence of a frequency division signal during the mask timer's mask period. To clear it by software, write 0 after reading 1. Also, setting has the highest priority in this flag. If a condition setting the flag and 0 write occur simultaneously, the latter is invalid.

#### Bit 7

| MCGin | Description                                                     |
|-------|-----------------------------------------------------------------|
| 0     | CFG is in normal operation (Initial value)                      |
| 1     | Shows that DVCFG was detected during masking (runaway detected) |

**Bit 6—Reserved:** Cannot be modified and is always read as 1.

**Bit 5—CFG Mask Status Bit (CMK):** Indicates the status of the mask. It is initialized to 1 by a reset, or in stand-by or module stop mode.

**Bit 5**

| CMK | Description                                                                |
|-----|----------------------------------------------------------------------------|
| 0   | Indicates that the capstan mask timer has released masking                 |
| 1   | Indicates that the capstan mask timer is currently masking (Initial value) |

**Bit 4—CFG Mask Selection Bit (CMN):** Selects the turning on/off of the mask function.

**Bit 4**

| CMN | Description                                     |
|-----|-------------------------------------------------|
| 0   | Capstan mask timer function on. (Initial value) |
| 1   | Capstan mask timer function off.                |

**Bit 3—PB (ASM) → REC Transition Timing Sync ON/OFF Selection Bit (DVTRG):** Selects the On/Off of the timing sync of the transition from PB (ASM) to REC when the DVCFG2 signal is generated.

**Bit 3**

| DVTRG | Description                                               |
|-------|-----------------------------------------------------------|
| 0     | PB (ASM) → REC transition timing sync on. (Initial value) |
| 1     | PB (ASM) → REC transition timing sync off.                |

**Bit 2—CFG Frequency Division Edge Selection Bit (CRF):** Selects the edge of the CFG signal to be divided.

**Bit 2**

| CRF | Description                                                            |
|-----|------------------------------------------------------------------------|
| 0   | Performs frequency division at the rising edge of CFG. (Initial value) |
| 1   | Performs frequency division at both edges of CFG.                      |



**Bits 1 and 0—CFG Mask Timer Clock Selection Bits (CPS1, CPS0):** Select the clock source for the CFG mask timer. ( $\phi_s = f_{osc}/2$ )

| Bit 1 | Bit 0 | Description                   |
|-------|-------|-------------------------------|
| CPS1  | CPS0  |                               |
| 0     | 0     | $\phi_s/1024$ (Initial value) |
|       | 1     | $\phi_s/512$                  |
| 1     | 0     | $\phi_s/256$                  |
|       | 1     | $\phi_s/128$                  |

### CFG Frequency Division Register 1 (CDIVR1)

|                 |   |       |       |       |       |       |       |       |
|-----------------|---|-------|-------|-------|-------|-------|-------|-------|
| Bit :           | 7 | 6     | 5     | 4     | 3     | 2     | 1     | 0     |
|                 | — | CDV16 | CDV15 | CDV14 | CDV13 | CDV12 | CDV11 | CDV10 |
| Initial value : | 1 | 0     | 0     | 0     | 0     | 0     | 0     | 0     |
| R/W :           | — | W     | W     | W     | W     | W     | W     | W     |

CDIVR1 is an 8-bit write-only register to set the division value. If a read is attempted, an undetermined value is read out. Bit 7 is reserved.

The frequency division value is written in the reload register and the down counter at the same time.

CFG's frequency is divided by N at its rising edge or both edges. If the register value is 0, no division operation is performed, and the DVCFG signal with the same input cycle with CFG signal is output. The DVCFG signal is sent to the capstan speed error detector. It is initialized to H'80 by a reset or in stand-by mode together with the capstan frequency division register and the down counter.

## CFG Frequency Division Register 2 (CDIVR2)

|                 |   |       |       |       |       |       |       |       |
|-----------------|---|-------|-------|-------|-------|-------|-------|-------|
| Bit :           | 7 | 6     | 5     | 4     | 3     | 2     | 1     | 0     |
|                 | — | CDV26 | CDV25 | CDV24 | CDV23 | CDV22 | CDV21 | CDV20 |
| Initial value : | 1 | 0     | 0     | 0     | 0     | 0     | 0     | 0     |
| R/W :           | — | W     | W     | W     | W     | W     | W     | W     |

CDIVR2 is an 8-bit write-only register to set the division value. If a read is attempted, an undetermined value is read out. Bit 7 is reserved.

The frequency division value is written in the reload register and the down counter at the same time.

CFG's frequency is divided by N at its rising edge or both edges. If the register value was 0, no division operation is performed, and the DVCFG signal with the same input cycle with CFG is output. The DVCFG2 signal is sent to the capstan speed error detector and the Timer L.

The DVCFG2 circuit has no mask timer function.

The frequency division counter starts its division operation at the point data was written in CDIVR2. If synchronization is required for phase matching, for example, do it by writing in CDIVR2. If the DVTRG bit of the CDVC register is 0, the register synchronizes with the switching timing from PB (ASM) to REC.

It is initialized to H'80 by a reset or in stand-by mode together with the capstan frequency division register and the down counter.

## DVCFG Mask Period Register (CTMR)

|                 |   |   |      |      |      |      |      |      |
|-----------------|---|---|------|------|------|------|------|------|
| Bit :           | 7 | 6 | 5    | 4    | 3    | 2    | 1    | 0    |
|                 | — | — | CPM5 | CPM4 | CPM3 | CPM2 | CPM1 | CPM0 |
| Initial value : | 1 | 1 | 1    | 1    | 1    | 1    | 1    | 1    |
| R/W :           | — | — | W    | W    | W    | W    | W    | W    |

CTMR is an 8-bit write-only register. If a read is attempted, an undetermined value is read out. CTMR is a reload register for the mask timer (down counter). Set in it the mask period of CFG. The mask period is determined by the clock specified by the bits 1 and 0 of CDVC and the set value (N - 1). If data is written in CTMR, it is written also in the mask timer at the same time.

It is initialized to H'FF by a reset, or in stand-by or module stop mode.

Mask period =  $N \times \text{clock cycle}$

## Operation:

- Frequency divider

The CFG pulses output from the capstan motor are sent to internal circuitry as the CFG signal via the zero-cross type comparator. The CFG signal, shaped into a rectangular waveform by a reshaping circuit, is divided by the CFG frequency dividers, and used in servo control. The rising edge or both edges of the CFG signal can be selected for the frequency divider.

The CFG frequency divider consists of a 7-bit frequency divider with a mask timer for capstan speed control (DVCFG signal generator) and a 7-bit frequency divider for capstan phase control (DVCFG2 signal generator).

The DVCFG signal generator consists of a 7-bit reload register (CFG frequency division register1: CDIVR1), a 7-bit down-counter, and a 6-bit mask timer (with settable mask interval). Frequency division is performed by setting the frequency-division value in 7-bit CDIVR1. When the frequency-division value is written in CDIVR1, it is also written in the down-counter. After frequency-division of a CFG signal for which the edge has been selected, the signal is sent via the mask timer to the capstan speed error detector as the DVCFG signal.

The DVCFG2 signal generator consists of a 7-bit reload register (CFG frequency division register 2: CDIVR2) and a 7-bit down-counter. The 7-bit frequency divider does not have a mask timer. Frequency division is performed by setting the frequency-division value in CDIVR2. When the frequency-division value is written in CDIVR2, it is also written in the down-counter. After frequency division of a CFG signal for which the edge has been selected, the signal is sent to the capstan speed error detector and timer L as the DVCFG2 signal. Frequency division starts when the frequency-division value is written.

When DVTRG bit in CDVC register is set to 0, reloading is executed with the switch over timing from PB (ASM) mode to REC mode. To switch from REF30 to CREF, change the settings of bit 4 (CR/RF bit) in the capstan phase error detection control register (CPGCR). If synchronization is necessary for phase control, this can be provided by writing the frequency-division value in CDIVR2.

The down-counters are decremented on rising edges of the CFG signal when the CRF bit is 0 in the DVCFG control register (CDVC), and on both edges when the CRF bit is 1.

Figure 26.66 shows examples of CFG frequency division waveforms.

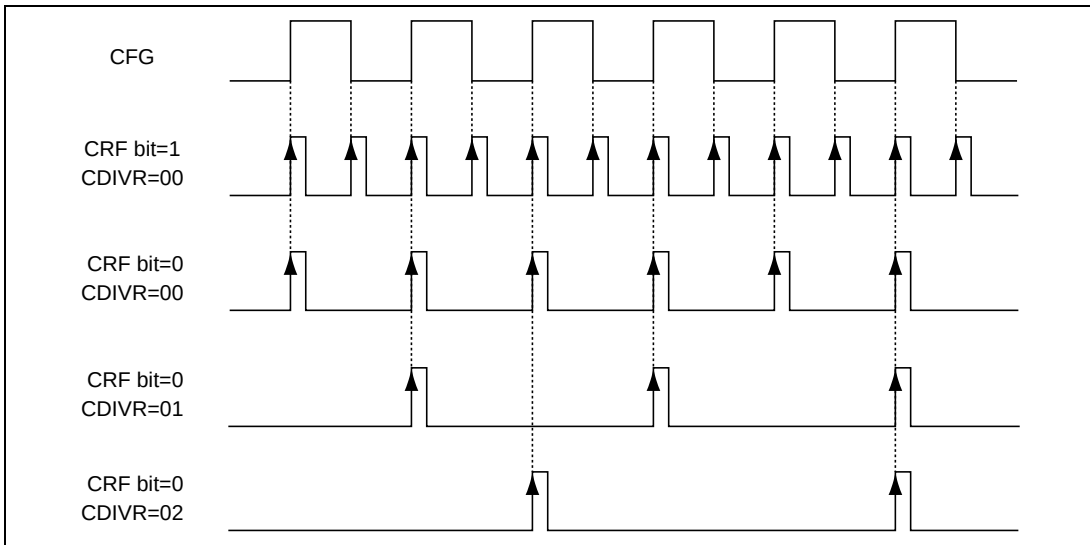


**Figure 26.66 CFG Frequency Division Waveforms**

- Mask timer

The capstan mask timer is a 6-bit reload timer that uses a prescaled clock as a clock source. The mask timer is used for masking DVCFG signal intended for controlling the capstan speed. The capstan mask timer prevents edge detection to be carried out for an unnecessarily long duration by masking the edge detection for a certain period. The above trouble can result from abnormal revolution (runout) of the capstan motor because its revolution has to cover a wide range speeds from the low/still up to the high speed search.

The capstan mask timer is started by a pulse edge in the divided CFG signal (DVCFG). While the timer is running, a mask signal disables the output of further DVCFG pulses. The mask signal is shown in figure 26.67.

The mask timer status can be monitored by reading the CMK flag in the DVCFG control register (CDVC).

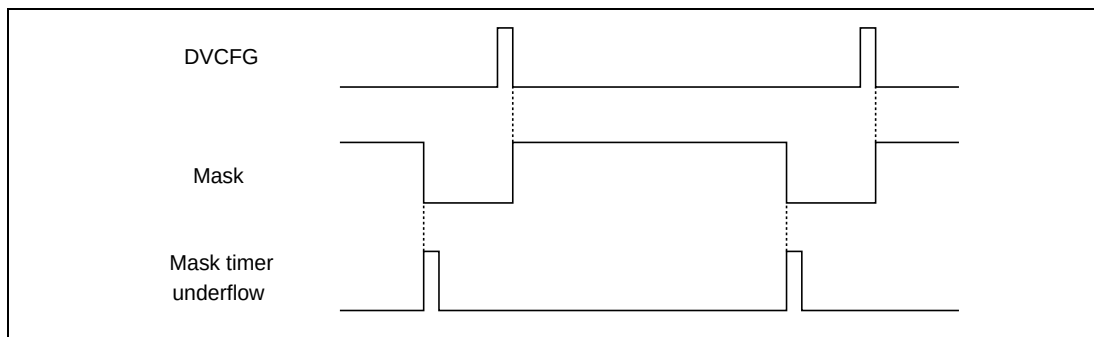


**Figure 26.67 Mask Signal**

Figures 26.68 and 26.69 show examples of CFG mask timer operations.

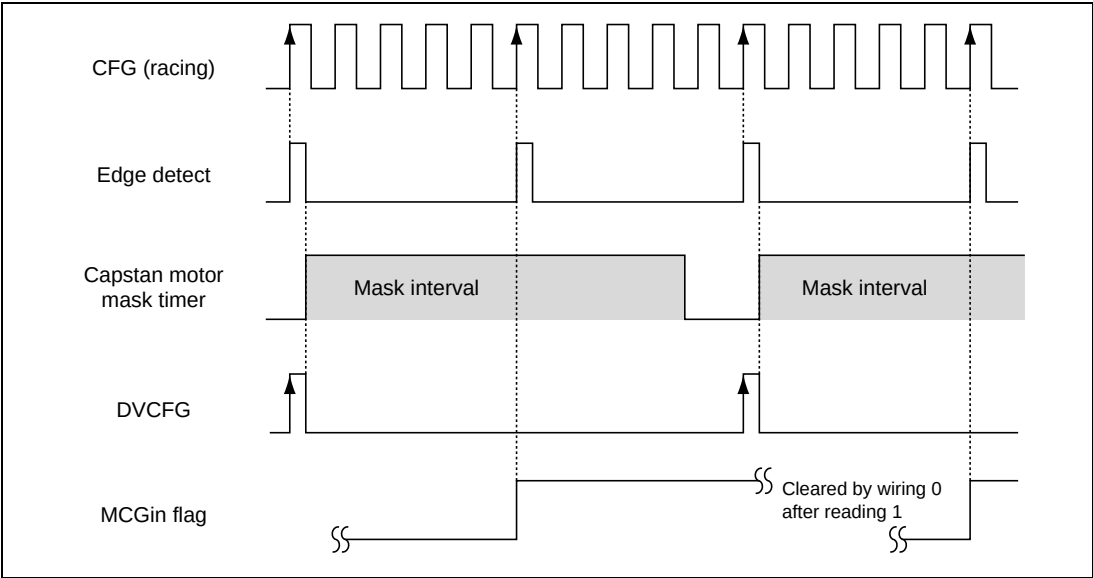


**Figure 26.68** CFG Mask Timer Operation (When Capstan Motor is Racing)

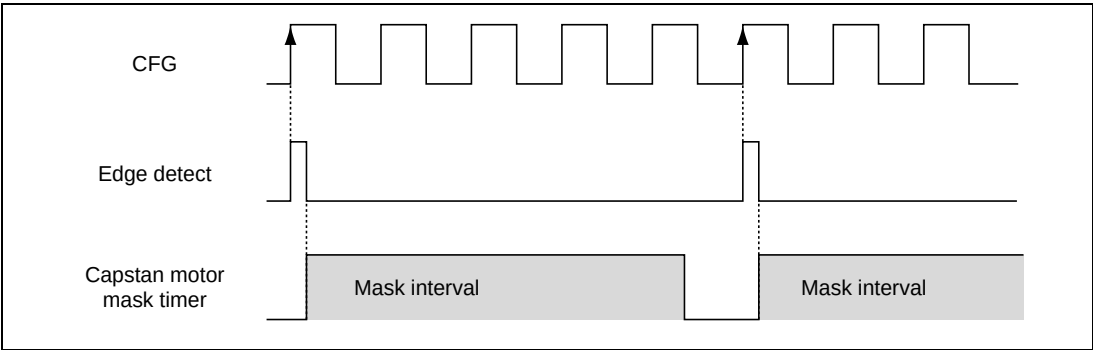


**Figure 26.69** CFG Mask Timer Operation (When Capstan Motor is Operating Normally)

26.14.4 DFG Noise Removal Circuit

**Block Diagram:** Figure 26.70 shows the block diagram of the DFG noise removal circuit.

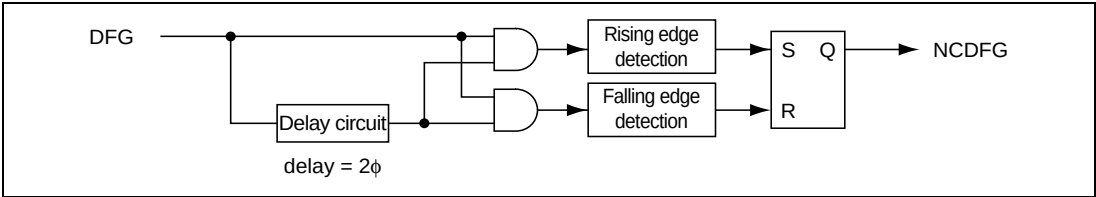


Figure 26.70 DFG Noise Removal Circuit

**Register Description:** Table 26.24 shows the register configuration of the DFG mask circuit.

Table 26.24 Register Configuration

| Name                | Abbrev. | R/W | Size | Initial Value | Address |
|---------------------|---------|-----|------|---------------|---------|
| FG control register | FGCR    | W   | Byte | H'FE          | H'D09E  |

FG Control Register (FGCR)

|                 |   |   |   |   |   |   |   |     |
|-----------------|---|---|---|---|---|---|---|-----|
| Bit :           | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0   |
|                 | — | — | — | — | — | — | — | DRF |
| Initial value : | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 0   |
| R/W :           | — | — | — | — | — | — | — | W   |

FGCR selects the edge of the DFG noise removal signal (NCDFG) to be sent to the drum speed error detector. If a read is attempted, an undetermined value is read out. It is initialized to H'FE by a reset, or in stand-by or module stop mode. The edge selection circuit is located in the drum speed error detector, and outputs the register output to the drum speed error detector.

**Bits 7 to 1—Reserved:** Cannot be modified and are always read as 1.

**Bit 0—DFG Edge Selection Bit (DRF):** Selects the edge of the NCDFG signal used in the drum speed error detector.

**Bit 0**

| DRF | Description                                             |
|-----|---------------------------------------------------------|
| 0   | Selects the rising edge of NCDFG signal (Initial value) |
| 1   | Selects the falling edge of NCDFG signal                |

**Operation**

The DFG noise removal circuit generates a signal (NCDFG signal) as a result of removing noise (signal fluctuation smaller than  $2\phi$ ) from the DFG signal. The resulted NCDFG signal is behind the time when the DFG signal was detected by  $2\phi$ . Figure 26.71 shows the NCDFG signal.

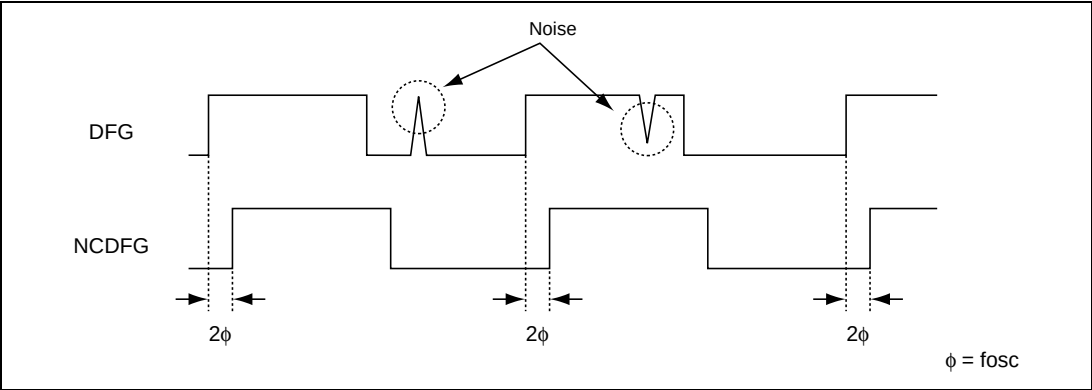


**Figure 26.71 NCDFG Signal**



## 26.15 Sync Signal Detector

### 26.15.1 Overview

This block performs detection of the horizontal sync signal (Hsync) and vertical sync signal (Vsync) from the composite sync signal (Csync), noise counting, and field detection. It detects the horizontal and vertical sync signals by setting threshold in the register and based on the servo clock ( $\phi_s = f_{osc}/2$ ). Noise masking is possible during the detection of the horizontal sync signals, and if any Hsync pulse is missing, it can be supplemented. Also, if total volume of the noise detected in one frame of Csync amounted over a specified volume, the detector generates a noise detection interrupt.

**Note:** This circuit detects a pulse with a specific width set by the threshold register. It does not classify or restore the sync signal to a formal one.

26.15.2 Block Diagram

Figure 26.72 shows the block diagram of the sync signal detector.

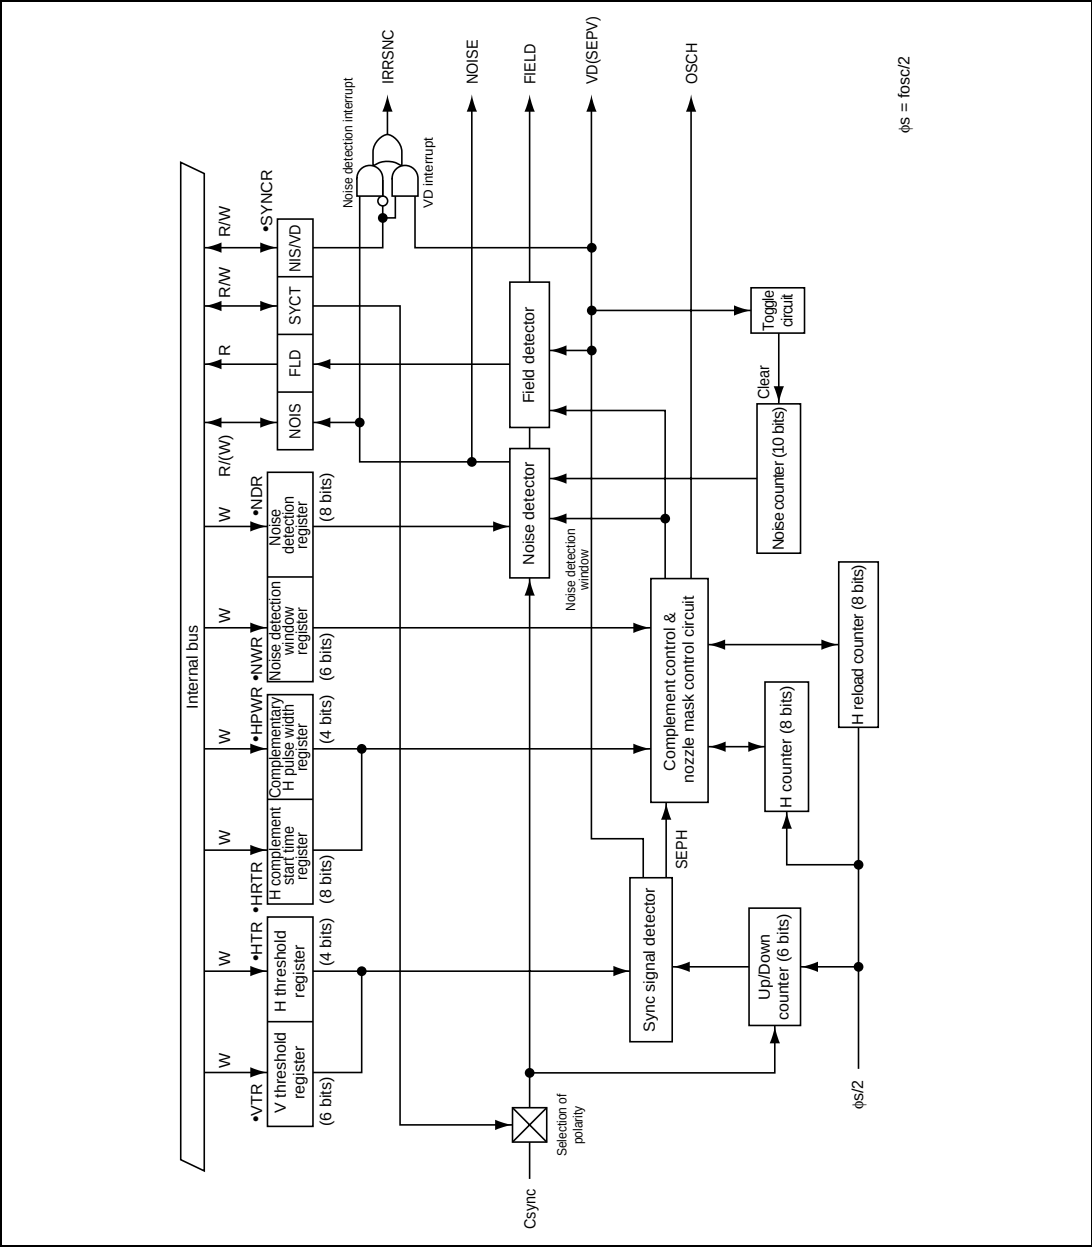


Figure 26.72 Block Diagram of the Sync Signal Detector

### 26.15.3 Pin Configuration

Table 26.25 shows the pin configuration of the sync signal detector.

**Table 26.25 Pin Configuration**

| Name                            | Abbrev. | I/O   | Function                    |
|---------------------------------|---------|-------|-----------------------------|
| Composite sync signal input pin | Csync   | Input | Composite sync signal input |

### 26.15.4 Register Configuration

Table 26.26 shows the register configuration of the sync signal detector.

**Table 26.26 Register Configuration**

| Name                                      | Abbrev. | R/W | Size | Initial Value | Address |
|-------------------------------------------|---------|-----|------|---------------|---------|
| Vertical sync signal threshold register   | VTR     | W   | Byte | H'C0          | H'D0B0  |
| Horizontal sync signal threshold register | HTR     | W   | Byte | H'F0          | H'D0B1  |
| H complement start time setting register  | HRTR    | W   | Byte | H'00          | H'D0B2  |
| Complement H pulse width setting register | HPWR    | W   | Byte | H'F0          | H'D0B3  |
| Noise detection window setting register   | NWR     | W   | Byte | H'C0          | H'D0B4  |
| Noise detector                            | NDR     | W   | Byte | H'00          | H'D0B5  |
| Sync signal control register              | SYNCR   | R/W | Byte | H'F8          | H'D0B6  |

26.15.5 Register Description

Vertical Sync Signal Threshold Register (VTR)

|                 |   |   |      |      |      |      |      |      |
|-----------------|---|---|------|------|------|------|------|------|
| Bit :           | 7 | 6 | 5    | 4    | 3    | 2    | 1    | 0    |
|                 | — | — | VTR5 | VTR4 | VTR3 | VTR2 | VTR1 | VTR0 |
| Initial value : | 1 | 1 | 0    | 0    | 0    | 0    | 0    | 0    |
| R/ W :          | — | — | W    | W    | W    | W    | W    | W    |

VTR is an 8-bit write-only register that sets the threshold for the vertical sync signal when the signal is detected from the composite sync signal. The threshold is set by bits 5 to 0 (VTR5 to VTR0). Bits 7 and 6 are reserved. If a read is attempted, an undetermined value is read out. It is initialized to H'C0 by a reset, or in stand-by or module stop mode.

## Horizontal Sync Signal Threshold Register (HTR)

|                 |   |   |   |   |      |      |      |      |
|-----------------|---|---|---|---|------|------|------|------|
| Bit :           | 7 | 6 | 5 | 4 | 3    | 2    | 1    | 0    |
|                 | — | — | — | — | HTR3 | HTR2 | HTR1 | HTR0 |
| Initial value : | 1 | 1 | 1 | 1 | 0    | 0    | 0    | 0    |
| R/W :           | — | — | — | — | W    | W    | W    | W    |

HTR is an 8-bit write-only register that sets the threshold for the horizontal sync signal when the signal is detected from the composite sync signal. The threshold is set by bits 3 to 0 (HTR3 to HTR0). Bits 7 and 4 are reserved. If a read is attempted, an undetermined value is read out. It is initialized to H'F0 by a reset, or in stand-by or module stop mode.

Figure 26.73 shows the threshold values and separated sync signals.

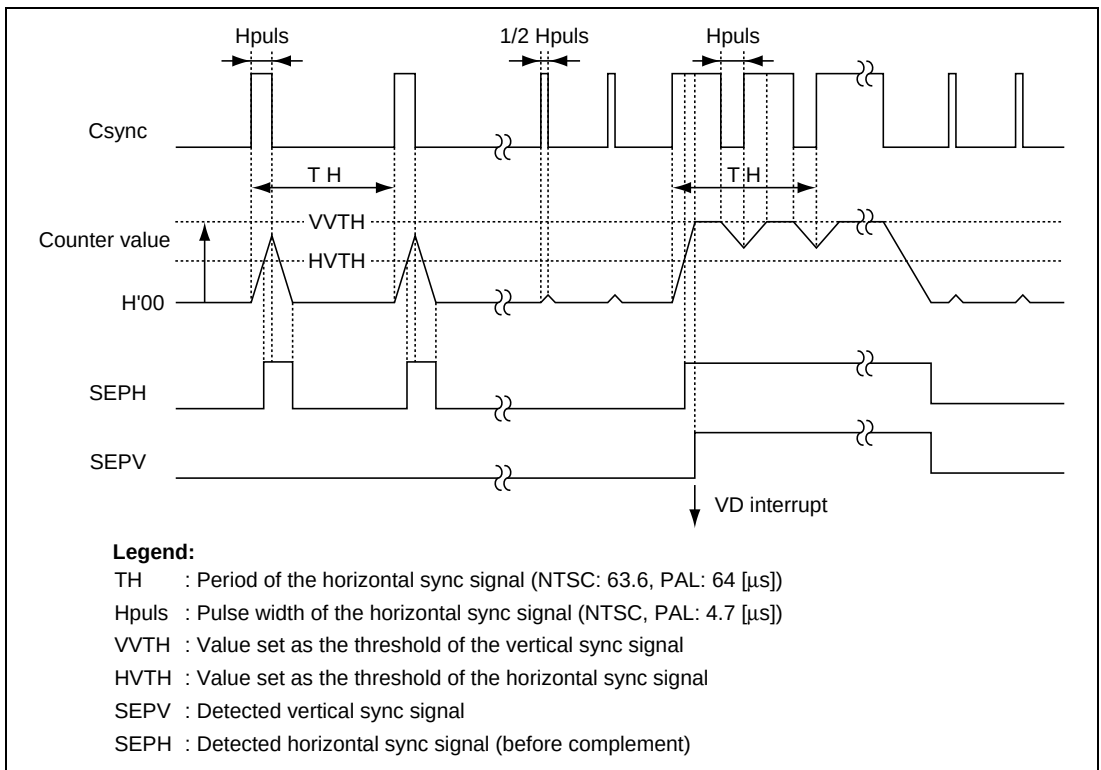


**Figure 26.73 Threshold Values and Separated Sync Signals**

### Example

The values set to detect the vertical and horizontal sync signals (SEPV, SEPH) from Csync are required to meet the following conditions. Assumed that the set values in VTHR register were VVTH and HVTH,

$$(VVTH-1) \times 2/\phi_s > H_{pulse}$$

$$(HVTH-2) \times 2/\phi_s \leq H_{pulse}/2 < (HVTH-1) \times 2/\phi_s$$

Where,  $H_{pulse}$  is pulse width ( $\mu s$ ) of the horizontal sync signal, and  $\phi_s$  is servo clock ( $f_{osc}/2$ ).

Thus, if  $\phi_s = 5$  MHz, NTSC system is used,

$$(VVTH-1) \times 0.4\mu s > 4.7\mu s$$

$$\therefore VVTH \geq H'D$$

$$(VVTH-2) \times 0.4\mu s \leq 2.35\mu s < (HVTH-1) \times 0.4\mu s$$

$$\therefore VVTH \geq H'7$$

Note: This circuit detects the pulse with the width set in VTHR. If a noise pulse with the width greater than the set value is input, the circuit regards it as a sync signal.

## H Complement Start Time Setting Register (HRTR)

|                 |       |       |       |       |       |       |       |       |
|-----------------|-------|-------|-------|-------|-------|-------|-------|-------|
| Bit :           | 7     | 6     | 5     | 4     | 3     | 2     | 1     | 0     |
|                 | HRTR7 | HRTR6 | HRTR5 | HRTR4 | HRTR3 | HRTR2 | HRTR1 | HRTR0 |
| Initial value : | 0     | 0     | 0     | 0     | 0     | 0     | 0     | 0     |
| R/W :           | W     | W     | W     | W     | W     | W     | W     | W     |

HRTR is an 8-bit write-only register that sets the timing to generate a complementary pulse if a pulse of the horizontal sync signal is missing.

If a read is attempted, an undetermined value is read out. It is initialized to H'00 by a reset, or in stand-by or module stop mode.

$$((\text{Value of HRTR7-0}) + 1) \times 2/\phi_s = \text{TH}$$

where, TH is the period of the horizontal sync signal ( $\mu\text{s}$ ), and  $\phi_s$  is the servo clock ( $f_{\text{osc}}/2$ ).

Whether the horizontal sync signal exists or not is determined one clock before the complementary pulse is generated. Accordingly, set to HRTR7 to HRTR0 a value obtained from the equation shown above plus one.

Also, HRTR7-HRTR0 sets the noise mask period. If the horizontal sync signal has the normal pulses, it is masked in the mask period.

The start and the end of the mask period are computed from the rising edge of OSCH and SEPH, respectively. See figure 26.75.

## Complementary H Pulse Width Setting Register (HPWR)

|                 |   |   |   |   |       |       |       |       |
|-----------------|---|---|---|---|-------|-------|-------|-------|
| Bit :           | 7 | 6 | 5 | 4 | 3     | 2     | 1     | 0     |
|                 | — | — | — | — | HPWR3 | HPWR2 | HPWR1 | HPWR0 |
| Initial value : | 1 | 1 | 1 | 1 | 0     | 0     | 0     | 0     |
| R/W :           | — | — | — | — | W     | W     | W     | W     |

HRWR is an 8-bit write-only register that sets the pulse width of the complementary pulse which is generated if a pulse of the horizontal sync signal is missing. Bits 7 to 4 are reserved.

If a read is attempted, an undetermined value is read out. It is initialized to H'F0 by a reset or in stand-by mode.

$$((\text{Value of HPWR3-0}) + 1) \times 2/\phi_s = \text{Hpulse}$$

Where, Hpuls is the pulse width of the horizontal sync signal ( $\mu\text{s}$ ), and  $\phi_s$  is the servo clock ( $f_{\text{osc}}/2$ ).

## Noise Detection Window Setting Register (NWR)

|                 |   |   |      |      |      |      |      |      |
|-----------------|---|---|------|------|------|------|------|------|
| Bit :           | 7 | 6 | 5    | 4    | 3    | 2    | 1    | 0    |
|                 | — | — | NWR5 | NWR4 | NWR3 | NWR2 | NWR1 | NWR0 |
| Initial value : | 1 | 1 | 0    | 0    | 0    | 0    | 0    | 0    |
| R/W :           | — | — | W    | W    | W    | W    | W    | W    |

NWR is an 8-bit write-only register that sets the period (window) when the drop-out of the horizontal sync signal pulse is detected and the noise is counted. Set the timing of the noise detection window in bits 5 to 0. Bits 7 and 6 are reserved.

If a read is attempted, an undetermined value is read out. It is initialized to H'C0 by a reset, or in stand-by or module stop mode.

Set the value of the noise detection window timing according to the following equation.

$$((\text{Value of NWR5-0}) + 1) \times 2/\phi_s = 1/4 \times TH$$

Where, TH is the pulse width of the horizontal sync signal ( $\mu\text{s}$ ), and  $\phi_s$  is the servo clock ( $f_{osc}/2$ ).

It is recommended that this timing value is set at about 1/4 of the cycle of the horizontal sync signal.

## Noise Detection Register (NDR)

|                 |      |      |      |      |      |      |      |      |
|-----------------|------|------|------|------|------|------|------|------|
| Bit :           | 7    | 6    | 5    | 4    | 3    | 2    | 1    | 0    |
|                 | NDR7 | NDR6 | NDR5 | NDR4 | NDR3 | NDR2 | NDR1 | NDR0 |
| Initial value : | 0    | 0    | 0    | 0    | 0    | 0    | 0    | 0    |
| R/W :           | W    | W    | W    | W    | W    | W    | W    | W    |

NDR is an 8-bit write-only register that sets the noise detection level when the noise of the horizontal sync signal is detected (when NWR is set). Set the noise detection level in bits 7 to 0.

No read is valid. If a read is attempted, an undetermined value is read out. It is initialized to H'00 by a reset, or in stand-by or module stop mode.

The noise detector takes counts of the drop-outs of the horizontal sync signal pulses and the noise within the pulses, and if they amount to a count greater than four times of the value set in NDR7-NDR0, the detector sets the NOIS flag in the sync signal control register (SYNCR). Set the noise detection level at 1/4 of the noise counts in one frame.

The noise counter is cleared whenever Vsync is detected twice.

See section 26.15.6, Noise Detection for the details of the noise detection window and the noise detection level.



Sync Signal Control Register (SYNCR)

|                 |   |   |   |   |        |        |     |      |
|-----------------|---|---|---|---|--------|--------|-----|------|
| Bit :           | 7 | 6 | 5 | 4 | 3      | 2      | 1   | 0    |
|                 | — | — | — | — | NIS/VD | NOIS   | FLD | SYCT |
| Initial value : | 1 | 1 | 1 | 1 | 1      | 0      | 0   | 0    |
| R/W :           | — | — | — | — | R/W    | R/(W)* | R   | R/W  |

Note: \* Only 0 can be written

SYNCR is an 8-bit register that controls the noise detection, field detection, polarity of the sync signal input, etc.

It is initialized to H'F8 by a reset, or in stand-by mode. Bits 7 to 4 are reserved. No write is valid. Bit 1 is read-only.

**Bits 7 to 4—Reserved:** Cannot be modified and are always read as 1.

**Bit 3—Interrupt Selection Bit (NIS/VD):** Selects whether an interrupt request is generated by noise level detection or VD signal detection.

Bit 3

| NIS/VD | Description                     |
|--------|---------------------------------|
| 0      | Interrupt at the noise level    |
| 1      | Interrupt at VD (Initial value) |

**Bit 2—Noise Detection Flag (NOIS):** NOIS is a status flag indicating that the noise counts reached at more than four times of the value set in NDR. The flag is cleared only by writing 0 after reading 1. Care is required because it is not cleared automatically.

Bit 2

| NOIS | Description                                                                    |
|------|--------------------------------------------------------------------------------|
| 0    | Noise count is smaller than four times of the value set in NDR (Initial value) |
| 1    | Noise count is the same or greater than four times of the value set in NDR     |


**Bit 1—Field Detection Flag (FLD):** Indicates whether the field currently being scanned is even or odd. See figure 26.74.

**Bit 1**

| FLD | Description               |
|-----|---------------------------|
| 0   | Odd field (Initial value) |
| 1   | Even field                |

**Bit 0—Sync Signal Polarity Selection Bit (SYCT):** Selects the polarity of the sync signal (Csync) to be input.

**Bit 0**

| SYCT | Description                                                                                       | Polarity |
|------|---------------------------------------------------------------------------------------------------|----------|
| 0    |  (Initial value) | Positive |
| 1    |                  | Negative |

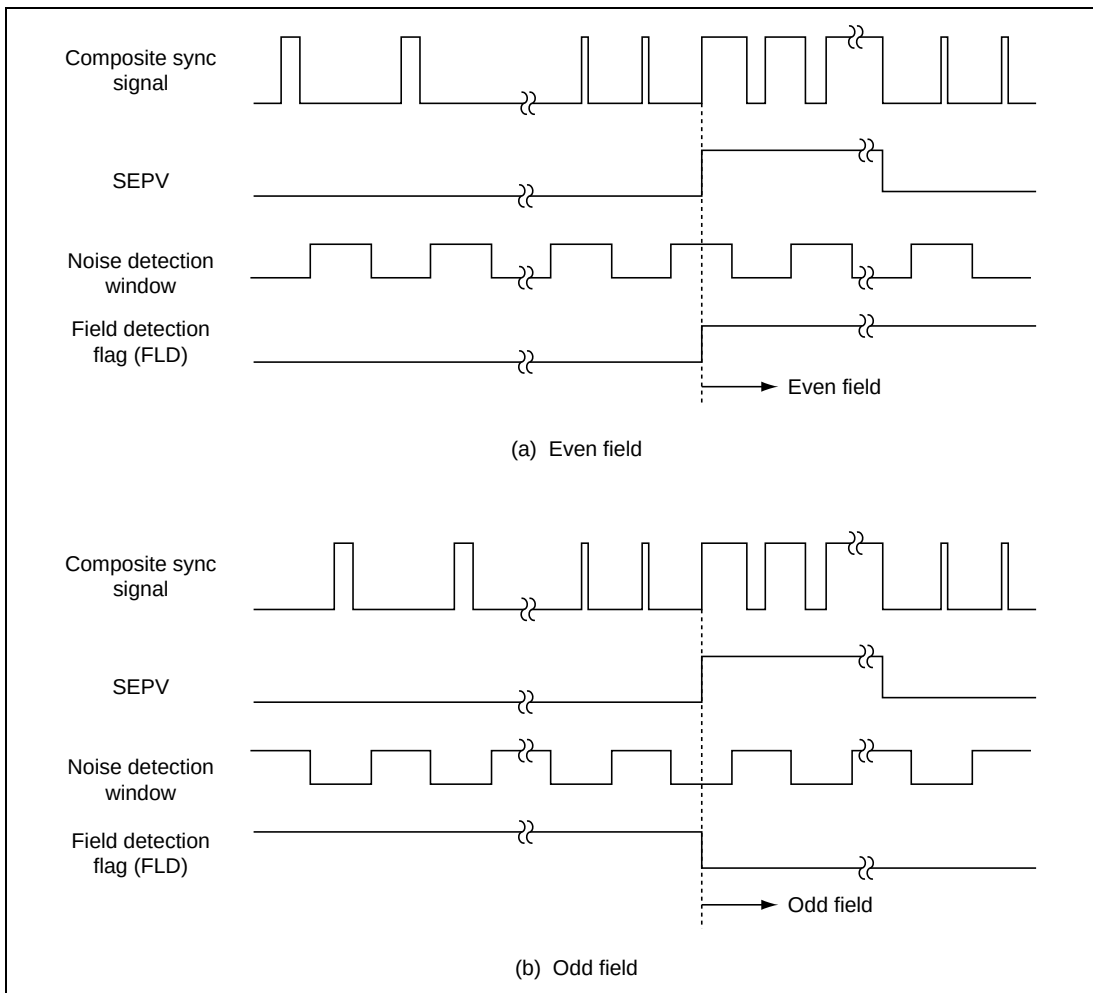


**Figure 26.74 Field Detection**

### 26.15.6 Noise Detection

If a pulse of the horizontal sync signal is missing, a complementary pulse is set at the timing set in HPWR and with the set pulse width.

Set the noise detection window with HWR of about 1/4 of the horizontal sync signal, and the pulse with equal high and low periods will be obtained.

**Example of Setting:** Assumed that a complementary pulse is set when fosc = 10MHz under the conditions  $\phi_s = 5$  MHz, NTSC:TH = 63.6 ( $\mu$ s) and Hpuls = 4.7 ( $\mu$ s), the set values of the complementary pulse timing (HRTR7-0), complementary pulse width (HPWR3-0), and noise detection window timing (NWR5-0) are expressed by the following equations.

$$(\text{Value of HRTR7-0}) \times 2/\phi_s = \text{TH}$$

$$((\text{Value of HPWR3-0}) + 1) \times 2/\phi_s = \text{Hpuls}$$

$$((\text{Value of NWR5-0}) + 1) \times 2/\phi_s = 1/4 \times \text{TH}$$

Where, TH is the cycle of the horizontal sync signal ( $\mu$ s), Hpuls is the pulse width of the horizontal sync signal ( $\mu$ s) and  $\phi_s$  is the servo clock (Hz) (fosc/2).

Accordingly,

$$(\text{Value of HRTR7-0}) \times 0.4 (\mu\text{s}) = 63.6 (\mu\text{s})$$

$$\therefore \text{HRTR7-0} = \text{H'9F}$$

$$((\text{Value of HPWR3-0}) + 1) \times 0.4 (\mu\text{s}) = 4.7 (\mu\text{s})$$

$$\therefore \text{HRTR3-0} = \text{H'B}$$

$$((\text{Value of NWR5-0}) + 1) \times 0.4 (\mu\text{s}) = 16 (\mu\text{s})$$


$$\therefore \text{NWR5-0} = \text{H'27}$$

Also, the noise mask period is computed as follows.

$$((\text{Value of HRTR7-0}) + 1) - 24 \times 2/\phi_s = 54 (\mu\text{s})$$

Where, 24 is a constant required for a structural reason.

Figure 26.75 shows the set period for HRTR, HPWR, and NWR.

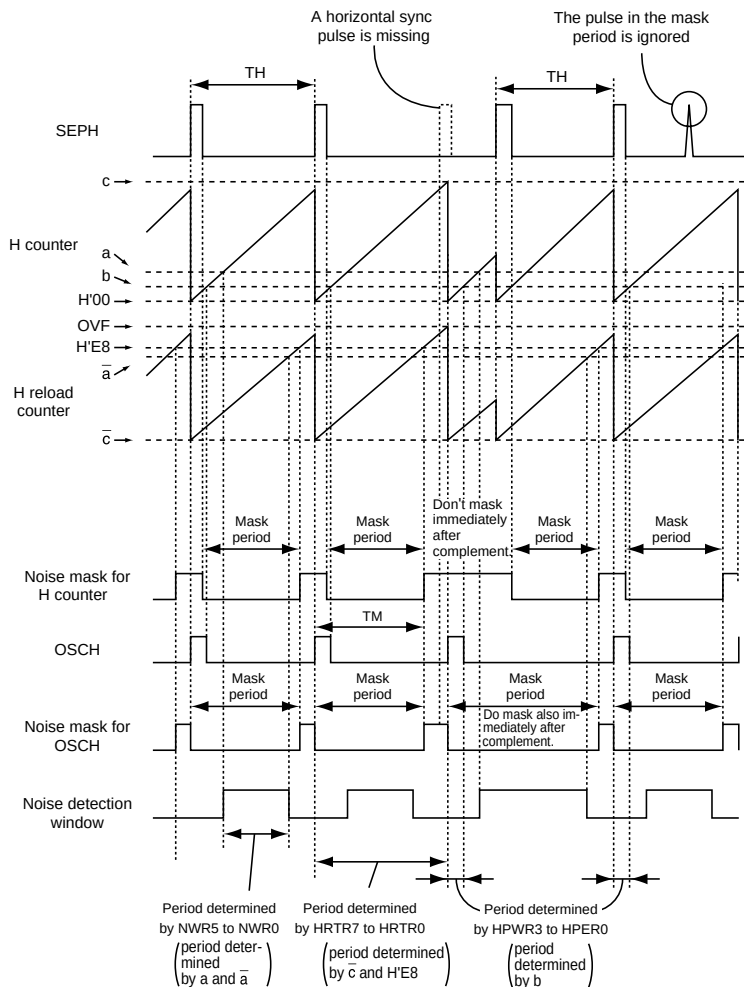

#### Legend:

SEPH : Horizontal sync signal after detection

OSCH : Horizontal sync signal after complement

a : Value set for the noise detection window (NWR5 to NWR0)

b : Value set for the pulse width of the horizontal sync signal (NPWR3 to NPWR0)

c : Value set for complement timing (HRTR7 to HRTR0)

a, b, c : Complements of 1 of a, b, c, respectively

H'E8 : Complement of 2 of multiplier 24 in the equation for the noise mask period  
(The noise mask period ends 24 counts before the overflow of H reload counter.)

TH : Cycle of the horizontal sync signal  
(NTSC:63.6 [ms], PAL:64[ms])

TM : Timing at which the noise mask period ends.

**Figure 26.75 Set Period for HRTR, HPWR, and NWR**

**Noise Detection Operation:** The noise detector considers an irregular pulse of the composite sync signal (Csync) and a chip of a horizontal sync signal pulse within a frame as noise. The noise counter takes counts of the irregular pulses during the high period of the noise detection window and the chips and drop-outs of the horizontal sync signal pulses during the low period. The noise detector counts more than one irregular pulses as one. The noise counter is cleared at every frame (Vsync is detected twice).

The equalizing pulse contained in 9H of the vertical sync signal is counted also as an irregular pulse.

The noise detection flag (NOIS) in the sync signal control register (SYNCR) is set to 1 if the count of the irregular pulses + the count of the pulse chips and drop-outs of the horizontal sync signal  $> 4 \times (\text{value of NDR7 to 0})$ .

See the description on the sync signal control register (SYNCR) in section 26.15.5, Register Description, for the NOIS bit.

Figure 26.76 shows the operation of the noise detection.

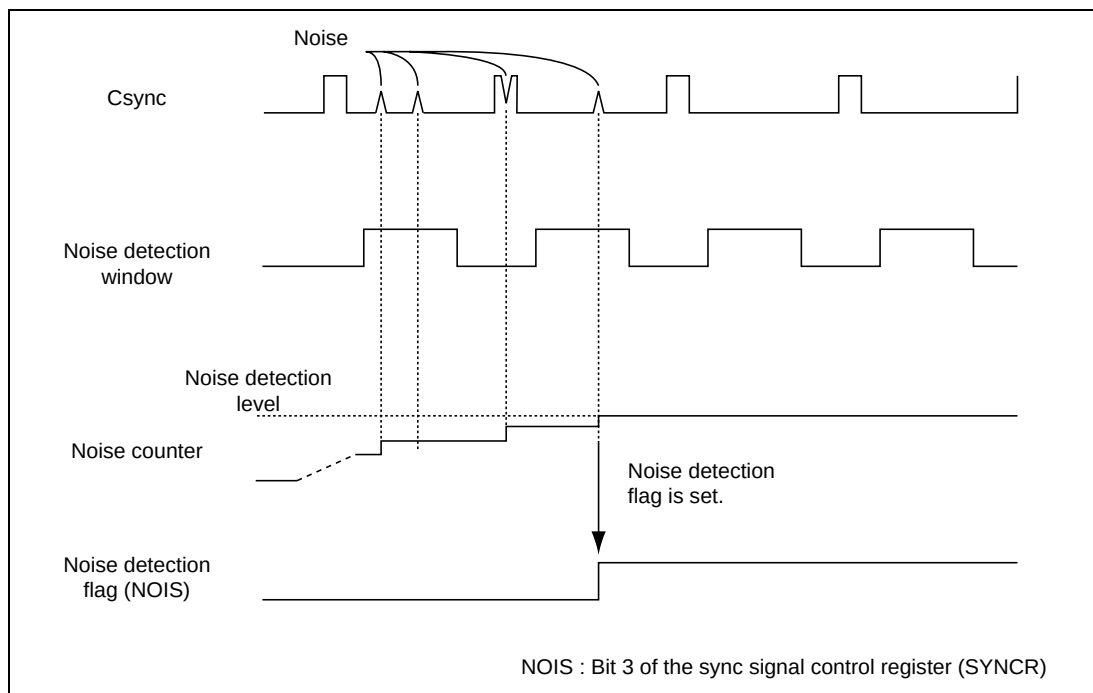


**Figure 26.76 Operation of the Noise Detection**

### 26.15.7 Activation of the Sync Signal Detector

After release of reset or transition from the power down mode to the active mode, the sync signal detector starts operation by a sync signal input after release of module stop. The pulse of the polarity specified by the SYCT bit of the sync signal control register (SYNCR) is input to the detector. The detector starts operation even if this pulse is a noise pulse with a width smaller than the regular width. The minimum pulse width which can activate the detector is not constant depending on the internal operation of the input circuit. Accordingly, if the assured activation of the detector is required, input a pulse with a width greater than  $4/\phi_s$  ( $\phi_s = f_{osc}/2$  (Hz)). In such a case, care is required to noise, because even a pulse with a width smaller than  $4\phi/s$  may cause activation.

## 26.16 Servo Interrupt

### 26.16.1 Overview

The interrupt exception processing of the servo module is started by one of ten factors, i.e. the drum speed error detector ( $\times 2$ ), drum phase error detector, capstan speed error detector ( $\times 2$ ), capstan phase error detector, HSW timing generator ( $\times 2$ ), sync detector, and CTL circuit. For these interrupt factors, see each of their circuit sections of this manual. For details of exception processing, see section 5, Exception Handling.

### 26.16.2 Register Configuration

Table 26.27 shows the list of the registers which control the interrupt of the servo section.

**Table 26.27 Registers which Control the Interrupt of the Servo Section**

| Name                               | Abbrev. | R/W | Size | Initial Value | Address |
|------------------------------------|---------|-----|------|---------------|---------|
| Servo interrupt enable register 1  | SIENR1  | R/W | Byte | H'00          | H'D0B8  |
| Servo interrupt enable register 2  | SIENR2  | R/W | Byte | H'FC          | H'D0B9  |
| Servo interrupt request register 1 | SIRQR1  | R/W | Byte | H'00          | H'D0BA  |
| Servo interrupt request register 2 | SIRQR2  | R/W | Byte | H'FC          | H'D0BB  |

### 26.16.3 Register Description

#### Servo Interrupt Enable Register 1 (SIENR1)

|                 |        |        |        |        |        |        |        |        |
|-----------------|--------|--------|--------|--------|--------|--------|--------|--------|
| Bit :           | 7      | 6      | 5      | 4      | 3      | 2      | 1      | 0      |
|                 | IEDRM3 | IEDRM2 | IEDRM1 | IECAP3 | IECAP2 | IECAP1 | IEHSW2 | IEHSW1 |
| Initial value : | 0      | 0      | 0      | 0      | 0      | 0      | 0      | 0      |
| R/W :           | R/W    | R/W    | R/W    | R/W    | R/W    | R/W    | R/W    | R/W    |

SIENR1 is an 8-bit read/write register that enables or disables interrupts in the servo section. It is initialized to H'00 by a reset, or in stand-by or module stop mode.



### Bit 7—Drum Phase Error Detection Interrupt Enable Bit (IEDRM3)

#### Bit 7

| IEDRM3 | Description                                                      |
|--------|------------------------------------------------------------------|
| 0      | Disables the request of the interrupt by IRRDRM3 (Initial value) |
| 1      | Enables the request of the interrupt by IRRDRM3                  |

### Bit 6—Drum Speed Error Detection (Lock Detection) Interrupt Enable Bit (IEDRM2)

#### Bit 6

| IEDRM2 | Description                                                      |
|--------|------------------------------------------------------------------|
| 0      | Disables the request of the interrupt by IRRDRM2 (Initial value) |
| 1      | Enables the request of the interrupt by IRRDRM2                  |

### Bit 5—Drum Speed Error Detection (OVF, Latch) Interrupt Enable Bit (IEDRM1)

#### Bit 5

| IEDRM1 | Description                                                      |
|--------|------------------------------------------------------------------|
| 0      | Disables the request of the interrupt by IRRDRM1 (Initial value) |
| 1      | Enables the request of the interrupt by IRRDRM1                  |

### Bit 4—Capstan Phase Error Detection Interrupt Enable Bit (IECAP3)

#### Bit 4

| IECAP3 | Description                                                      |
|--------|------------------------------------------------------------------|
| 0      | Disables the request of the interrupt by IRRCAP3 (Initial value) |
| 1      | Enables the request of the interrupt by IRRCAP3                  |

### Bit 3—Capstan Speed Error Detection (Lock Detection) Interrupt Enable Bit (IECAP2)

#### Bit 3

| IECAP2 | Description                                                      |
|--------|------------------------------------------------------------------|
| 0      | Disables the request of the interrupt by IRRCAP2 (Initial value) |
| 1      | Enables the request of the interrupt by IRRCAP2                  |

## Bit 2—Capstan Speed Error Detection (OVF, Latch) Interrupt Enable Bit (IECAP1)

### Bit 2

| IECAP1 | Description                                                         |
|--------|---------------------------------------------------------------------|
| 0      | Disables the request of the interrupt by IRRCAP1<br>(Initial value) |
| 1      | Enables the request of the interrupt by IRRCAP1                     |

## Bit 1—HSW Timing Generation (counter clear, capture) Interrupt Enable Bit (IEHSW2)

### Bit 1

| IEHSW2 | Description                                                         |
|--------|---------------------------------------------------------------------|
| 0      | Disables the request of the interrupt by IRRHSW2<br>(Initial value) |
| 1      | Enables the request of the interrupt by IRRHSW2                     |

## Bit 0—HSW Timing Generation (OVW, Matching, STRIG) Interrupt Enable Bit (IEHSW1)

### Bit 0

| IEHSW1 | Description                                                         |
|--------|---------------------------------------------------------------------|
| 0      | Disables the request of the interrupt by IRRHSW1<br>(Initial value) |
| 1      | Enables the request of the interrupt by IRRHSW1                     |

Servo Interrupt Enable Register 2 (SIENR2)

|                 |   |   |   |   |   |   |       |       |
|-----------------|---|---|---|---|---|---|-------|-------|
| Bit :           | 7 | 6 | 5 | 4 | 3 | 2 | 1     | 0     |
|                 | — | — | — | — | — | — | IESNC | IECTL |
| Initial value : | 1 | 1 | 1 | 1 | 1 | 1 | 0     | 0     |
| R/W :           | — | — | — | — | — | — | R/W   | R/W   |

SIENR2 is an 8-bit read/write register that enables or disables interrupts in the servo section. It is initialized to H'FC by a reset, stand-by or module stop.

**Bits 7 to 2—Reserved:** Cannot be modified and are always read as 1.

**Bit 1—Vertical Sync Signal Interrupt Enable Bit (IESNC)**

**Bit 1**

| IESNC | Description                                                                                                |
|-------|------------------------------------------------------------------------------------------------------------|
| 0     | Disables the request of the interrupt (interrupt to the vertical sync signal) by IRRSNC<br>(Initial value) |
| 1     | Enables the request of the interrupt by IRRSNC                                                             |

**Bit 0—CTL Interrupt Enable Bit (IECTL)**

**Bit 0**

| IECTL | Description                                                        |
|-------|--------------------------------------------------------------------|
| 0     | Disables the request of the interrupt by IRRCTL<br>(Initial value) |
| 1     | Enables the request of the interrupt by IRRCTL                     |

## Servo Interrupt Request Register 1 (SIRQR1)

|                 |         |         |         |         |         |         |         |         |
|-----------------|---------|---------|---------|---------|---------|---------|---------|---------|
| Bit :           | 7       | 6       | 5       | 4       | 3       | 2       | 1       | 0       |
|                 | IRRDRM3 | IRRDRM2 | IRRDRM1 | IRRCAP3 | IRRCAP2 | IRRCAP1 | IRRHSW2 | IRRHSW1 |
| Initial value : | 0       | 0       | 0       | 0       | 0       | 0       | 0       | 0       |
| R/W :           | R/(W)*  | R/(W)*  | R/(W)*  | R/(W)*  | R/(W)*  | R/(W)*  | R/(W)*  | R/(W)*  |

Note: \* Only 0 can be written to clear the flag.

SIRQR1 is an 8-bit read/write register that indicates interrupt request in the servo section. If the interrupt request has occurred, the corresponding bit is set to 1.

Only 0 can be written to clear the flag. It is initialized to H'00 by a reset, or in stand-by or module stop mode.

### Bit 7—Drum Phase Error Detector Interrupt Request Bit (IRRDRM3)

#### Bit 7

| IRRDRM3 | Description                                                              |
|---------|--------------------------------------------------------------------------|
| 0       | No interrupt request from the drum phase error detector. (Initial value) |
| 1       | Interrupt requested from the drum phase error detector.                  |

### Bit 6—Drum Speed Error Detector (Lock Detection) Interrupt Request Bit (IRRDRM2)

#### Bit 6

| IRRDRM2 | Description                                                                               |
|---------|-------------------------------------------------------------------------------------------|
| 0       | No interrupt request from the drum speed error detector (lock detection). (Initial value) |
| 1       | Interrupt requested from the drum speed error detector (lock detection).                  |

### Bit 5—Drum Speed Error Detector (OVF, Latch) Interrupt Request Bit (IRRDRM1)

#### Bit 5

| IRRDRM1 | Description                                                                           |
|---------|---------------------------------------------------------------------------------------|
| 0       | No interrupt request from the drum speed error detector (OVF, latch). (Initial value) |
| 1       | Interrupt requested from the drum speed error detector (OVF, latch).                  |

#### Bit 4—Capstan Phase Error Detector Interrupt Request Bit (IRRCAP3)

##### Bit 4

| IRRCAP3 | Description                                                                 |
|---------|-----------------------------------------------------------------------------|
| 0       | No interrupt request from the capstan phase error detector. (Initial value) |
| 1       | Interrupt requested from the capstan phase error detector.                  |

#### Bit 3—Capstan Speed Error Detector (Lock Detection) Interrupt Request Bit (IRRCAP2)

##### Bit 3

| IRRCAP2 | Description                                                                                  |
|---------|----------------------------------------------------------------------------------------------|
| 0       | No interrupt request from the capstan speed error detector (lock detection). (Initial value) |
| 1       | Interrupt requested from the drum speed error detector (lock detection).                     |

#### Bit 2—Drum Speed Error Detector (OVF, Latch) Interrupt Request Bit (IRRCAP1)

##### Bit 2

| IRRCAP1 | Description                                                                              |
|---------|------------------------------------------------------------------------------------------|
| 0       | No interrupt request from the capstan speed error detector (OVF, latch). (Initial value) |
| 1       | Interrupt requested from the capstan speed error detector (OVF, latch).                  |

#### Bit 1—HSW Timing Generator (Counter Clear, Capture) Interrupt Permission Bit (IRRHSW2)

##### Bit 1

| IRRHSW2 | Description                                                                                  |
|---------|----------------------------------------------------------------------------------------------|
| 0       | No interrupt request from the HSW timing generator (counter clear, capture). (Initial value) |
| 1       | Interrupt requested from the HSW timing generator (counter clear, capture).                  |

**Bit 0—HSW Timing Generator (OVW, Matching, STRIG) Interrupt Permission Bit (IRRHSW1)**

**Bit 0**

| <b>IRRHSW1</b> | <b>Description</b>                                                                            |
|----------------|-----------------------------------------------------------------------------------------------|
| 0              | No interrupt request from the HSW timing generator (OVW, matching, STRIG).<br>(Initial value) |
| 1              | Interrupt requested from the HSW timing generator (OVW, matching, STRIG).                     |

## Servo Interrupt Request Register 2 (SIRQR2)

|                 |   |   |   |   |   |   |        |        |
|-----------------|---|---|---|---|---|---|--------|--------|
| Bit :           | 7 | 6 | 5 | 4 | 3 | 2 | 1      | 0      |
|                 | — | — | — | — | — | — | IRRSNC | IRRCTL |
| Initial value : | 1 | 1 | 1 | 1 | 1 | 1 | 0      | 0      |
| R/W :           | — | — | — | — | — | — | R/(W)* | R/(W)* |

Note: \* Only 0 can be written to clear the flag.

SIRQR2 is an 8-bit read/write register that indicates interrupt request in the servo section. If the interrupt request has occurred, the corresponding bit is set to 1.

Writing 0 after reading 1 is allowed; no other writing is allowed. It is initialized to H'FC by a reset, or in stand-by or module stop mode.

**Bits 7 to 2—Reserved:** Cannot be modified and are always read as 1.

### Bit 1—Vertical Sync Signal Interrupt Request Bit (IRRSNC)

#### Bit 1

| IRRSNC | Description                                                                    |
|--------|--------------------------------------------------------------------------------|
| 0      | No interrupt request from the sync signal detector (VD, noise) (Initial value) |
| 1      | Interrupt requested from the sync signal detector (VD, noise)                  |

### Bit 0—CTL Signal Interrupt Request Bit (IRRCTL)

#### Bit 0

| IRRCTL | Description                                   |
|--------|-----------------------------------------------|
| 0      | No interrupt request from CTL (Initial value) |
| 1      | Interrupt requested from CTL                  |





# Section 27 Sync Separator for OSD and Data Slicer

## 27.1 Overview

The sync separator separates the horizontal sync signal and vertical sync signal from the composite video signal input from the CVin2 terminal and sends the sync signals to the on screen display (OSD) module and data slicer.

The sync separator has an automatic frequency controller (AFC), which generates a reference clock at 576 or 448 times the horizontal sync signal frequency. This reference clock is used to separate the horizontal sync signal from the composite video signal. The AFC receives the Hsync signal processed by the H complement and mask counter. The H complement and mask counter removes noise and equalizing pulses from the Hsync signal and interpolates necessary pulses for the Hsync signal.

The sync separator separates the vertical sync signal from the composite video signal through the counting operation of the V complement and mask counter. The V complement and mask counter increments the count at double the frequency of the horizontal sync signal to mask the Vsync noise and to generate complementary pulses for the Vsync signal according to the register settings.

Through the above functions, the sync signals can be separated correctly against noise input to the CVin2 terminal, motor skew due to VCR tape playback or special-function playback, and abnormal noise in a weak field.

In addition, the sync separator provides the field detection function necessary for the data slicer, and the noise detection function necessary for tuner detection (detecting the tuning status).

As the AFC reference clock is also used as the dot clock of the OSD, switching the reference clock can change the dot width of the display. When the text display mode of the OSD is used, refer to section 27.3.6, Automatic Frequency Controller (AFC).

In addition to the CVin2 video signal, the following signals can be selected as sources of sync separation through the external circuit and register settings: the Csync composite sync signal input from the Csync/Hsync terminal, and the separate Vsync and Hsync signals input from the VLPF/Vsync and Csync/Hsync terminals, respectively.

### 27.1.1 Features

- Horizontal sync signal separation: Stable separation is provided by the AFC, and complement and mask functions are available.
- AFC reference clock frequency: 576 or 448 times the frequency of the horizontal sync signal can be selected.
- Vertical sync signal separation: The masking and complement functions are available through the V complement and mask counter.
- The source for sync separation can be selected from three signals (five methods).
  1. Composite video signal input from the CVin2 terminal (two methods)
  2. Csync signal input from the Csync/Hsync terminal (two methods)
  3. Vsync and Hsync signals that are input from the VLPF/Vsync and Csync/Hsync terminals, respectively (one method)
- Csync separation comparator: The slice level can be selected by register settings.
- Polarity of the Csync/Hsync terminal input: The signal detection polarity can be selected.
- Polarity of the VLPF/Vsync terminal input: The signal detection polarity can be selected.
- Noise detection: Noise during one frame is counted and a noise detection interrupt is generated when the count reaches the specified value.
- Noise detection counter: The count is readable and is reset every other vertical sync signal input.
- Field detection: The odd or even field for interlace scanning is distinguished.
- Reference Hsync signal for the AFC: The reference Hsync signal can be selected.
- V complement and mask counter: The source for the counter clock (twice the frequency of the horizontal sync signal) can be selected.
- Internal Csync generator: The clock source for the internal Csync generator can be selected.

### 27.1.2 Block Diagram

Figure 27.1 shows the block diagram of the sync separator.

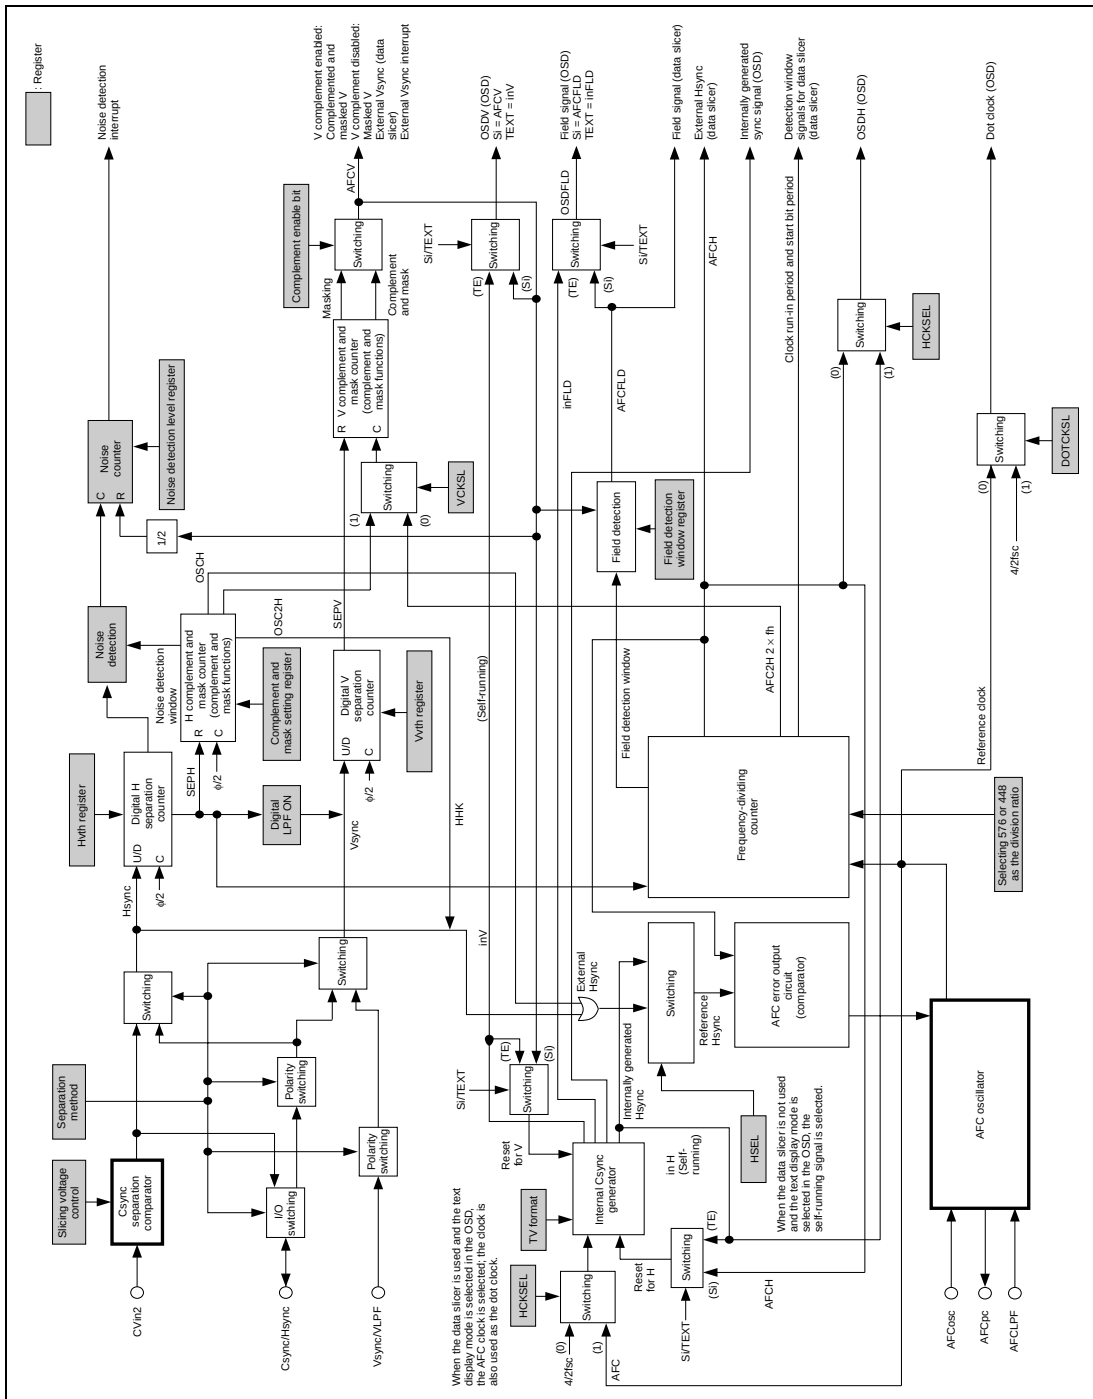


Figure 27.1 Sync Separator Block Diagram

### 27.1.3 Pin Configuration

Table 27.1 shows the pin configuration of the sync separator.

**Table 27.1 Sync Separator Pin Configuration**

| Name                     | Abbrev.     | I/O          | Function                                                                                       |
|--------------------------|-------------|--------------|------------------------------------------------------------------------------------------------|
| Sync signal input/output | Csync/Hsync | Input/output | Composite sync signal input/output or horizontal sync signal input                             |
|                          | VLPF/Vsync  | Input        | Pin for connecting external LPF for vertical sync signal or input pin for vertical sync signal |
| AFC oscillation signals  | AFCosc      | Input/output | AFC oscillation signal                                                                         |
|                          | AFCpc       | Input/output | AFC by-pass capacitor connecting pin                                                           |
| LPF for AFC              | AFCLPF      | Input/output | External LPF connecting pin for AFC                                                            |
| Composite video signal   | CVin2       | Input        | Composite video signal input (2 Vpp, with a sync tip clamp circuit)                            |

### 27.1.4 Register Configuration

Table 27.2 shows the sync separator registers.

**Table 27.2 Sync Separator Registers**

| Name                                      | Abbrev. | R/W                 | Size | Initial Value | Address* <sup>1</sup> |
|-------------------------------------------|---------|---------------------|------|---------------|-----------------------|
| Sync separation input mode register       | SEPIMR  | R/W                 | Byte | H'00          | H'D240                |
| Sync separation control register          | SEPCR   | R/(W)* <sup>2</sup> | Byte | H'00          | H'D241                |
| Sync separation AFC control register      | SEPACR  | R/(W)* <sup>2</sup> | Byte | H'10          | H'D242                |
| Horizontal sync signal threshold register | HVTHR   | W                   | Byte | H'E0          | H'D243                |
| Vertical sync signal threshold register   | VVTHR   | W                   | Byte | H'00          | H'D244                |
| Field detection window register           | FWIDR   | W                   | Byte | H'F0          | H'D245                |
| H complement and mask register            | HCMMR   | W                   | Word | H'0000        | H'D246                |
| Noise detection counter                   | NDETC   | R                   | Byte | H'00          | H'D248                |
| Noise detection level register            | NDETR   | W                   | Byte | H'00          | H'D248                |
| Data slicer detection window register     | DDETR   | W                   | Byte | H'00          | H'D249                |
| Internal sync signal frequency register   | INFRQR  | W                   | Byte | H'10          | H'D24A                |

Notes: 1. Lower 16 bits of the address.

2. Only 0 can be written to clear the flag.

# 27.2 Register Description

## 27.2.1 Sync Separation Input Mode Register (SEPIMR)

|                 |        |        |        |       |      |        |   |        |
|-----------------|--------|--------|--------|-------|------|--------|---|--------|
| Bit :           | 7      | 6      | 5      | 4     | 3    | 2      | 1 | 0      |
|                 | CCMPV1 | CCMPV0 | COMPSL | SYNCT | VSEL | DLPFON | — | FRQSEL |
| Initial value : | 0      | 0      | 0      | 0     | 0    | 0      | 0 | 0      |
| R/W :           | R/W    | R/W    | R/W    | R/W   | R/W  | R/W    | — | R/W    |

The SEPIMR is an 8-bit read/write register for selecting the source signals for sync separation. In addition to the internal switches controlled by this register setting, the external circuits are used to select the sources of the Hsync and Vsync signals to be supplied to the digital H separation counter and the digital V separation counter, respectively. Figure 27.2 and table 27.3 show the source signal selection. The SEPIMR also specifies the slicing voltage of the Csync separation comparator, switches the polarity of the signals input from the Csync/Hsync and VLPF/Vsync terminals, turns on or off the digital LPF, and switches the reference clock frequency for the AFC. For details on the source signals for sync separation, refer to section 27.3.1, Selecting Source Signals for Sync Separation. When reset, the SEPIMR is initialized to H'00.

Bits other than bit5 (COMPSL) are cleared to 0 in module stop, sleep, standby, watch, subactive, and subsleep modes.

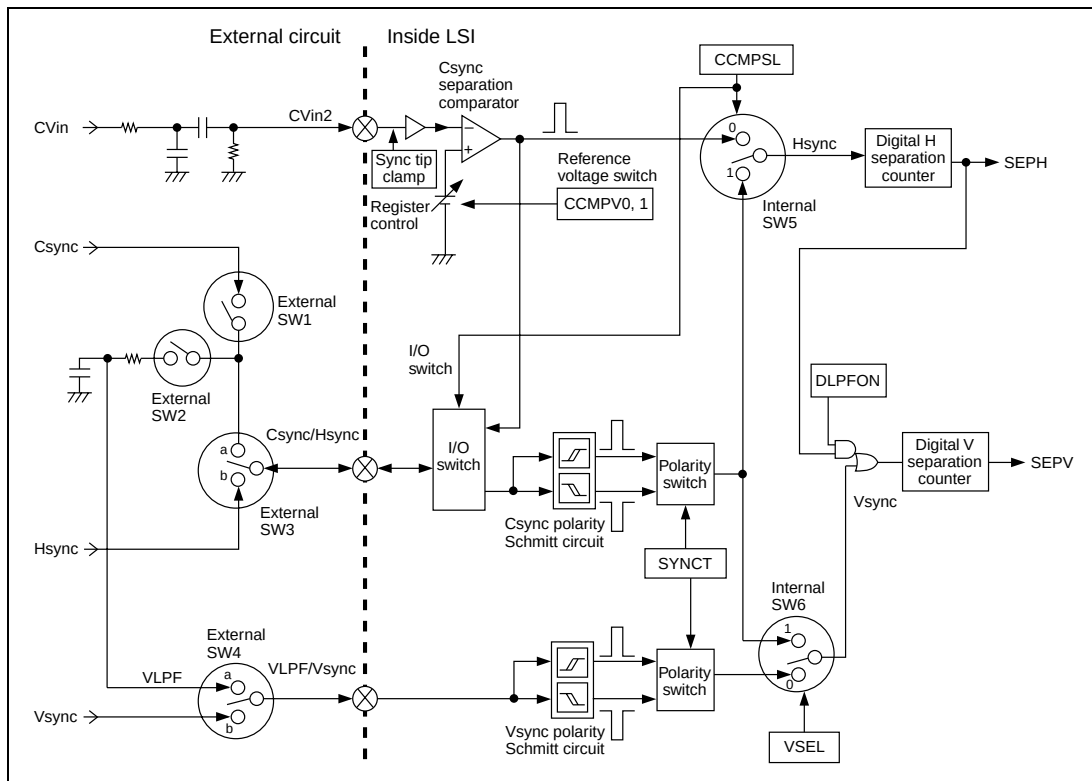


**Figure 27.2 Diagram of the Circuit for Selecting the Source Signals for Sync Separation**

**Table 27.3 Source Signals for Sync Separation**

| Input Source      | Vsync Detector | External SW1 | External SW2 | External SW3 | External SW4        | CCMPSL (Internal SW5) | VSEL (Internal SW6) | Csync/Hsync Terminal |
|-------------------|----------------|--------------|--------------|--------------|---------------------|-----------------------|---------------------|----------------------|
| CVin2 input       | Vsync Schmitt  | Off          | On           | a            | a                   | 0                     | 0                   | Output               |
|                   | Csync Schmitt  | Off          | Off          | Open         | Input fixed to OVss | 0                     | 1                   | Output               |
| Csync input       | Vsync Schmitt  | On           | On           | a            | a                   | 1                     | 0                   | Input                |
|                   | Csync Schmitt  | On           | Off          | a            | Input fixed to OVss | 1                     | 1                   | Input                |
| Hsync/Vsync input | Vsync Schmitt  | Off          | Off          | b            | b                   | 1                     | 0                   | Input                |

**Bits 7 and 6—Csync Separation Comparator Slicing Voltage Select**

**(CCMPV1 and CCMPV0):** Select the slicing voltage for the Csync separation comparator. The value set by these bits is the slicing level against the sync tip level (–40 IRE). Note that this slicing level is used only for reference.

| Bit 7  | Bit 6  |                                                   |
|--------|--------|---------------------------------------------------|
| CCMPV1 | CCMPV0 | Description                                       |
| 0      | 0      | The Csync slicing level is 10 IRE (Initial value) |
|        | 1      | The Csync slicing level is 5 IRE                  |
| 1      | 0      | The Csync slicing level is 15 IRE                 |
|        | 1      | The Csync slicing level is 20 IRE                 |

**Bit 5—Csync Separation Comparator Input Select (CCMPSL):** Controls internal switch SW5 to select whether to use the Csync separation comparator input or Csync Schmitt input. Writing 0 to this bit selects the Csync separation comparator input, and writing 1 selects the Csync Schmitt input. This bit also controls the input/output status of the Csync/Hsync terminal. Writing 0 to this bit makes the Csync/Hsync an output terminal, and writing 1 makes it an input terminal. This bit is cleared to 0 only at reset. Note that the Csync/Hsync terminal enters a high-impedance state at reset and in sleep, subactive, subsleep, watch, standby, and module stop modes\*.


| Bit 5  |                                                                                                                              |
|--------|------------------------------------------------------------------------------------------------------------------------------|
| CCMPSL | Description                                                                                                                  |
| 0      | The Csync separation comparator input is selected<br>The Csync/Hsync terminal operates as an output terminal (Initial value) |
| 1      | The Csync Schmitt input is selected<br>The Csync/Hsync terminal operates as an input terminal                                |

Note: \* When this bit is set to 1, it must be set to 1 by the instruction following the module stop release instruction in the interrupt-prohibited state.

|        |                  |                        |
|--------|------------------|------------------------|
| ORC    | #B'10000000, CCR | ← Interrupt prohibited |
| BCLR.B | #1, @MSTPCRH     | ← Module stop release  |
| BSET.B | #5, @SEPIMR      | ← Sets CCMPSL bit to 1 |
| ANDC   | #5'01111111, CCR | ← Interrupt permitted  |

**Bit 4—Sync Signal Polarity Select (SYNCT):** This bit selects the polarity of the Csync/Hsync and VLPF/Vsync input signals. When using the CVin2 input signal, be sure to write 0 to this bit to select the positive polarity.

**Bit 4**

| SYNCT | Description                                                                                          |
|-------|------------------------------------------------------------------------------------------------------|
| 0     | <br>(Initial value) |
| 1     |                     |

**Bit 3—Vsync Input Signal Select (VSEL):** Controls internal switch SW6 to select the Vsync input signal. Writing 0 to this bit selects the Vsync Schmitt input, and writing 0 selects the Csync Schmitt input.

**Bit 3**

| VSEL | Description                            |
|------|----------------------------------------|
| 0    | Vsync Schmitt input<br>(Initial value) |
| 1    | Csync Schmitt input                    |

**Bit 2—Digital LPF Control (DLPFON):** Specifies the digital LPF function, which masks noise components of the Vsync signal in a weak field. The digital LPF logically ORs the Csync signal (Vsync signal) and the SEPH signal that is separated by the digital H separation counter, then inputs the ORed result to the digital V separation counter. This function prevents Vsync detection delay and Vsync detection miss in a weak field. For the timing, refer to section 27.2.5, Vertical Sync Signal Threshold Register (VVTHR).

**Bit 2**

| DLPFON | Description                                         |
|--------|-----------------------------------------------------|
| 0      | The digital LPF does not operate<br>(Initial value) |
| 1      | The digital LPF operates                            |

**Bit 1—Reserved:** Cannot be modified and is always read as 0. When 1 is written to this bit, correct operation is not guaranteed.



**Bit 0—Reference Clock Frequency Select (FRQSEL):** Selects the frequency of the reference clock for the AFC: 576 times or 448 times the horizontal sync signal frequency. To obtain a desired reference clock frequency, connect an external circuit of a value suitable for the desired frequency to the AFCosc and AFCpc terminals, and select the division ratio of the frequency dividing counter with this bit. This AFC reference clock is also used as the dot clock for the OSD; change this frequency to adjust the dot width of the display characters. Note that the data slicer will operate when 448 times the horizontal sync frequency is selected. For details, refer to section 27.3.6, Automatic Frequency Controller (AFC).

**Bit 0**

| FRQSEL | Description                             |                 |
|--------|-----------------------------------------|-----------------|
| 0      | 576 times the horizontal sync frequency | (Initial value) |
| 1      | 448 times the horizontal sync frequency |                 |

27.2.2 Sync Separation Control Register (SEPCR)

|                 |        |        |       |        |        |       |        |     |
|-----------------|--------|--------|-------|--------|--------|-------|--------|-----|
| Bit :           | 7      | 6      | 5     | 4      | 3      | 2     | 1      | 0   |
|                 | AFCVIE | AFCVIF | VCKSL | VCMPON | HCKSEL | HHKON | HHKON2 | FLD |
| Initial value : | 0      | 0      | 0     | 0      | 0      | 0     | 0      | 0   |
| R/W :           | R/W    | R/(W)* | R/W   | R/W    | R/W    | R/W   | R/W    | R   |

Note: \* Only 0 can be written to clear the flag.

The SEPCR is an 8-bit read/write register for controlling the external Vsync interrupt, enabling or disabling the V complement function, selecting the clock source for the V complement and mask counter, selecting the clock source for the internal Csync generator, and indicating the field detected by the AFC. The SEPCR is initialized to H'00 by a reset, in module stop mode, in sleep mode, in standby mode, in watch mode, in subactive mode, or in subsleep mode.

**Bit 7—External Vsync Interrupt Enable (AFCVIE):** Enables or disables the external Vsync interrupt to be requested when the AFCVIF is set to 1.

Bit 7

| AFCVIE | Description                                              |
|--------|----------------------------------------------------------|
| 0      | The external Vsync interrupt is disabled (Initial value) |
| 1      | The external Vsync interrupt is enabled                  |

**Bit 6—External Vsync Interrupt Flag (AFCVIF):** This flag is set to 1 when the V complement and mask counter detects the external Vsync signal (the AFCV signal). For the Vsync interrupt generated in the OSD, refer to section 29, On Screen Display (OSD).

Bit 6

| AFCVIF | Description                                                                                              |
|--------|----------------------------------------------------------------------------------------------------------|
| 0      | [Clearing condition]<br>1 is read, then 0 is written (Initial value)                                     |
| 1      | [Setting condition]<br>The V complement and mask counter detects the external Vsync signal (AFCV signal) |

**Bit 5—V Complement and Mask Counter Clock Source Select (VCKSL):** Selects the clock source for the V complement and mask counter: double the frequency of the horizontal sync signal for the AFC (AFCH signal) or that for the H complement and mask counter (OSCH signal). When the text display mode is selected for the OSD and internally generated Hsync signal is selected as the reference Hsync signal for the AFC by setting the HSEL bit (bit 5) of the SEPACR, setting this VCKSL bit to 1 enables the external Vsync signal to be detected irrespectively of the text display mode operation.

#### Bit 5

| VCKSL | Description                                                                                            |
|-------|--------------------------------------------------------------------------------------------------------|
| 0     | Double the frequency of the horizontal sync signal (AFCH signal) for the AFC<br>(Initial value)        |
| 1     | Double the frequency of the horizontal sync signal (OSCH signal) for the H complement and mask counter |

**Bit 4—V Complement Function Control (VCM PON):** Enables or disables the V complement function of the V complement and mask counter. The V complement function prevents the Vsync detection being delayed and missed in a weak field. For the timing, refer to section 27.2.5, Vertical Signal Signal Threshold Register (VVTHR).

#### Bit 4

| VCM PON | Description                                              |
|---------|----------------------------------------------------------|
| 0       | The V complement function is disabled<br>(Initial value) |
| 1       | The V complement function is enabled                     |

**Bit 3—Internal Csync Generator Clock Source Select (HCKSEL):** Selects the clock source for the internal Csync generator: the 4/2 fsc clock or the AFC reference clock. When the text display mode is selected for the OSD and the external Hsync signal is selected as the reference Hsync signal for the AFC, set this HCKSEL bit to 1 to generate the internal Csync signal from the AFC reference clock. In this case, however, the Hsync and Vsync signals must be dedicated separation inputs, with both signals having equal cycles and pulse widths. This bit must be cleared to 0 when bit 1 (DOTCKSL) of SEPACR is set to 1.

#### Bit 3

| HCKSEL | Description                      |
|--------|----------------------------------|
| 0      | 4/2 fsc clock<br>(Initial value) |
| 1      | AFC reference clock              |

**Bit 2—HHK Forcibly Turned On (HHKON):** Forcibly operates the half Hsync killer (HHK) function when the H complement and mask counter interpolates complementary pulses three successive times. When the HVTHR is set within the range from 2.35  $\mu$ s to 4.7  $\mu$ s to remove equalizing pulses by using the digital H separation counter, the HHK function prevents Hsync-Vsync phase-difference errors during the V blanking period. For the timing, refer to section 27.2.4, Horizontal Sync Signal Threshold Register (HVTHR).

#### Bit 2

| HHKON | Description                                                                                               |
|-------|-----------------------------------------------------------------------------------------------------------|
| 0     | The HHK is not operated when complementary pulses are interpolated three successive times (Initial value) |
| 1     | The HHK is forcibly operated when complementary pulses are interpolated three successive times            |

**Bit 1—HHK Forcibly Turned On 2 (HHKON2):** Forcibly operates the half Hsync killer (HHK) during the V blanking period. Thus the HHK function can be forcibly operated after an interpolation operation even when the Hsync signal is not input. When the HVTHR is set within the range from 2.35  $\mu$ s to 4.7  $\mu$ s to remove equalizing pulses by using the digital H separation counter, this is an effective countermeasure against erroneous field or line detection that occurs when there is no Hsync signal input in the case of a weak electric field, etc., or when noise is superimposed. For the timing, refer to section 27.2.4, Horizontal Sync Signal Threshold Register (HVTHR).

#### Bit 1

| HHKON2 | Description                                                                   |
|--------|-------------------------------------------------------------------------------|
| 0      | The HHK is not forcibly operated during the V blanking period (Initial value) |
| 1      | The HHK is forcibly operated during the V blanking period                     |

**Bit 0—Field Detection Flag (FLD):** Indicates the field status determined by the status of the field detection window signal generated by the AFC when the external Vsync signal (AFCV signal) rises. This flag is invalid when the internally generated Hsync signal is selected as the AFC reference Hsync signal. For the timing, refer to section 27.2.6, Field Detection Window Register (FWIDR).

#### Bit 0

| FLD | Description                |
|-----|----------------------------|
| 0   | Even field (Initial value) |
| 1   | Odd field                  |

27.2.3 Sync Separation AFC Control Register (SEPACR)

|                 |        |        |      |   |   |      |         |        |
|-----------------|--------|--------|------|---|---|------|---------|--------|
| Bit :           | 7      | 6      | 5    | 4 | 3 | 2    | 1       | 0      |
|                 | NDETIE | NDETIF | HSEL | — | — | ARST | DOTCKSL | DSL32B |
| Initial value : | 0      | 0      | 0    | 1 | 0 | 0    | 0       | 0      |
| R/W :           | R/W    | R/(W)* | R/W  | — | — | R/W  | R/W     | R/W    |

Note: \* Only 0 can be written to clear the flag.

The SEPACR is an 8-bit read/write register for controlling the AFC. The AFC generates a reference clock of 576 or 448 times the frequency of the horizontal sync signal. From this reference clock, several signals such as the horizontal sync signal (AFCH signal), clock run-in detection window signal, or start bit detection window signal are generated. The reference clock is also used as the dot clock for the OSD. The AFC reference Hsync signal can be switched between the external Hsync signal and the internally generated Hsync signal. In addition, the SEPACR has a function for controlling the noise detection interrupt and enabling or disabling the AFC reset function. The SEPACR is initialized to H'10 by a reset, in module stop mode, in sleep mode, in standby mode, in watch mode, in subactive mode or in subsleep mode.

**Bit 7—Noise Detection Interrupt Enable (NDETIE):** Enables or disables the noise detection interrupt to be requested when the NDETIF is set to 1.

Bit 7

| NDETIF | Description                                               |
|--------|-----------------------------------------------------------|
| 0      | The noise detection interrupt is disabled (Initial value) |
| 1      | The noise detection interrupt is enabled                  |

**Bit 6—Noise Detection Interrupt Flag (NDETIF):** This flag is set to 1 when the noise detection counter value matches the noise detection level register value.

Bit 6

| NDETIF | Description                                                                                               |
|--------|-----------------------------------------------------------------------------------------------------------|
| 0      | [Clearing condition]<br>1 is read, then 0 is written (Initial value)                                      |
| 1      | [Setting condition]<br>The noise detection counter value matches the noise detection level register value |

**Bit 5—Reference Hsync Signal Select (HSEL):** Selects the reference Hsync signal for the AFC: the external Hsync signal or the internally generated Hsync signal. When using the data slicer, select the external Hsync signal. When not using the data slicer but using the text display mode for the OSD, select the internally generated Hsync signal. Before this bit setting is modified, the OSD display should be turned off.

#### Bit 5

| HSEL | Description                                           |
|------|-------------------------------------------------------|
| 0    | The external Hsync signal is selected (Initial value) |
| 1    | The internally generated Hsync signal is selected     |

**Bit 4—Blank Bit:** Cannot be read or modified.

**Bit 3—Reserved:** Cannot be modified and is always read as 0. When 1 is written to this bit, correct operation is not guaranteed.

**Bit 2—AFC Reset Control (ARST):** Enables or disables the AFC reset function. When a VCR motor skew occurs or the channel is switched, and if the Hsync signal (AFCH signal) output from the AFC differs in phase from the reference Hsync signal input to the AFC, the AFC is reset to eliminate the phase difference and to lock the AFCH signal phase to that of the reference signal.

#### Bit 2

| ARST | Description                                    |
|------|------------------------------------------------|
| 0    | The reset function is disabled (Initial value) |
| 1    | The reset function is enabled                  |

**Bit 1—DOTCKSL Bit (DOTCKSL):** Selects the dot-clock source of the OSD. When this bit is reset to 0, the reference clock of the AFC circuit is selected. When this bit is set to 1, the 4/2fsc clock that is input from 4/2fsc in pin is selected. When this bit is set to 1, use the OSD in text display mode. When this bit is set to 1 in superimposed mode or when HCKSEL in SEPCR is set to 1, characters will flicker. When a 4fsc clock is input while this bit is set to 1, the OSD display becomes smaller in the horizontal direction; be sure to input a 2fsc clock. To operate the data slicer in text display mode, set this bit to 1.

#### Bit 1

| DOTCKSL | Description                                                                          |
|---------|--------------------------------------------------------------------------------------|
| 0       | The reference clock of the AFC circuit is selected for the dot clock (Initial value) |
| 1       | The 4/2fsc clock is selected for the dot clock                                       |

**Bit 0—DSL32B Bit (DSL32B):** Sets 16-bit or 32-bit mode slice operation of the data slicer. For details, see section 28.4, 32-bit Slice Operation.

**Bit 0**

| DSL32B | Description                                                |
|--------|------------------------------------------------------------|
| 0      | 16-bit mode is set for the slice operation (Initial value) |
| 1      | 32-bit mode is set for the slice operation                 |

**27.2.4 Horizontal Sync Signal Threshold Register (HVTHR)**

|                 |   |   |   |       |       |       |       |       |
|-----------------|---|---|---|-------|-------|-------|-------|-------|
| Bit :           | 7 | 6 | 5 | 4     | 3     | 2     | 1     | 0     |
|                 | — | — | — | HVTH4 | HVTH3 | HVTH2 | HVTH1 | HVTH0 |
| Initial value : | 1 | 1 | 1 | 0     | 0     | 0     | 0     | 0     |
| R/W :           | — | — | — | W     | W     | W     | W     | W     |

The HVTHR is a 5-bit write-only register for specifying the threshold value for the digital H separation counter; this value is used to generate the SEPH signal from the Csync signal. The SEPH signal is set to 1 when the digital H separation counter value matches the HVTHR value while the Csync is high, and is reset to 0 when the digital H separation counter value becomes 00 while the Csync is low. The HVTHR is initialized to H'E0 by a reset, in module stop mode, in sleep mode, in standby mode, in watch mode, in subactive mode or in subsleep mode.

Figures 27.3 and 27.4 show the HVTHR value and the SEPH signal generation timing.

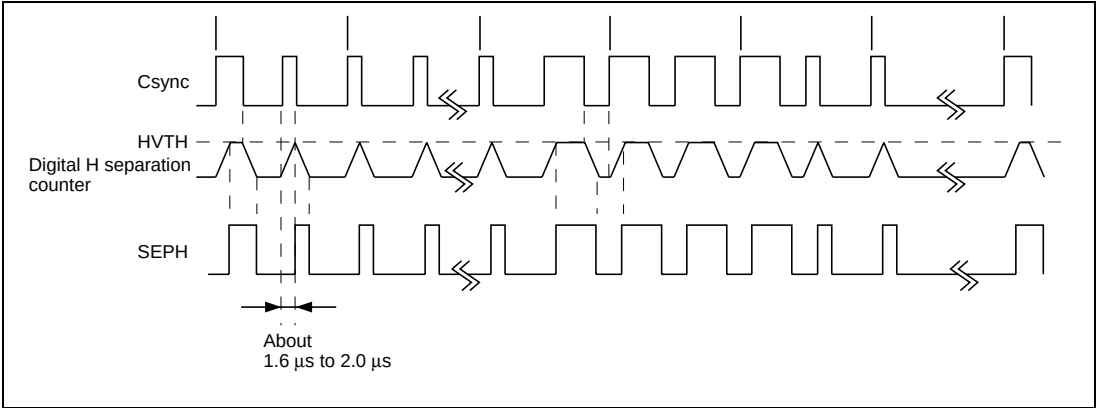


**Figure 27.3 HVTHR Value and SEPH Generation Timing  
When Equalizing Pulses Are Detected**

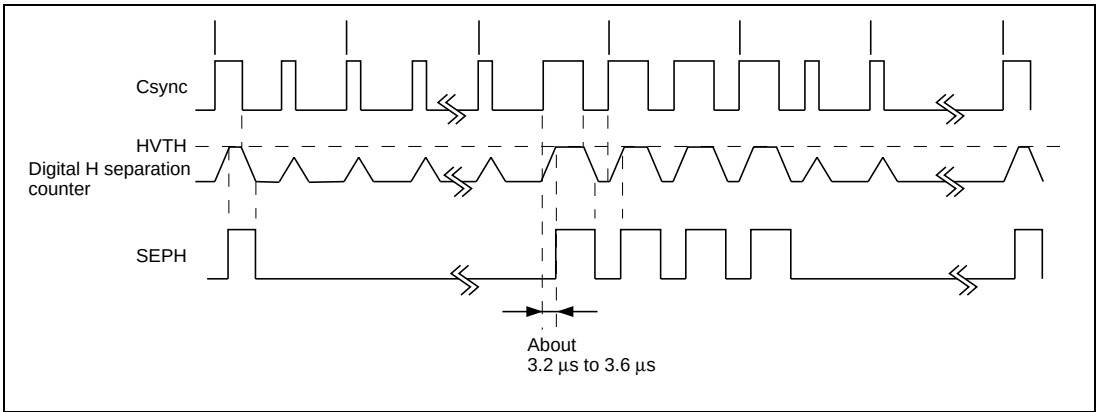


**Figure 27.4 HVTH Value and SEPH Generation Timing  
When Equalizing Pulses Are Not Detected**

The following shows examples of HVTHR settings.

Condition:  $(HVTHR - 1) \times (2/OSC) > 1.6 \mu s$  or  $3.2 \mu s$   
 System clock OSC = 10 MHz  
 $2/OSC$  (5 MHz =  $0.2 \mu s$ )

---

Example 1: To detect equalizing pulses

---

Hsync detection threshold value:  $1.6 \mu s$

---

$1.6 \mu s / 0.2 \mu s = 8$

---

HVTHR value = H'8 (8)

---



---

Example 2: To not detect equalizing pulses

---

Hsync detection threshold value:  $3.2 \mu s$

---

$3.2 \mu s / 0.2 \mu s = 16$

---

HVTHR value = H'10 (16)

---

In general, to detect Hsync pulses continuously, set the HVTHR value so that 2.35-μs equalizing pulses can be detected. However, if an equalizing pulse at an Hsync pulse position is lost in a weak field, a Hsync-Vsync phase-difference error will occur, and the field will not be detected correctly. In such a weak field, this error can be prevented by eliminating 2.35-μs equalizing pulses. Figure 27.5 shows the timing when a phase-difference error occurs.



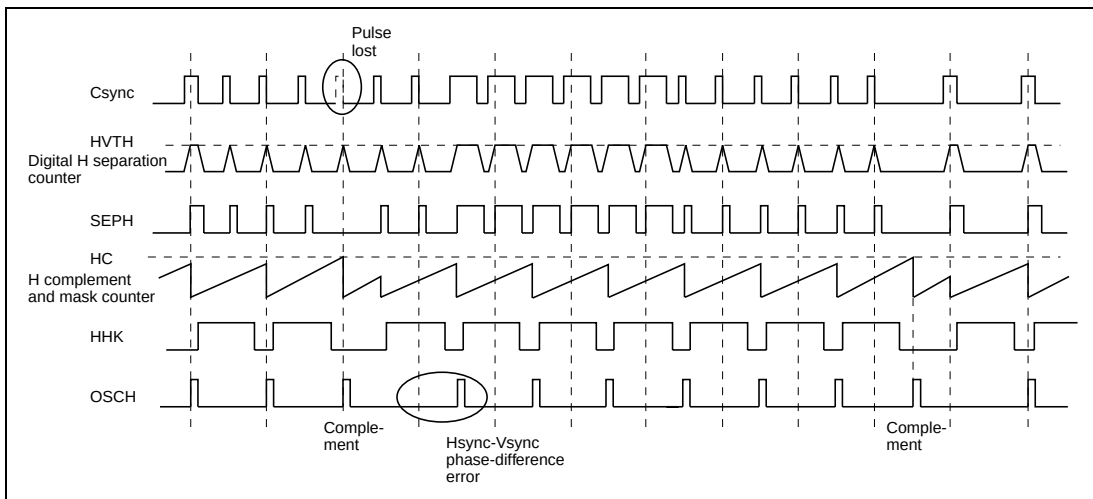


**Figure 27.5 Timing of Hsync-Vsync Phase-Difference Error When Equalizing Pulse Lost at Hsync Pulse Position**

Note: When 2.35- $\mu$ s equalizing pulses are eliminated, the complement function operates for the eliminated period. Accordingly, the rising edge of the Vsync signal for the even field is detected as an Hsync pulse. Therefore, to not generate an Hsync pulse at this position, set the HHKON bit (bit 2) of the SEPCR to 1 so that the HHK function is forcibly operated when complementary pulses are inserted three successive times. Figures 27.6 and 27.7 show this timing.

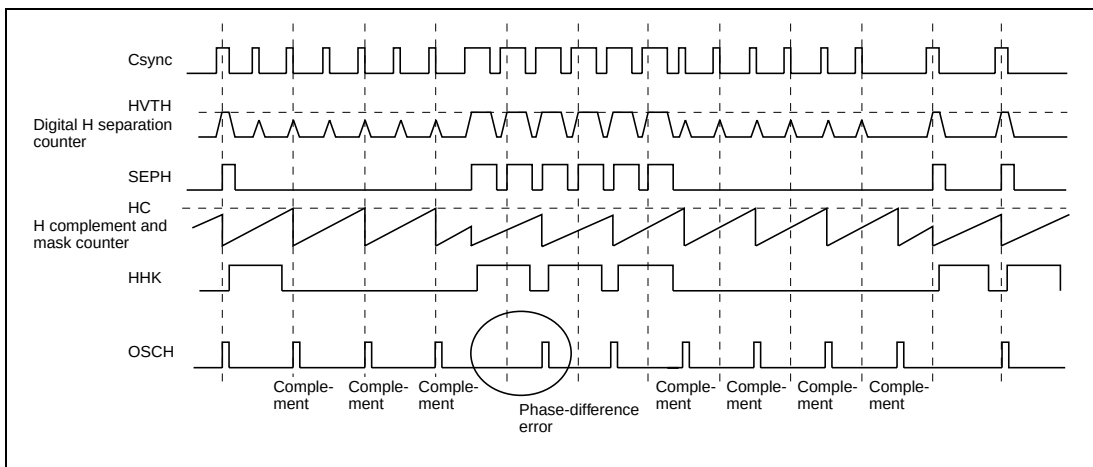


**Figure 27.6 Timing of Hsync-Vsync Phase-Difference Error When Equalizing Pulse Not Detected**

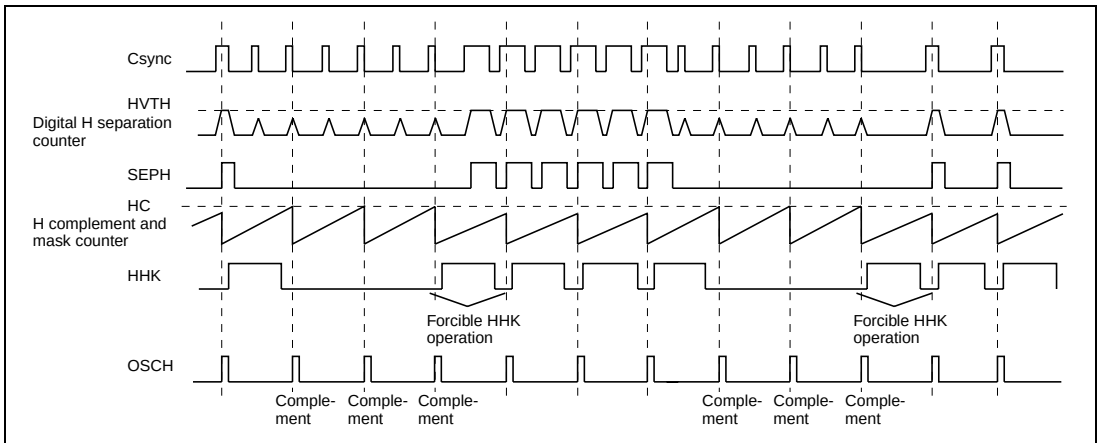


**Figure 27.7 Timing of HHK Operation**  
**When Complementary Pulses Inserted Three Successive Times While HHKON = 1**

Note: When 2.35- $\mu$ s equalizing pulses are eliminated, the complement function operates for the eliminated period. Accordingly, when there is no Hsync signal input in the case of a weak electric field, etc., and noise is superimposed, the noise is detected as an Hsync pulse. Therefore, in order not to generate an Hsync pulse in this case, set the HHKON2 bit (bit 1) of the SEPCR register to 1. Figures 27.8 and 27.9 show this timing.

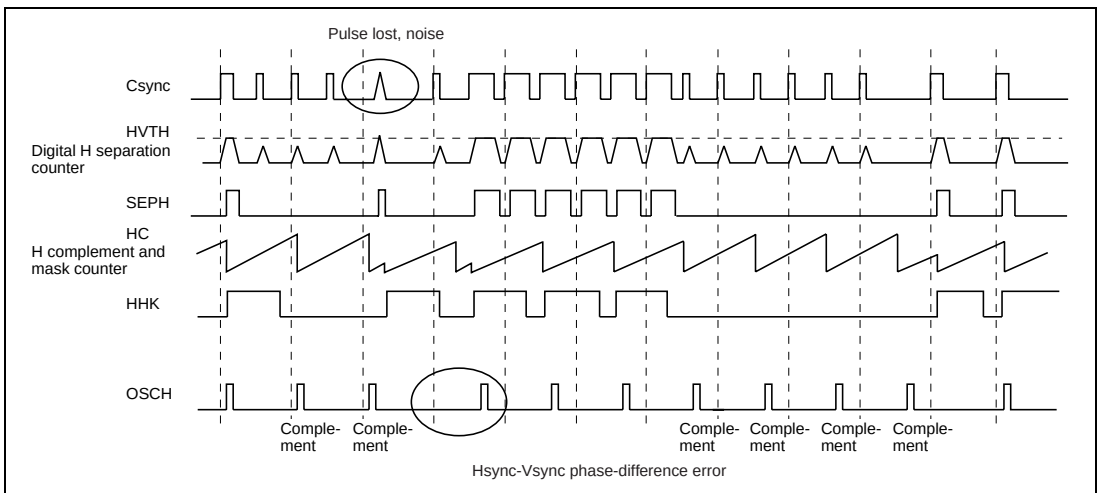


**Figure 27.8 Timing of Hsync-Vsync Phase-Difference Error Due to Noise Occurrence After Equalizing Pulse is Lost at Hsync Pulse Position**

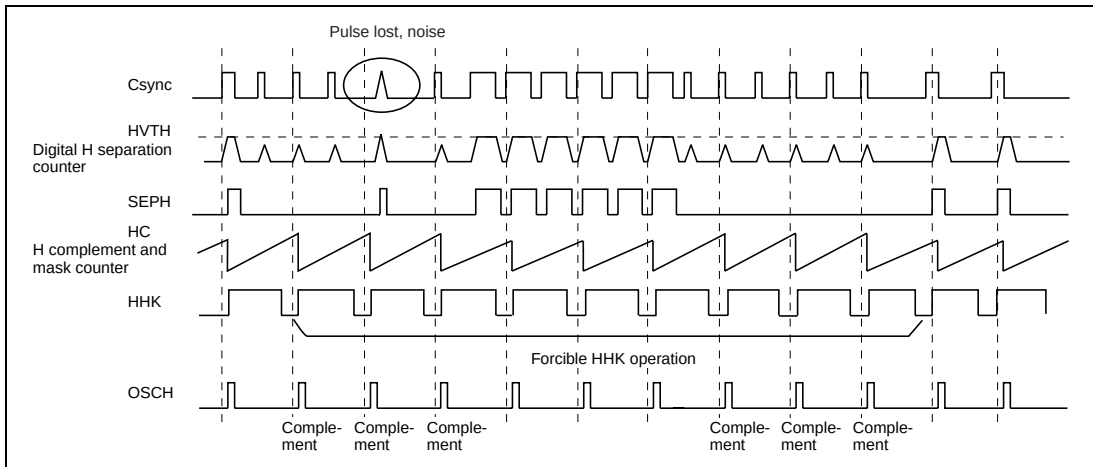


**Figure 27.9 Timing of Forcible HHK Operation in V Blanking Period When Equalizing Pulse is Not Detected**

## 27.2.5 Vertical Sync Signal Threshold Register (VVTHR)

|                 |       |       |       |       |       |       |       |       |
|-----------------|-------|-------|-------|-------|-------|-------|-------|-------|
| Bit :           | 7     | 6     | 5     | 4     | 3     | 2     | 1     | 0     |
|                 | VVTH7 | VVTH6 | VVTH5 | VVTH4 | VVTH3 | VVTH2 | VVTH1 | VVTH0 |
| Initial value : | 0     | 0     | 0     | 0     | 0     | 0     | 0     | 0     |
| R/W :           | W     | W     | W     | W     | W     | W     | W     | W     |

The VVTHR is an 8-bit write-only register for specifying the threshold value for the digital V separation counter; this value is used to generate the SEPV signal from the Csync signal. The SEPV signal is set to 1 when the digital V separation counter value matches the VVTHR value while the Csync is high, and reset to 0 when the digital V separation counter value becomes 00 while the Csync is low. Set the VVTHR value so that the SEPV signal goes high 1/2H or more after the Vsync start point. The VVTHR is initialized to H'00 by a reset, in module stop mode, in sleep mode, in standby mode, in watch mode, in subactive mode or in subsleep mode.

Figure 27.10 shows the VVTHR value and the SEPV signal generation timing.

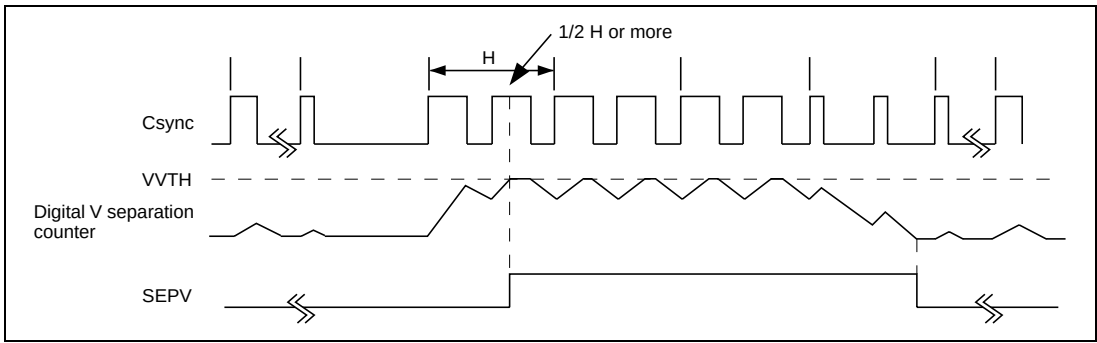


**Figure 27.10 VVTHR Value and SEPV Generation Timing**

The following shows an example of VVTHR settings.

Condition:  $(VVTHR - 1) \times (2/OSC) > (Hsync\ period / 2 - 4.7\ \mu s) \times 1.5 = 41\ \mu s$   
 System clock OSC = 10 MHz  
 $2/OSC$  (5 MHz = 0.2  $\mu s$ )

|            |                                             |
|------------|---------------------------------------------|
| Example 1: | To detect 41- $\mu s$ pulses                |
|            | Vsync detection threshold value: 41 $\mu s$ |
|            | $41\ \mu s / 0.2\ \mu s = 205$              |
|            | HVTHR value = H'CE (206)                    |

The noise component of the Csync signal in a weak field is usually large, and will cause the Vsync detection delay or miss. In such a case, set the DLPFON (bit 2) of the SEPIMR to 1; the SEPH signal detected by the digital H separation counter is logically ORed with the Csync signal (Vsync), then the result is input to the digital V separation counter. This will prevent the Vsync detection delay or miss in a weak field. Figure 27.11 shows this timing.

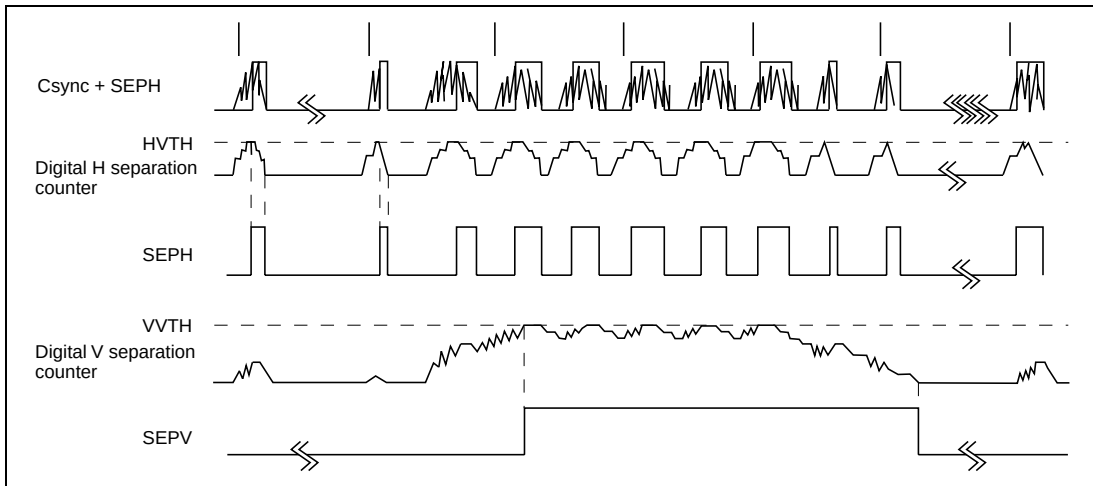


**Figure 27.11 VVTHR Value and SEPV Generation Timing When Digital LPF Is Enabled**

Alternatively, set the VCM PON (bit 4) of the SEPCR to 1 when the Vsync detection delay or miss may occur in a weak field; the external Vsync detection signal (AFCV signal) will be generated by the V complement and mask counter. Figure 27.12 shows this timing.

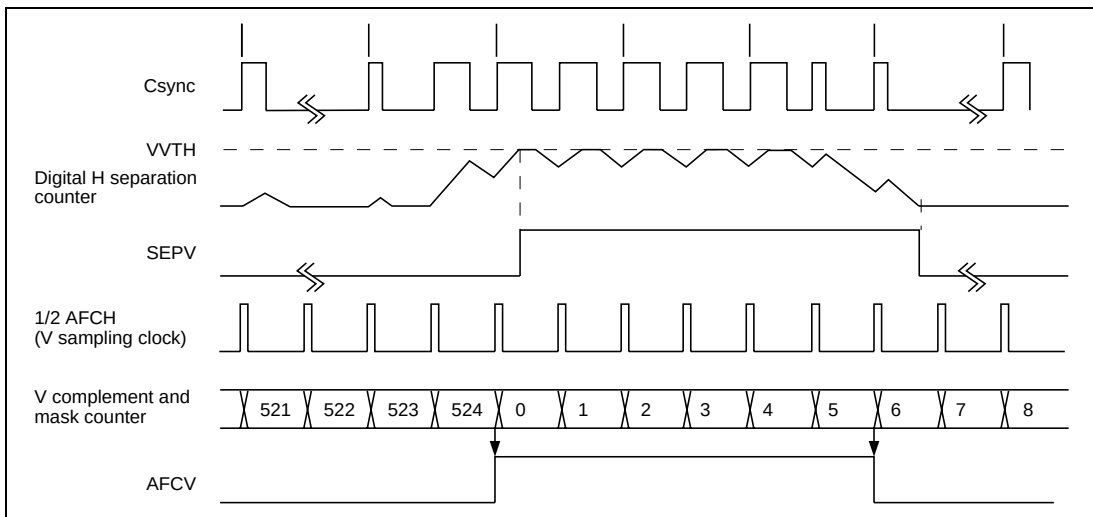


**Figure 27.12 AFCV Generation Timing When V Complement Function Is Enabled (for NTSC)**

27.2.6 Field Detection Window Register (FWIDR)

|                 |   |   |   |   |       |       |       |       |
|-----------------|---|---|---|---|-------|-------|-------|-------|
| Bit :           | 7 | 6 | 5 | 4 | 3     | 2     | 1     | 0     |
|                 | — | — | — | — | FWID3 | FWID2 | FWID1 | FWID0 |
| Initial value : | 1 | 1 | 1 | 1 | 0     | 0     | 0     | 0     |
| R/W :           | — | — | — | — | W     | W     | W     | W     |

The FWIDR is a 4-bit write-only register for specifying the field detection window timing in units of  $16 \times fh$  (fh: horizontal sync signal frequency). The field detection window signal is reset to 0 when the AFC dividing counter value matches the FWIDR value, and the signal is again set to 1 when 1/2 the Hsync signal period has passed. At a rising edge of the AFCV signal while the field detection window signal is 1, the field is determined as an odd one, and the field detection flag (FLD) is set to 1. At a rising edge of the AFCV signal while the field detection window signal is 0, the field is determined as an even one, and the FLD is cleared to 0. The value set to the FWIDR depends on the setting of the V complement function control (VCM PON) bit (bit 4) of the SEPCR. When the VCM PON is cleared to 0, that is, when the V complement function is not operating, the FWIDR must be set so that the rising edge of the SEPV signal, which is generated when the V separation counter value reaches the specified threshold value, comes to the center of the field detection window period. When the VCM PON is set to 1, that is, when the V complement function is operating, the FWIDR must be set so that the dividing counter overflow timing comes to the center of the field detection window period. The FWIDR is initialized to H'F0 by a reset, in module stop mode, in sleep mode, in standby mode, in watch mode, in subactive mode or in subsleep mode.

(1) Bit 0 of SEPCR Register

**Bit 0—Field Detection Flag (FLD):** Indicates the field determined by the status of the field detection window signal generated by the AFC when the external Vsync signal (AFCV signal) rises. This flag is invalid when the internally generated Hsync signal is selected as the AFC reference Hsync signal. For the timing, refer to figure 27.13 Field Detection Timing.

Bit 0

| LD | Description                |
|----|----------------------------|
| 0  | Even field (Initial value) |
| 1  | Odd field                  |

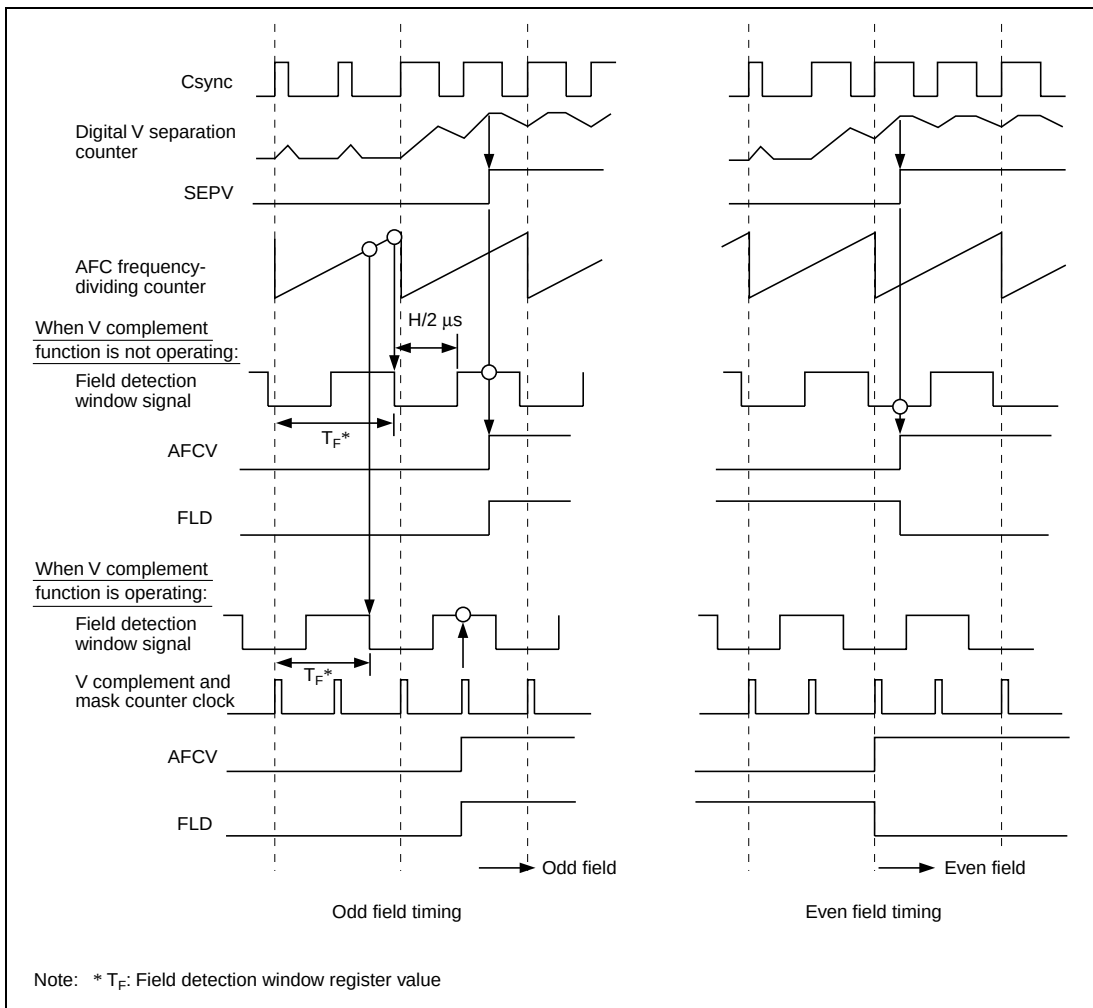


**Figure 27.13 Field Detection Timing**

## 27.2.7 H Complement and Mask Timing Register (HCMMR)

|                 |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |
|-----------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| Bit :           | 15  | 14  | 13  | 12  | 11  | 10  | 9   | 8   | 7   | 6   | 5   | 4   | 3   | 2   | 1   | 0   |
|                 | HC8 | HC7 | HC6 | HC5 | HC4 | HC3 | HC2 | HC1 | HC0 | HM6 | HM5 | HM4 | HM3 | HM2 | HM1 | HM0 |
| Initial value : | 0   | 0   | 0   | 0   | 0   | 0   | 0   | 0   | 0   | 0   | 0   | 0   | 0   | 0   | 0   | 0   |
| R/W :           | W   | W   | W   | W   | W   | W   | W   | W   | W   | W   | W   | W   | W   | W   | W   | W   |

The HCMMR is a 16-bit write-only register for specifying the timing (Th: Hsync frequency) for generating a complementary pulse when a pulse in the Hsync signal is lost, and the timing (Tm and Tm2) for clearing the HHK (masking period).

The HC8 to HC0 bits specify the timing for generating a complementary pulse; if no Hsync pulse is input within this specified time, a complementary pulse is generated from the H complement and mask counter. When a supplementary pulse is generated, the HHK function, provided for resetting the H supplement mask counter, remains cleared, and the H supplement mask counter is synchronized with the Hsync signal at the next Hsync pulse input. The HHK2 operation for generating the Hsync signal (OSCH) for the AFC circuit is performed when a supplementary pulse is generated.

The HM6 to HM0 bits specify the timing for clearing the HHK function. Set the HHK clearing timing to about 85% of the Hsync period starting from the SEPH rising edge to eliminate equalizing pulses and copy-guard signals.

Figure 27.14 shows the complement and mask timing. The HHK signal is set to 1 about 5  $\mu$ s after the SEPH rising edge, and the HHK2 signal is set to 1 immediately after the H complement and mask counter is reset. The HHK signal is also used for the noise detection window. For details on the noise detection, refer to section 27.2.8, Noise Detection Counter (NDETC).

The HCMMR is initialized to H'0000 by a reset, in module stop mode, in sleep mode, in standby mode, in watch mode, in subactive mode or in subsleep mode.



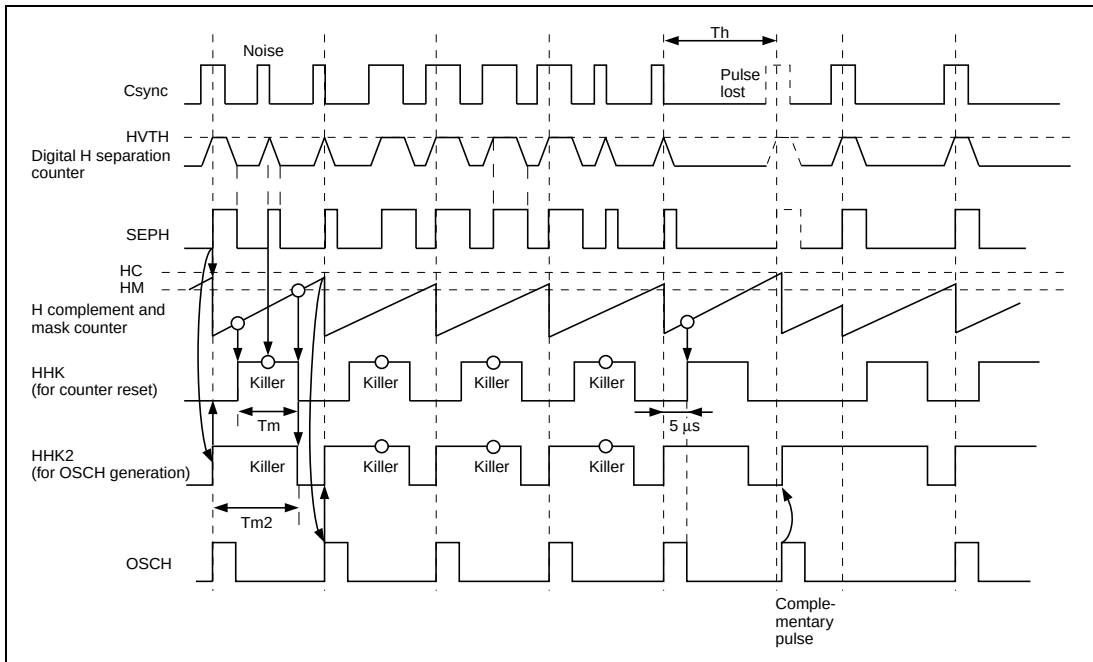


**Figure 27.14 Complement and Mask Timing of the H Complement and Mask Counter**

**Bits 15 to 7—H Complementary Pulse Setting (HC8 to HC0):** Specify the timing for generating a complementary pulse when an Hsync pulse is lost. If no Hsync pulse is input within the specified time, a complementary pulse is generated from the H complement and mask counter and interpolated to the OSCH signal.

The following shows examples of HC8 to HC0 settings.

Condition:  $(HC + 1) \times (2/OSC) > 63.5 \mu s$  (PAL:  $64 \mu s$ )  
 System clock OSC = 10 MHz  
 $2/OSC$  (5 MHz =  $0.2 \mu s$ )

Example 1: To set the timing for NTSC

NTSC:  $63.5 \mu s$

$63.5 \mu s / 0.2 \mu s = 317.5$

HC8 to HC0 value = H'13E (318)

Example 2: To set the timing for PAL

PAL:  $64 \mu s$

$64 \mu s / 0.2 \mu s = 320$

HC8 to HC0 value = H'141 (321)

**Bits 6 to 0—HHK Period Setting (HM6 to HM0):** Specify the timing for clearing the HHK (masking period) for the Hsync signal. The H complement and mask counter starts counting at a rising edge of the SEPH signal; the HHK period specified by these bits starts at this timing. This value is also used as the timing for resetting the noise detection window signal. Note that the setting precision is the upper six bits of the H complement and mask counter: the lower two bits of the counter are ignored.

The following shows an example of HM6 to HM0 settings.

Condition:  $(HM + 1) \times (8/OSC) > 54 \mu s$  (about 85% of the Hsync period)  
System clock OSC = 10 MHz  
8/OSC: 1.25 MHz (0.8  $\mu s$ )

|          |                                 |
|----------|---------------------------------|
| Example: | To set the timing to 54 $\mu s$ |
|          | $54 \mu s / 0.8 \mu s = 67.5$   |
|          | HM6 to HM0 value = H'44 (67)    |

### 27.2.8 Noise Detection Counter (NDETC)

|                 |     |     |     |     |     |     |     |     |
|-----------------|-----|-----|-----|-----|-----|-----|-----|-----|
| Bit :           | 7   | 6   | 5   | 4   | 3   | 2   | 1   | 0   |
|                 | NC7 | NC6 | NC5 | NC4 | NC3 | NC2 | NC1 | NC0 |
| Initial value : | 0   | 0   | 0   | 0   | 0   | 0   | 0   | 0   |
| R/W :           | R   | R   | R   | R   | R   | R   | R   | R   |

The NDETC is a 10-bit read-only counter of which the upper eight bits can be read. This counter counts the number of Hsync cycles in which an Hsync pulse (noise H) is input while the noise detection window signal is 1, and counts the number of Hsync cycles in which no Hsync pulse is input while the noise detection window signal is 0. When this counter value matches the noise detection level, the noise detection interrupt request flag is set. The counter is reset at every other vertical sync signal (AFCV signal) input; that is, the noise status for one field can be monitored.

The NDETC value can be read by the CPU; the noise status can be monitored by the read value.

The NDETC is initialized to H'00 by a reset, in module stop mode, in sleep mode, in standby mode, in watch mode, in subactive mode or in subsleep mode. The NDETC is assigned to the same address as the NDETR. Figure 27.15 shows the timing for noise detection.

## 27.2.9 Noise Detection Level Register (NDETR)

|                 |     |     |     |     |     |     |     |     |
|-----------------|-----|-----|-----|-----|-----|-----|-----|-----|
| Bit :           | 7   | 6   | 5   | 4   | 3   | 2   | 1   | 0   |
|                 | NR7 | NR6 | NR5 | NR4 | NR3 | NR2 | NR1 | NR0 |
| Initial value : | 0   | 0   | 0   | 0   | 0   | 0   | 0   | 0   |
| R/W :           | W   | W   | W   | W   | W   | W   | W   | W   |

The NDETR is an 8-bit write-only register for specifying the noise detection level. The set value must be 1/4 of the actual noise detection level. The noise detection window signal is set to 1 at a falling edge of the OSCH signal, and reset to 0 after the time specified by the HHK period setting bits has passed. The OSCH signal falls about 5  $\mu$ s after a rising edge of the SEPH signal.

When the noise detection counter value matches the specified noise detection level, the noise detection interrupt request flag is set to 1. The NDETR is initialized to H'00 by a reset, in module stop mode, in sleep mode, in standby mode, in watch mode, in subactive mode or in subsleep mode. The NDETR is assigned to the same address as the NDETC.

Figure 27.15 shows the timing for noise detection.

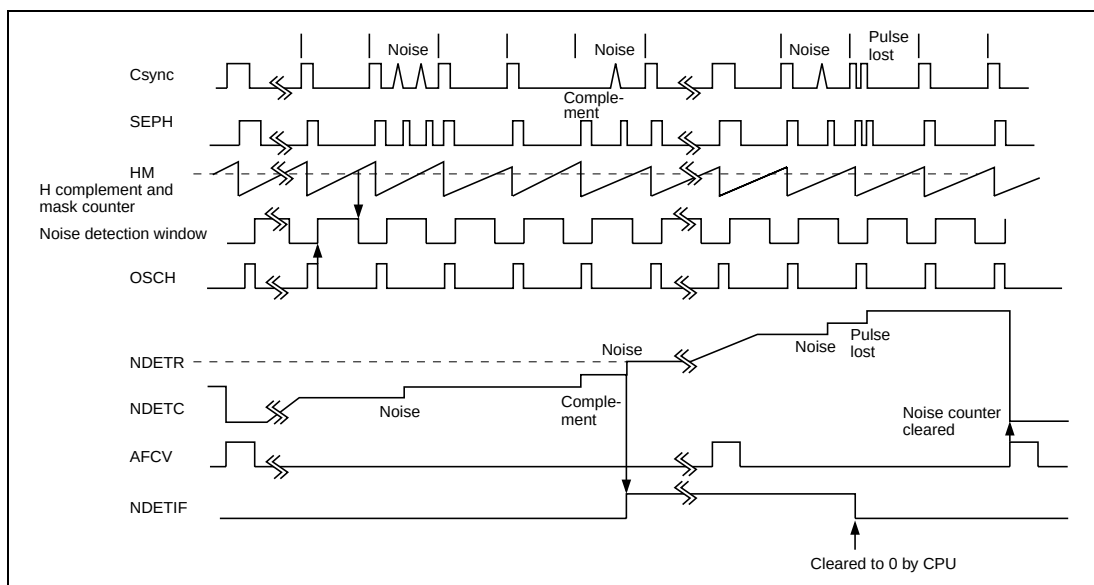


**Figure 27.15 Noise Detection Window Setting and Noise Counting Timing**

27.2.10 Data Slicer Detection Window Register (DDETWDR)

|                 |        |        |        |        |        |        |        |        |
|-----------------|--------|--------|--------|--------|--------|--------|--------|--------|
| Bit :           | 7      | 6      | 5      | 4      | 3      | 2      | 1      | 0      |
|                 | SRWDE1 | SRWDE0 | SRWDS1 | SRWDS0 | CRWDE1 | CRWDE0 | CRWDS1 | CRWDS0 |
| Initial value : | 0      | 0      | 0      | 0      | 0      | 0      | 0      | 0      |
| R/W :           | W      | W      | W      | W      | W      | W      | W      | W      |

The DDETWDR is an 8-bit write-only register for specifying the timing of the clock run-in detection window signal and start bit detection window signal supplied to the data slicer. Figure 27.16 shows the timing of the signals. The DDETWDR is initialized to H'00 by a reset, in module stop mode, in sleep mode, in standby mode, in watch mode, in subactive mode or in subsleep mode.

These detection window signals can be monitored through terminals. For details, refer to section 29.7.3, Digital Output Specification Register.

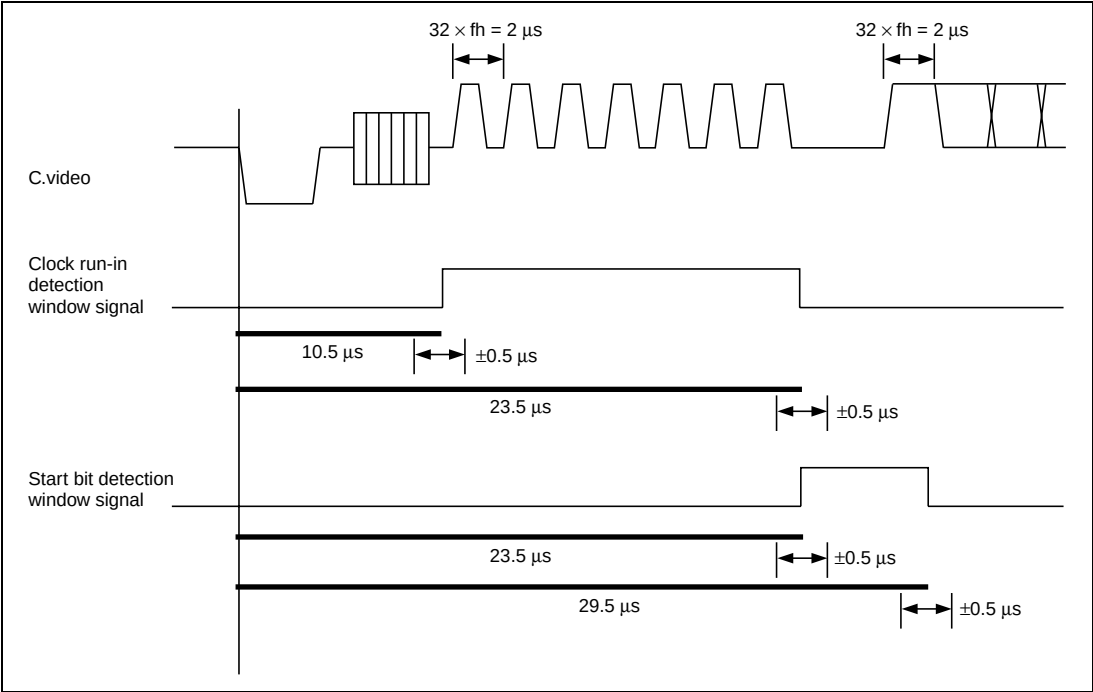


Figure 27.16 Timing for Generating Clock Run-in Detection Window Signal and Start Bit Detection Window Signal

**Bits 7 and 6—Start Bit Detection Window Signal Falling Timing Setting**

**(SRWDE1, SRWDE0):** Specify the falling timing (end timing) of the start bit detection window signal.

| Bit 7  | Bit 6  | Description                                                                           |
|--------|--------|---------------------------------------------------------------------------------------|
| SRWDE1 | SRWDE0 |                                                                                       |
| 0      | 0      | The detection ends about 29.5 $\mu$ s after the slicer start point<br>(Initial value) |
|        | 1      | The detection ends about 29.0 $\mu$ s after the slicer start point                    |
| 1      | 0      | The detection ends about 30.0 $\mu$ s after the slicer start point                    |
|        | 1      | This setting must not be used                                                         |

**Bits 5 and 4—Start Bit Detection Window Signal Rising Timing Setting**

**(SRWDS1, SRWDS0):** Specify the rising timing (start timing) of the start bit detection window signal.

| Bit 5  | Bit 4  | Description                                                                             |
|--------|--------|-----------------------------------------------------------------------------------------|
| SRWDS1 | SRWDS0 |                                                                                         |
| 0      | 0      | The detection starts about 23.5 $\mu$ s after the slicer start point<br>(Initial value) |
|        | 1      | The detection starts about 23.0 $\mu$ s after the slicer start point                    |
| 1      | 0      | The detection starts about 24.0 $\mu$ s after the slicer start point                    |
|        | 1      | This setting must not be used                                                           |

**Bits 3 and 2—Clock Run-in Detection Window Signal Falling Timing Setting**

**(CRWDE1, CRWDE0):** Specify the falling timing (end timing) of the clock run-in detection window signal.

| Bit 3  | Bit 2  | Description                                                                           |
|--------|--------|---------------------------------------------------------------------------------------|
| CRWDE1 | CRWDE0 |                                                                                       |
| 0      | 0      | The detection ends about 23.5 $\mu$ s after the slicer start point<br>(Initial value) |
|        | 1      | The detection ends about 23.0 $\mu$ s after the slicer start point                    |
| 1      | 0      | The detection ends about 24.0 $\mu$ s after the slicer start point                    |
|        | 1      | This setting must not be used                                                         |

**Bits 1 and 0—Clock Run-in Detection Window Signal Rising Timing Setting**

**(CRWDS1, CRWDS0):** Specify the rising timing (start timing) of the clock run-in detection window signal.

| Bit 1  | Bit 0  | Description                                                                          |
|--------|--------|--------------------------------------------------------------------------------------|
| CRWDS1 | CRWDS0 |                                                                                      |
| 0      | 0      | The detection starts about 10.5 $\mu$ s after the slicer start point (Initial value) |
|        | 1      | The detection starts about 10.0 $\mu$ s after the slicer start point                 |
| 1      | 0      | The detection starts about 11.0 $\mu$ s after the slicer start point                 |
|        | 1      | This setting must not be used                                                        |

**27.2.11 Internal Sync Frequency Register (INFRQR)**

|                 |      |      |     |   |   |   |   |   |
|-----------------|------|------|-----|---|---|---|---|---|
| Bit :           | 7    | 6    | 5   | 4 | 3 | 2 | 1 | 0 |
|                 | VFS2 | VFS1 | HFS | — | — | — | — | — |
| Initial value : | 0    | 0    | 0   | 1 | 0 | 0 | 0 | 0 |
| R/W :           | W    | W    | W   | — | — | — | — | — |

The INFRQR is an 8-bit write-only register for modifying the internally generated Hsync and Vsync frequency to reduce the color-bleeding or jitter of OSD in PAL, MPAL, or NPAL mode or when the non-interlaced text display mode is selected in the OSD. The INFRQR is initialized to H'10 by a reset, in module stop mode, in sleep mode, in standby mode, in watch mode, in subactive mode or in subsleep mode.

**Bits 7 and 6—Vsync Frequency Selection (VFS2, VFS1):** Select the Vsync frequency. Here, fh indicates the Hsync frequency in each TV format.

| Bit 7 | Bit 6 | Description            |
|-------|-------|------------------------|
| VFS2  | VFS1  |                        |
| 0     | 0     | fh/313 (Initial value) |
|       | 1     | fh/314                 |
| 1     | 0     | fh/310                 |
|       | 1     | fh/312                 |

**Bit 5—Hsync Frequency Selection (HFS):** Selects the Hsync frequency. Here, fsc indicates the color subcarrier signal frequency in each TV format. Note that this setting is ignored when the HCKSEL bit (bit 3) of the SEPCR is set to 1 to select the AFC clock as the internal Csync generator clock source and when the FSCIN bit (bit 12) of the DFORM in the OSD is set to 1 to select the 2fsc clock.

| Bit 5 | Description                |                            |                            |
|-------|----------------------------|----------------------------|----------------------------|
| HFS   | PAL                        | MPAL                       | NPAL                       |
| 0     | fsc/283.75 (Initial value) | fsc/227.25 (Initial value) | fsc/229.25 (Initial value) |
| 1     | fsc/283.5                  | fsc/227.5                  | fsc/229.5                  |

**Bit 4—Blank Bit:** Cannot be read or modified.

**Bits 3 to 0—Reserved:** Cannot be modified and are always read as 0. When 1 is written to these bits, correct operation is not guaranteed.

## 27.3 Operation

### 27.3.1 Selecting Source Signals for Sync Separation

The source for sync separation can be selected from three signals (five methods):

1. Composite video signal input from the CVin2 terminal (two methods)
2. Csync signal input from the Csync/Hsync terminal (two methods)
3. Vsync and Hsync signals that are input from the VLPF/Vsync and Csync/Hsync terminals, respectively (one method)

For the composite video signal and the Csync signal, two methods are available for processing the Vsync component.

#### (1) Inputting the Composite Video Signal as the Source

When the composite video signal is selected as the source, the Vsync component can be processed in two methods: using the Vsync Schmitt circuit or using the Csync Schmitt circuit.

##### (a) Using the Vsync Schmitt Circuit

The composite video signal input to the CVin2 terminal is selected as the source, and the Csync separation comparator separates the composite sync signal from the source signal. Of the composite sync signal, the Hsync component is input to the digital H separation counter, and the Vsync component is output from the Csync/Hsync terminal, goes through the external LPF circuit, then is input again through the Vsync/VLPF terminal and the Vsync Schmitt circuit to the digital V separation counter. The initial value of the SEPIMR specifies this method. Figure 27.17 shows this method.

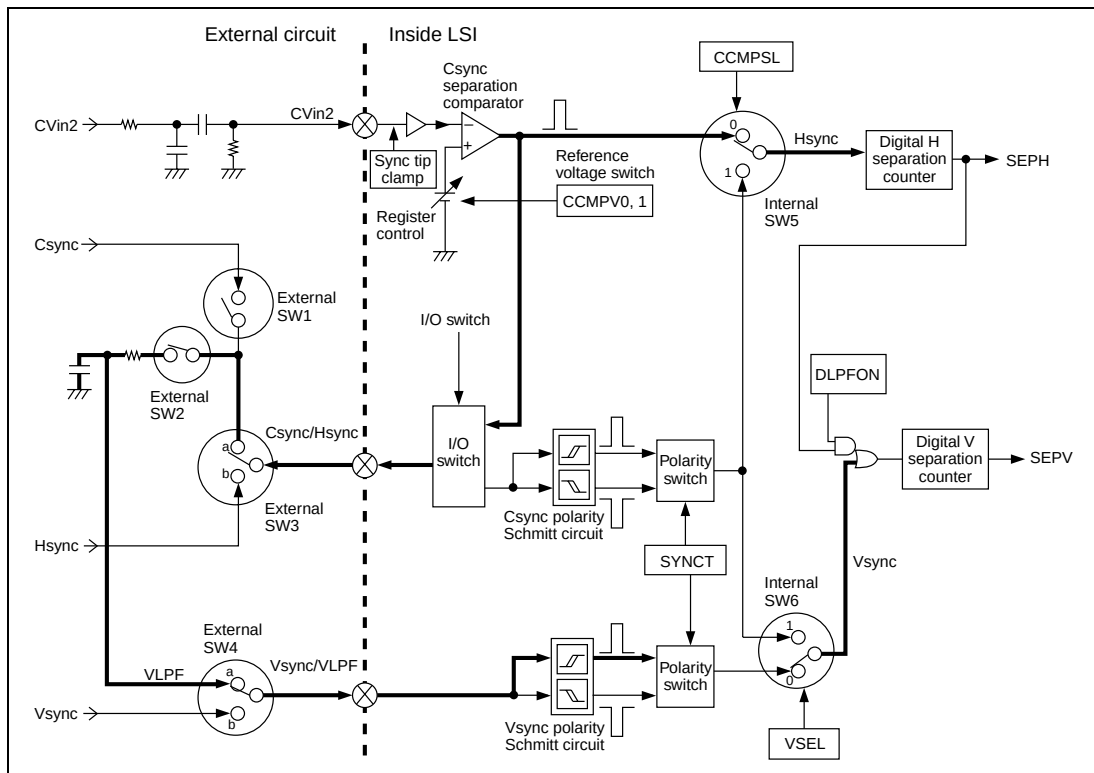


**Figure 27.17 Sync Source Selection When Using the CVin2 Signal and the Vsync Schmitt Circuit**

| Source Signal | Vsync Detection | External SW1 | External SW2 | External SW3 | External SW4 | CCMPSL (Internal SW5) | VSEL (Internal SW6) | Csync/ Hsync Terminal I/O |
|---------------|-----------------|--------------|--------------|--------------|--------------|-----------------------|---------------------|---------------------------|
| CVin2 input   | Vsync Schmitt   | Off          | On           | a            | a            | 0                     | 0                   | Output                    |



(b) Using the Csync Schmitt Circuit

The Hsync component is processed in the same way as described in (a), but the Vsync component is processed differently; the Csync/Hsync terminal is left open and the separated Vsync component is input through the Csync Schmitt circuit to the digital V separation counter. Figure 27.18 shows this method.

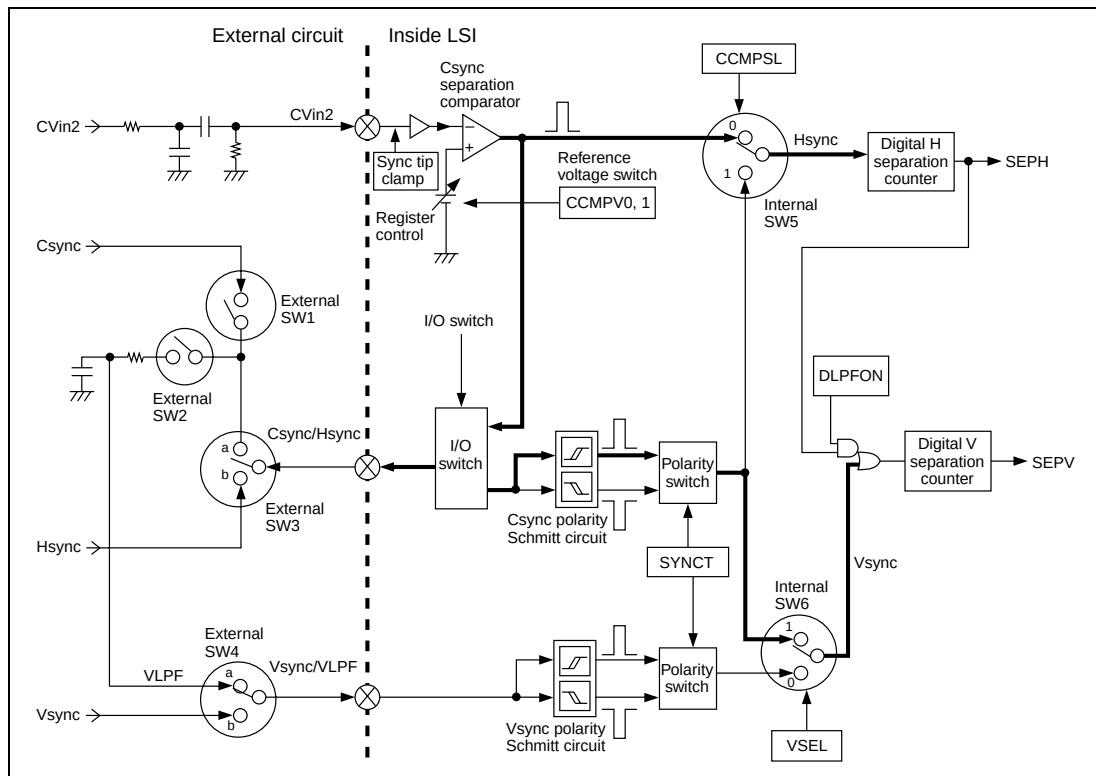


**Figure 27.18 Sync Source Selection When Using the CVin2 Signal and the Csync Schmitt Circuit**

| Source Signal | Vsync Detection | External SW1 | External SW2 | External SW3 | External SW4    | CCMPSL (Internal SW5) | VSEL (Internal SW6) | Csync/ Hsync Terminal I/O |
|---------------|-----------------|--------------|--------------|--------------|-----------------|-----------------------|---------------------|---------------------------|
| CVin2 input   | Csync Schmitt   | Off          | Off          | Open         | Fixed to 0 or 1 | 0                     | 1                   | Output                    |

## (2) Inputting the Csync Signal as the Source

When the Csync signal is selected as the source, the Vsync component can be processed in two methods: using the Vsync Schmitt circuit or using the Csync Schmitt circuit.

### (a) Using the Vsync Schmitt Circuit

The Csync signal having the polarity selected by the SYNCT bit (bit 4) of the SEPIMR is input to the Csync/Hsync terminal. The Hsync component is input through the Csync Schmitt circuit to the digital H separation counter; the Vsync component goes through the external LPF circuit, then is input through the Vsync/VLPF terminal and the Vsync Schmitt circuit to the digital V separation counter. Figure 27.19 shows this method.

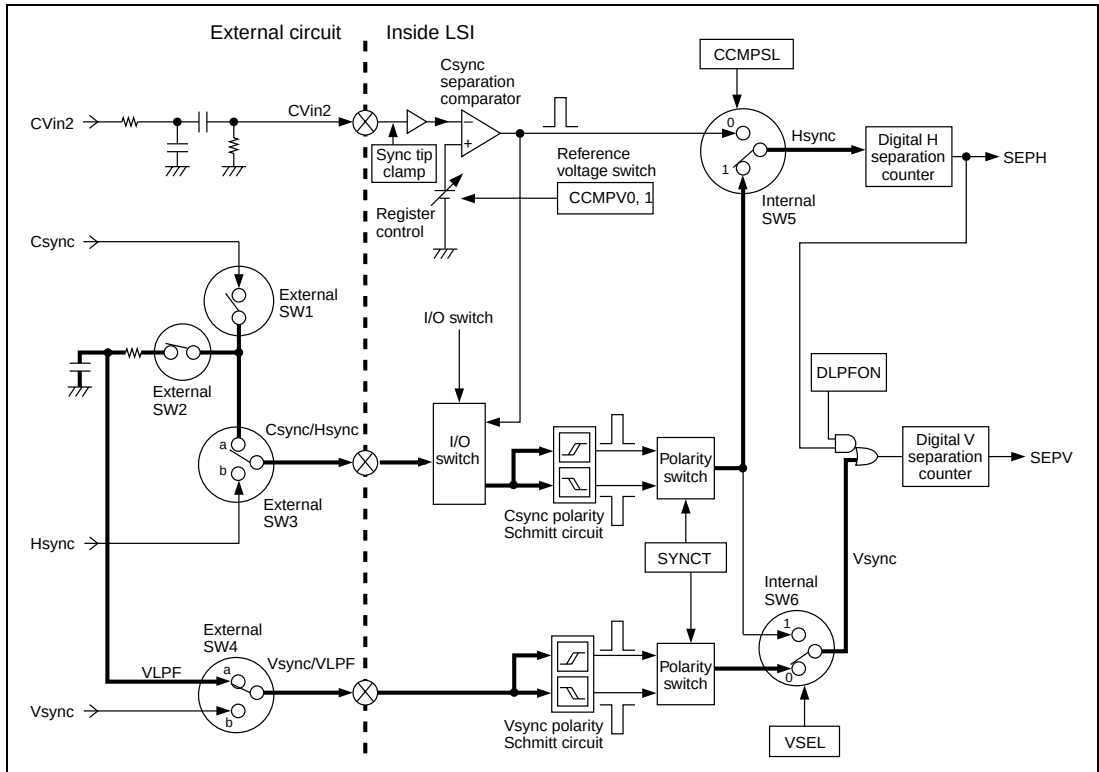


**Figure 27.19 Sync Source Selection When Using the Csync Signal and the Vsync Schmitt Circuit**

| Source Signal | Vsync Detection | External SW1 | External SW2 | External SW3 | External SW4 | CCMPSSL (Internal SW5) | VSEL (Internal SW6) | Csync/ Hsync Terminal I/O |
|---------------|-----------------|--------------|--------------|--------------|--------------|------------------------|---------------------|---------------------------|
| Csync input   | Vsync Schmitt   | On           | On           | a            | a            | 1                      | 0                   | Input                     |

## (b) Using the Csync Schmitt Circuit

The Hsync component is processed in the same way as described in (a), but the Vsync component is processed differently; the Vsync component is input through the Csync Schmitt circuit to the digital V separation counter. Figure 27.20 shows this method.

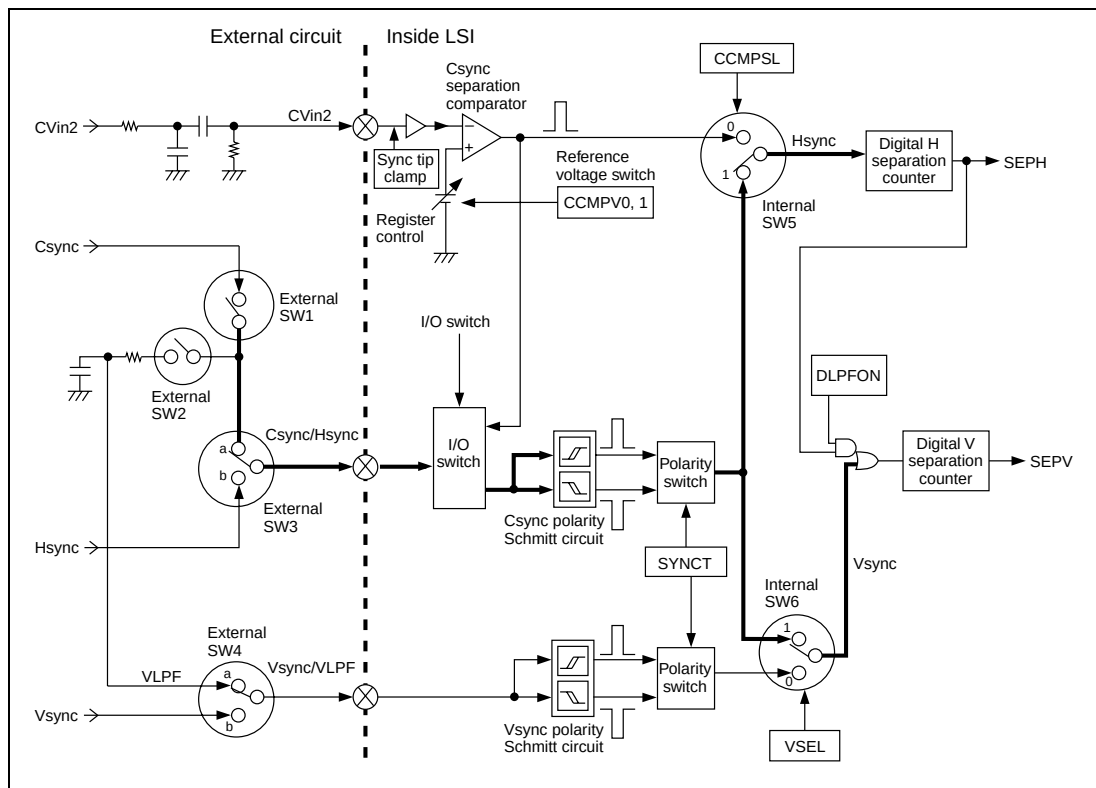


**Figure 27.20 Sync Source Selection When Using the Csync Signal and the Csync Schmitt Circuit**

| Source Signal | Vsync Detection | External SW1 | External SW2 | External SW3 | External SW4    | CCMPSL (Internal SW5) | VSEL (Internal SW6) | Csync/ Hsync Terminal I/O |
|---------------|-----------------|--------------|--------------|--------------|-----------------|-----------------------|---------------------|---------------------------|
| Csync input   | Csync Schmitt   | On           | Off          | a            | Fixed to 0 or 1 | 1                     | 1                   | Input                     |

### (3) Inputting the Hsync and Vsync Signals Separately as Sources

The Hsync signal having the polarity selected by the SYNCT bit (bit 4) of the SEPIMR is input to the Csync/Hsync terminal, and is input through the Csync Schmitt circuit to the digital H separation counter; the Vsync signal having the polarity selected by the SYNCT bit is input to the Vsync/VLPF terminal, and is sent through the Vsync Schmitt circuit to the digital V separation counter. Figure 27.21 shows this method.

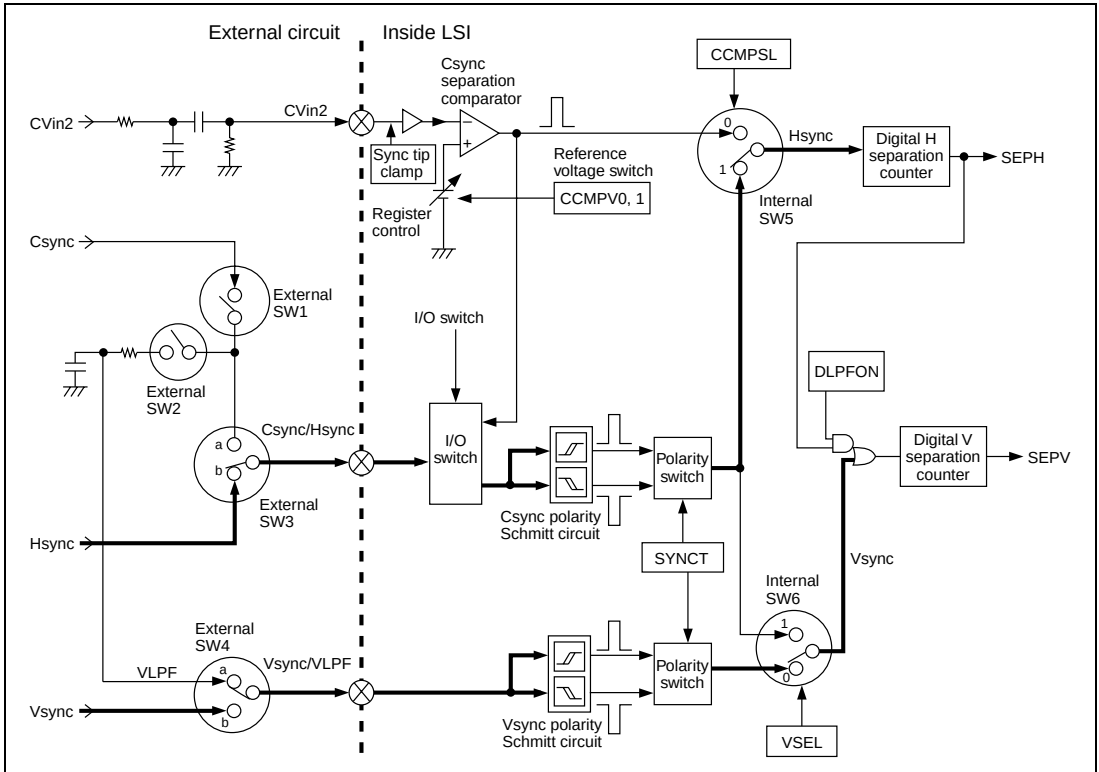


**Figure 27.21 Sync Source Selection When Using the Hsync and Vsync Signals Separately**

| Source Signal         | Vsync Detection | External SW1 | External SW2 | External SW3 | External SW4 | CCMPSL (Internal SW5) | VSEL (Internal SW6) | Csync/Hsync Terminal I/O |
|-----------------------|-----------------|--------------|--------------|--------------|--------------|-----------------------|---------------------|--------------------------|
| Hsync and Vsync input | Vsync Schmitt   | Off          | Off          | b            | b            | 1                     | 0                   | Input                    |

### 27.3.2 Vsync Separation

The Hsync separator separates the Vsync signal from the Csync signal by using the digital V separation counter, which is an 8-bit up-/down-counter, and the VVTHR register, which holds the threshold value. The digital V separation counter increments the count when the Csync signal is high, and decrements the count when the Csync is low. When the count reaches the VVTHR value while the count is incremented, the SEPV signal is set to 1 and the counter stops until the Csync signal goes low. When the Csync signal goes low, the counter starts to decrement the count. When the count reaches H'00, the SEPV signal is reset to 0 and the counter stops until the Csync signal goes high. Set the VVTHR value so that the SEPV signal goes high 1/2 or more after the Vsync start position to correctly separate the Vsync signal against the signal disturbance in a weak field or the motor skew during video tape playback. Refer to figure 27.10.

The obtained SEPV signal is sent to the V complement and mask counter. The V complement and mask counter is reset to 0 when the SEPV signal is input, and increments the count at twice the frequency ( $2 \times f_h$ ) of the horizontal sync signal for the Vsync signal (SEPV signal) cycle period. This counter masks the reset signal (SEPV) for about 85% (NTSC) or 72% (PAL) of the period from a reset to the next reset; even if a SEPV signal generated by noise is input to the counter during this period, the counter is not reset. If no SEPV signal is input after the mask period ends, the mask is left cleared; the next SEPV signal input resets the counter, and the counter is synchronized with the SEPV signal. When the counter is reset by the SEPV signal, the external Vsync detection signal (AFCV) is generated and the external Vsync interrupt flag is set to 1.

The Vsync separation function includes the digital LPF function and the Vsync complement function, which reduce the chance of the Vsync detection being delayed or missed due to the Vsync disturbance in a weak field.

#### (1) Digital LPF Function

This function logically ORs the Csync (Vsync) signal and the SEPH signal separated by the digital H counter to mask the noise component due to loss of a Vsync pulse. The digital V separation counter increment the count when the resultant signal is input. Loss of a Vsync pulse in a weak field causes SEPV signal detection to be delayed or missed, which will result in incorrect detection of fields or lines. To enable this function, set the DLPFON bit (bit 2) of the SEPIMR to 1. For the timing, refer to figure 27.11.

#### (2) Vsync Complement Function

This function makes the V complement and mask counter increment the count at a clock having twice the frequency ( $2 \times f_h$ ) of the horizontal sync signal (AFCH), and generates the AFCV signal (Vsync signal) from the count if a Vsync pulse is lost.

The count value is decoded in different ways depending on the TV format. The source of the clock for the V complement and mask counter can be switched between the AFC or the H complement and mask counter. This function can reduce the chance of the SEPV signal detection being delayed and missed in a weak field. To enable this function, set the VCM PON bit (bit 4) of the SEPCR to 1. For the timing, refer to figure 27.12.

### 27.3.3 Hsync Separation

The Hsync separator separates the Hsync signal from the Csync signal by using the digital H separation counter, which is a 5-bit up-/down-counter, and the HVTHR register, which holds the threshold value. The digital H separation counter increments the count when the Csync signal is high, and decrements the count when the Csync is low. When the count reaches the HVTHR value while the count is incremented, the SEPH signal is set to 1 and the counter stops until the Csync signal goes low. When the Csync signal goes low, the counter starts to decrement the count. When the count reaches H'00, the SEPH signal is reset to 0 and the counter stops until the Csync signal goes high. Set the HVTHR value so that 2.35- $\mu$ s equalizing pulses can be detected; that is, that the Hsync pulses can be continuously detected. Refer to figure 27.3.

The obtained SEPH signal is sent to the H complement and mask counter. The H complement and mask counter is reset to 0 when the SEPH signal is input, and increments the count at a frequency of  $\phi/2$  for the SEPH signal cycle period to generate the OSCH signal, HHK signal, and noise detection window signal. The HHK period is specified by the HM6 to HM0 bits of the HCMMR. Even if a SEPH signal is input to the counter during this HHK period, the SEPH signal is masked and the counter is not reset; noise pulses and equalizing pulses during the V blanking period are eliminated by this function.

The H complement and mask counter has the complement function. If no SEPH signal is input during the period specified by the HC8 to HC0 bits of the HCMMR, the complement function generates a complementary pulse and inserts the pulse into the OSCH signal. In this case, the counter is reset by the complementary pulse, but no HHK signal is generated; the next SEPH signal input resets the counter, and the counter is synchronized with the SEPH signal. For the timing, refer to figure 27.14.

**Note:** In a weak field, equalizing pulses are not detected in some cases because the pulses have a short duration of 2.35  $\mu$ s. If equalizing pulses, which are input at the same timing as the Hsync pulses, are not detected, a phase-difference error between the Hsync and Vsync occurs at a rising edge of the Vsync signal. Such an error will cause incorrect field detection in the sync separator and incorrect line detection by the OSD or data slicer. In such a weak field, adjust the HVTHR value so that equalizing pulses are not detected. Note that while equalizing pulses are not detected, complementary pulses are inserted repeatedly and an Hsync-Vsync phase-difference error occurs at a rising edge of the Vsync signal, even in a field that is not weak. To avoid this, set the HHKON bit (bit 2) or HHKON2 bit (bit 1) of the SEPCR to 1 to operate the HHK function when complementary pulses are generated three successive times. For the timing, refer to figures 27.6, 27.7, 27.8, and 27.9.

### 27.3.4 Field Detection

The sync separator detects whether the current field is an even field or an odd field from the 1/2H phase difference between the Hsync and Vsync by using the AFCV signal generated by the V complement and mask counter and the field detection window signal generated by the AFC. The timing of the field detection window signal can be adjusted by the FWIDR setting so that it is suitable for comparison with the AFCV signal. When a rising edge of the AFCV signal is detected while the field detection window signal is high, the current field is determined as an odd field; when a rising edge of the AFCV signal is detected while the field detection window signal is low, the current field is determined as an even field. The field detection status can be monitored from the CPU by reading the FLD bit (bit 0) of the SEPACR. This function will not operate when the internally generated Hsync signal is selected as the reference Hsync signal for the AFC, because the AFC is not synchronized with the external Hsync signal in this case. For the timing, refer to figure 27.13.

### 27.3.5 Noise Detection

The noise detection function is necessary for tuned status detection. The sync separator detects noise by using the Csync signal and the noise detection window signal generated by the H complement and mask counter. The noise detection window signal is set to 1 at a falling edge of the OSCH signal generated by the H complement and mask counter, and reset to 0 at the HHK clearing timing specified by bits 6 to 0 of the HCMMR. Noise is detected by comparing the noise counter value with the noise detection level register value. The noise counter counts the number of Hsync cycles in which an Hsync signal is input (noise H) while the noise detection window signal is high and the number of Hsync cycles in which no Hsync signal is input while the noise detection window signal is low. When the counted value reaches the noise detection level, the noise detection interrupt request flag is set. The noise counter can be read from the CPU, and the noise detection status can be monitored. The noise detection counter is reset every other Vsync signal input. Accordingly, the noise input during one field can be detected. When the internally generated Hsync signal is selected as the reference Hsync signal for the AFC and the text display mode is used in the OSD, the noise counter reset operation can be enabled by setting the VCKSL bit (bit 5) of the SEPCR to 1. For the timing, refer to figure 27.15.

### 27.3.6 Automatic Frequency Controller (AFC)

The AFC averages the Hsync signal fluctuation of the video signal. Figure 27.22 shows the AFC configuration. The AFC generates a reference clock having  $576 \times f_h$  or  $448 \times f_h$  of the Hsync signal. From this clock, several clocks are generated, such as the horizontal sync signal (AFCH signal), clock run-in detection window signal, start bit detection window signal, V complement and mask counter clock when the V complement function is selected, and the field detection window signal. The reference clock is also used as the dot clock for the OSD; modifying the reference clock frequency can change the dot width of the character display. To change the frequency, connect a circuit having a value suitable for the desired frequency to the AFCosc and AFCpc terminals, and select the division ratio for the frequency-dividing counter through the setting of the FRQSEL bit in SEPIMR. Note that the data slicer operates even when  $448 \times f_h$  is selected as the reference clock.

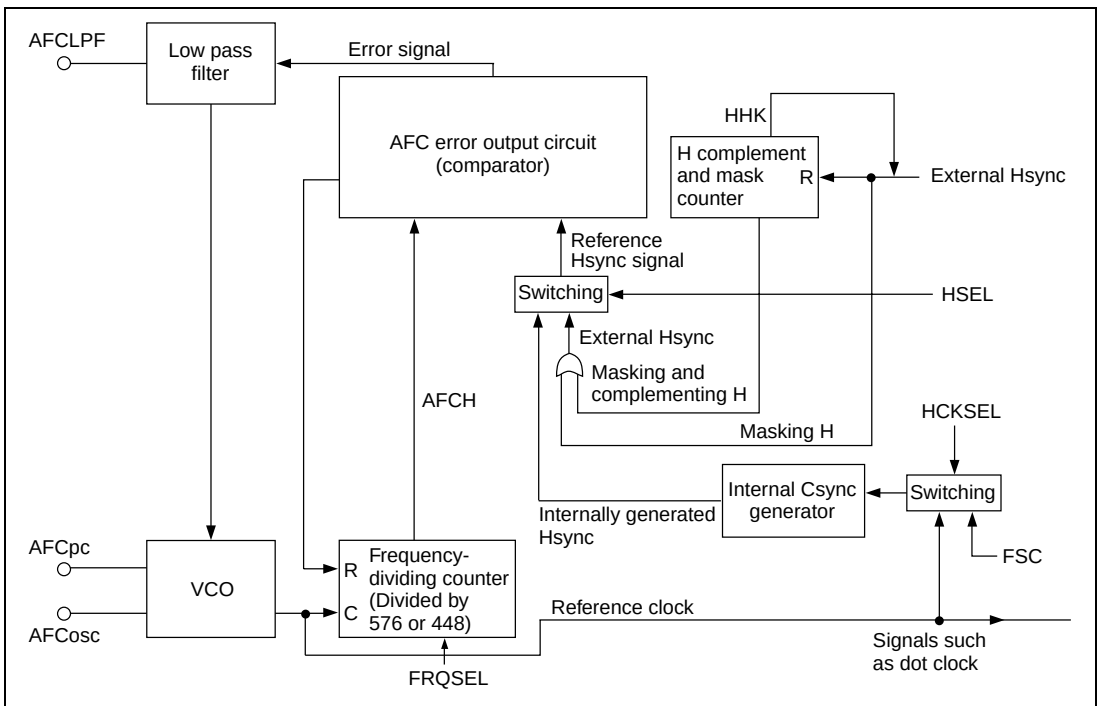


**Figure 27.22 AFC Configuration**



### (1) AFC Oscillator

The AFCosc terminal, which is the oscillation signal terminal of the voltage controlled oscillator (VCO), oscillates at 576 times the frequency ( $576 \times f_h$ ) of the Hsync signal when the Hsync signal is input at a certain phase and frequency. The difference in phase or frequency is detected between the reference Hsync signal and the Hsync signal (AFCH signal) obtained by dividing the  $576 \times f_h$  signal, the error signal is converted to a voltage by a low pass filter through the AFC error output circuit, and the voltage is used to control the VCO.

The VCO control voltage (the AFCLPF terminal voltage) is within a range from about 1.0 V to 4.0 V. The oscillating capacitance should be set so that the AFCosc oscillating frequency becomes  $576 \times f_h$  at the center (about 2.5 V) of the control voltage range. To set the oscillating frequency to  $448 \times f_h$ , change the values of the external circuits connected to the AFCpc and AFCosc terminals and modify the FRQSEL bit in SEPIMR.

### (2) AFCLPF

The AFC error output circuit detects the difference in phase or frequency between the reference Hsync signal and the Hsync signal (AFCH signal) obtained by dividing the  $576 \times f_h$  or  $448 \times f_h$  signal, and generates a pulse corresponding to the error. Connect a low pass filter (LPF) to the AFCLPF terminal to average these error pulses. If the cut-off frequency is too low, the oscillation stabilizing time (the pull-in time) needed to reach  $576 \times f_h$  or  $448 \times f_h$  becomes long when a large error is detected or after the power is turned on; a high cut-off frequency will cause jitter or an unstable display.

Connect a suitable LPF by referring to the external circuit examples shown in figures 27.23 and 27.24. When the Hsync signal includes a large disturbance, for example during special playback operation, the AFC circuit may operate incorrectly.

### (3) Reference Hsync Signal for AFC

The AFC reference clock is also used as the dot clock for the OSD. Accordingly, select the reference Hsync signal depending on whether the OSD operates in the super-imposed mode or text display mode. Refer to table 27.4, Reference Hsync Signal for AFC.

**Table 27.4 Reference Hsync Signal for AFC**

| <b>AFC<br/>Reference<br/>Hsync<br/>Signal</b> | <b>Data Slicer<br/>Operation</b> | <b>OSD<br/>Operation</b>  | <b>Field<br/>Detection</b> | <b>V Comple-<br/>ment and<br/>Mask<br/>Counter</b> | <b>HCKSEL</b> | <b>HSEL</b> | <b>VCKSL</b> | <b>DOTCKSL</b> |
|-----------------------------------------------|----------------------------------|---------------------------|----------------------------|----------------------------------------------------|---------------|-------------|--------------|----------------|
| External Hsync signal                         | Operates/<br>Stops               | Super-<br>imposed<br>mode | Operates                   | Twice the<br>frequency of<br>the AFCH              | 0             | 0           | 0            | 0              |
| Internally<br>generated<br>Hsync<br>signal    | Stops                            | Text<br>display<br>mode   | Stops                      | Twice the<br>frequency of<br>the OSCH              | 0             | 1           | 1            | 0              |
| External Hsync signal                         | Operates                         | Text<br>display<br>mode   | Operates                   | Twice the<br>frequency of<br>the AFCH              | 0             | 0           | 0            | 1              |
| External Hsync signal*                        | Operates                         | Text<br>display<br>mode   | Operates                   | Twice the<br>frequency of<br>the AFCH              | 1             | 0           | 0            | 0              |

Note: \* In this case, the Hsync and Vsync signals must be dedicated separation inputs, with both signals having equal cycles and pulse widths. The FRQSEL bit in the SEPIMR register must be cleared to 0.

#### (4) External Circuit Examples

Figures 27.23 and 27.24 show external circuit examples of the AFC.

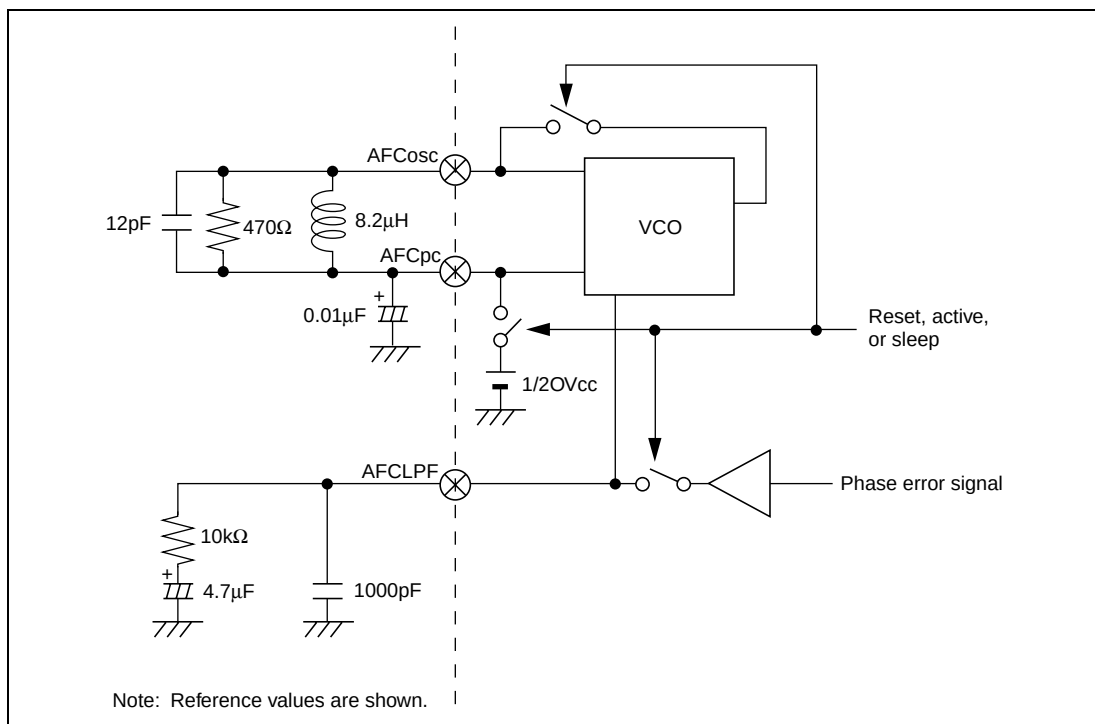


**Figure 27.23 Circuit Example for a 576 x fh Reference Clock**


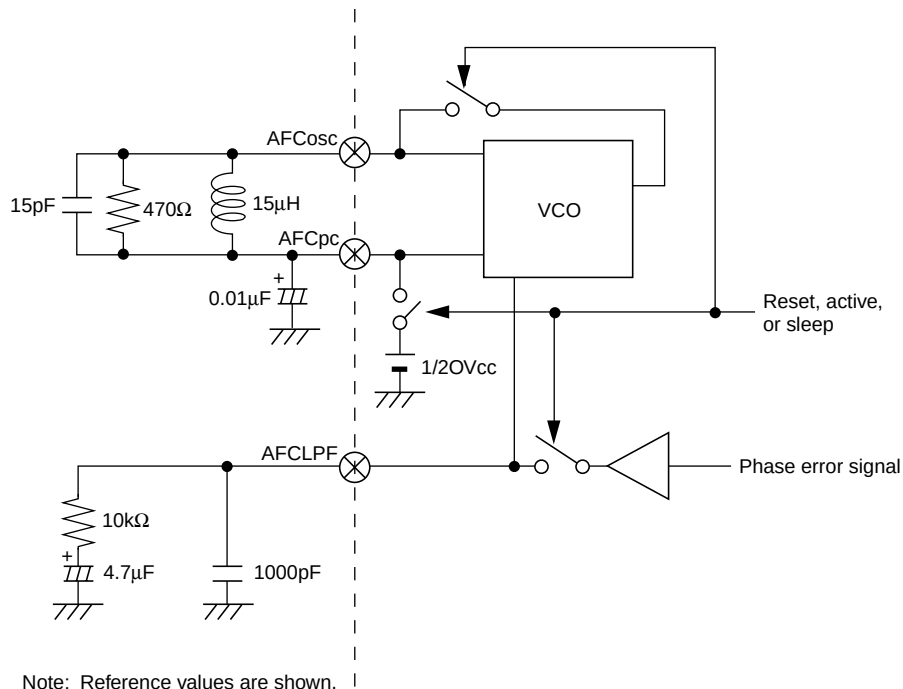


**Figure 27.24 Circuit Example for a 448 × fh Reference Clock**

27.3.7 Module Stop Control Register (MSTPCR)

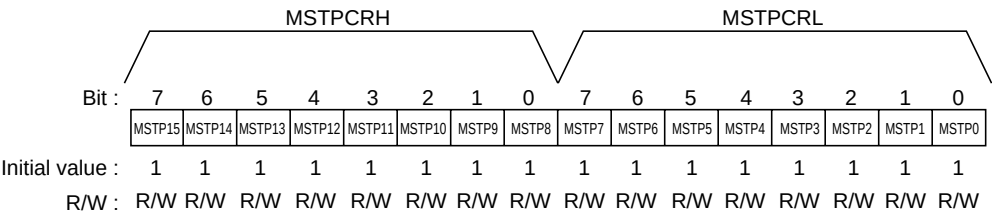

The MSTPCR is a 16-bit read/write register for controlling the module stop mode. Writing 0 to the MSTP9 bit starts the sync separator; setting the MSTP9 bit to 1 stops the sync separator at the end of a bus cycle and the module stop mode is entered.

The AFC oscillator operates in reset, active, and sleep modes. Accordingly, after the reset state is cleared, the AFC oscillator operates but the AFC error output circuit (comparator) does not operate. Clear the module stop mode of the sync separator and set the sync separator registers to the desired values. The AFC error output circuit (comparator) will stop in standby, sleep, watch, subactive, subsleep, and module stop modes. When these modes are cleared, wait for the oscillation to stabilize, that is, for the AFC frequency to reach  $576 \times fh$  or  $448 \times fh$ .

The registers cannot be read or written to in module stop mode. For details, refer to section 4.5, Module Stop Mode.

**Bit 9—Module Stop (MSTP9):** Specifies the module stop mode of the sync separator.

Bit 9

| MSTP9 | Description                                                          |
|-------|----------------------------------------------------------------------|
| 0     | Clears the module stop mode of the sync separator                    |
| 1     | Specifies the module stop mode of the sync separator (Initial value) |



# Section 28 Data Slicer

## 28.1 Overview

The data slicer extracts signals for closed caption signal in the U.S. This function can be used to extract caption data superimposed on the vertical blanking interval of TV video signals.

A high-performance internal sync separator enables reliable caption data extraction.

The data slicer operates even when 448 times the horizontal sync frequency is selected for the AFC reference clock frequency. For details, refer to section 27.3.6, Automatic Frequency Controller (AFC).

### 28.1.1 Features

- Slice lines: 4 lines\* (16-bit mode) / 1 line (32-bit mode)
- Slice levels: 7 levels
- Sampling clock: Generated by AFC
- Slice interrupt: A slice completion interrupt is generated at the end of all slices in a field
- Error detection: Clock run-in, start bit, and data end

Note: \* The H8S/2197S and H8S/2196S: 2 lines.

## 28.1.2 Block Diagram

Figure 28.1 shows the block diagram of the data slicer.

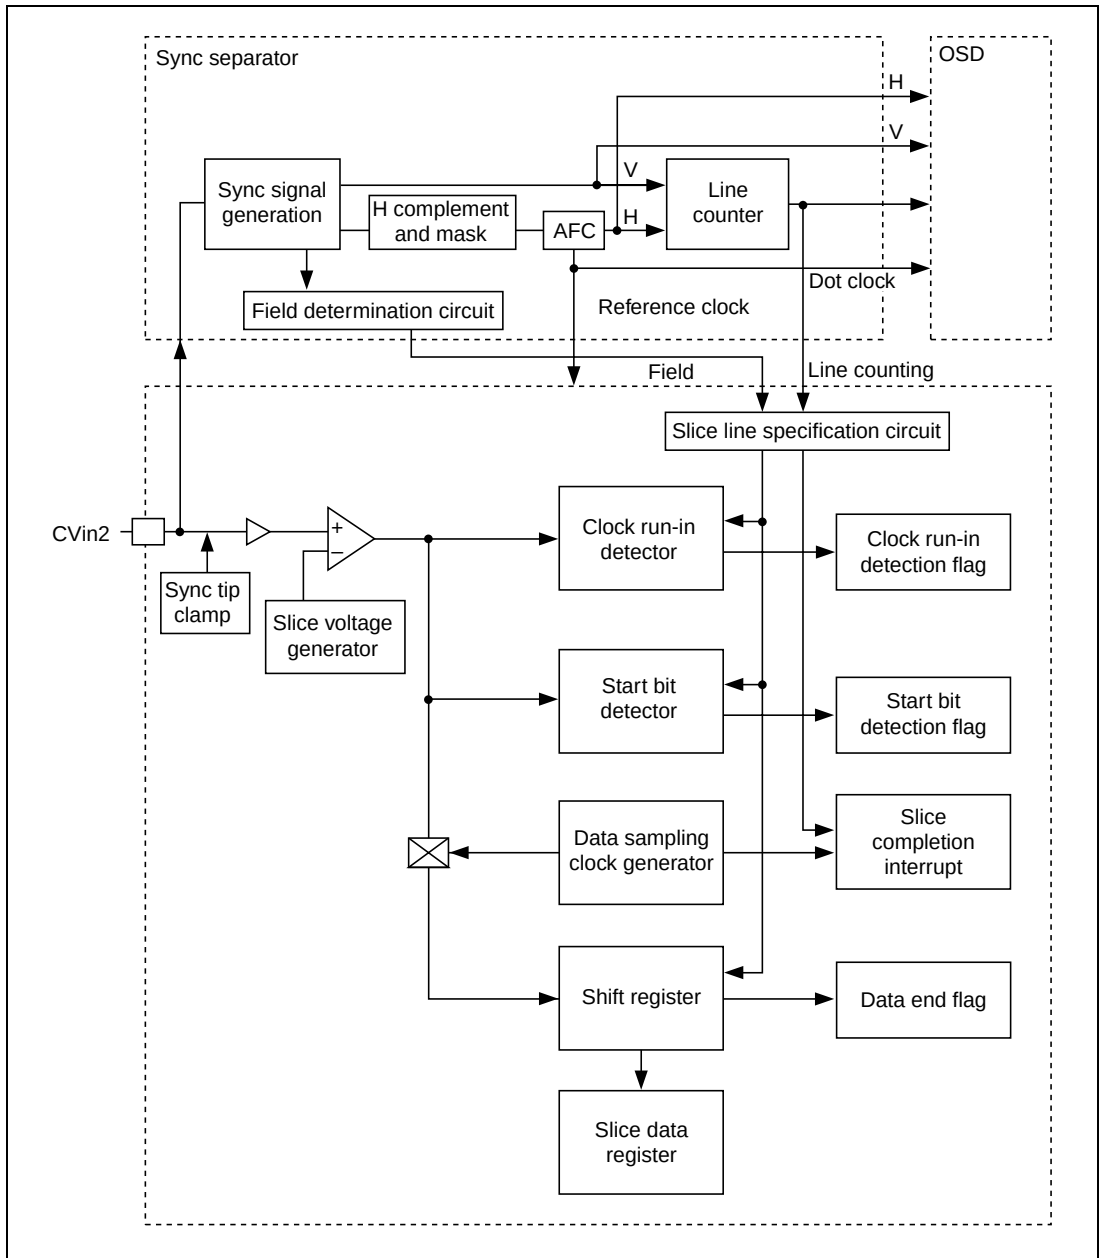


Figure 28.1 Data Slicer Block Diagram



### 28.1.3 Pin Configuration

Table 28.1 shows the pin configuration for the data slicer.

**Table 28.1 Data Slicer Pin Configuration**

| Block          | Name                     | Abbrev.      | I/O          | Function                                                                                       |
|----------------|--------------------------|--------------|--------------|------------------------------------------------------------------------------------------------|
| Sync separator | Sync signal input/output | Csync/Hsync  | Input/output | Composite sync signal input/output or horizontal sync signal input                             |
|                |                          | VLPF/Vsync   | Input        | Pin for connecting external LPF for vertical sync signal or input pin for vertical sync signal |
|                | AFC oscillation          | AFCosc       | Input/output | AFC oscillation signal                                                                         |
|                |                          | AFCpc        | Input/output | AFC by-pass capacitor connecting pin                                                           |
|                | LPF for AFC              | AFCLPF       | Input/output | External LPF connecting pin for AFC                                                            |
|                | fsc oscillation          | 4fsc/2fscin  | Input        | 4fsc or 2fsc input                                                                             |
|                |                          | 4fsc/2fscout | Output       | 4fsc or 2fsc output                                                                            |
| Data slicer    | Composite video signal   | Cvin2        | Input        | Composite video signal input (2 Vpp, with a sync tip clamp circuit)                            |

## 28.1.4 Register Configuration

Table 28.2 shows the data slicer registers.

**Table 28.2 Register Configuration**

| Name                                        | Abbrev. | R/W                 | Size      | Initial Value | Address <sup>*3</sup> |
|---------------------------------------------|---------|---------------------|-----------|---------------|-----------------------|
| Slice even-field mode register              | SEVFD   | R/(W) <sup>*1</sup> | Word/byte | H'2000        | H'D220                |
| Slice odd-field mode register               | SODFD   | R/(W) <sup>*1</sup> | Word/byte | H'2000        | H'D222                |
| Slice line setting register 1               | SLINE1  | R/W                 | Word/byte | H'20          | H'D224                |
| Slice line setting register 2               | SLINE2  | R/W                 | Word/byte | H'20          | H'D225                |
| Slice line setting register 3 <sup>*4</sup> | SLINE3  | R/W                 | Word/byte | H'20          | H'D226                |
| Slice line setting register 4 <sup>*4</sup> | SLINE4  | R/W                 | Word/byte | H'20          | H'D227                |
| Slice detection register 1                  | SDTCT1  | R/(W) <sup>*2</sup> | Word/byte | H'10          | H'D228                |
| Slice detection register 2                  | SDTCT2  | R/(W) <sup>*2</sup> | Word/byte | H'10          | H'D229                |
| Slice detection register 3 <sup>*4</sup>    | SDTCT3  | R/(W) <sup>*2</sup> | Word/byte | H'10          | H'D22A                |
| Slice detection register 4 <sup>*4</sup>    | SDTCT4  | R/(W) <sup>*2</sup> | Word/byte | H'10          | H'D22B                |
| Slice data register 1                       | SDATA1  | R                   | Word/byte | Undefined     | H'D22C                |
| Slice data register 2                       | SDATA2  | R                   | Word/byte | Undefined     | H'D22E                |
| Slice data register 3 <sup>*4</sup>         | SDATA3  | R                   | Word/byte | Undefined     | H'D230                |
| Slice data register 4 <sup>*4</sup>         | SDATA4  | R                   | Word/byte | Undefined     | H'D232                |

- Notes: 1. Only 0 can be written to clear the flag (bit 14).  
2. Bits 7 to 0 are cleared when 1 is written to bit 7 of the corresponding slice line setting register.  
3. Lower 16 bits of the address.  
4. Not available for the H8S/2197S and H8S/2196S.

## 28.1.5 Data Slicer Use Conditions

Table 28.3 indicates the conditions of use of the data slicer.

**Table 28.3 Data Slicer Use Conditions**

| Sync Signal Input for Sync Separation   | Data Slicer |
|-----------------------------------------|-------------|
| Sync separation signal input from CVin2 | Usable      |
| Sync separation signal input from Csync | Usable      |
| Hsync or Vsync separation signals       | Usable      |

## 28.2 Register Description

### 28.2.1 Slice Even- (Odd-) Field Mode Register (SEVFD, SODFD)

#### (1) Slice even-field mode register

|                |       |        |    |       |       |       |       |       |
|----------------|-------|--------|----|-------|-------|-------|-------|-------|
| Bit:           | 15    | 14     | 13 | 12    | 11    | 10    | 9     | 8     |
|                | EVNIE | EVNIF  | —  | STBE4 | STBE3 | STBE2 | STBE1 | STBE0 |
| Initial value: | 0     | 0      | 1  | 0     | 0     | 0     | 0     | 0     |
| R/W:           | R/W   | R/(W)* | —  | R/W   | R/W   | R/W   | R/W   | R/W   |

|                |        |        |        |       |       |       |       |       |
|----------------|--------|--------|--------|-------|-------|-------|-------|-------|
| Bit:           | 7      | 6      | 5      | 4     | 3     | 2     | 1     | 0     |
|                | SLVLE2 | SLVLE1 | SLVLE0 | DLYE4 | DLYE3 | DLYE2 | DLYE1 | DLYE0 |
| Initial value: | 0      | 0      | 0      | 0     | 0     | 0     | 0     | 0     |
| R/W:           | R/W    | R/W    | R/W    | R/W   | R/W   | R/W   | R/W   | R/W   |

#### (2) Slice odd-field mode register

|                |       |        |    |       |       |       |       |       |
|----------------|-------|--------|----|-------|-------|-------|-------|-------|
| Bit:           | 15    | 14     | 13 | 12    | 11    | 10    | 9     | 8     |
|                | ODDIE | ODDIF  | —  | STBO4 | STBO3 | STBO2 | STBO1 | STBO0 |
| Initial value: | 0     | 0      | 1  | 0     | 0     | 0     | 0     | 0     |
| R/W:           | R/W   | R/(W)* | —  | R/W   | R/W   | R/W   | R/W   | R/W   |

|                |        |        |        |       |       |       |       |       |
|----------------|--------|--------|--------|-------|-------|-------|-------|-------|
| Bit:           | 7      | 6      | 5      | 4     | 3     | 2     | 1     | 0     |
|                | SLVLO2 | SLVLO1 | SLVLO0 | DLYO4 | DLYO3 | DLYO2 | DLYO1 | DLYO0 |
| Initial value: | 0      | 0      | 0      | 0     | 0     | 0     | 0     | 0     |
| R/W:           | R/W    | R/W    | R/W    | R/W   | R/W   | R/W   | R/W   | R/W   |

Note: \* Only 0 can be written to clear the flag.

The SEVFD and SODFD control the start bit detection starting position, slice voltage level, data sampling delay time, and interrupts. The SEVFD holds settings for even fields, and the SODFD holds settings for odd fields. When reset, when the module is stopped, in sleep mode, in standby mode, in watch mode, in subactive mode, or in subsleep mode, the SEVFD and SODFD are both initialized to H'2000.

The SEVFD and SODFD are 16-bit read/write registers; however, rewriting of SEVFD or SODFD should be performed after output of an even- (odd-) field slice completion interrupt. During data slice operations, if SEVFD or SODFD is rewritten, a malfunction will result; do not perform rewriting during data slice operation.

**Bit 15—Even- (Odd-) Field Slice Completion Interrupt Enable Flag (EVNIE, ODDIE):**

Enables or disables the generation of even- (odd-) field slice completion interrupts.

**Bit 15**

| EVNIE<br>ODDIE | Description                                            |                 |
|----------------|--------------------------------------------------------|-----------------|
| 0              | Disables even- (odd-) field slice completion interrupt | (Initial value) |
| 1              | Enables even- (odd-) field slice completion interrupt  |                 |

**Bit 14—Even- (Odd-) Field Slice Completion Interrupt Flag (EVNIF, ODDIF):** Set when data slicing for all specified lines of even (odd) field is completed.

**Bit 14**

| EVNIF<br>ODDIF | Description                                                                                       |                 |
|----------------|---------------------------------------------------------------------------------------------------|-----------------|
| 0              | [Clearing condition]<br>When 0 is written after reading 1                                         | (Initial value) |
| 1              | [Setting condition]<br>When data slicing is completed for all specified lines of even (odd) field |                 |

**Bit 13—Reserved:** Cannot be modified and is always read as 1.

**Bits 12 to 8—Start Bit Detection Starting Position Bits**

**(STBE4 to STBE0) (STBO4 to STBO0):** Set the starting position for start bit detection in even (odd) fields.

The base point for the data slicer is the falling edge of the horizontal sync signal (slicer base point H) synchronized within the LSI; the starting position for start bit detection can be set using STBE4 to STBE 0 (STBO4 to STBO0) in  $288 \times f_h$  (where  $f_h$  is the horizontal sync signal frequency) clock units from approximately 23.5  $\mu$ s after the data slicer base point.

The start bit detection end position is at approximately 29.5  $\mu$ s after the data slicer base point.

In start bit detection, the presence of the rising edge of start bits in the interval between these starting and ending positions is detected. Further, the start bit detection window signal, which becomes the base point for the start bit detection starting position, can be adjusted by means of the data slicer detection window register of the sync separator. For details, refer to section 27.2.10, Data Slicer Detection Window Register (DDETWR).

Figure 28.2 shows the data slicer base point and start bit detection starting position.

Note: 288 when bit 0 (FRQSEL) of SEPIMR in the sync separator is 0, and 224 when FRQSEL is 1.

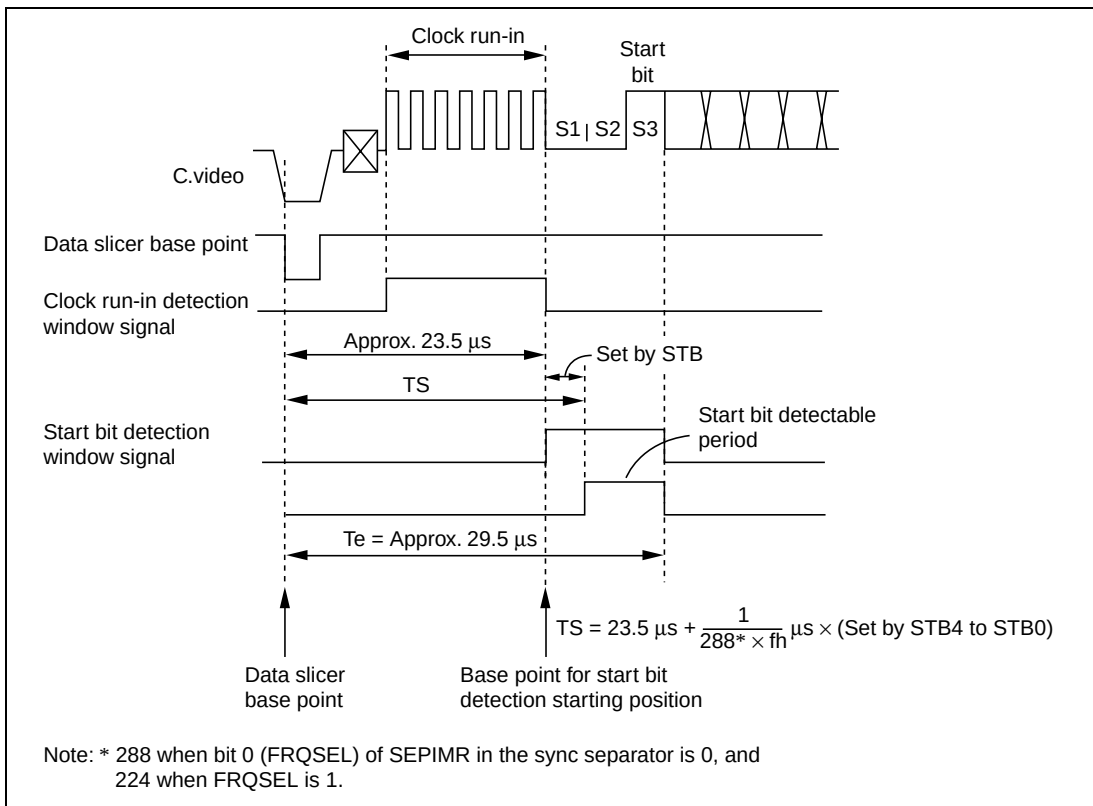


**Figure 28.2 Data Slicer Base Point and Start Bit Detection Starting Position**

**Bits 7 to 5—Slice Level Setting Bits (SLVLE2 to SLVLE0) (SLVLO2 to SLVLO0):** Specify the even (odd) field data slice level.

The data slice level is common to clock line detection, start bit detection, and 16-bit data slicing.

| Bit 7            | Bit 6            | Bit 5            | Description                          |
|------------------|------------------|------------------|--------------------------------------|
| SLVLE2<br>SLVLO2 | SLVLE1<br>SLVLO1 | SLVLE0<br>SLVLO0 |                                      |
| 0                | 0                | 0                | Slice level is 0 IRE (Initial value) |
|                  |                  | 1                | Slice level is 5 IRE                 |
|                  | 1                | 0                | Slice level is 15 IRE                |
|                  |                  | 1                | Slice level is 20 IRE                |
| 1                | 0                | 0                | Slice level is 25 IRE                |
|                  |                  | 1                | Slice level is 35 IRE                |
|                  | 1                | 0                | Slice level is 40 IRE                |
|                  |                  | 1                | Must not be specified                |

Note: All slice levels are with reference to the pedestal level (5 IRE). Slice level values are provided for reference.

#### **Bits 4 to 0—Data Sampling Delay Time Setting Bits**

**(DLYE4 to DLYE0) (DLYO4 to DLYO0):** Set the even (odd) field data sampling clock delay time.

Figure 28.3 explains the data sampling clock.

The data sampling clock is a clock with period  $32 \times fh^{*2}$ , used for slicing 16-bit closed caption data. The data sampling clock is generated after the rising edge of the start bit is detected and the time set by the DLY bit is passed. The delay time setting can be adjusted in units of  $576^{*1} \times fh^{*2}$ , so that sampling is possible at a phase optimal for the slice data. The data sampling delay time (TD) should be set based on the calculation indicated below. Eighteen pulses of data sampling clock are output in total for start bit detection, slice data, and end data detection. In order to make the sampling phase even more optimal, the slice data (analog comparator output) and sampling clock can be output from the port. For details of monitor output, refer to section 28.2.6, Monitor Output Setting Register (DOUT).

Notes: \*1 fh: Horizontal sync signal frequency

\*2 576 when bit 0 (FRQSEL) of SEPIMR in the sync separator is 0, and 448 when FRQSEL is 1.

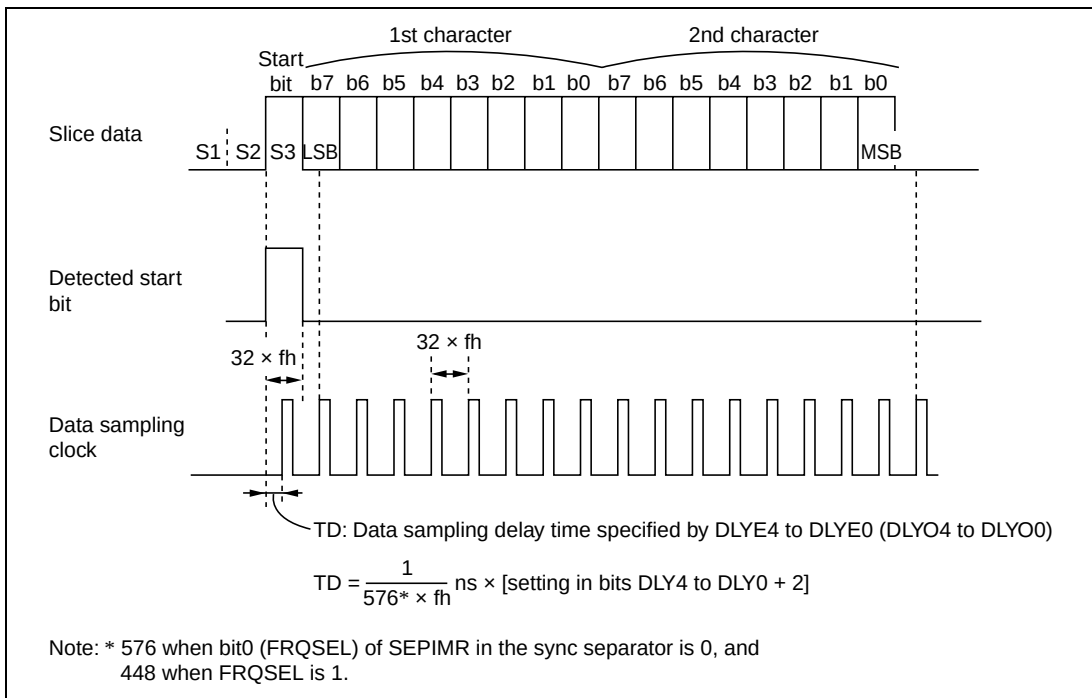


**Figure 28.3 Data Sampling Clock Description**

## 28.2.2 Slice Line Setting Registers 1 to 4 (SLINE1 to SLINE4)

| Bit:           | 7       | 6      | 5 | 4        | 3        | 2        | 1        | 0        |
|----------------|---------|--------|---|----------|----------|----------|----------|----------|
|                | SENBLn* | SFLDn* | — | SLINEn4* | SLINEn3* | SLINEn2* | SLINEn1* | SLINEn0* |
| Initial value: | 0       | 0      | 1 | 0        | 0        | 0        | 0        | 0        |
| R/W:           | R/W     | R/W    | — | R/W      | R/W      | R/W      | R/W      | R/W      |

The slice line setting registers 1 to 4 (SLINE1 to SLINE4) specify slice fields and lines. Up to four slice lines can be specified; these are specified in the slice line setting registers 1 to 4 respectively.

These are 8-bit read/write registers. Rewrites of SLINE should be performed after an even (odd) field slice completion interrupt is output, or after module stop mode has been set, registers have been initialized, and module stop mode has been cleared again. If SLINE is rewritten during a data slice operation, a malfunction will result; do not perform rewriting during data slice operation.

When reset, when the module is stopped, in sleep mode, in standby mode, in watch mode, in subactive mode, or in subsleep mode, the registers are initialized to H'20.

Note: \* n=1 and 2 in the H8S/2197S and H8S/2196S.

**Bit 7—Slice Enable Bit (SENBLn n=1 to 4):** Enables or disables data slice operations for the line specified by SFLDn and SLINEn4 to SLINEn1.

When data slicing for a given line is completed, this bit is reset to 0, and slicing is not again performed until it is set to 1. This bit is set at the rising edge of the Vsync signal; hence data slicing settings become valid from the rising edge of the next Vsync signal after this bit has been set. When 1 is written to this bit, the corresponding slice detection register is cleared, and so caution should be exercised.

#### Bit 7

| SENBLn | Description                                                                                                                                               |
|--------|-----------------------------------------------------------------------------------------------------------------------------------------------------------|
| 0      | When read: Disables data slice operation for the specified lines<br>[Clearing condition]<br>When the data slice operation for the line has been completed |
| 1      | Enables data slice operation for the specified lines                                                                                                      |

**Bit 6—Field Setting Bit (SFLDn n=1 to 4):** Specifies the field of the slice line. For information on field discrimination, refer to section 27.2.6, Field Detection Window Register (FWIDR).

#### Bit 6

| SFLDn | Description                |
|-------|----------------------------|
| 0     | Even field (Initial value) |
| 1     | Odd field                  |

**Bit 5—Reserved:** Cannot be modified and is always read as 1.



**Bits 4 to 0—Slice Line Setting Bits (SLINE4 to SLINE0):** Specify the data slice line. Slice lines up to H'1F (31) can be specified.

Figure 28.4 explains the line count.

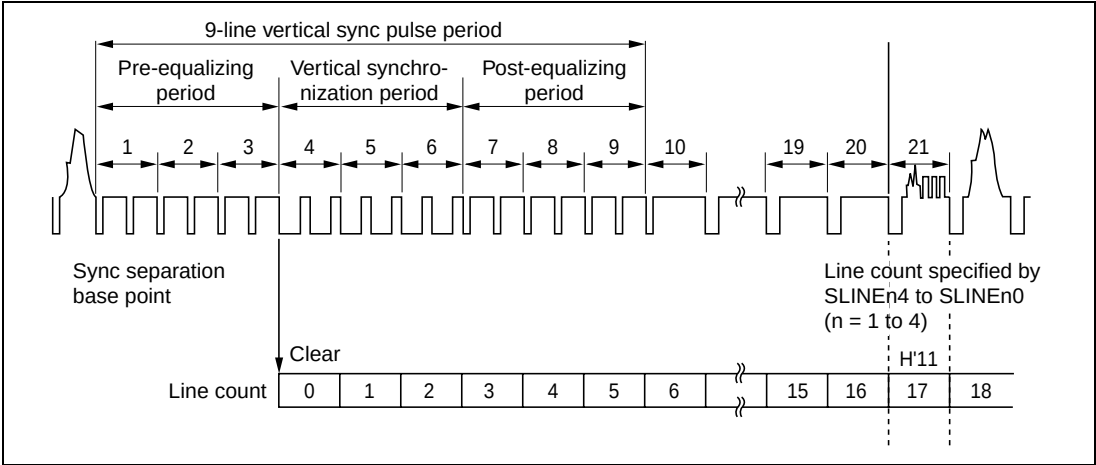


**Figure 28.4 Line Count**

**28.2.3 Slice Detection Registers 1 to 4 (SDTCT1 to SDTCT4)**

| Bit:           | 7      | 6      | 5      | 4 | 3       | 2       | 1       | 0       |
|----------------|--------|--------|--------|---|---------|---------|---------|---------|
|                | CRDFn* | SBDFn* | ENDFn* | — | CRICn3* | CRICn2* | CRICn1* | CRICn0* |
| Initial value: | 0      | 0      | 0      | 1 | 0       | 0       | 0       | 0       |
| R/W:           | R      | R      | R      | — | R       | R       | R       | R       |

The slice detection registers 1 to 4 (SDTCT1 to SDTCT4) store information on data slice results.

Data slice result information includes the clock run-in detection flag, start bit detection flag, data end detection flag, and run-in pulse count for the clock run-in period.

This information is useful for optimal positioning of the data slicer slice level, start bit detection timing, and sampling clock generation timing.

There are four slice detection registers; data slice information results are stored in them on completion of data slicing for each line specified by the slice line setting registers 1 to 4. Data is stored not in slicing order, but in the corresponding registers. For information on the slice line sequence, refer to section 28.3.2, Slice Sequence.



**Figure 28.5 Relationship between Slice Line Setting Register and Slice Detection Register**

SDTCT is an 8-bit read-only register. SDTCT read operations should be performed after an even (odd) field slice completion interrupt. If SDTCT is read during a data slice operation, an indeterminate value may be read; the register should not be read during operation.

If 1 is written to bit 7 (SENBL) of slice line setting registers 1 to 4, the corresponding slice detection register is automatically cleared, so caution should be exercised.

When reset, when the module is stopped, in sleep mode, in standby mode, in watch mode, in subactive mode, or in subsleep mode, the registers are initialized to H'10.

Note: \* n=1 and 2 in the H8S/2197S and H8S/2196S.

**Bit 7—Clock Run-In Detection Flag (CRDFn n=1 to 4):** Set when, during the clock run-in period, the count is concluded in the range 3 to 7 pulses, and clock run-in is detected. When 16 or more pulses are counted, further input pulses are not counted in order to prevent erroneous detection, and an overflow state is maintained. Further, the clock run-in detection window signal indicating the clock run-in period can be adjusted using the DDETW register of the sync separator. For details, refer to section 27.2.10, Data Slicer Detection Window Register (DDETW).

#### Bit 7

| CRDFn | Description                                                         |
|-------|---------------------------------------------------------------------|
| 0     | Clock run-in not detected for line for data slicing (Initial value) |
| 1     | Clock run-in detected for line for data slicing                     |

**Bit 6—Start Bit Detection Flag (SBDFn, n=1 to 4):** Set when the start bit for a line for data slicing is detected.

#### Bit 6

| SBDFn | Description                                                      |
|-------|------------------------------------------------------------------|
| 0     | Start bit not detected for line for data slicing (Initial value) |
| 1     | Start bit detected for line for data slicing                     |

When the start bit is not detected, the data sampling clock is generated after the time set as the data sampling delay time (DLY4 to DLY0) has elapsed from the phase of the start bit detection end position.

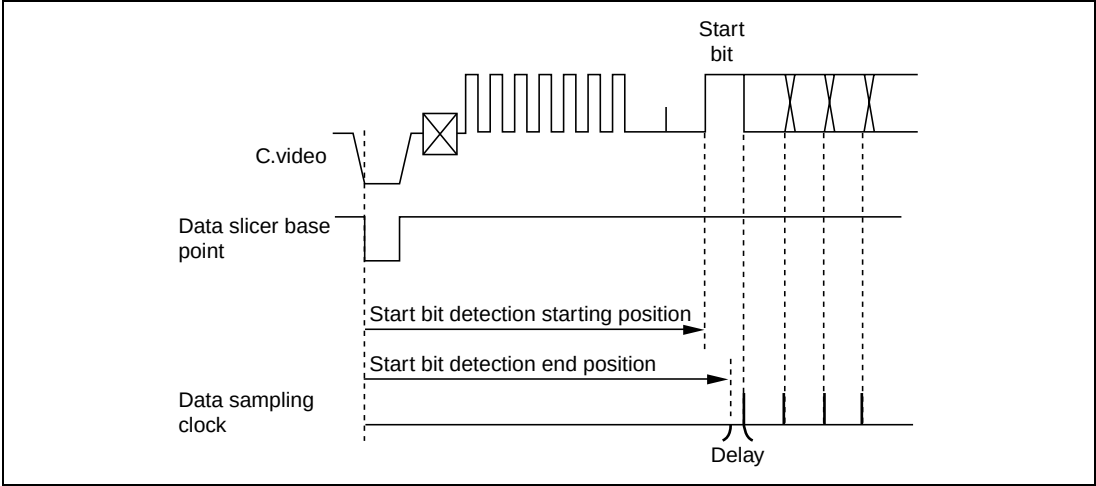


Figure 28.6 Data Sampling Clock When Start Bit is not Detected

**Bit 5—Data End Detection Flag (ENDFn n=1 to 4):** Shows whether or not slice data is input at the 18th sampling clock pulse. This flag is set when the slice data is 0, that is, when data slicing is regarded as having been completed normally.


Bit 5

| ENDFn | Description                                     |                 |
|-------|-------------------------------------------------|-----------------|
| 0     | Data end not detected for line for data slicing | (Initial value) |
| 1     | Data end detected for line for data slicing     |                 |

**Bit 4—Reserved:** Cannot be modified and is always read as 1.

**Bits 3 to 0—Clock Run-in Count Value (CRICn3 to CRICn0):** Count result for run-in pulses during the clock run-in period. When 16 or more pulses are input, further input pulses are not counted in order to prevent erroneous detection, and an overflow state is maintained. Further, the clock run-in detection window signal indicating the clock run-in period can be adjusted using the DDETW register of the sync separator. For details, refer to section 27.2.10, Data Slicer Detection Window Register (DDETW).

28.2.4 Slice Data Registers 1 to 4 (SDATA1 to SDATA4)

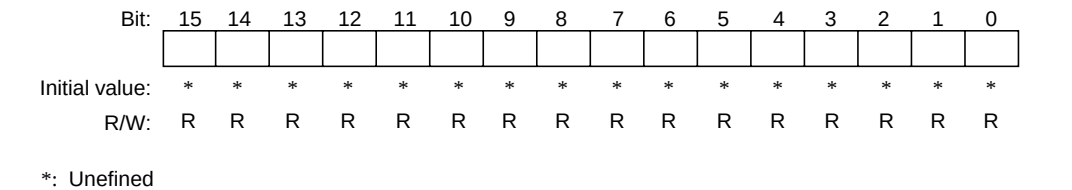

The slice data registers 1 to 4 (SDATA1 to SDATA4) are registers in which the slice results are stored. The data is stored in LSB-first fashion, in order from the LSB side near the start bit. Figure 28.7 shows how to store the slice data.

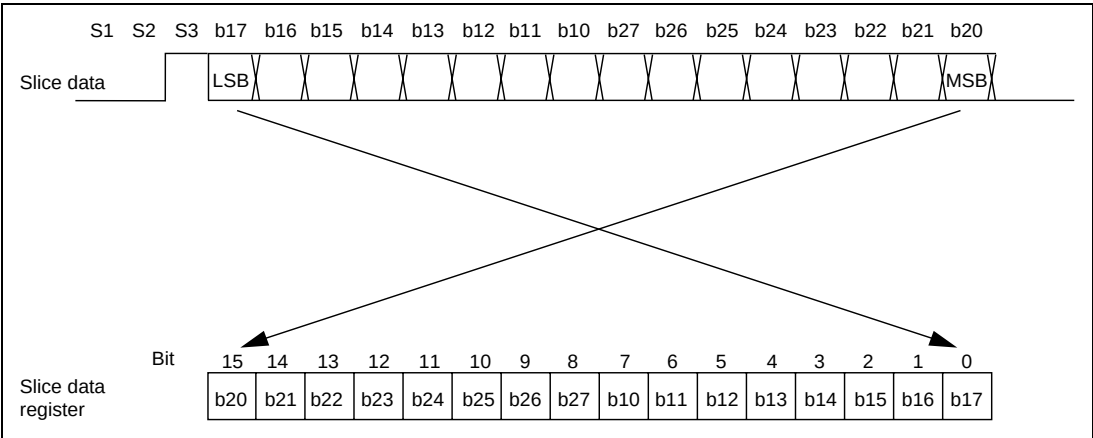


Figure 28.7 Relationship between Slice Data and Slice Data Register

There are four slice data registers, in which are stored slice results when data slicing is completed for each line specified by the slice line setting registers. At this time data is stored in the corresponding registers, rather than in the slicing order.


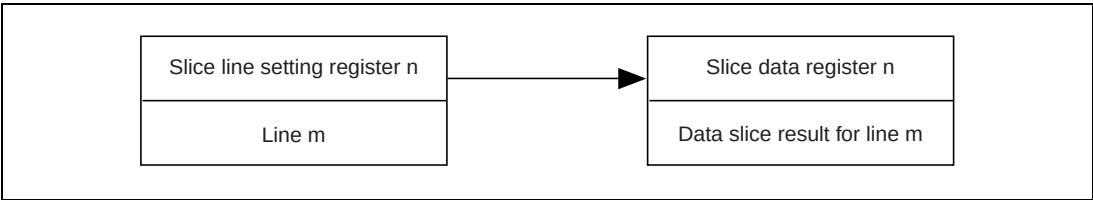


Figure 28.8 Relationship between Slice Line Setting Register and Slice Data Register

These are 16-bit read-only registers. SDATA read operations should be performed after an even (odd) field slice completion interrupt. If an SDATA register is read during a data slice operation, an indeterminate value may be read; the register should not be read during operation.

When reset, when the module is stopped, in sleep mode, in standby mode, in watch mode, in subactive mode, or in subsleep mode, the SDATA register values are indeterminate.

28.2.5 Module Stop Control Register (MSTPCR)

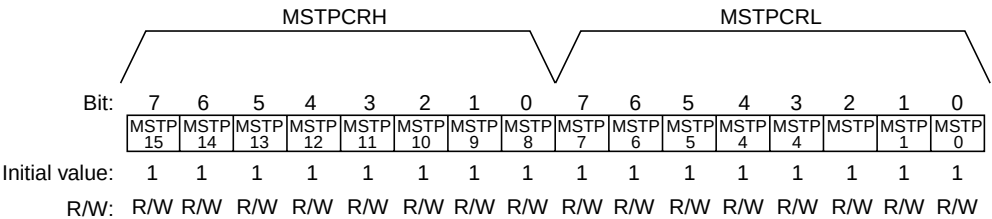

The MSTPCR consists of two 8-bit read/write registers for controlling the module stop mode. Writing 0 to the MSTP3 bit starts the data slicer; setting the MSTP3 bit to 1 stops the data slicer at the end of a bus cycle and the module stop mode is entered. Before writing 0 to this bit, set the MSTP9 bit to 0, to operate the sync separator.

The registers cannot be read or written to in module stop mode. For details, refer to section 4.5, Module Stop Mode.

**Bit 3—Module Stop (MSTP3):** Specifies the module stop mode for the data slicer.

Bit 3

| MSTP3 | Description                                                        |
|-------|--------------------------------------------------------------------|
| 0     | Clears the module stop mode for the data slicer                    |
| 1     | Specifies the module stop mode for the data slicer (Initial value) |

28.2.6 Monitor Output Setting Register (DOUT)

|                |   |      |      |      |      |       |   |   |
|----------------|---|------|------|------|------|-------|---|---|
| Bit:           | 7 | 6    | 5    | 4    | 3    | 2     | 1 | 0 |
|                | — | RGBC | YCOC | DOBC | DSEL | CRSEL | — | — |
| Initial value: | 0 | 0    | 0    | 1    | 0    | 0     | 1 | 1 |
| R/W:           | — | R/W  | R/W  | R/W  | R/W  | R/W   | — | — |

The internal signals used by the data slicer can be monitored through the R, G, B, YCO, and YBO pins. For the bits other than bits 2 and 3, refer to section 29.7.3, Digital Output Specification Register (DOUT).

**Bit 3—Bit to Select Functions for R, G, B, YCO, YBO Pins (DSEL):** Selects whether the digital output pins output R, G, B, YCO, and YBO signals, or output data slicer internal monitor signals.

Bit 3

| DSEL | Description                                                                                                                                                                                                                                                                                                                    |
|------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 0    | R, G, B, YCO, and YBO signals selected (Initial value)                                                                                                                                                                                                                                                                         |
| 1    | Data slicer monitor signals selected<br>Pin R: Signal selected by bit 2 (CRSEL)<br>Pin G: Slice data signal analog-compared with Cvin2<br>Pin B: Sampling clock generated within data slicer<br>Pin YCO: External Hsync signal (AFCH) synchronized in the LSI<br>Pin YBO: External Vsync signal (AFCV) synchronized in the LSI |

**Bit 2—Monitor Signal Select Bit (CRSEL):** Selects whether the clock run-in detection window signal is output, or the start bit detection window signal is output. This bit is valid when DSEL is set to 1 to select data slicer internal monitor signal output.

Bit 2

| CRSEL | Description                                                          |
|-------|----------------------------------------------------------------------|
| 0     | Clock run-in detection window signal output selected (Initial value) |
| 1     | Start bit detection window signal output selected                    |

## 28.3 Operation

### 28.3.1 Slice Line Specification

Up to four slice lines can be specified using the slice line setting registers 1 to 4. For information on field discrimination, refer to section 27.2.6, Field Detection Window Register (FWIDR).

After completion of data slicing for all lines specified by registers, a slice completion interrupt is output; the slice results and slice information should then be read.

Slice information includes clock run-in detection, start bit detection, and data end detection to determine whether data sampling was performed normally; this information is stored in slice detection registers 1 to 4.

After completion of slicing for specified lines, the slice enable bit for the slice line setting register is reset to 0. The next time the data slicer is operated, the slice enable bit of the slice line setting register should be set to 1. At this time, the corresponding slice detection register is cleared. The slice enable bit is sampled at the rising edge of the Vsync signal. Hence enabling of slice operation is valid until the next Vsync signal after reset of the slice enable bit.

Figures 28.9 and 28.10 show examples of slice line specification and operation. For details, refer to section 28.2.2, Slice Line Setting Registers 1 to 4.

The data slicer initialization and operation for one specification example are shown in figure 28.9.

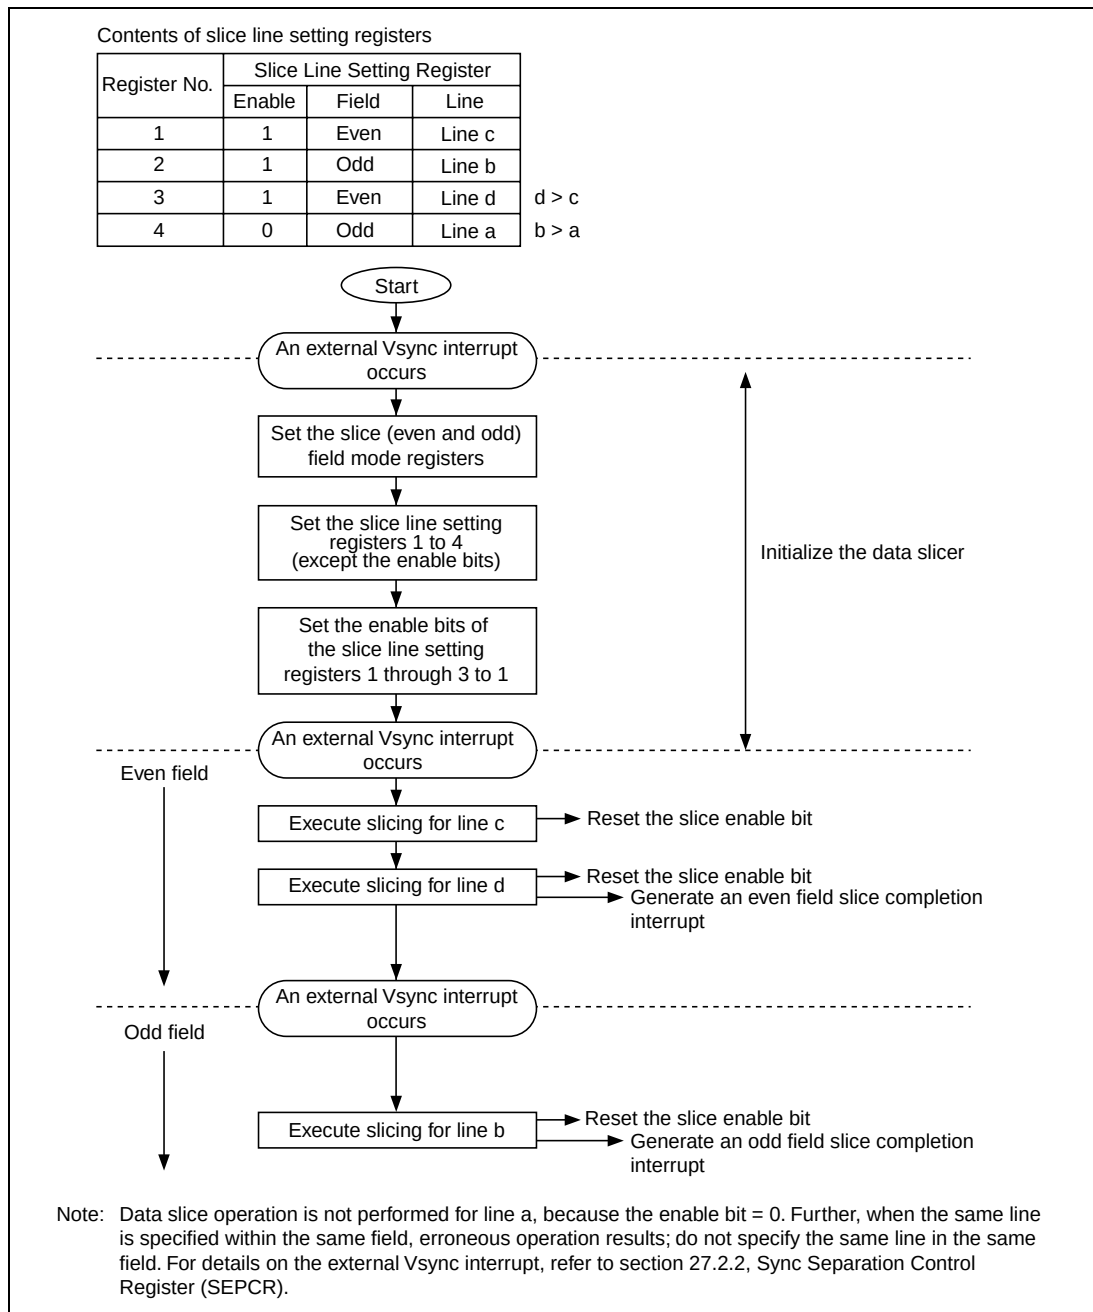


**Figure 28.9 Example of Slice Line Specification and Operation (1)**



Operation for data slicer resetting for a second specification is shown in figure 28.10.

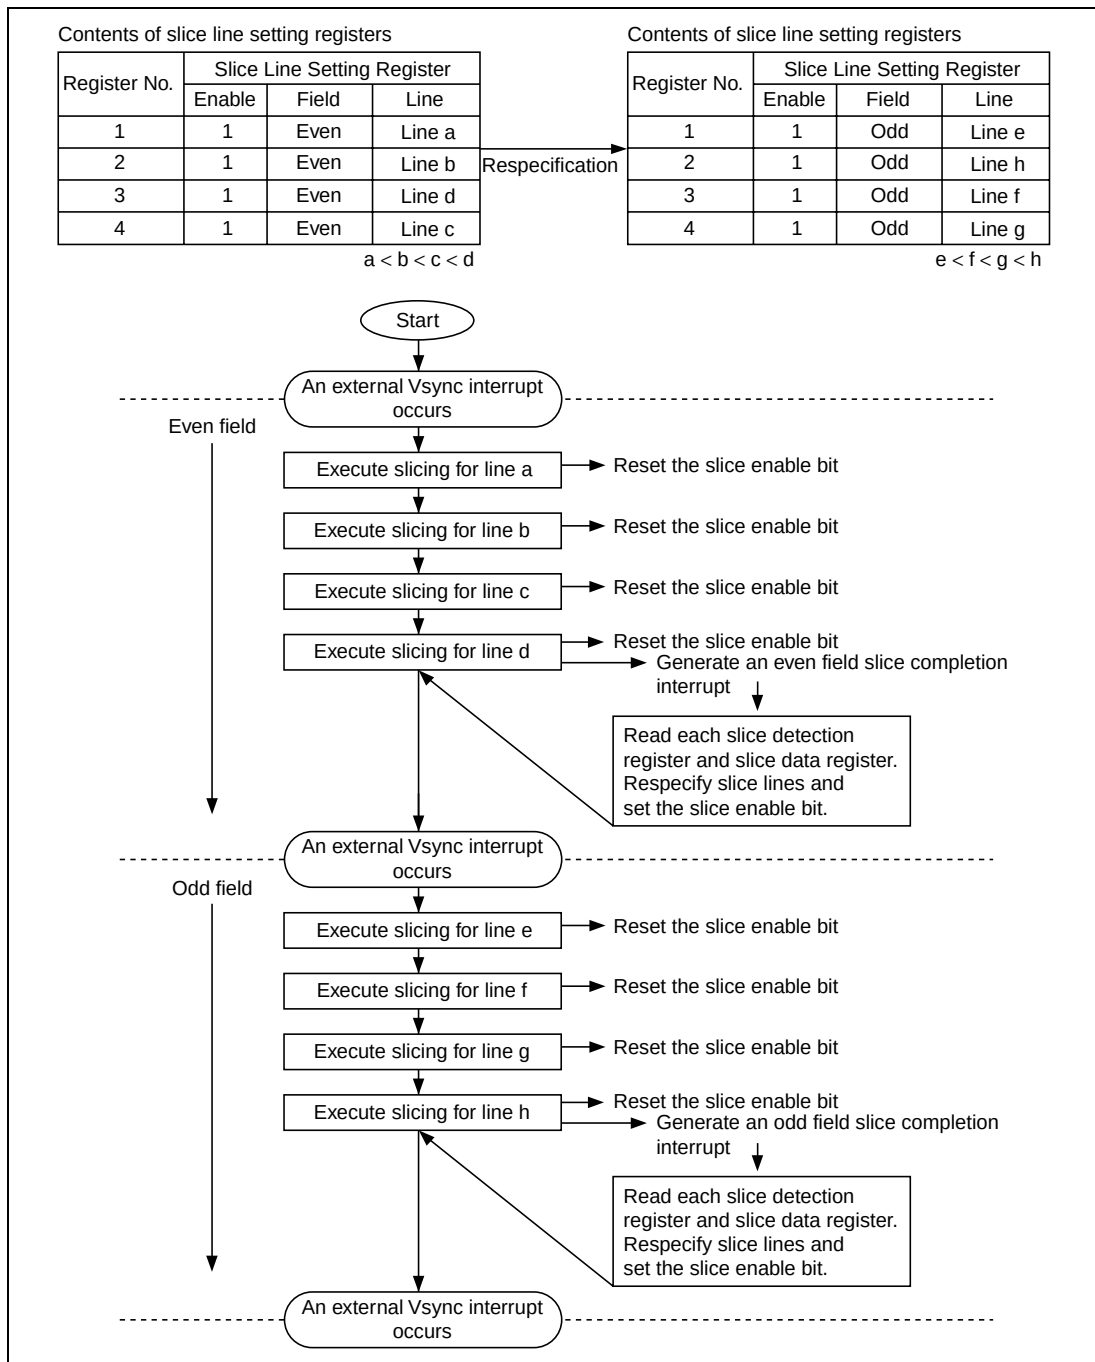


**Figure 28.10 Example of Slice Line Specification and Operation (2)**

### 28.3.2 Slice Sequence

Figure 28.11 shows the slice sequence.

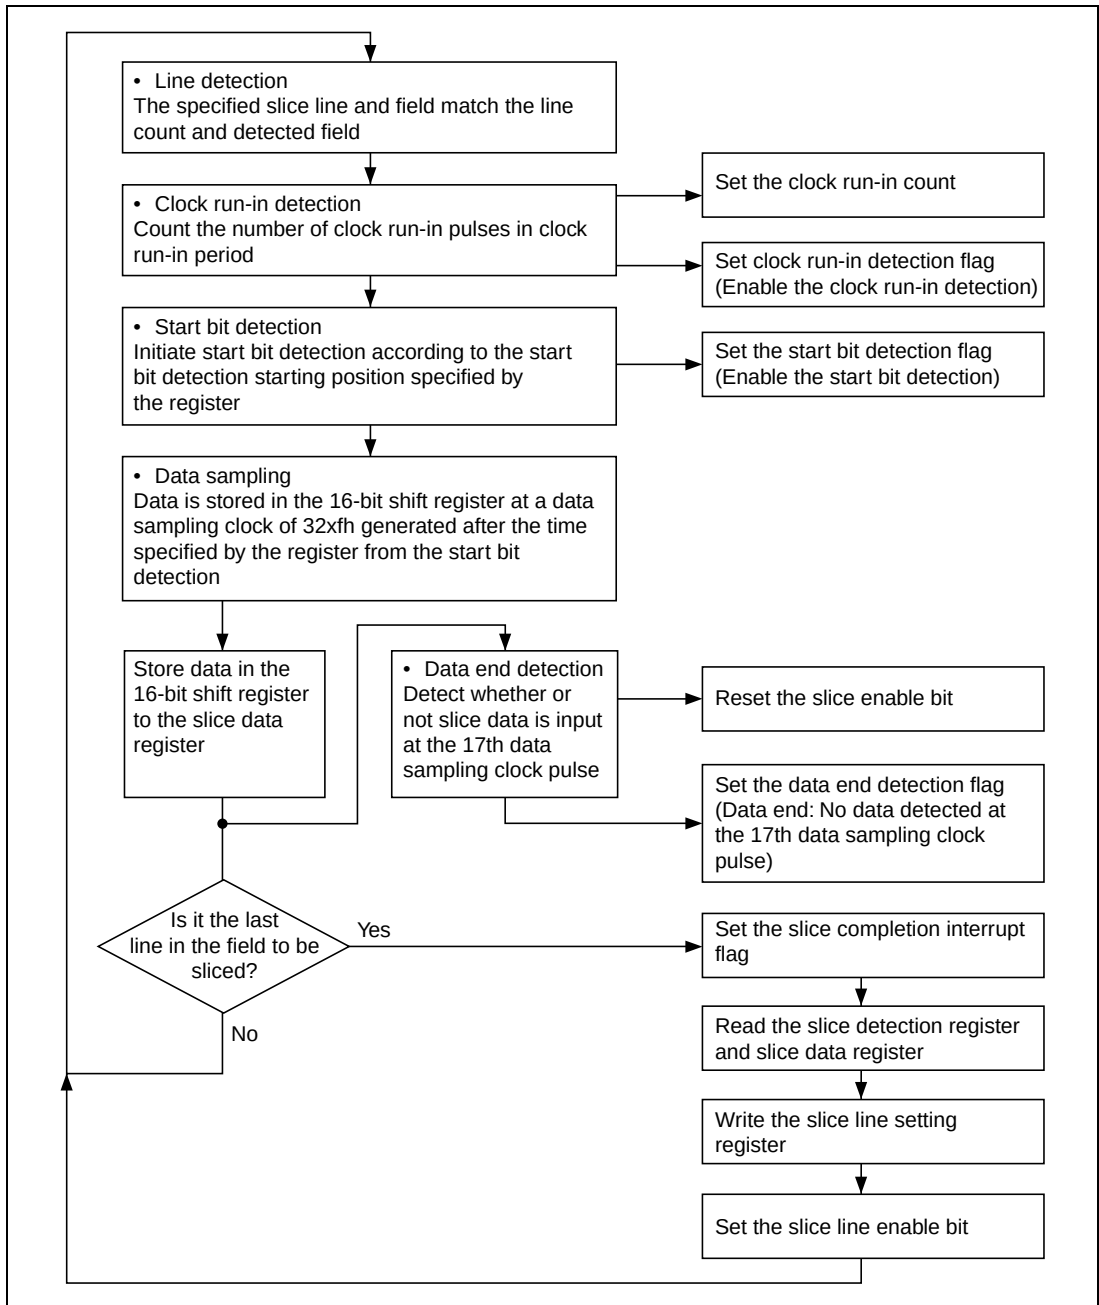


Figure 28.11 Slice Sequence

# 28.4 32-Bit Slice Operation

The data slicer operates in 32-bit mode when the DSL32B bit (bit 0) in the synchronization separation AFC control register (SEPACR) of the synchronization separator is set to 1.

## Synchronization Separation AFC Control Register (SEPACR):

|                |        |        |      |   |   |      |         |        |
|----------------|--------|--------|------|---|---|------|---------|--------|
| Bit:           | 7      | 6      | 5    | 4 | 3 | 2    | 1       | 0      |
|                | NDETIE | NDETIF | HSEL | — | — | ARST | DOTCKSL | DSL32B |
| Initial value: | 0      | 0      | 0    | 0 | 0 | 0    | 0       | 0      |
| R/W:           | R/W    | R/W*   | R/W  | — | — | R/W  | R/W     | R/W    |

**Bit 0—DSL32B (DSL32B):** Specifies whether the data slicer performs slice operation in 32-bit mode or 16-bit mode.

| Bit 0: DSL32B | Description                                    |
|---------------|------------------------------------------------|
| 0             | Slice operation in 16-bit mode (Initial value) |
| 1             | Slice operation in 32-bit mode                 |


The DSL32B bit can select 32-bit slice operation for the data slicer. When this bit is set to 1, the data slicer starts operation at the line specified by slice line setting registers 1 and 2. Only one slice line can be selected for a field, so the same values must be set in slice line setting registers 1 and 2. Operation is not guaranteed when different values are set in slice line setting registers 1 and 2.

The start bit detection starting position is specified similar to as in 16-bit mode. However, the values set in bits STBE4 to STBE0 (STBO4 to STBO0) must be adjusted so that the detection starting position is not before rising edge 1. This is to prevent the rising edge 1 that is input during the start bit detection window signal from being accidentally detected. For details on the detection start timing, see figure 28.12.

After the rising edge of the start bit is detected, a sampling clock is generated at every 64xfh, starting from time TD set in bits DLYE4 to DLYE0 (DLYO4 to DLYO0). A total of 34 sampling clocks are output for start bit detection, slice data, and end data detection. For details on the generation timing of the sampling clocks, see figure 28.13.

After slice operation has ended, the same values are stored in slice detection registers 1 and 2, and the 32-bit slice data is written to slice data registers 1 and 2 which are connected by cascade connection. 16 bits from the start bit are written to slice data register 1, and the remaining 16 bits to slice data register 2. For details on writing slice data to slice data registers, see figure 28.14.

When this bit is set to 1, be sure to clear the slice enable bit (bit 7) in slice line setting registers 3 and 4 to 0. In 32-bit mode, slice line setting register 3 and 4, slice detection registers 3 and 4, and slice data registers 3 and 4 are disabled.

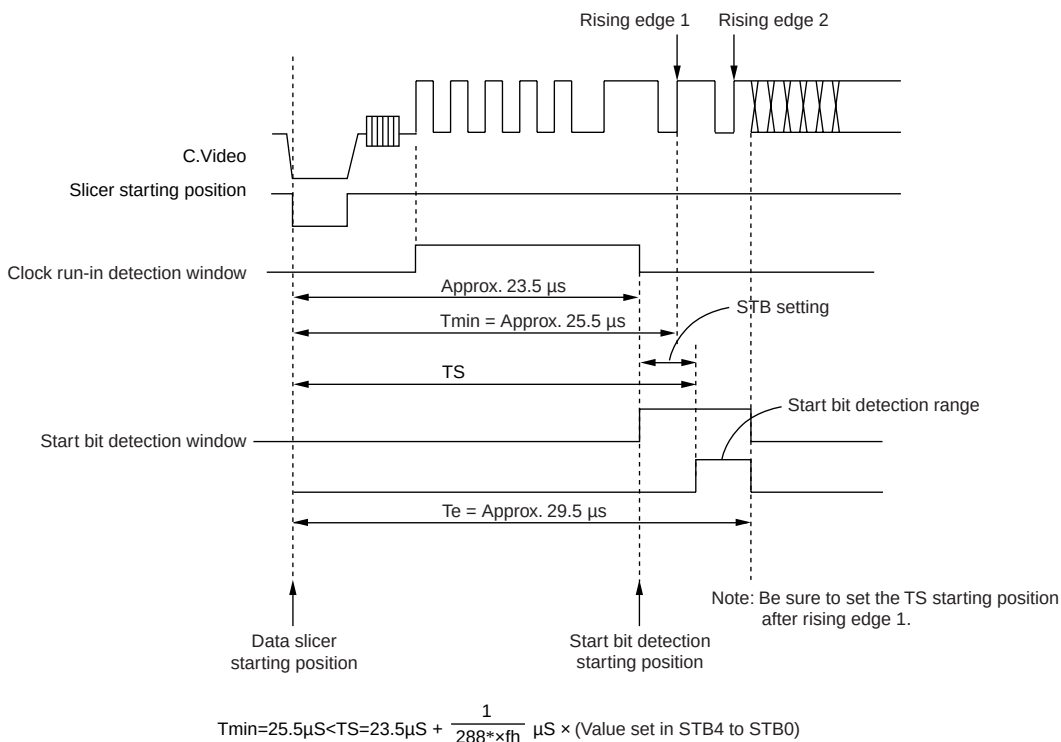

$$T_{min} = 25.5 \mu S < T_S = 23.5 \mu S + \frac{1}{288 \times f_{fh}} \mu S \times (\text{Value set in STB4 to STB0})$$

Note: 288 when bit FRQSEL (bit 0) in SEPIMR (synchronization separator) is set to 0.  
224 when bit FRQSEL (bit 0) in SEPIMR (synchronization separator) is set to 1.

**Figure 28.12 Start Bit Detection Starting Position when Bit DSL32B is 1**

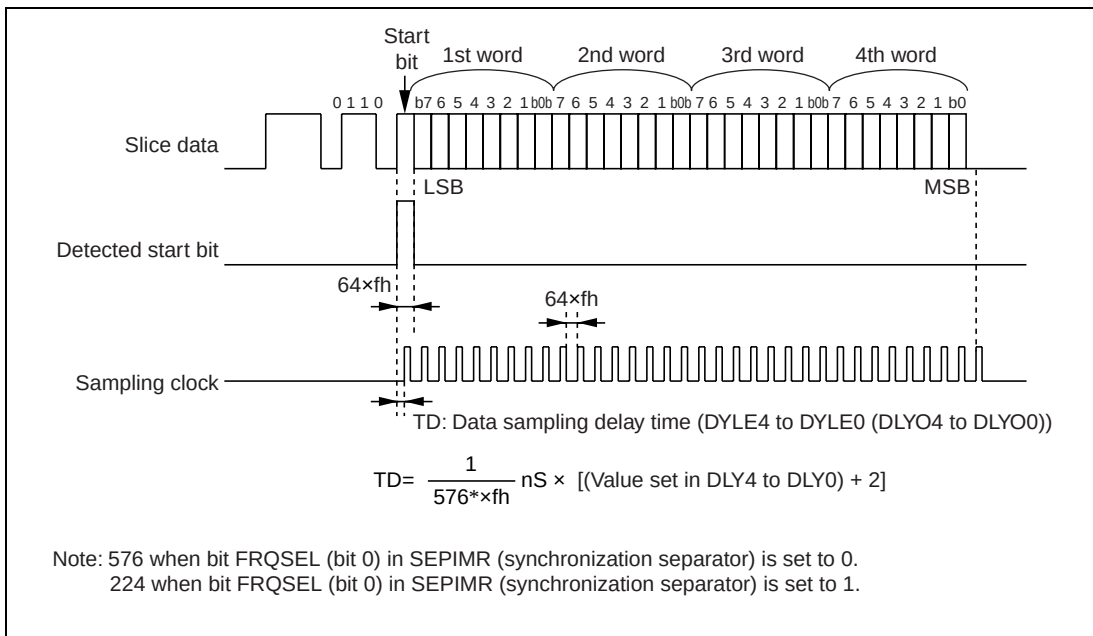


**Figure 28.13 Sampling Clock when Bit DSL32B is 1**

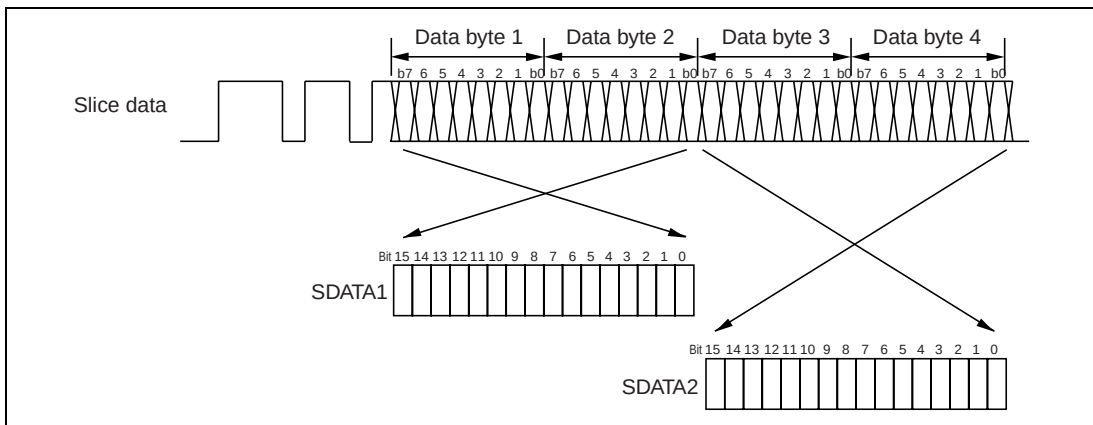


**Figure 28.14 Slice Data and Slice Data Registers when Bit DSL32B is 1**



# Section 29 On-Screen Display (OSD)

## 29.1 Overview

OSD (on-screen display) is a function for superimposing arbitrary characters or display patterns on a TV image signal.

The display screen consists of up to 32 characters  $\times$  12 rows; a single character consists of 12 dots  $\times$  18 lines. Up to 384 different character types\*<sup>1</sup> can be registered, and each character display can be connected to the top, bottom, right, and left of another character. Hence in addition to alphanumerics and kanji characters, graphics can also be displayed.

Text display and superimposed display are supported, and there are composite video signal output and digital outputs.

There are a wealth of ornamental features as well, including blinking display, borders, cursors, halftone display, buttons, and enlarged display.

Analog functions (video amp, analog switch) peripheral to OSD are also incorporated. The sync separator has an AFC circuit built-in, for stable display.

### 29.1.1 Features

- Screen configuration: 32 characters  $\times$  12 rows
- Character size: 12 dots  $\times$  18 lines
- Character types: 384 types\*<sup>1</sup>
- Supports text display and superimposed display
- Display enlargement: 1 $\times$ 1, 2 $\times$ 2 (line units, vertical  $\times$  horizontal)
- Blinking: Can be set in single character units  
Blinking period can be set to either 32/fV or 64/fV (for the entire screen)  
(fV: vertical sync signal frequency)
- Border function: Single-dot borders in each of eight directions  
Border color: In text mode, white or black, and brightness fixed  
In superimposed mode, black, and brightness fixed
- Supported TV formats: NTSC, PAL, SECAM
- Display position: Horizontal and vertical direction leading positions are set, and line intervals can be set
- Digital outputs: R, G, B; output of YCO (character data bit strings) and YBO (character display positions)

- Background colors: Eight hues\*<sup>2</sup>  
Background brightness, chroma saturation: Four brightness levels, two chroma levels
- Character colors: Text display: Eight hues (character units)\*<sup>2</sup>  
Superimposed display: White  
Character brightness, chroma saturation: Four brightness levels, two chroma levels
- Cursor: Character background colored during text display (character units)
- Cursor colors: Eight hues (line units)\*<sup>2</sup>  
Cursor brightness, chroma saturation: Two brightness levels, two chroma levels
- Halftone display: Feature for reducing the brightness/chroma saturation of the image signal in the text background during superimposed display to render it semi-transparent, so that characters appear to float above the background (character units)
- Halftone gray shades: Two levels (row units)
- Button display: Two types

Notes: 1. Includes blank character as character code H'000.

512 character types for the H8S/2199R flash memory version, 384 character types for the H8S/2199R Series mask-ROM version, and 256 character types for the H8S/2197S and H8S/2196S.

2. Background colors, character colors, cursor colors: the background, character, and cursor colors in text display include black and white. In SECAM, only black and white are supported. For details, refer to section 29.1.5, TV Formats and Display Modes.



## 29.1.2 Block Diagram

A block diagram of the OSD appears in figure 29.1.

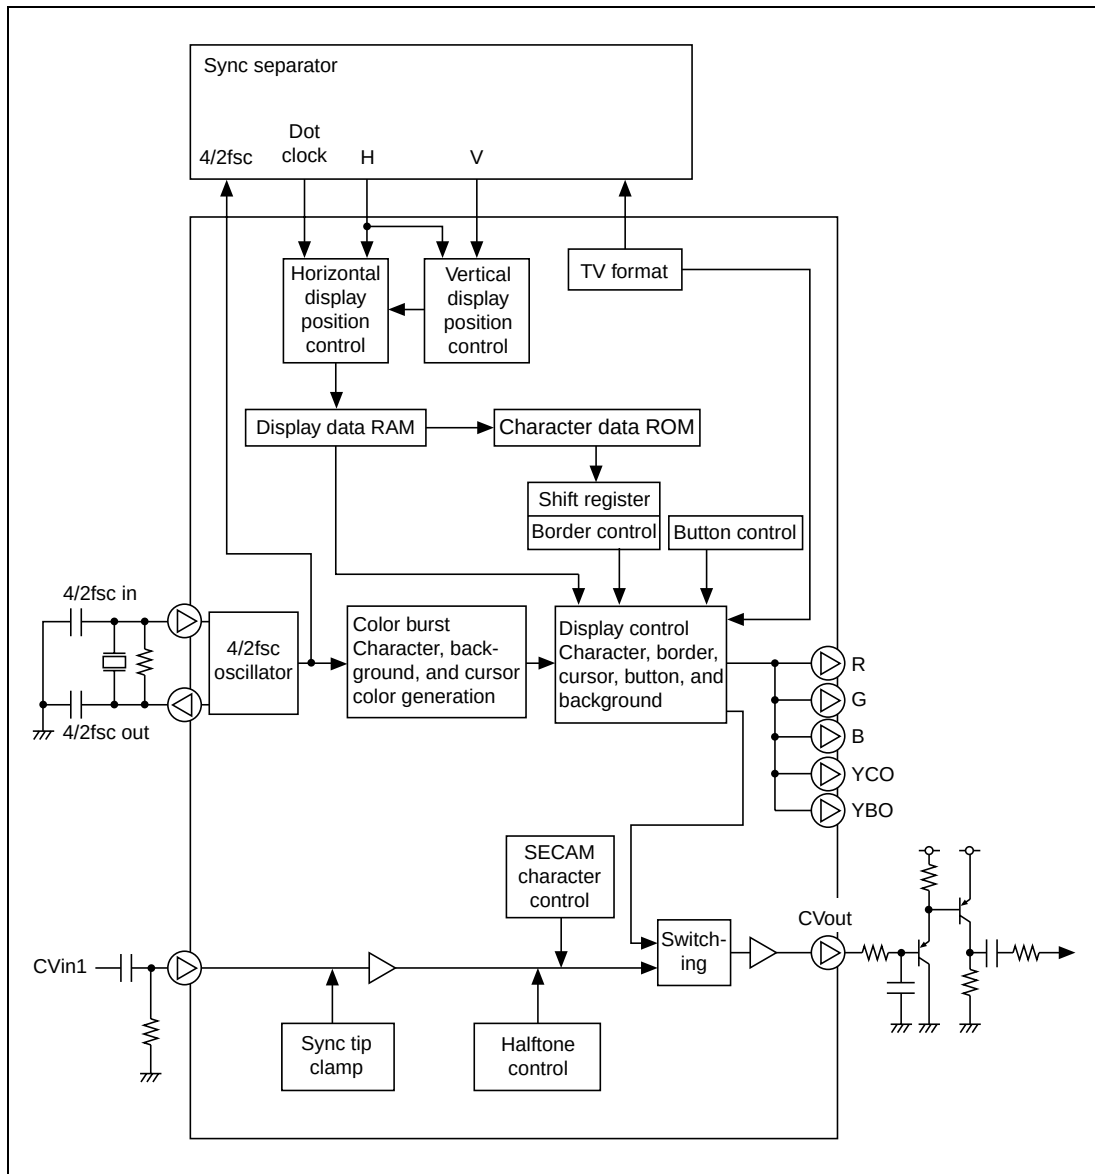


Figure 29.1 OSD Block Diagram

### 29.1.3 Pin Configuration

The OSD pin configuration is shown in table 29.1. Even when not using the data slicer, the composite video signal should be input to Cvin2 in order to perform sync separation from the composite video signal.

**Table 29.1 OSD Pin Configuration**

| Block          | Name                          | Abbrev.      | I/O          | Function                                                                                       |
|----------------|-------------------------------|--------------|--------------|------------------------------------------------------------------------------------------------|
| Sync separator | Sync signal input/output      | Csync/Hsync  | Input/output | Composite sync signal input/output or horizontal sync signal input                             |
|                |                               | VLPF/Vsync   | Input        | Pin for connecting external LPF for vertical sync signal or input pin for vertical sync signal |
|                | AFC oscillation               | AFCosc       | Input/output | AFC oscillation signal                                                                         |
|                |                               | AFCpc        | Input/output | AFC by-pass capacitor connecting pin                                                           |
|                | LPF for AFC                   | AFCLPF       | Input/output | External LPF connecting pin for AFC                                                            |
| OSD            | OSD analog power              | OVcc         | Input        | Analog power for OSD, data slicer, and sync separator                                          |
|                | OSD analog ground             | OVss         | Input        | Analog ground for OSD, data slicer, and sync separator                                         |
|                | Composite video signal input  | CVin1        | Input        | Composite video signal input (2 Vpp, with a sync tip clamp circuit)                            |
|                | Composite video signal output | CVout        | Output       | Composite video signal output (2 Vpp)                                                          |
|                | fsc oscillation               | 4fsc/2fscin  | Input        | 4fsc or 2fsc input                                                                             |
|                |                               | 4fsc/2fscout | Output       | 4fsc or 2fsc output                                                                            |
|                | Color signal output           | R            | Output       | Color signal output (R) for character, border, cursor, background, and button, or a port       |
|                |                               | G            | Output       | Color signal output (G) for character, border, cursor, background, and button, or a port       |
|                |                               | B            | Output       | Color signal output (B) for character, border, cursor, background, and button, or a port       |
|                | Character data output         | YCO          | Output       | Character data output (digital output), or a port                                              |
|                |                               | YBO          | Output       | Character display position output (digital output), or a port                                  |

| Block       | Name                   | Abbrev. | I/O   | Function                                                            |
|-------------|------------------------|---------|-------|---------------------------------------------------------------------|
| Data slicer | Composite video signal | Cvin2   | Input | Composite video signal input (2 Vpp, with a sync tip clamp circuit) |

### 29.1.4 Register Configuration

Table 29.2 shows the OSD registers.

**Table 29.2 Register Configuration**

| Name                                  | Abbrev. | R/W                 | Size                      | Initial Value | Address* <sup>1</sup> |
|---------------------------------------|---------|---------------------|---------------------------|---------------|-----------------------|
| Character data ROM                    | OSDROM  | —                   | 24576 bytes* <sup>3</sup> | —             | H'040000              |
| Display data RAM (Master)             | OSDRAM  | R/W                 | 768 bytes                 | Undefined     | H'D800                |
| Display data RAM (Slave)              | —       | —                   | 768 bytes                 | Undefined     | —                     |
| Row register 1                        | CLINE1  | R/W                 | Byte                      | H'00          | H'D200                |
| Row register 2                        | CLINE2  | R/W                 | Byte                      | H'00          | H'D201                |
| Row register 3                        | CLINE3  | R/W                 | Byte                      | H'00          | H'D202                |
| Row register 4                        | CLINE4  | R/W                 | Byte                      | H'00          | H'D203                |
| Row register 5                        | CLINE5  | R/W                 | Byte                      | H'00          | H'D204                |
| Row register 6                        | CLINE6  | R/W                 | Byte                      | H'00          | H'D205                |
| Row register 7                        | CLINE7  | R/W                 | Byte                      | H'00          | H'D206                |
| Row register 8                        | CLINE8  | R/W                 | Byte                      | H'00          | H'D207                |
| Row register 9                        | CLINE9  | R/W                 | Byte                      | H'00          | H'D208                |
| Row register 10                       | CLINE10 | R/W                 | Byte                      | H'00          | H'D209                |
| Row register 11                       | CLINE11 | R/W                 | Byte                      | H'00          | H'D20A                |
| Row register 12                       | CLINE12 | R/W                 | Byte                      | H'00          | H'D20B                |
| Vertical display position register    | VPOS    | R/W                 | Word                      | H'F000        | H'D20C                |
| Horizontal display position register  | HPOS    | R/W                 | Byte                      | H'00          | H'D20E                |
| Digital output specification register | DOUT    | R/W                 | Byte                      | H'02          | H'D20F                |
| Screen control register               | DCNTL   | R/W                 | Word                      | H'0000        | H'D210                |
| OSD format register                   | DFORM   | R/(W)* <sup>2</sup> | Word                      | H'00F8        | H'D212                |

- Notes: 1. Lower 16 bits of the address. (excluding character data ROM)
2. Only 0 can be written to bits 8 and 0 to clear the flags.
3. 32768 bytes for the H8S/2199R flash memory version, 24576 bytes for the H8S/2199R Series mask-ROM version, and 16384 bytes for the H8S/2197S and H8S/2196S.

### 29.1.5 TV Formats and Display Modes

Table 29.3 indicates support for different TV formats in each display mode. Operation is not guaranteed if a frequency resulting from division by 4 or 2 from the 4fsc/2fsc input pin is not one of those listed in table 29.3.

**Table 29.3 TV Formats and Display Modes**

| TV Format                    | fsc (MHz)  | Text Display | Superimposed Mode |
|------------------------------|------------|--------------|-------------------|
| M/NTSC                       | 3.579545   | 8 colors     | Supported         |
| 4.43-NTSC                    | 4.43361875 | 8 colors     | Supported         |
| M/PAL                        | 3.57561149 | 8 colors     | Supported         |
| N/PAL                        | 3.58205625 | 8 colors     | Supported         |
| B.G.H/PAL, I/PAL,<br>D.K/PAL | 4.43361875 | 8 colors     | Supported         |
| SECAM                        | 4.43361875 | White/black  | Supported         |

## 29.2 Description of Display Functions

### 29.2.1 Superimposed Mode and Text Display Mode

There are two types of OSD display: superimposed and text display.

#### (1) Superimposed Mode

In superimposed mode, the state of operation of a VCR, the current time, and other text and graphics are displayed on an ordinary TV image. In doing so, there is no mixing of the background image and the display character colors. There is an internal AFC circuit, enabling reliable text display. In addition, a halftone function, in which the brightness and chroma saturation of the background screen in the character display area is reduced to make characters appear to “float” above the background, is also available. Other features include a character border function.

#### (2) Text Display Mode

In text display mode, characters and graphic data can be displayed in synchronous with the internal sync signal generated by the internal Csync generator circuit in the sync separator. The background color for display can be selected from among eight hues. There are plentiful ornamental functions, including functions for displaying cursors and buttons; cursor and text colors can be selected from among eight hues, making this function ideal for use in programming VCR recording and setting modes.

29.2.2 Character Configuration

Displayed characters and patterns consist of 12 dots × 18 lines per character. There are notes on creation of OSD fonts. For details, refer to section 29.8, Notes on OSD Font Creation.

An example of a character configuration appears in figure 29.2. An example of an enlarged character appears in figure 29.3.

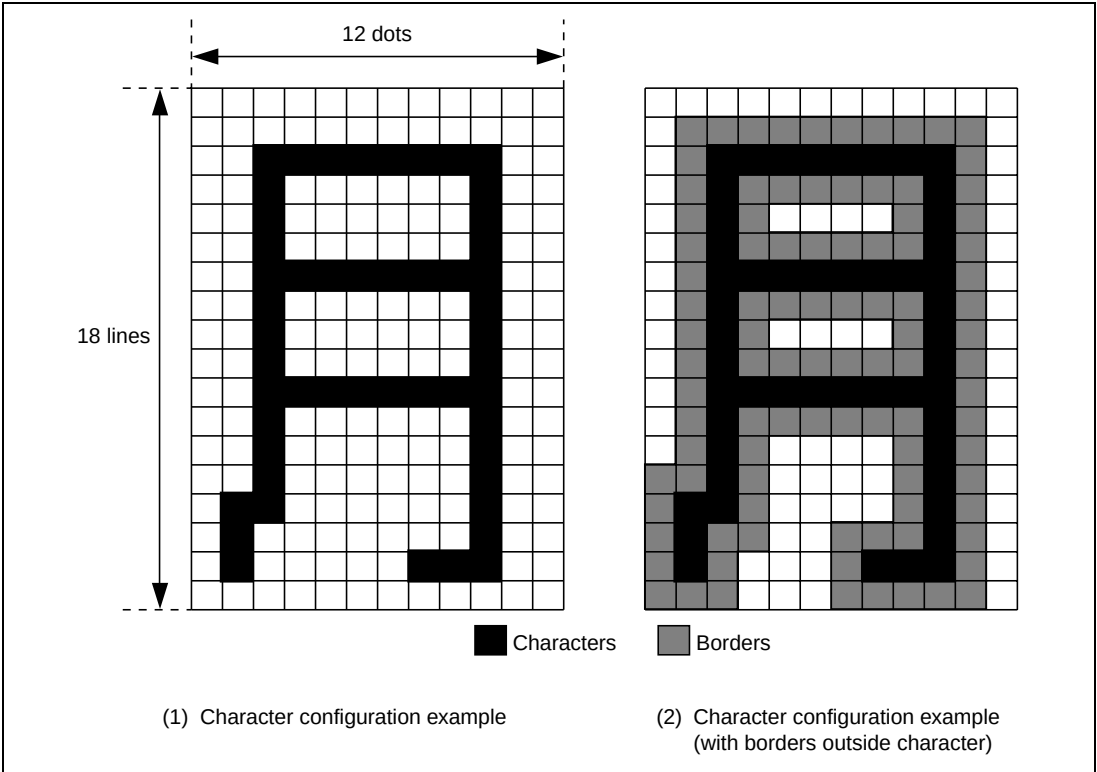


Figure 29.2 Character Configuration Examples

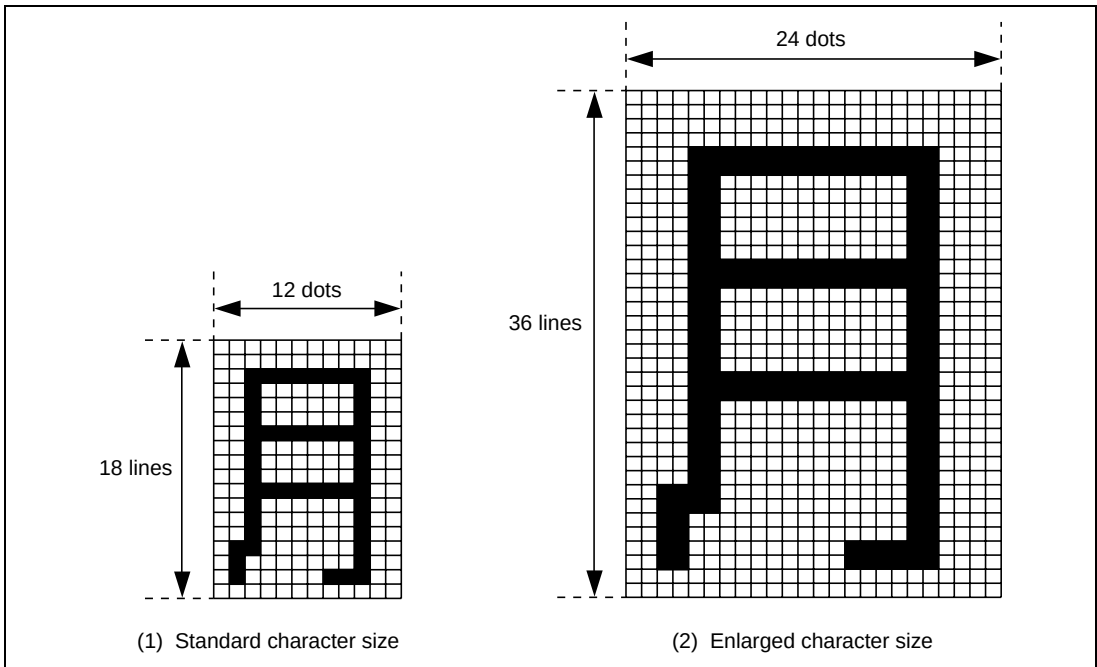


**Figure 29.3 Enlarged Character Example**

### 29.2.3 On-Screen Display Configuration

The on-screen display area consists of 12 horizontal rows each containing up to 32 characters.

The correspondence between display data RAM and the screen display is indicated in figure 29.4.

The starting position for display can be set freely by using the display position registers to set the horizontal starting display position, vertical starting display position, and row interval. Even when the frequency of the AFC reference clock (dot clock) is modified, the display configuration (12 horizontal rows each containing 32 characters) will not change; characters in the region protruding outside the display area should be blank characters.

For information on the display position registers, refer to section 29.5.1, Display Positions, and section 29.5.8, Display Position Registers (HPOS, VPOS).

|        |                  |                  |                  |                  |       |                   |
|--------|------------------|------------------|------------------|------------------|-------|-------------------|
|        | 1st<br>character | 2nd<br>character | 3rd<br>character | 4th<br>character | ----- | 32nd<br>character |
| Row 1  | D800             | D802             | D804             | D806             |       | D83E              |
| Row 2  | D840             | D842             | D844             | D846             | ....  | D87E              |
|        |                  |                  |                  |                  |       |                   |
|        |                  |                  |                  |                  |       |                   |
|        |                  |                  |                  |                  |       |                   |
|        |                  |                  |                  |                  |       |                   |
|        |                  |                  |                  |                  |       |                   |
|        |                  |                  |                  |                  |       |                   |
|        |                  |                  |                  |                  |       |                   |
|        |                  |                  |                  |                  |       |                   |
| Row 11 | DA80             | DA82             | DA84             | DA86             |       | DABE              |
| Row 12 | DAC0             | DAC2             | DAC4             | DAC6             | ....  | DAFE              |

Note: D800 to DAFF indicate the lower 16 bits of addresses in the on-screen display RAM.

**Figure 29.4 Correspondence between Display Data RAM and On-Screen Display**

## 29.3 Settings in Character Units

The following items can be set in character units by using the display data RAM.

### 29.3.1 Character Configuration

Characters can be set freely by writing, to the display data RAM, the character data ROM address (character code) at which the character to be displayed is stored.

For explanations of the character data ROM and display data RAM, refer to section 29.3.6, Character Data ROM (OSDROM), and section 29.3.7, Display Data RAM (OSDRAM).

### 29.3.2 Character Colors

Character colors in text display mode can be set in character units through the character color specification bit in display data RAM.

Table 29.4 shows the correspondence between character color code settings and color output signals.

For details on display data RAM, refer to section 29.3.7, Display Data RAM (OSDRAM).

In the SECAM TV format, only black and white can be used in text display mode, and in superimposed mode characters are white, with a faint background color.

**Table 29.4 Correspondence between Character Color Code Settings and Color Output Signals**

| R                      |                  | 1     | 1          | 1            | 1           | 0            | 0            | 0         | 0     |
|------------------------|------------------|-------|------------|--------------|-------------|--------------|--------------|-----------|-------|
| G                      | Display Data RAM | 1     | 1          | 0            | 0           | 1            | 1            | 0         | 0     |
| B                      | Settings*        | 1     | 0          | 1            | 0           | 1            | 0            | 1         | 0     |
| R, G, or B port output |                  | White | Yellow     | Magenta      | Red         | Cyan         | Green        | Blue      | Black |
| C.Video output (NTSC)  |                  | White | Same phase | $3\pi/4$     | $\pi/2$     | $3\pi/2$     | $7\pi/4$     | $\pi$     | Black |
| C.Video output (PAL)   |                  | White | $\pm 0$    | $\pm 3\pi/4$ | $\pm \pi/2$ | $\pm 3\pi/2$ | $\pm 7\pi/4$ | $\pm \pi$ | Black |

Note: \* Can be specified in character units.

### 29.3.3 Halftones/Cursors

#### (1) Halftones

The halftone function reduces the brightness and chroma saturation of the image signal in the character background to make it semi-transparent, so that characters appear to float above the background. By specifying halftone in the display data RAM, halftone can be toggled in character units. Here the halftone levels are specified in the row register.

In the SECAM format, use of halftones or bordering is recommended.

#### (2) Cursors

The cursor function colors the background area of a character. By specifying the cursor in display data RAM, cursor display can be toggled in character units. The cursor color and brightness are specified in the row register; within a given row, the same color and brightness are used. The chroma saturation can be set for the entire screen.

Note: Cursor display is a function for use in text display mode only; halftones are a function for use in superimposed mode only. The display data RAM halftone/cursor specification bit is dual-purpose, so that depending on the display mode, function may switch automatically between halftone/cursor.

Figure 29.5 shows examples of halftone and cursor display. For details on display data RAM, refer to section 29.3.7, Display Data RAM (OSDRAM). For an explanation of each register, refer to section 29.4.5, Row Registers (CLINEn, n= rows 1 to 12).



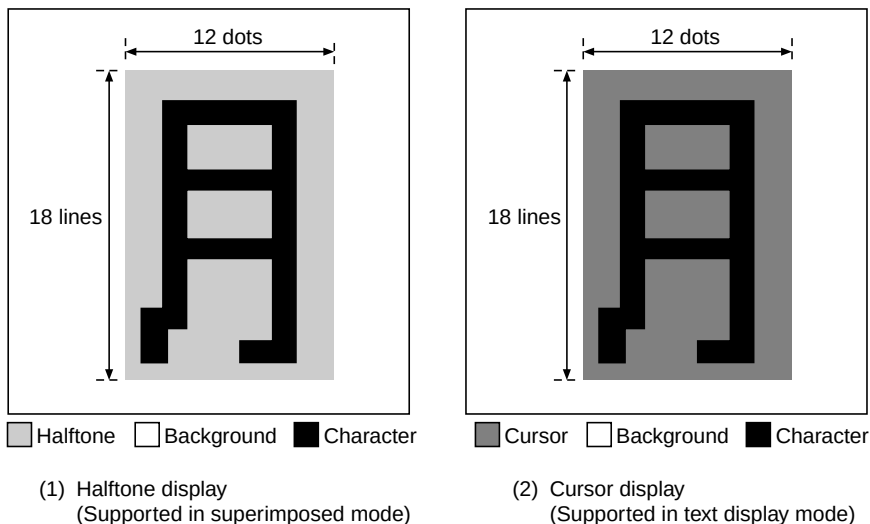


**Figure 29.5 Halftone and Cursor Display Examples**

### 29.3.4 Blinking

Blinking is a function in which displayed characters are displayed intermittently. By specifying blinking in display data RAM, text can be made to blink in character units. The blinking period can be chosen from two values through the screen control register. Blinking is supported both in superimposed mode and text display mode.

Digital outputs (YCO, R, G, and B) can be made to blink or not blink through the digital output specification register. The YBO digital output cannot be made to blink.

For details on display data RAM, refer to section 29.3.7, Display Data RAM (OSDRAM).

For an explanation of each register, refer to section 29.5.9, Screen Control Register (DCNTL), and section 29.7.3, Digital Output Specification Register (DOUT).

Buttons cannot be made to blink.

For notes on blinking, refer to section 29.8.3, Note 3 on Font Creation (Blinking).

### 29.3.5 Button Display

Button display is a function in which a frame is drawn around a character string; buttons can be set in character units in display data RAM. There are two types of button: one type of button appears to be raised or floating, and the other type appears to be lowered or sunken. By switching from the raised button type to the lowered button type, the button appears to have been depressed; such displays are ideal for screens on which various settings are to be made.

Button displays can be used simultaneously with the blinking function, but blinking can only be used for characters; buttons cannot be made to blink.

When used with enlarged characters, the button width is enlarged to two dots by two lines.

Buttons are horizontal rectangles; vertical-rectangle buttons cannot be created.

In order to create a button with three or more characters, a button display (start) character and a button display (end) character should be specified.

Multiple buttons can be created in a single row, but the button pattern in a given row is the same for all buttons in that row.


The button pattern can be set in row units; white brightness is 75IRE, and black brightness is 15 IRE. Both are values relative to the pedestal (5 IRE). These brightness values are for reference.

Figure 29.6 shows examples of button display.


For details on display data RAM, refer to section 29.3.7, Display Data RAM (OSDRAM). For an explanation of each register, refer to section 29.4.5, Row Registers (CLINEn, n= rows 1 to 12).

In a button display, the button pattern replaces the outer periphery of the 12 dot × 18 line character region; this should be born in mind when creating character fonts. Refer to section 29.8.4, Note 4 on Font Creation (Buttons).

|      |   |   |      |   |   |   |
|------|---|---|------|---|---|---|
| BPTn | 0 | 0 | 0    | 0 | 0 | 0 |
| BON1 | 0 | 0 | 0/1* | 1 | 0 | 1 |
| BON0 | 0 | 1 | 0/1* | 0 | 0 | 1 |

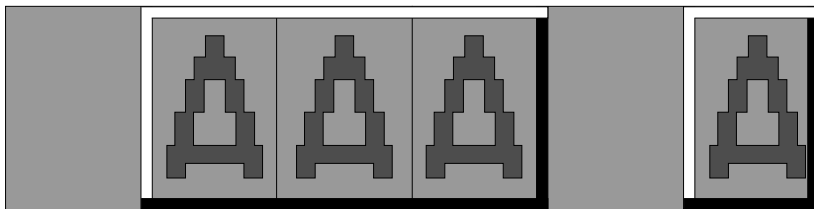

|      |   |   |   |   |   |   |
|------|---|---|---|---|---|---|
| BPTn | 1 | 1 | 1 | 1 | 1 | 1 |
| BON1 | 0 | 0 | 1 | 0 | 0 | 1 |
| BON0 | 0 | 0 | 1 | 0 | 1 | 0 |

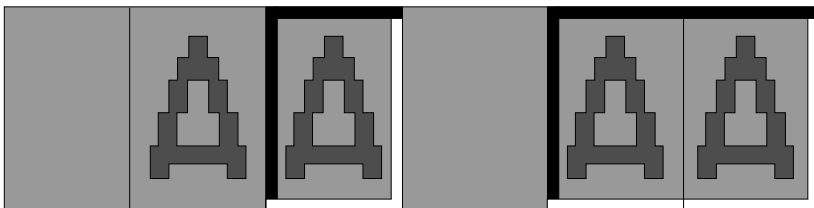

Note: \* Do not set (start) or (end).

**Figure 29.6 Button Display Examples**

### 29.3.6 Character Data ROM (OSDROM)

The character data ROM (OSDROM) contains 384 character types\*, each consisting of 12 dots by 18 lines. User programs can write individual character data sets. However, character code H'000 is fixed as a blank character, and a new character pattern for this code cannot be set by the user.

The character data ROM (OSDROM) is referenced by character codes in the display data RAM, and dots of display character data are read for each scanning line.

This character data ROM can be accessed by the CPU as part of user ROM. For details, refer to section 29.11, Character Data ROM (OSDROM) Access by CPU.

The memory map appears in figure 29.7. An example of configuration for a single character appears in figure 29.8.

Note: 512 character types for the H8S/2199R flash memory version, 384 character types for the H8S/2199R Series mask-ROM version, and 256 character types for the H8S/2197S and H8S/2196S.

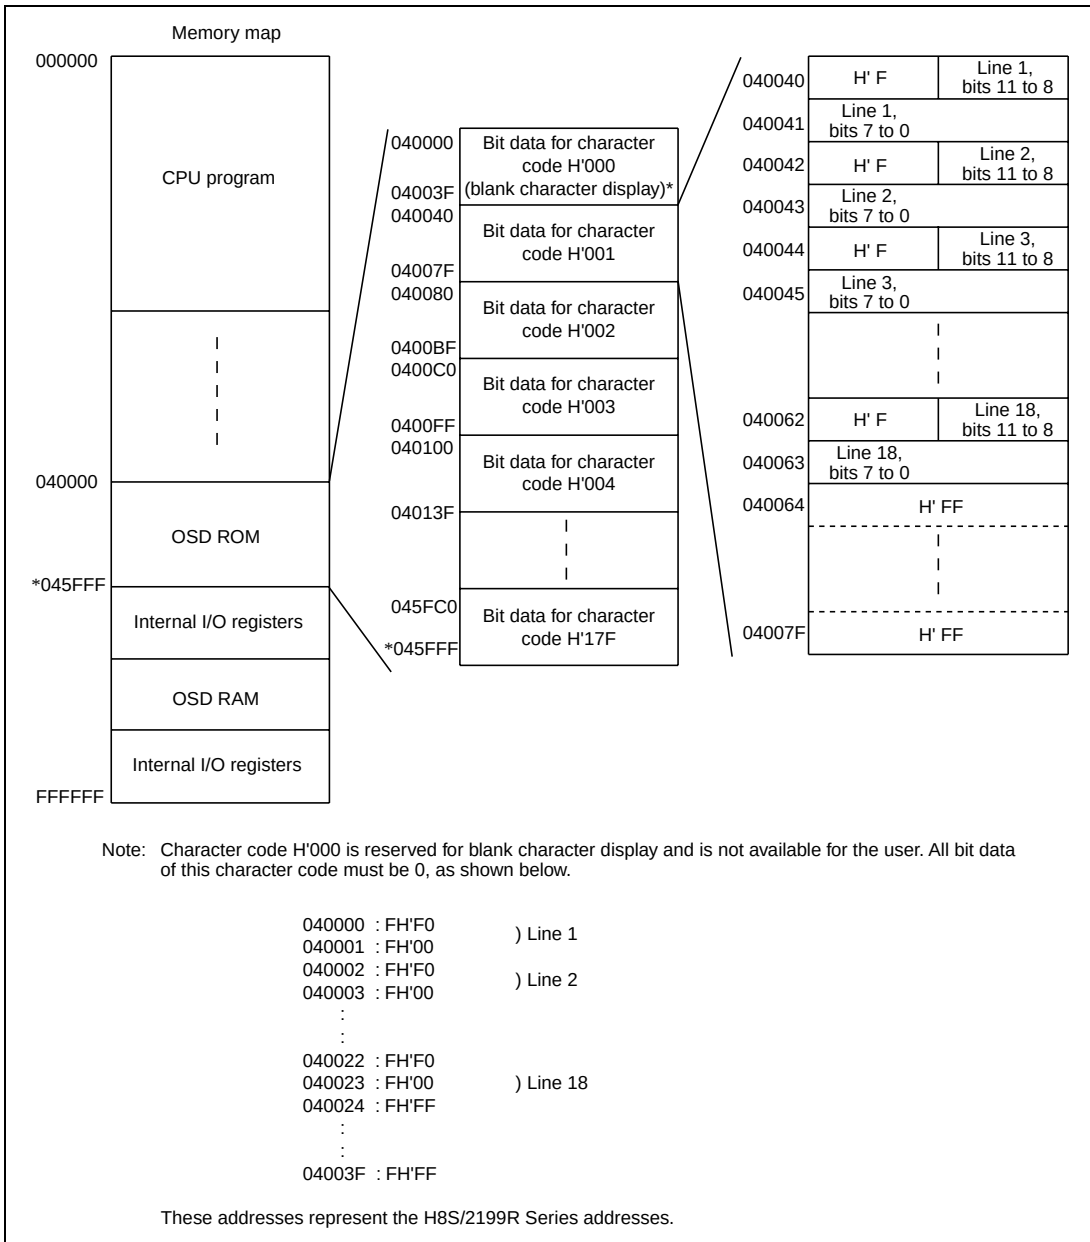


**Figure 29.7 OSD ROM Map**

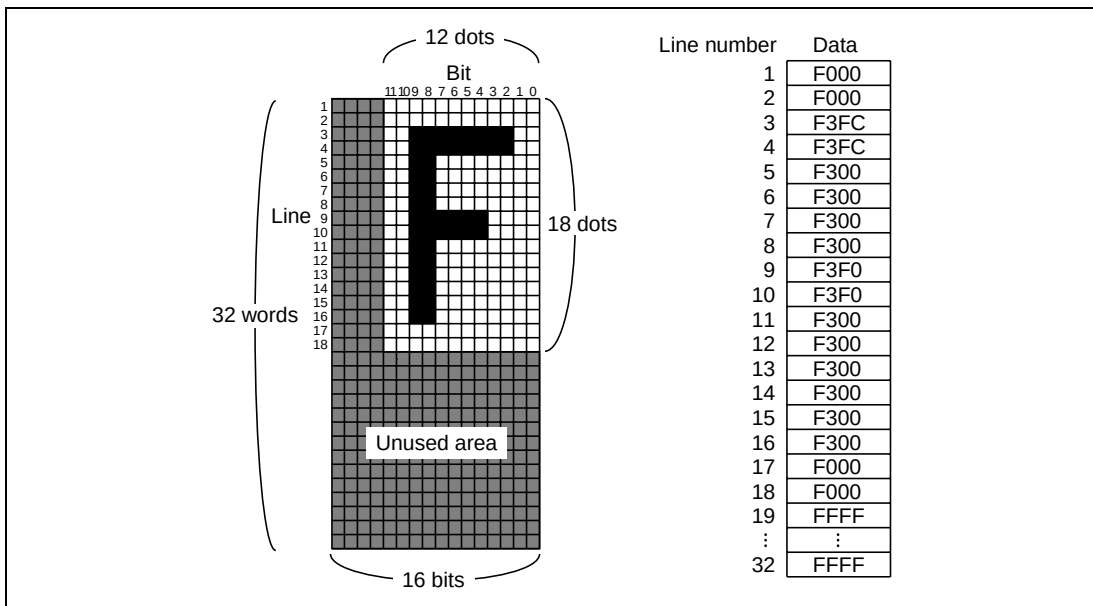


**Figure 29.8 OSDROM Data Configuration (for the letter “F”)**

Note: OSDROM consists of 12 dots × 18 lines per character. When character data is written to flash memory, addresses are written in a 16-bit × 32-word area as shown in figure 29.8. Data in the unused area should be set to 1. In addition, character data for blank display should always be set to 0.

### 29.3.7 Display Data RAM (OSDRAM)

|                |      |       |      |      |     |     |     |     |
|----------------|------|-------|------|------|-----|-----|-----|-----|
| Bit:           | 15   | 14    | 13   | 12   | 11  | 10  | 9   | 8   |
|                | BLNK | HT/CR | BON1 | BON0 | CR  | CG  | CB  | C8  |
| Initial value: | *    | *     | *    | *    | *   | *   | *   | *   |
| R/W:           | R/W  | R/W   | R/W  | R/W  | R/W | R/W | R/W | R/W |

|                |     |     |     |     |     |     |     |     |
|----------------|-----|-----|-----|-----|-----|-----|-----|-----|
| Bit:           | 7   | 6   | 5   | 4   | 3   | 2   | 1   | 0   |
|                | C7  | C6  | C5  | C4  | C3  | C2  | C1  | C0  |
| Initial value: | *   | *   | *   | *   | *   | *   | *   | *   |
| R/W:           | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |

\*: Undefined

Display data RAM for OSD (OSDRAM) contains 12 rows of 32 characters each, or 384 characters (384 words), and consists of master RAM and slave RAM. Master RAM can be read and written by the CPU; slave RAM is accessed by the OSD.

The OSD display changes when the data written to master RAM is transferred to the slave RAM. Data is transferred from the master RAM to the slave RAM by setting the LDREQ bit in the OSD format register to 1. At this time, when the DTMV bit is 0, transfer is performed at the moment the LDREQ bit is set to 1; when the DTMV bit is 1, transfer is performed in synchronous with the Vsync signal after the LDREQ bit is set to 1. After transfer, the LDREQ bit is cleared to 0. During transfer, the LDREQ bit remains set to 1; master RAM should be accessed only after confirming that the LDREQ bit has been cleared to 0. If the CPU accesses master RAM during transfer, the access is invalid and the VACS bit in the OSD format register is set to 1. The master RAM can be accessed by the CPU even in the module stop mode.

After power-down mode is cancelled, the OSDRAM must be initialized. For details on the OSD format register, refer to section 29.6.6, OSD Format Register (DFDRM).

**Bit 15—Blinking Specification Bit (BLNK):** Turns blinking (intermittent display) on and off for characters in character units. Blinking for digital outputs (YCO, R, G, and B) is set by the digital output specification register. Digital output (YBO) cannot be set to blink.

**OSDRAM**

| Bit 15 | Description     |
|--------|-----------------|
| BLNK   | C.Video Output  |
| 0      | Blinking is off |
| 1      | Blinking is on  |

| DOUT  | OSDRAM |                               |
|-------|--------|-------------------------------|
| Bit 4 | Bit 15 | Description                   |
| DOBC  | BLNK   | Digital Output (YCO, R, G, B) |
| 0     | 0      | Blinking is off               |
|       | 1      | Blinking is off               |
| 1     | 0      | Blinking is off               |
|       | 1      | Blinking is on                |

**Bit 14—Halftone/Cursor Display Specification Bit (HT/CR):** Turns halftone/cursor display on and off in character units. The superimposed/text display mode switching bit of the screen control register is used for switching between halftone and cursor display.

In digital outputs (R, G, and B), when the RGBC bit of the digital output specification register is set to 1 in either superimposed or text display mode to select output of display data for all of characters/borders/cursor/background/button display, the cursor color data specified by the cursor color specification bit of the row register is output. In SECAM TV format, it is recommended that halftone display be used.

| DCNTL  | OSDRAM |                       |
|--------|--------|-----------------------|
| Bit 14 | Bit 14 | Description           |
| DISPM  | HT/CR  | C.Video Output        |
| 0      | 0      | Halftone is off       |
|        | 1      | Halftone is on        |
| 1      | 0      | Cursor display is off |
|        | 1      | Cursor display is on  |

| DOUT  | OSDRAM |                                                                                             |
|-------|--------|---------------------------------------------------------------------------------------------|
| Bit 6 | Bit 14 | Description                                                                                 |
| RGBC  | HT/CR  | Digital Output (R, G, B)                                                                    |
| 0     | 0/1    | Character is output (halftone/cursor specification invalid)                                 |
| 1     | 0      | Character is output (halftone/cursor display off)                                           |
|       | 1      | Cursor color data specified by the cursor color specification bit of row register is output |

**Bits 13 and 12—Button Specification Bits (BON1, BON0):** Set buttons in character units in conjunction with the BPTNn bit of the row register. To create a button with three or more characters, no-button display characters or button display (one character) must be specified between a button display (start) character and a button display (end) character. For details, refer to figure 29.6, Button Display Example.

| CLINEn |        | OSDRAM |                                     | Description | Display                                                                             |
|--------|--------|--------|-------------------------------------|-------------|-------------------------------------------------------------------------------------|
| Bit 7  | Bit 13 | Bit 12 |                                     |             |                                                                                     |
| BPTNn  | BON1   | BON0   |                                     |             |                                                                                     |
| 0      | 0      | 0      | No button is displayed              |             |  |
|        |        | 1      | Button is displayed (start)         |             |  |
|        | 1      | 0      | Button is displayed (end)           |             |  |
|        |        | 1      | Button is displayed (one character) |             |  |
| 1      | 0      | 0      | No button is displayed              |             |  |
|        |        | 1      | Button is displayed (start)         |             |  |
|        | 1      | 0      | Button is displayed (end)           |             |  |
|        |        | 1      | Button is displayed (one character) |             |  |



**Bits 11 to 9—Character Color Specification Bits (CR, CG, CB):** Specify character colors in character units.

In superimposed mode, the only character color is white, and register settings are invalid.

For digital outputs (R, G, and B), character color data specified by the character color specification bits for both superimposed and text display modes is output.

| Bit 11 | Bit 10 | Bit 9 | Character Color |              |               |
|--------|--------|-------|-----------------|--------------|---------------|
|        |        |       | C.Video Output  |              | R,G,B Outputs |
| CR     | CG     | CB    | NTSC            | PAL          |               |
| 0      | 0      | 0     | Black           | Black        | Black         |
|        |        | 1     | $\pi$           | $\pm\pi$     | Blue          |
|        | 1      | 0     | $7\pi/4$        | $\pm 7\pi/4$ | Green         |
|        |        | 1     | $3\pi/2$        | $\pm 3\pi/2$ | Cyan          |
| 1      | 0      | 0     | $\pi/2$         | $\pm\pi/2$   | Red           |
|        |        | 1     | $3\pi/4$        | $\pm 3\pi/4$ | Magenta       |
|        | 1      | 0     | Same phase      | $\pm 0$      | Yellow        |
|        |        | 1     | White           | White        | White         |

**Bits 8 to 0—Character Codes (C8 to C0):** Set character codes (H'000 to H'17F) to be displayed.

Note: Character code H'000 is defined as blank (nothing displayed).  
For the H8S/2199R Series, character display is not guaranteed if character codes from H'180 to H'1FF are specified.  
For the H8S/2197S and H8S/2196S, character display is not guaranteed if character codes from H'100 to H'1FF are specified.

## 29.4 Settings in Row Units

The following items can be set in row units by using the row registers.

### 29.4.1 Button Patterns

Characters can be set freely by writing, to display data RAM, the character data ROM address (character code) at which the character to be displayed is stored.

For information on character data ROM and display data RAM, refer to section 29.3.6, Character Data ROM (OSDROM), and section 29.3.7, Display Data RAM (OSDRAM).

The button pattern specification bit of the row registers can be used to select the button pattern (raised or lowered pattern) in row units.

### 29.4.2 Display Enlargement

The size of characters can be selected in row units by using the character size specification bit of the row register. When selecting enlarged characters, the border width and button width also change to accommodate the character size.

### 29.4.3 Character Brightness

Character brightness can be set in row units using the character brightness specification bit of the row register. Four different character brightnesses can be selected.

### 29.4.4 Cursor Color, Brightness, Halftone Levels

#### (1) Cursor Color

Cursor colors can be set in row units using the cursor color specification bit of the row register.

Table 29.5 shows the correspondence between cursor color code settings and color output signals.

Cursor display functions in text display mode only.

For details on row registers, refer to section 29.4.5, Row Registers (CLINEn, n=rows 1 to 12).

**Table 29.5 Correspondence between Cursor Color Code Settings and Color Output Signals**

| R                      | 1     |            |              |             | 0            |              |           |       |
|------------------------|-------|------------|--------------|-------------|--------------|--------------|-----------|-------|
| G                      | 1     |            |              |             | 0            |              |           |       |
| B                      | 1     |            |              |             | 0            |              |           |       |
| Row Register Settings* | 1     | 0          | 1            | 0           | 1            | 0            | 1         | 0     |
| R, G, or B port output | White | Yellow     | Magenta      | Red         | Cyan         | Green        | Blue      | Black |
| C.Video output (NTSC)  | White | Same phase | $3\pi/4$     | $\pi/2$     | $3\pi/2$     | $7\pi/4$     | $\pi$     | Black |
| C.Video output (PAL)   | White | $\pm 0$    | $\pm 3\pi/4$ | $\pm \pi/2$ | $\pm 3\pi/2$ | $\pm 7\pi/4$ | $\pm \pi$ | Black |

Note: \* Can be set in display block units.

## (2) Cursor Brightness

Cursor brightness can be set in row units using the cursor brightness specification bit of the row register. Two different brightness levels can be selected.

For details on row registers, refer to section 29.4.5, Row Registers (CLINEn, n=rows 1 to 12).

## (3) Halftone Levels

Halftone levels can be set in row units using the cursor brightness specification bit of the row register. Two different halftone levels can be selected.

Figure 29.9 shows examples of a halftone level.

Halftone settings function only in superimposed mode.

For details on row registers, refer to section 29.4.5, Row Registers (CLINEn, n = rows 1 to 12).

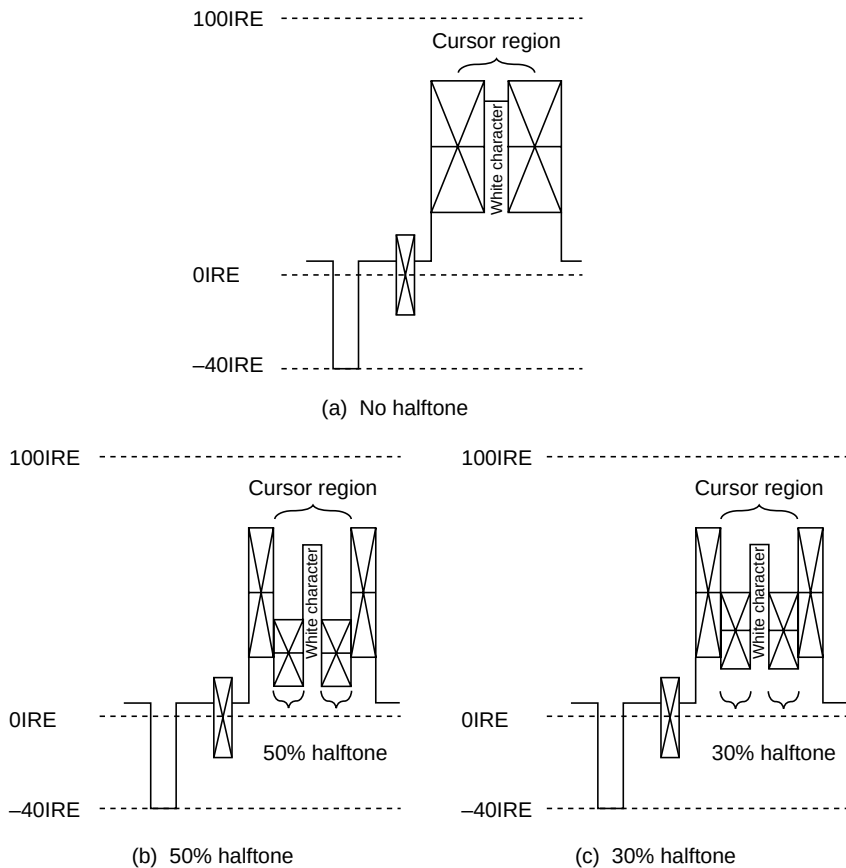


**Figure 29.9 Halftone Level Examples (C.Video)**

### 29.4.5 Row Registers (CLINEn, n = rows 1 to 12)

|                |       |     |       |       |     |     |     |      |
|----------------|-------|-----|-------|-------|-----|-----|-----|------|
| Bit:           | 7     | 6   | 5     | 4     | 3   | 2   | 1   | 0    |
|                | BPTNn | SZn | CLUn1 | CLUn2 | KRn | KGn | KBn | KLUn |
| Initial value: | 0     | 0   | 0     | 0     | 0   | 0   | 0   | 0    |
| R/W:           | R/W   | R/W | R/W   | R/W   | R/W | R/W | R/W | R/W  |

There are a total of 12 row registers (CLINEn), for use with rows 1 to 12.

Row register n is used in conjunction with display data RAM to set the character size, button pattern, cursor color, etc., for the nth row. Each of these is an 8-bit read/write register.

When reset, when the module is stopped, in sleep mode, in standby mode, in watch mode, in subactive mode, or in subsleep mode, the registers are initialized to H'00.

All of the row registers 1 to 12 have the same specifiable format.

When the OSD display update timing control bit (DTMV) is 1, the OSD display is updated to the row register settings in synchronous with the Vsync signal (OSDV).

**Bit 7—Button Pattern Specification Bit (BPTNn n=1 to 12):** Sets the button pattern for the nth row. For button specification, refer to section 29.3.7, Display Data RAM (OSDRAM).

Bit 7

| BPTNn | Description                                                    |                                                                                                       |
|-------|----------------------------------------------------------------|-------------------------------------------------------------------------------------------------------|
| 0     | Pattern causing buttons in the nth row to appear to be raised  | <br>(Initial value) |
| 1     | Pattern causing buttons in the nth row to appear to be lowered |                     |

**Bit 6—Character Size Specification Bit (SZn, n =1 to 12):** Sets the size of characters. The border width and button width also change according to the character size. These settings are common to superimposed and text display modes and to C.Video output and digital outputs.

Bit 6

| SZn | Description                                          |                 |
|-----|------------------------------------------------------|-----------------|
| 0   | Character display size: single height × single width | (Initial value) |
| 1   | Character display size: double height × double width |                 |

**Bits 5 and 4—Character Brightness Specification Bits (CLUn1, CLUn0, n = 1 to 12):** Set the character brightness. The character brightness differs with the character color.

In superimposed mode, white is the only character color.

This setting has no effect on digital outputs (YCO, YBO, R, G, and B).

| Bit 5 | Bit 4 |                                         |                            |
|-------|-------|-----------------------------------------|----------------------------|
| CLUn1 | CLUn0 | Character Color                         | Character Brightness Level |
| 0     | 0     | Black                                   | 0 IRE (Initial value)      |
|       | 1     |                                         | 10 IRE                     |
| 1     | 0     |                                         | 20 IRE                     |
|       | 1     |                                         | 30 IRE                     |
| 0     | 0     | Blue, green, cyan, red, yellow, magenta | 25 IRE (Initial value)     |
|       | 1     |                                         | 45 IRE                     |
| 1     | 0     |                                         | 55 IRE                     |
|       | 1     |                                         | 65 IRE                     |
| 0     | 0     | White                                   | 45 IRE (Initial value)     |
|       | 1     |                                         | 70 IRE                     |
| 1     | 0     |                                         | 80 IRE                     |
|       | 1     |                                         | 90 IRE                     |

Note: All brightness levels are with reference to the pedestal level (5 IRE). Brightness levels are reference values.

**Bits 3 to 1—Cursor Color Specification Bits (KRn, KGn, KBn, n = 1 to 12):** Set the cursor color in row units. C.Video output in superimposed mode uses halftone display, so that cursor color specifications are invalid.

- Cursor Colors in Text Display Mode

| Bit 3 | Bit 2 | Bit 1 | Cursor Color   |              |                 |
|-------|-------|-------|----------------|--------------|-----------------|
|       |       |       | C.Video Output |              | R, G, B Outputs |
| KRn   | KGn   | KBn   | NTSC           | PAL          | (Initial value) |
| 0     | 0     | 0     | Black          | Black        | Black           |
|       |       | 1     | $\pi$          | $\pm\pi$     | Blue            |
|       | 1     | 0     | $7\pi/4$       | $\pm 7\pi/4$ | Green           |
|       |       | 1     | $3\pi/2$       | $\pm 3\pi/2$ | Cyan            |
| 1     | 0     | 0     | $\pi/2$        | $\pm\pi/2$   | Red             |
|       |       | 1     | $3\pi/4$       | $\pm 3\pi/4$ | Magenta         |
|       | 1     | 0     | Same phase     | $\pm 0$      | Yellow          |
|       |       | 1     | White          | White        | White           |

- Cursor Colors in Superimposed Mode

| Bit 3 | Bit 2 | Bit 1 | Cursor Color                                                        |                       |
|-------|-------|-------|---------------------------------------------------------------------|-----------------------|
|       |       |       | C.Video Output                                                      | R, G, B Outputs       |
| KRn   | KGn   | KBn   |                                                                     |                       |
| 0     | 0     | 0     | Specification invalid<br>(Halftone display in<br>superimposed mode) | Black (Initial value) |
|       |       | 1     |                                                                     | Blue                  |
|       | 1     | 0     |                                                                     | Green                 |
|       |       | 1     |                                                                     | Cyan                  |
| 1     | 0     | 0     |                                                                     | Red                   |
|       |       | 1     |                                                                     | Magenta               |
|       | 1     | 0     |                                                                     | Yellow                |
|       |       | 1     |                                                                     | White                 |

**Bit 0—Cursor Brightness/Halftone Level Specification Bit (KLUn, n = 1 to 12):** Sets the cursor brightness/halftone level in row units. Cursor brightness differs for different cursor colors. This setting has no effect on digital outputs (YCO, YBO, R, G, and B).

- Cursor Brightness in Text Display Mode

**Bit 0**

| KLK | Cursor Color                            | Cursor Brightness Level |                 |
|-----|-----------------------------------------|-------------------------|-----------------|
| 0   | Black                                   | 0 IRE                   | (Initial value) |
| 1   |                                         | 25 IRE                  |                 |
| 0   | Blue, green, cyan, red, yellow, magenta | 25 IRE                  | (Initial value) |
| 1   |                                         | 45 IRE                  |                 |
| 0   | White                                   | 45 IRE                  | (Initial value) |
| 1   |                                         | 55 IRE                  |                 |

Note: All brightness levels are with reference to the pedestal level (5IRE). Brightness levels are reference values.

- Halftone Levels in Superimposed Mode

**Bit 0**

| KLK | Description (Halftone Levels) |                 |
|-----|-------------------------------|-----------------|
| 0   | 50% halftone                  | (Initial value) |
| 1   | 30% halftone                  |                 |



## 29.5 Settings in Screen Units

The following items can be set in screen units by using vertical display position register, horizontal display position register, and screen control register.

### 29.5.1 Display Positions

#### (1) Vertical Display Start Position

The vertical display start position can be set in single scanning line units using the vertical position specification bits of the vertical display position register.

In setting display positions, the following should be noted.

- Settings should be chosen to ensure that the display does not overlap with the vertical retrace line.
- When the display protrudes outside the screen, characters in the protruding region should be blank characters (character code H'000).

The base point for display start positions is shown in figure 29.10.

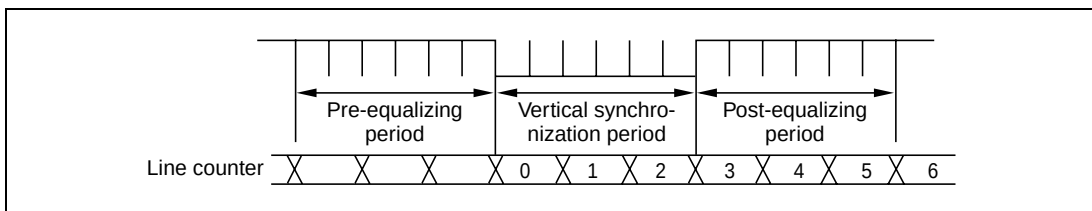


**Figure 29.10 Base Point for Vertical Display Start Positions**

#### (2) Vertical Display Interval

The vertical display interval can be set in single scanning line units using the line interval specification bit of the vertical display position register.

- When the display protrudes outside the screen, characters in the protruding region should be blank characters (character code H'000).

#### (3) Horizontal Display Start Position

The horizontal display start position can be set in units equal to double the dot clock cycle using the horizontal position specification bit of the horizontal display position register.

The base point for the horizontal display start position is the center of the horizontal sync signal.

Note the following when choosing display position settings.

- Settings should be chosen such that the display does not overlap with the color burst.
- When the display protrudes outside the screen, characters in the protruding region should be blank characters (character code H'000).

The base point for the horizontal display start position is shown in figure 29.11.

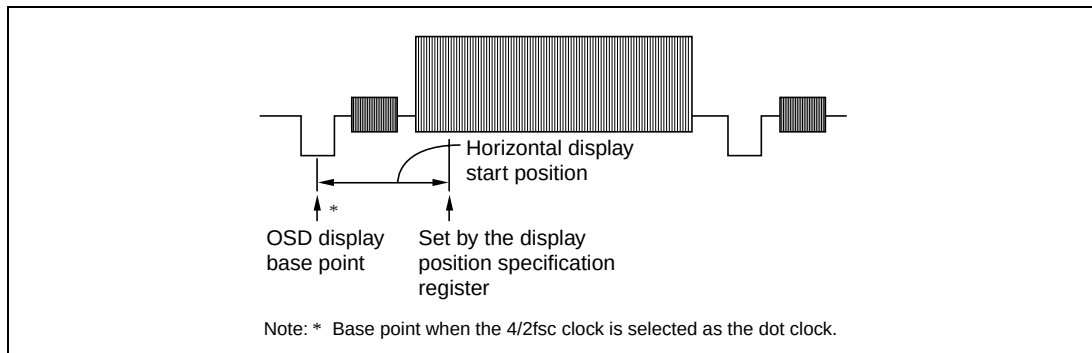


**Figure 29.11 Base Point for Horizontal Display Start Position**

### 29.5.2 Turning the OSD Display On and Off

The OSD display can be turned on and off using the display on/off bit of the screen control register.

### 29.5.3 Display Method

Display can be switched between text display mode and superimposed mode, and while in text display mode the display can be switched between interlaced and noninterlaced display, using the display mode specification bit of the screen control register.

### 29.5.4 Blinking Period

A blinking period of either approximately 0.5 sec (32/fV) or approximately 1 sec (64/fV) can be selected using the blinking period specification bit of the screen control register.

### **29.5.5 Borders**

Borders on the periphery of characters can be set using the border specification bit of the screen control register. For an example of border display, see figure 29.2, Character Configuration Examples.

The border color can be set in screen units using the border color specification bit of the screen control register. In text display mode, the border color can be selected from either white or black. In superimposed mode, all borders are black only.

The horizontal size of borders is one dot (the same as one dot in a character), but for enlarged characters is two dots.

The vertical size of borders is one line (the same as one line in a character), but for enlarged characters is two lines.

For an explanation of the screen control register, refer to section 29.5.9, Screen Control Register (DCNTL).

There are notes on borders; refer to section 29.8, Notes on OSD Font Creation.

In the SECAM format, use of halftones or bordering is recommended.

### **29.5.6 Background Color and Brightness**

In text display mode, the background color can be selected from among eight hues, and the brightness from among four levels, using the background color specification bits and background brightness select bits of the screen control register.

### **29.5.7 Character, Cursor, and Background Chroma Saturation**

In text display mode, the chroma saturation of the character, cursor, and background can each be selected from among two levels using the character chroma specification bit, cursor chroma specification bit, and background chroma specification bit of the screen control register, respectively.

## 29.5.8 Display Position Registers (HPOS and VPOS)

The HPOS and VPOS include the horizontal display position register and the vertical display position register.

### (1) Horizontal Display Position Register (HPOS)

|                |     |     |     |     |     |     |     |     |
|----------------|-----|-----|-----|-----|-----|-----|-----|-----|
| Bit:           | 7   | 6   | 5   | 4   | 3   | 2   | 1   | 0   |
|                | HP7 | HP6 | HP5 | HP4 | HP3 | HP2 | HP1 | HP0 |
| Initial value: | 0   | 0   | 0   | 0   | 0   | 0   | 0   | 0   |
| R/W:           | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |

The horizontal display position register is used to set the horizontal display start position for characters. It is an 8-bit read/write register. When reset, when the module is stopped, in sleep mode, in standby mode, in watch mode, in subactive mode, or in subsleep mode, the horizontal display position register is initialized to H'00. When the OSD display update timing control bit (DTMV) is 1, the OSD display is updated to the horizontal display position register settings synchronously with the Vsync signal (OSDV).

**Bits 7 to 0—Horizontal Display Start Position Specification Bits (HP7 to HP0):** Set the display start position in the horizontal direction. Setting units are twice the dot clock cycle. Refer to the base point for the horizontal display start position in figure 29.11.

If the horizontal display start position is  $H_s$  ( $\mu s$ ), then  $H_s$  is given by  $2 \times t_c \times (\text{value of HP7 to HP0})$ , where  $t_c$  is the dot clock cycle.

### (2) Vertical Display Position Register (VPOS)

|                |     |     |     |     |       |       |       |     |
|----------------|-----|-----|-----|-----|-------|-------|-------|-----|
| Bit:           | 15  | 14  | 13  | 12  | 11    | 10    | 9     | 8   |
|                | —   | —   | —   | —   | VSPC2 | VSPC1 | VSPC0 | VP8 |
| Initial value: | 1   | 1   | 1   | 1   | 0     | 0     | 0     | 0   |
| R/W:           | —   | —   | —   | —   | R/W   | R/W   | R/W   | R/W |
| Bit:           | 7   | 6   | 5   | 4   | 3     | 2     | 1     | 0   |
|                | VP7 | VP6 | VP5 | VP4 | VP3   | VP2   | VP1   | VP0 |
| Initial value: | 0   | 0   | 0   | 0   | 0     | 0     | 0     | 0   |
| R/W:           | R/W | R/W | R/W | R/W | R/W   | R/W   | R/W   | R/W |

The vertical display position register is a 16-bit read/write register used to set the character size, vertical display start position, and vertical-direction row interval. When reset, when the module is stopped, in sleep mode, in standby mode, in watch mode, in subactive mode, or in subsleep mode, the vertical display position register is initialized to H'F000. When the OSD display update timing control bit (DTMV) is 1, the OSD display is updated to the vertical display position register settings synchronously with the Vsync signal (OSDV).

**Bits 15 to 12—Reserved:** Cannot be modified and are always read as 1.

**Bits 11 to 9—Vertical Row Interval Specification Bits (VSPC2 to VSPC0):** Set the row interval in the vertical direction. They can be set in single scanning line units.

| Bit 11 | Bit 10 | Bit 9 | Description                        |
|--------|--------|-------|------------------------------------|
| VSPC2  | VSPC1  | VSPC0 |                                    |
| 0      | 0      | 0     | No row interval (Initial value)    |
|        |        | 1     | Row interval: One scanning line    |
|        | 1      | 0     | Row interval: Two scanning lines   |
|        |        | 1     | Row interval: Three scanning lines |
| 1      | 0      | 0     | Row interval: Four scanning lines  |
|        |        | 1     | Row interval: Five scanning lines  |
|        | 1      | 0     | Row interval: Six scanning lines   |
|        |        | 1     | Row interval: Seven scanning lines |

**Bits 8 to 0—Vertical Display Start Position Specification Bits (VP8 to VP0):** Set the display start position in the vertical direction. The vertical display start position can be set in single scanning line units. The base point of the display start position is the vertical sync signal. Refer to the base point for the vertical display start position in figure 29.10.

If the vertical display start position is  $V_s$  ( $\mu\text{s}$ ), then  $V_s$  is given by  $V_s = t_H \times (\text{value of VP8 to VP0})$ , where  $t_H$  is the horizontal sync signal period ( $\mu\text{s}$ ), corresponding to a single horizontal scanning line.

29.5.9 Screen Control Register (DCNTL)

|                |        |       |       |      |       |      |      |      |
|----------------|--------|-------|-------|------|-------|------|------|------|
| Bit:           | 15     | 14    | 13    | 12   | 11    | 10   | 9    | 8    |
|                | VDSPON | DISPM | LACEM | BLKS | OSDON | —    | EDGE | EDGC |
| Initial value: | 0      | 0     | 0     | 0    | 0     | 0    | 0    | 0    |
| R/W            | R/W    | R/W   | R/W   | R/W  | R/W   | —    | R/W  | R/W  |
| Bit:           | 7      | 6     | 5     | 4    | 3     | 2    | 1    | 0    |
|                | BR     | BG    | BB    | BLU1 | BLU0  | CAMP | KAMP | BAMP |
| Initial value: | 0      | 0     | 0     | 0    | 0     | 0    | 0    | 0    |
| R/W            | R/W    | R/W   | R/W   | R/W  | R/W   | R/W  | R/W  | R/W  |

The DCNTL is a 16-bit read/write register used to switch between superimposed and text display modes, set the background and color for text display mode in screen units, and turn OSD display on and off.

When reset, when the module is stopped, in sleep mode, in standby mode, in watch mode, in subactive mode, or in subsleep mode, the DCNTL is initialized to H'0000.

When the OSD display update timing control bit (DTMV) is 1, the OSD display is updated to the screen control register settings except the setting in bit 13 (LACEM bit) synchronously with the Vsync signal (OSDV).

**Bit 15—OSD C. Video Display Enable Bit (VDSPON):** Turns OSD C.Video display output on and off.

Bit 15

| VDSPON | Description                                |
|--------|--------------------------------------------|
| 0      | OSD C.Video display is off (Initial value) |
| 1      | OSD C.Video display is on                  |

**Bit 14—Superimposed/Text Display Mode Select Bit (DISPM):** Selects superimposed mode or text display mode.

When selecting a display mode, the dot clock also serves as the AFC circuit reference clock, and so the AFC circuit reference Hsync signal must be switched. For details, refer to section 27.3.6, Automatic Frequency Controller (AFC).

Bit 14

| DISPM | Description                                   |
|-------|-----------------------------------------------|
| 0     | Superimposed mode is selected (Initial value) |
| 1     | Text display mode is selected                 |

**Bit 13—Interlaced/Noninterlaced Display Select Bit (LACEM):** Selects interlaced or noninterlaced text display mode. When noninterlaced text display is selected, the internally generated Hsync and Vsync frequency can be modified. For details, refer to section 27.2.11, Internal Sync Frequency Register (INFRQR).

#### Bit 13

| LACEM | Description                                       |
|-------|---------------------------------------------------|
| 0     | Noninterlaced display is selected (Initial value) |
| 1     | Interlaced display is selected                    |

**Bit 12—Blinking Period Select Bit (BLKS):** Selects the character blinking period. The duty is 50%. The blinking period differs somewhat depending on the TV format selected by the TVM2 bit of the OSD format register (either a 525-line system or a 625-line system).

| DFORM  | DCNTL  |                                                        |
|--------|--------|--------------------------------------------------------|
| Bit 15 | Bit 12 |                                                        |
| TVM2   | BLKS   | Description (Blinking Period)                          |
| 0      | 0      | Approx. 0.5 sec ( $32/f_v = 0.53$ sec) (Initial value) |
|        | 1      | Approx. 1.0 sec ( $64/f_v = 1.07$ sec)                 |
| 1      | 0      | Approx. 0.5 sec ( $32/f_v = 0.64$ sec) (Initial value) |
|        | 1      | Approx. 1.0 sec ( $64/f_v = 1.28$ sec)                 |

Note:  $f_v$  is the vertical sync signal frequency.

**Bit 11—OSD Display Start Bit (OSDON):** Starts OSD display. When the OSD display start bit is 0, the OSD internal display circuit stops operation. In conjunction with the OSD C.Video display enable bit (bit 15), changes operation as follows. When accessing character data ROM (OSDROM) from the CPU, this bit should always be cleared to 0. If this bit is set to 1, access by the CPU is not guaranteed.

| Bit 15 | Bit 11 |                                                                                     |
|--------|--------|-------------------------------------------------------------------------------------|
| VDSPON | OSDON  | Description                                                                         |
| 0/1    | 0      | OSD display is stopped (C.Video output and digital output both off) (Initial value) |
| 0      | 1      | OSD display is started (digital output only)                                        |
| 1      | 1      | OSD display is started (both C.Video output and digital output enabled)             |

**Bit 10—Reserved:** Cannot be modified and is always read as 0. When 1 is written to this bit, correct operation is not guaranteed.

**Bit 9—Border Specification Bit (EDGE):** Sets the border for characters for the entire screen.

**Bit 9**

| EDGE | Description                         |
|------|-------------------------------------|
| 0    | No character border (Initial value) |
| 1    | Character border                    |

**Bit 8—Border Color Specification Bit (EDGC):** Selects the border color. Border color specifications for C.Video output are invalid in superimposed mode.

Border brightness levels are 0 IRE for black and 90 IRE for white.

Note: Brightness levels are with reference to the pedestal level (5IRE). Brightness levels are reference values.

- Border Color in Text Display Mode

| Bit 8 | Border Color   |                       |
|-------|----------------|-----------------------|
| EDGC  | C.Video Output | R, G, B Outputs       |
| 0     | Black          | Black (Initial value) |
| 1     | White          | White                 |

- Border Color in Superimposed Mode

| Bit 8 | Border Color                  |                       |
|-------|-------------------------------|-----------------------|
| EDGC  | C.Video Output                | R, G, B Outputs       |
| 0     | Specification invalid (black) | Black (Initial value) |
| 1     |                               | White                 |



**Bits 7 to 5—Background Color Specification Bits (BR, BG, BB):** Used to select the background color in text display mode. Background color specifications for C.Video output are invalid in superimposed mode.

- Background Colors in Text Display Mode

| Bit 7 | Bit 6 | Bit 5 | Background Color |              |                       |
|-------|-------|-------|------------------|--------------|-----------------------|
|       |       |       | C.Video Output   |              | R, G, B Outputs       |
| BR    | BG    | BB    | NTSC             | PAL          |                       |
| 0     | 0     | 0     | Black            | Black        | Black (Initial value) |
|       |       | 1     | $\pi$            | $\pm\pi$     | Blue                  |
|       | 1     | 0     | $7\pi/4$         | $\pm 7\pi/4$ | Green                 |
|       |       | 1     | $3\pi/2$         | $\pm 3\pi/2$ | Cyan                  |
| 1     | 0     | 0     | $\pi/2$          | $\pm\pi/2$   | Red                   |
|       |       | 1     | $3\pi/4$         | $\pm 3\pi/4$ | Magenta               |
|       | 1     | 0     | Same phase       | $\pm 0$      | Yellow                |
|       |       | 1     | White            | White        | White                 |

- Background Colors in Superimposed Mode

| Bit 7 | Bit 6 | Bit 5 | Background Color      |                       |
|-------|-------|-------|-----------------------|-----------------------|
| BR    | BG    | BB    | C.Video Output        | R, G, B Outputs       |
| 0     | 0     | 0     | Specification invalid | Black (Initial value) |
|       |       | 1     |                       | Blue                  |
|       | 1     | 0     |                       | Green                 |
|       |       | 1     |                       | Cyan                  |
| 1     | 0     | 0     |                       | Red                   |
|       |       | 1     |                       | Magenta               |
|       | 1     | 0     |                       | Yellow                |
|       |       | 1     |                       | White                 |

**Bits 4 and 3—Background Brightness Select Bits (BLU1, BLU0):** Select the background brightness in text display mode. These settings have no effect on digital outputs (YCO, YBO, R, G, and B).

| Bit 4 | Bit 3 |                        |
|-------|-------|------------------------|
| BUL1  | BUL0  | Background Brightness  |
| 0     | 0     | 10 IRE (Initial value) |
|       | 1     | 30 IRE                 |
| 1     | 0     | 50 IRE                 |
|       | 1     | 70 IRE                 |

Note: Brightness levels are with reference to the pedestal level (5IRE). Brightness levels are reference values.

**Bit 2—Character Chroma Select Bit (CAMP):** Selects the character chroma amplitude in text display mode. This setting has no effect on digital outputs (YCO, YBO, R, G, and B).

| Bit 2 |                                                    |
|-------|----------------------------------------------------|
| CAMP  | Description                                        |
| 0     | Character chroma amplitude: 60 IRE (Initial value) |
| 1     | Character chroma amplitude: 80 IRE                 |

Note: Amplitudes are reference values.

**Bit 1—Cursor Chroma Select Bit (KAMP):** Selects the cursor chroma amplitude in text display mode. This setting has no effect on digital outputs (YCO, YBO, R, G, and B).

| Bit 1 |                                                 |
|-------|-------------------------------------------------|
| KAMP  | Description                                     |
| 0     | Cursor chroma amplitude: 60 IRE (Initial value) |
| 1     | Cursor chroma amplitude: 80 IRE                 |

Note: Amplitudes are reference values.

**Bit 0—Background Chroma Select Bit (BAMP):** Selects the background chroma amplitude in text display mode. This setting has no effect on digital outputs (YCO, YBO, R, G, and B).

| Bit 0 |                                                     |
|-------|-----------------------------------------------------|
| BAMP  | Description                                         |
| 0     | Background chroma amplitude: 60 IRE (Initial value) |
| 1     | Background chroma amplitude: 80 IRE                 |

Note: Amplitudes are reference values.

## 29.6 Other Settings

### 29.6.1 TV Format

The OSD supports M/NTSC, 4.43-NTSC, M/PAL, N/PAL, B, G, H/PAL, I/PAL, D, K/PAL, and SECAM formats. See table 29.3, TV Formats and Display Modes.

### 29.6.2 Display Data RAM Control

The OSD display data RAM consists of master RAM and slave RAM. The master RAM can be read and written by the CPU; the slave RAM is accessed by the OSD.

The data written to master RAM is transferred to slave RAM to switch the OSD display.

The DTMV bit can be used to switch between timing the transfer of data to occur when the LDREQ bit is set to 1, or to occur synchronously with the Vsync signal after LDREQ is set to 1. For details, refer to section 29.6.6, OSD Format Register (DFORM).

### 29.6.3 Timing of OSD Display Updates Using Register Rewriting

It is possible to switch the timing of OSD display updates to occur simultaneously with register rewrites, or to occur synchronously with the Vsync signal (OSDV) after a register rewrite. For details, refer to section 29.6.6, OSD Format Register (DFORM).

### 29.6.4 4fsc/2fsc

For a 4fsc/2fsc signal, either an external clock signal is input, or a crystal oscillator can be connected. If an external clock signal is input, the signal must be amplified using a dedicated amplifier circuit; this is set using the register.

Either 4fsc or 2fsc input can be selected.

If a 2fsc signal is input, some colors cannot be displayed. For details, see table 29.7, OSD Display Colors for 2fsc Signal Input.

### 29.6.5 OSDV Interrupts

Interrupts triggered by the Vsync signal input to the OSD (OSDV interrupts) can be generated. In superimposed mode, interrupts are triggered by the external Vsync signal, and in text display mode, they are triggered by the internal Vsync signal generated in the sync separator.

## 29.6.6 OSD Format Register (DFORM)

|                |      |      |      |       |        |      |       |        |
|----------------|------|------|------|-------|--------|------|-------|--------|
| Bit:           | 15   | 14   | 13   | 12    | 11     | 10   | 9     | 8      |
|                | TVM2 | TVM1 | TMV0 | FSCIN | FSCEXT | —    | OSDVE | OSDVF  |
| Initial value: | 0    | 0    | 0    | 0     | 0      | 0    | 0     | 0      |
| R/W:           | R/W  | R/W  | R/W  | R/W   | R/W    | R/W  | R/W   | R/(W)* |
| Bit:           | 7    | 6    | 5    | 4     | 3      | 2    | 1     | 0      |
|                | —    | —    | —    | —     | —      | DTMV | LDREQ | VACS   |
| Initial value: | 1    | 1    | 1    | 1     | 1      | 0    | 0     | 0      |
| R/W:           | —    | —    | —    | —     | —      | R/W  | R/W   | R/(W)* |

Note: \* Only 0 can be written to clear the flag.

The DFORM is used to set the TV format and control display data RAM.

The DFORM is a 16-bit read/write register. When reset, it is initialized to H'00F8. Bits other than bits 12, 11, and 7 to 3 are cleared to 0 in module stop, sleep, standby, watch, subactive, and subsleep modes.

When the module stop bit of the sync separator is 0, bits 12 and 11 must not be rewritten.

**Bits 15 to 13—TV Format Select Bits (TVM2 to TVM0):** Select the TV format. The specified clock signal should always be input.

| Bit 15 | Bit 14 | Bit 13 | Bit 12 | Description                                     |                          |                         |
|--------|--------|--------|--------|-------------------------------------------------|--------------------------|-------------------------|
| TVM2   | TVM1   | TVM0   | FSCIN  | TV Format                                       | 4fsc (MHz)               | 2fsc (MHz)              |
| 0      | 0      | 0      | 0      | M/NTSC                                          | 14.31818                 | —                       |
|        |        |        | 1      |                                                 | —                        | 7.15909                 |
| 0      | 0      | 1      | 0      | 4.43-NTSC                                       | 17.734475<br>(17.734476) | —                       |
|        |        |        | 1      |                                                 | —                        | 8.8672375<br>(8.867238) |
| 0      | 1      | 0      | 0      | M/PAL                                           | 14.302446<br>(14.302444) | —                       |
|        |        |        | 1      |                                                 | —                        | 7.15122298              |
| 0      | 1      | 1      | 0/1    | Must not be specified.                          |                          |                         |
| 1      | 0      | 0      | 0      | N/PAL                                           | 14.328225<br>(14.328224) | —                       |
|        |        |        | 1      |                                                 | —                        | 7.1641125               |
| 1      | 0      | 1      | 0/1    | Must not be specified.                          |                          |                         |
| 1      | 1      | 0      | 0      | B, G, H/PAL,<br>I/PAL, D, K/PAL                 | 17.734475<br>(17.734476) | —                       |
|        |        |        | 1      |                                                 | —                        | 8.8672375<br>(8.867238) |
| 1      | 1      | 1      | 0      | B, G,<br>H/SECAM,<br>L/SECAM, D,<br>K, K1/SECAM | 17.734475<br>(17.734476) | —                       |
|        |        |        | 1      |                                                 | —                        | 8.8672375<br>(8.867238) |

Note: The 4fsc and 2fsc frequencies for SECAM do not conform to the SECAM TV format specifications.

**Bit 12—4/2fsc Input Select Bit (FSCIN):** Selects 4fsc or 2fsc input.

#### Bit 12

| FSCIN | Description            |                 |
|-------|------------------------|-----------------|
| 0     | 4fsc input is selected | (Initial value) |
| 1     | 2fsc input is selected |                 |

**Bit 11—4/2fsc External Input Select Bit (FSCEXT):** Selects 4fsc or 2fsc input.

**Bit 11**

| FSCEXT | Description                                                               |
|--------|---------------------------------------------------------------------------|
| 0      | 4/2fsc oscillator uses a crystal oscillator (Initial value)               |
| 1      | 4/2fsc uses a dedicated amplifier circuit for external clock signal input |

**Bit 10—Reserved:** Always read as 0. When 1 is written to this bit, correct operation is not guaranteed.

**Bit 9—OSDV Interrupt Enable Bit (OSDVE):** Enables or disables OSDV interrupts.

**Bit 9**

| OSDVE | Description                                    |
|-------|------------------------------------------------|
| 0     | The OSDV interrupt is disabled (Initial value) |
| 1     | The OSDV interrupt is enabled                  |

**Bit 8—OSDV Interrupt Flag (OSDVF):** Set when the OSD detects the Vsync signal. The timing for setting this flag differs depending on the OSD display mode. In superimposed mode, it is set on the external Vsync signal; in text display mode it is set on the internally generated Vsync signal.

**Bit 8**

| OSDVF | Description                                                               |
|-------|---------------------------------------------------------------------------|
| 0     | [Clearing condition]<br>When 0 is written after reading 1 (Initial value) |
| 1     | [Setting condition]<br>When OSD detects the Vsync signal                  |

**Bits 7 to 3—Reserved:** Always read as 1. When 0 is written to these bits, correct operation is not guaranteed.

**Bit 2—OSD Display Update Timing Control Bit (DTMV):** Selects the timing for transfer of data from master RAM to slave RAM and for OSD display update by register overwriting.

#### Bit 2

| DTMV | Description                                                                                                                                                                                                                                                                                             |
|------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 0    | After the LDREQ bit is written to 1, data is transferred from master RAM to slave RAM regardless of the Vsync signal (OSDV). The OSD display is updated simultaneously with register* rewriting.<br>Note: * When transferring data using this setting, do not have the OSD display data (Initial value) |
| 1    | After the LDREQ bit is written to 1, data is transferred from master RAM to slave RAM synchronously with the Vsync signal (OSDV). After rewriting the register, the OSD display is updated synchronously with the Vsync signal (OSDV).                                                                  |

Note: The registers and register bits whose settings are reflected in the OSD display are the row registers (CLINE), vertical display position register (VPOS), horizontal display position register (HPOS), screen control register (DCNTL) except bit 13, and the RGBC, YCOC, and DOBC bits of the digital output specification register (DOUT).

**Bit 1—Master-Slave RAM Transfer Request and State Bit (LDREQ):** Requests transfer of data from master RAM to slave RAM. After this bit is written to 1, a transfer request is issued with timing selected by the DTMV bit. When read, this bit indicates the state of data transfer from master RAM to slave RAM.

Note: To abort data transfer after writing this bit to 1, write it to 0. However, once data transfer begins it cannot be aborted.

- Writing

#### Bit 1

| LDREQ | Description                                                                                                   |
|-------|---------------------------------------------------------------------------------------------------------------|
| 0     | Requests abort of data transfer from master RAM to slave RAM                                                  |
| 1     | Requests transfer of data from master RAM to slave RAM. After transfer is completed, this bit is cleared to 0 |

- Reading

#### Bit 1

| LDREQ | Description                                                                                                                                      |
|-------|--------------------------------------------------------------------------------------------------------------------------------------------------|
| 0     | Data is not being transferred from master RAM to slave RAM (Initial value)                                                                       |
| 1     | Data is being transferred from master RAM to slave RAM, or is being prepared for transfer. After transfer is completed, this bit is cleared to 0 |

**Bit 0—Master-Slave RAM Transfer State Bit (VACS):** Is set to 1 if the CPU accesses OSDRAM during transfer of data from master RAM to slave RAM; the access is invalid. This bit is not cleared automatically, and so should be cleared by writing 0.

#### Bit 0

| VACS | Description                                                         |
|------|---------------------------------------------------------------------|
| 0    | The CPU did not access OSDRAM during data transfer (Initial value)  |
| 1    | The CPU accessed OSDRAM during data transfer; the access is invalid |

## 29.7 Digital Output

### 29.7.1 R, G, and B Outputs

R, G, and B outputs consist of display data in dot units for characters, background, cursors and other display elements.

Either of two output methods can be selected by the R, G, B digital output specification bit: characters only, or output of display data for all elements, including characters, borders, cursors, background, and buttons. Here data for borders and buttons is output as white-equivalent (R=1, G=1, B=1) or as black-equivalent (R=0, G=0, B=0) data.

The digital output blink control bit is used to select blinking for R, G, and B. The R, G, and B outputs are multiplexed with port 8 inputs/outputs. For details on pin function selection, refer to section 10.9, Port 8.

Display data RAM and the screen control register settings are output as display data output for characters, cursors and background in superimposed mode; this differs from the output data from the CVout pin.

Examples of R, G, B output are shown in figures 29.12 and 29.13.



### Output Example 1

Character color: Yellow (CR = 1, CG = 1, CB = 0)

Cursor color: Cyan (KR = 0, KG = 1, KB = 1)

Background color: Green (BR = 0, BG = 1, BB = 0)

Border: None (EDGE = 0)

Button: Displayed (pattern 1)

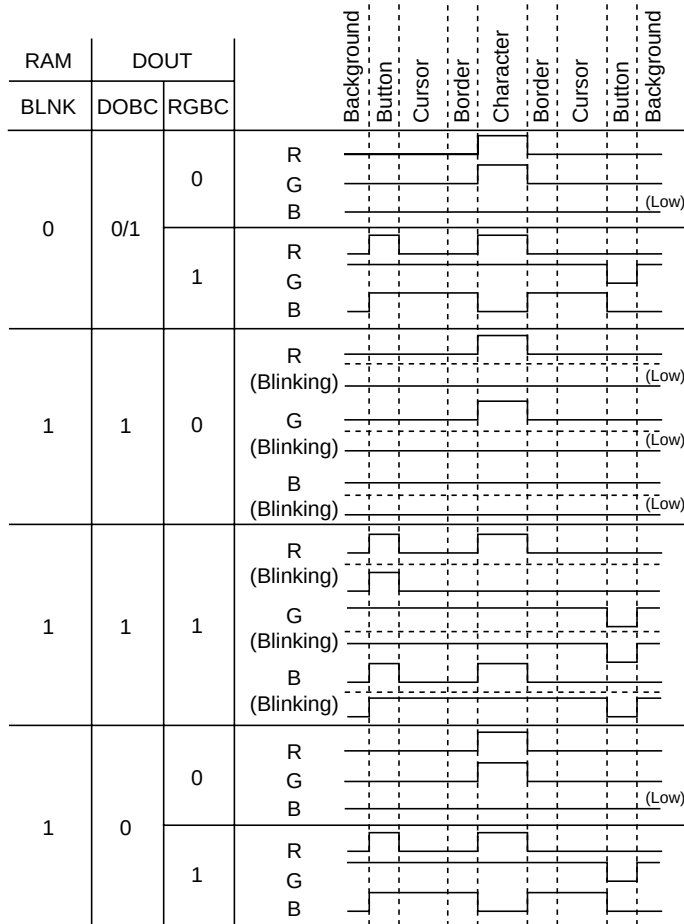



Figure 29.12 RGB Output Example (1)

## Output Example 2

Character color: Yellow (CR = 1, CG = 1, CB = 0)

Cursor color: None (HT/CR = 0)

Background color: Green (BR = 0, BG = 1, BB = 0)

Border: Black (EDGE = 1, EDGC = 0)

Button: None

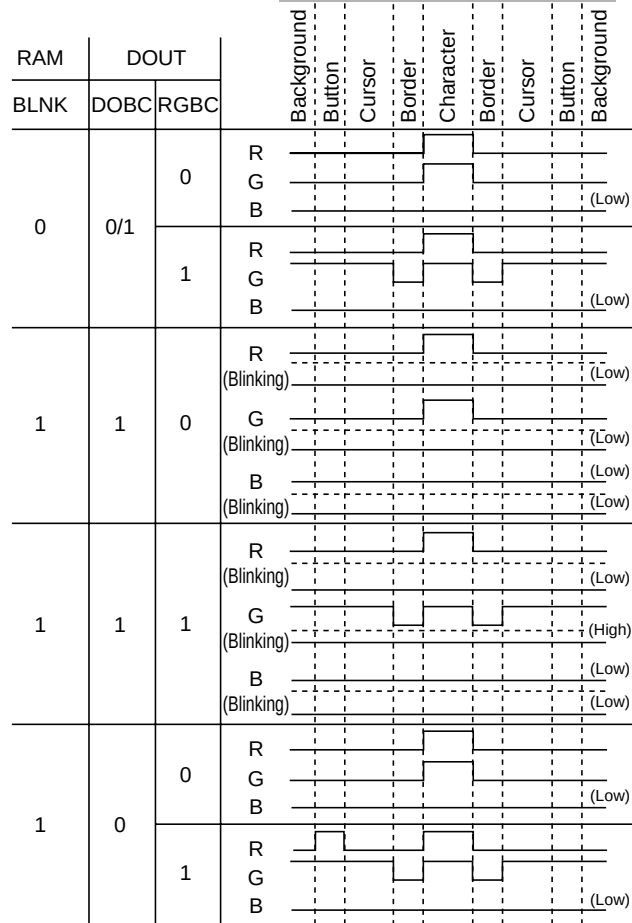



**Figure 29.13 RGB Output Example (2)**

29.7.2 YCO and YBO Outputs

YCO output consists of character and border data in dot units. Either of two YCO output methods can be selected by the YCO digital output specification bit: output of characters only, or combined output of character and border data. The digital output blink control bit can be used to select blinking for YCO output. The YCO data output specification bit must be reset to 0 when bordering is not performed, and must be set to 1 when bordering is performed. YBO output is data for the character display area. 32 characters' worth of data is output starting from the start position set by the horizontal-direction start position specification bit of the display position register. Here blank-character intervals have no character display, and so there is no output. In addition, YBO output cannot be made to blink.

The YCO and YBO outputs are multiplexed with port 8 inputs/outputs. For details on pin function selection, refer to section 10.9, Port 8.

An example of YCO output and that of YBO output appear in figures 29.14 and 29.15, respectively.

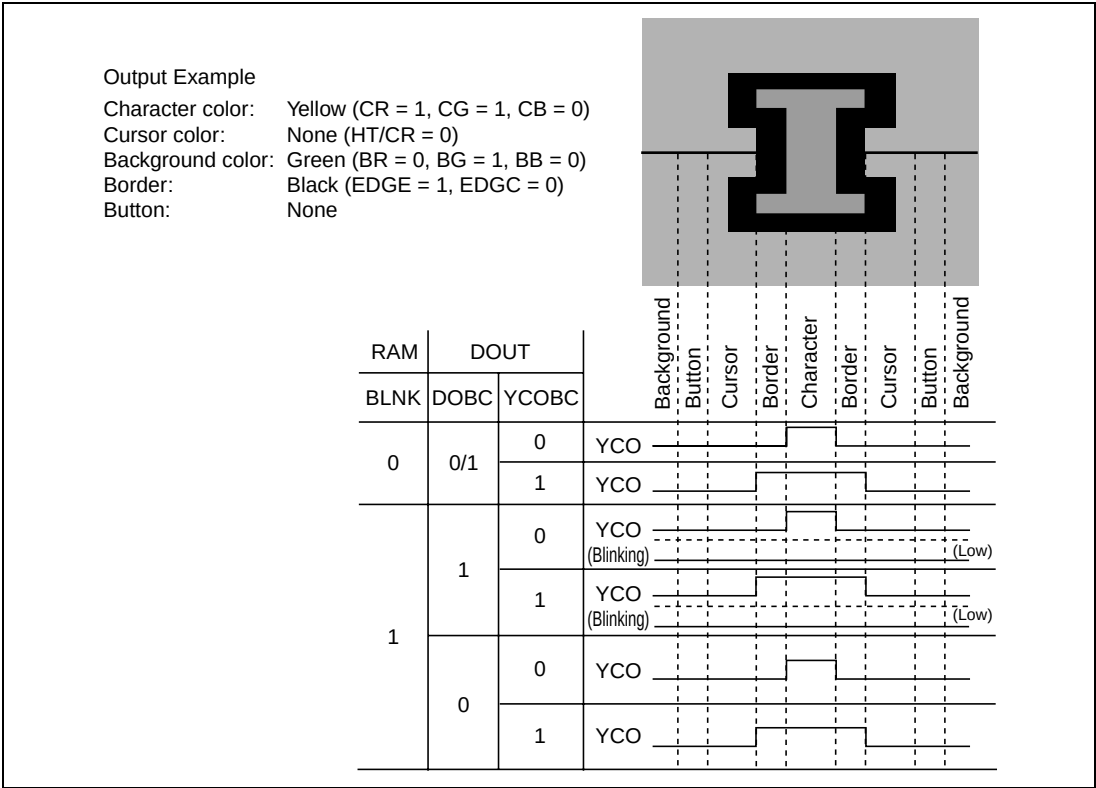


Figure 29.14 YCO Output Example

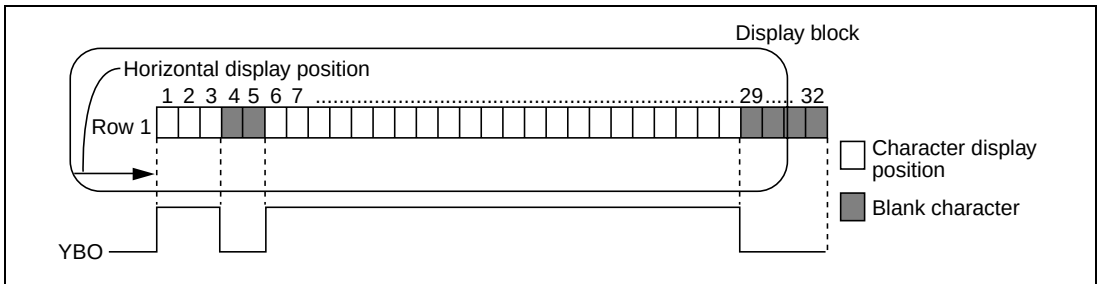


**Figure 29.15 YBO Output Example**

### 29.7.3 Digital Output Specification Register (DOUT)

|                |   |      |      |      |      |       |   |   |
|----------------|---|------|------|------|------|-------|---|---|
| Bit:           | 7 | 6    | 5    | 4    | 3    | 2     | 1 | 0 |
|                | — | RGBC | YCOC | DOBC | DSEL | CRSEL | — | — |
| Initial value: | 0 | 0    | 0    | 0    | 0    | 0     | 1 | 0 |
| R/W:           | — | R/W  | R/W  | R/W  | R/W  | R/W   | — | — |

The DOUT is used to choose settings for digital output.

The DOUT is an 8-bit read/write register. When reset, when the module is stopped, in sleep mode, in standby mode, in watch mode, in subactive mode, or in subsleep mode, it is initialized to H'02.

When the OSD display update timing control bit is 1, the OSD display is updated to the RGBC, YCOC and DOBC bit settings synchronously with the Vsync signal (OSDV).

The R, G, B, YCO, and YBO outputs are multiplexed with port 8 inputs/outputs. For details on pin function selection, refer to section 10.9, Port 8.

**Bit 7—Reserved:** Always read as 0. When 1 is written to this bit, correct operation is not guaranteed.

**Bit 6—R, G, B Digital Output Specification Bit (RGBC):** Specifies the R, G, B digital output format.

#### Bit 6

| RGBC | Description                                                                    |
|------|--------------------------------------------------------------------------------|
| 0    | Character output is specified (Initial value)                                  |
| 1    | Combined character, border, cursor, background, and button output is specified |

**Bit 5—YCO Digital Output Specification Bit (YCOC):** Specifies the YCO digital output format. This bit must be reset to 0 when bordering is not performed, and must be set to 1 when bordering is performed.

#### Bit 5

| YCOC | Description                                       |
|------|---------------------------------------------------|
| 0    | Character output is specified (Initial value)     |
| 1    | Combined character and border output is specified |

**Bit 4—Digital Output Blink Control Bit (DOBC):** Turns blinking on and off for digital outputs (YCO, R, G, and B). Digital output YBO cannot be made to blink.

| OSDRAM | DOUT  |                                |
|--------|-------|--------------------------------|
| Bit 15 | Bit 4 |                                |
| BLNK   | DOBC  | Description                    |
| 0      | 0     | Does not blink (Initial value) |
|        | 1     | Does not blink                 |
| 1      | 0     | Does not blink                 |
|        | 1     | Blinks                         |

**Bit 3—R, G, B, YCO, YBO Pin Function Select Bit (DSEL):** Selects the R, G, B, YCO, and YBO pins to function either as digital output pins, or as data slicer internal monitor signal pins.

#### Bit 3

| DSEL | Description                                                                                                                                                                                                                                                                                                                                            |
|------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 0    | R, G, B, YCO, YBO output function is selected (Initial value)                                                                                                                                                                                                                                                                                          |
| 1    | Data slicer monitor output function is selected<br>R pin = Signal selected by bit 2 (CRSEL)<br>G pin = Slice data signal analog-compared with Cvin2<br>B pin = Sampling clock generated within data slicer<br>YCO pin = External Hsync signal (AFCH) synchronized within the LSI<br>YBO pin = External Vsync signal (AFCV) synchronized within the LSI |

**Bit 2—Monitor Signal Switching Bit (CRSEL):** Selects whether a clock run-in detection window signal or a start bit detection window signal is output. This bit setting is valid when DSEL is 1, so that pins are used as data slicer internal monitor signal outputs.

**Bit 2**


| CRSEL | Description                                                             |
|-------|-------------------------------------------------------------------------|
| 0     | Clock run-in detection window signal output is selected (Initial value) |
| 1     | Start bit detection window signal output is selected                    |

For information on slice data and the sampling clock, refer to section 28.2.2, Slice Line Setting Registers 1 to 4. For details on the clock run-in detection window signal, start bit detection window signal, external Hsync signal (AFCH), and external Vsync signal (AFCV), refer to section 27, Sync Separator for OSD and Data Slicer.

**Bit 1—Reserved:** Cannot be modified and is always read as 1.

**Bit 0—Reserved:** Always read as 0. When 1 is written to this bit, correct operation is not guaranteed.

29.7.4    **Module Stop Control Register (MTSTPCR)**

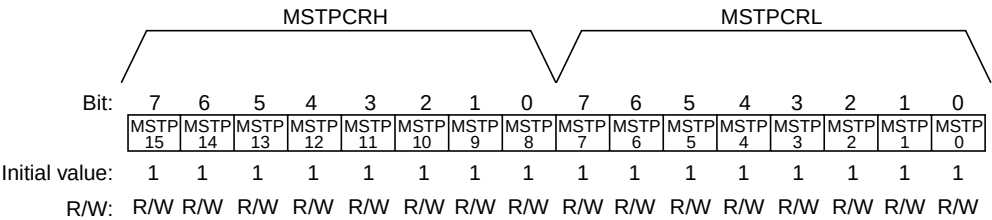

The MSTPCR consists of two 8-bit read/write registers for controlling the module stop mode. Writing 0 to the MSTP0 bit starts the OSD module; setting the MSTP0 bit to 1 stops the OSD module at the end of a bus cycle and the module stop mode is entered. At this time, the CVout and digital outputs also stop. Before writing 0 to this bit, set the MSTP9 bit to 0, to operate the sync separator.

The registers cannot be read or written to in module stop mode. However, character data ROM (OSDROM) and display data RAM (OSDRAM) can be read and written. For details, refer to section 4.5, Module Stop Mode.

**Bit 0—Module Stop (MSTP0):** Specifies the module stop mode for the OSD module.

**Bit 0**

| MSTP0 | Description                                                       |
|-------|-------------------------------------------------------------------|
| 0     | Clears the module stop mode for the OSD module                    |
| 1     | Specifies the module stop mode for the OSD module (Initial value) |

## 29.8 Notes on OSD Font Creation

### 29.8.1 Note 1 on Font Creation (Font Width)

In OSD display, vertical and diagonal lines in fonts that are one dot wide may appear to be narrow due to a shift of 0.5H. Display fonts should be created with liberal thicknesses.

### 29.8.2 Note 2 on Font Creation (Borders)

Borders extend beyond the character display frame in the X-direction, but no borders extend beyond the display frame in the Y-direction. Moreover, when borders are to the right or left of blank characters (H'000), borders extend beyond the display frame, but for the first and the 32nd characters in a displayed row (16th character when the character size is enlarged to double height  $\times$  double width), no borders extend beyond the display frame.

Examples of borders which extend beyond the display frame appear in figures 29.16 through figure 29.18.

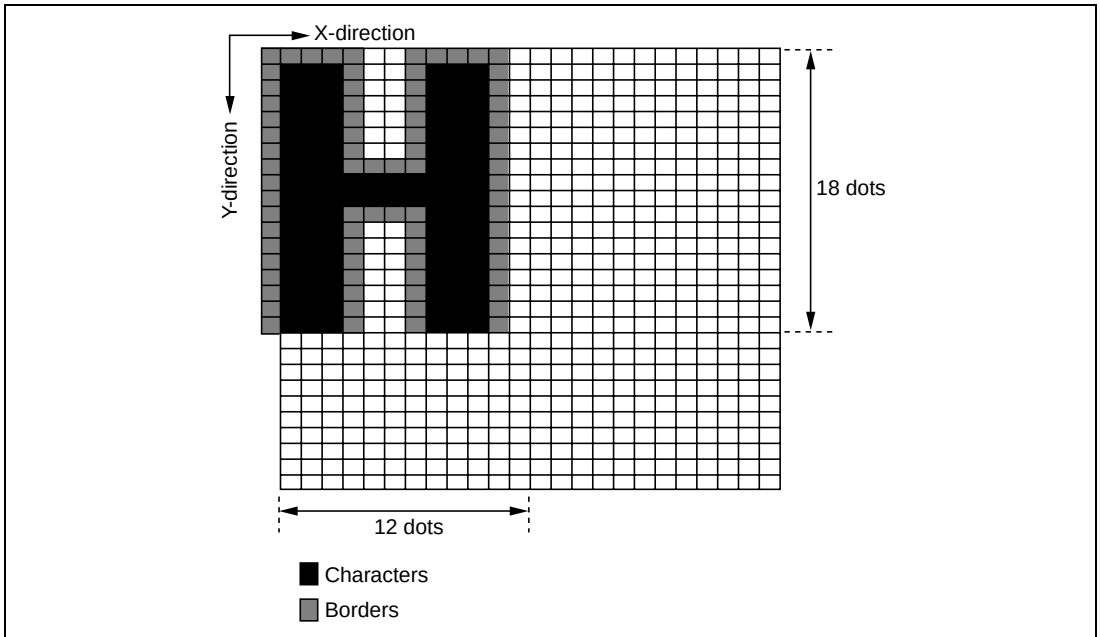


**Figure 29.16 Border Extending beyond the Display Frame (Example)**



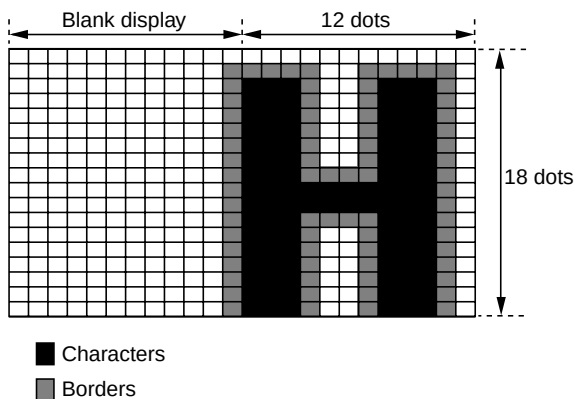


**Figure 29.17 Border Neighboring a Blank Character (Example)**

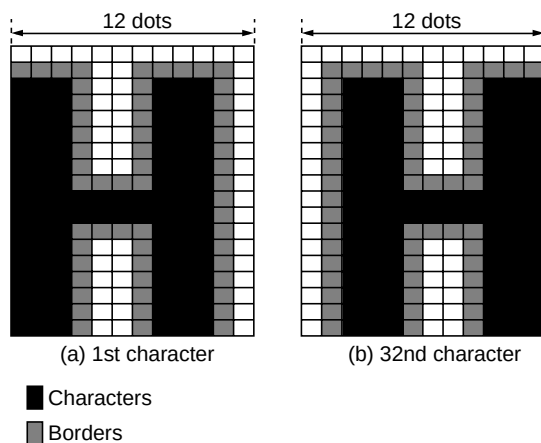


**Figure 29.18 Examples of Characters at the Starting and Ending Positions in a Row**

### 29.8.3 Note 3 on Font Creation (Blinking)

Blinking involves intermittent display within a specified display frame only. When blinking is necessary, font data should not be set to the first or twelfth dots in the X-direction.

Figure 29.19 shows an example of blinking for characters with borders extending beyond the display frame.

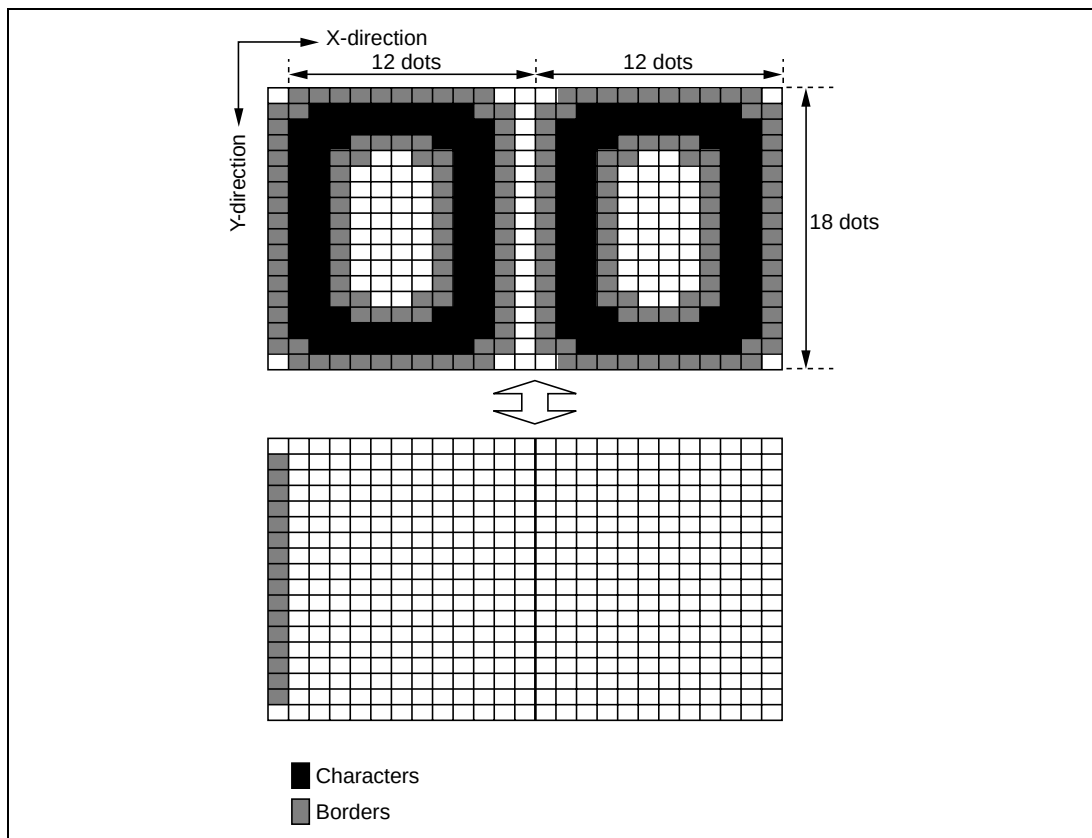


**Figure 29.19 Example of Blinking with Borders Extending beyond the Display Frame**

29.8.4 Note 4 on Font Creation (Buttons)

Buttons replace the outermost perimeter of the character display area with a button pattern. It should be remembered that the button pattern display takes priority over display of the font and border, if any.

Figure 29.20 shows an example of button pattern display that takes priority over font and border.

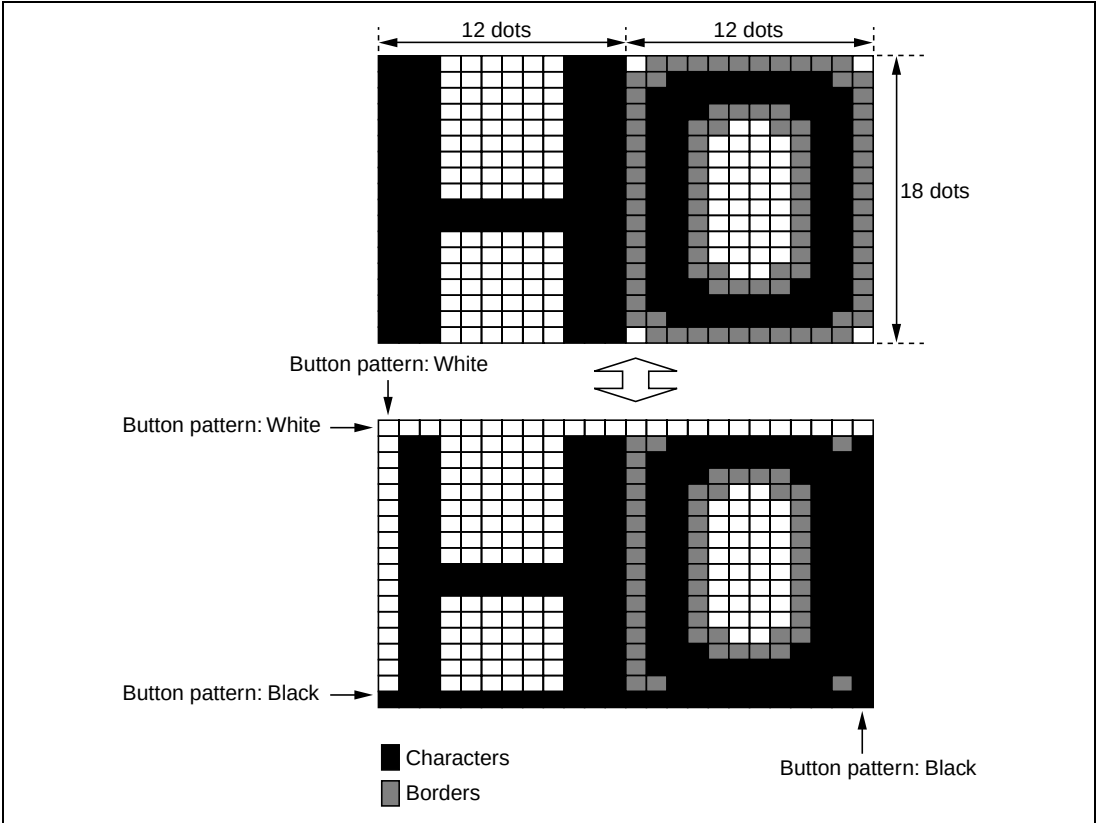


Figure 29.20 Example of Button Pattern Display Taking Priority over Font and Border

## 29.9 OSD Oscillator, AFC, and Dot Clock

In order to use the OSD, sync signals and a  $4/2f_{sc}$  clock signal are required.

### 29.9.1 Sync Signals

The sync signal for text display mode is a signal created from a  $4/2f_{sc}$  clock or an AFC reference clock. In superimposed mode, sync signals may be selected from one of the following three types.

1. Horizontal/vertical sync signals separated by the sync separator from the composite video signal (Cvin2)
2. Horizontal/vertical sync signals separated by the sync separator from the composite sync signal (Csync)
3. Hsync and Vsync signals input separately

For details, refer to section 27, Sync Separator for OSD and Data Slicer.

### 29.9.2 AFC Circuit

The AFC circuit averages the “fluctuation” in the horizontal sync signal (Hsync) during normal VCR playback, reducing OSD display jitter. In addition, the AFC circuit generates the dot clock. Be sure that an external circuit is connected. For details, refer to section 27.3.6, Automatic Frequency Controller (AFC).

### 29.9.3 Dot Clock

The dot clock is a clock used for X-direction (horizontal direction) OSD display. The reference clock from the AFC circuit or the  $4/2f_{sc}$  clock from the  $4/2f_{scin}$  pin can be selected with the DOTCKSL bit in the sync separator.

- Reference clock from AFC circuit

The dot clock generated by the AFC circuit is a clock synchronized with the horizontal sync signal. The dot clock frequency is 576 or 448 times the horizontal sync signal frequency ( $576 \times f_h$  or  $448 \times f_h$ ). The size of one dot in the horizontal direction of the OSD display appearing on the screen is the equivalent of one dot clock cycle. Accordingly, modifying the FRQSEL bit in the sync separator to change the horizontal sync signal frequency can adjust the dot size. The dot clock cycle is the same in superimposed mode and text display mode; it is also the same for both interlaced and noninterlaced displays. It changes somewhat depending on the TV format. The relation between TV format and dot clock cycle is shown in table 29.6.

- 4/2fsc clock

The dot clock generated by the 4/2fsc clock is the same clock that is input from the 4/2fscin pin. As a result, when the 4fsc-clock frequency is input, the OSD display becomes smaller in the horizontal direction. When the 4/2fsc clock is used, use the OSD in text display mode.

Using the OSD in superimposed mode causes characters to flicker.

**Table 29.6 Dot Clock Cycle**

| TV Format                           | Dot Clock Cycle              |                              |
|-------------------------------------|------------------------------|------------------------------|
|                                     | Reference Clock:<br>576 × fh | Reference Clock:<br>448 × fh |
| M/NTSC, 4.43-NTSC, M/PAL, N/PAL     | 110 ns (9.06 MHz)            | 142 ns (7.06 MHz)            |
| B, G, H/PAL, I/PAL, D, K/PAL, SECAM | 111 ns (9.00 MHz)            | 143 ns (7.00 MHz)            |


## 29.9.4 4/2fsc

### 1. 4/2fsc Oscillator

The 4/2fsc oscillator generates color signals for text display mode, and also generates the internal sync signal. A crystal oscillator can be connected, or an external clock can be input. The 4/2fsc frequency should be appropriate for the TV format. If an inappropriate frequency is used, or if no 4/2fsc signal is input, OSD operation is not guaranteed.

Circuit constants should be chosen such that frequency deviation, including temperature effects, is within  $\pm 30$  ppm.

An example of connection of a crystal oscillator appears in figure 29.21; an example of input of an external clock is shown in figure 29.22.

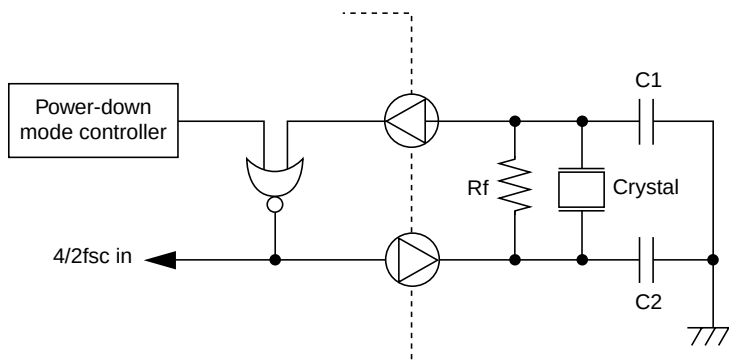


Note:  $R_f = 1\text{ M}\Omega$  typ.

Crystal should be at a frequency appropriate for the TV format.

$C_1$ ,  $C_2$  should be specified such that frequency deviation, including temperature effects, is less than  $\pm 30$  ppm.

**Figure 29.21 Example of Connection of a 4/2fsc Crystal Oscillator**

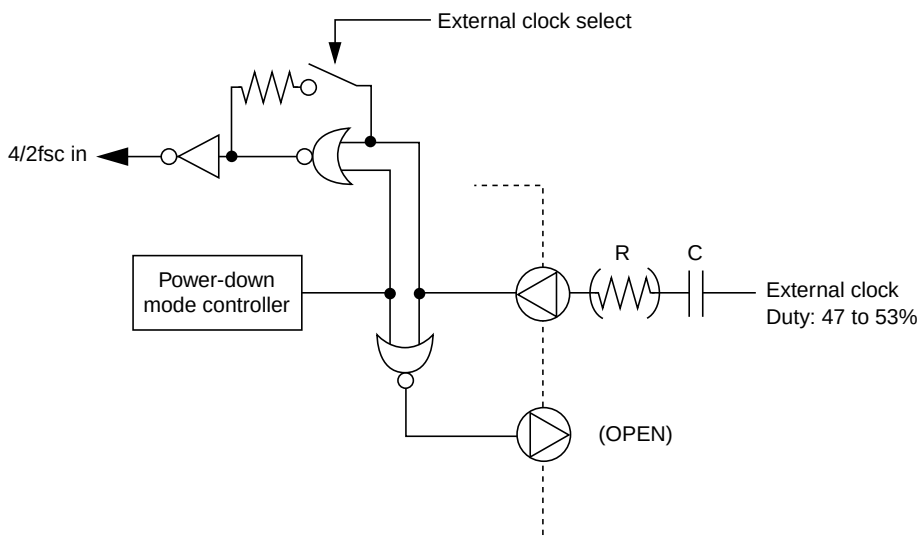

Note:  $C = 1000\text{ pF}$  typ

When the external clock amplitude is  $1\text{ V}_{p-p}$  or larger, connect a resistor in series with capacitor  $C$ .

**Figure 29.22 Example of Input of a 4/2fsc External Clock**

- For information on OSD display colors for a 2fsc signal input, refer to table 29.7. In NTSC format, some colors cannot be displayed. In PAL format, because alternating display is used, color muddiness, flickering and other problems may arise.

**Table 29.7 OSD Display Colors for 2fsc Signal Input**

| Character, Cursor,<br>and Background<br>Color Settings | NTSC                | PAL*                        | RGB<br>Digital Output |
|--------------------------------------------------------|---------------------|-----------------------------|-----------------------|
| Yellow (Same phase)                                    | Yellow (Same phase) | Yellow ( $3\pi/2, -\pi/2$ ) | Yellow                |
| Cyan ( $3\pi/2$ )                                      | Cyan ( $3\pi/2$ )   | Cyan ( $\pi, 0$ )           | Cyan                  |
| Green ( $7\pi/4$ )                                     | Cannot be specified | Green ( $-\pi/2, 0$ )       | Green                 |
| Magenta ( $3\pi/4$ )                                   | Cannot be specified | Magenta ( $+\pi/2, -\pi$ )  | Magenta               |
| Red ( $\pi/2$ )                                        | Red ( $\pi/2$ )     | Red ( $+\pi/2, -\pi/2$ )    | Red                   |
| Blue ( $\pi$ )                                         | Blue ( $\pi$ )      | Blue ( $\pi/2, -3\pi/2$ )   | Blue                  |
| White                                                  | White               | White                       | White                 |
| Black                                                  | Black               | Black                       | Black                 |

Note: \* The PAL color burst phase angle is  $\pm\pi/4$  rad for 4fsc input, but is 0 rad or  $-\pi/2$  rad for 2fsc, so that colors may differ from the color settings.

## 29.10 OSD Operation in CPU Operation Modes

Table 29.8 shows the OSD CVout pin status for different CPU operating modes.

During a transition to power-down mode, registers are initialized, and so register settings must be restored on return to active mode.

**Table 29.8 OSD Operation for Different CPU Operating Modes**

| Operating Mode                                | Module Stop Bit | DISPM Bit | CVout Pin                      |
|-----------------------------------------------|-----------------|-----------|--------------------------------|
| Reset                                         | 1               | 0         | No output                      |
| Active                                        | 0               | 0         | Chroma-through and OSD display |
|                                               |                 | 1         | Text display                   |
| Module stop                                   | 1               | 0         | No output                      |
| Sleep, standby, watch, subactive, or subsleep | Retained        | 0         | No output                      |

# 29.11 Character Data ROM (OSDROM) Access by CPU

The character data ROM can be accessed by the CPU as part of user ROM. Before accessing the character data ROM by the CPU, clear the OSDON bit in the screen control register to 0 to stop OSD display, then set the OSROME bit in the serial timer register to 1. The character data ROM can be accessed even in the module stop mode.

If the OSROME bit is set to 1 during OSD display, the character data ROM cannot be accessed correctly by CPU.

For details on OSROME bit setting, refer to section 29.5.9, Screen Control Register (DCNTL).

## 29.11.1 Serial Timer Control Register (STCR)

|                 |   |       |       |   |       |        |   |   |
|-----------------|---|-------|-------|---|-------|--------|---|---|
| Bit :           | 7 | 6     | 5     | 4 | 3     | 2      | 1 | 0 |
|                 | — | IICX1 | IICX0 | — | FLSHE | OSROME | — | — |
| Initial value : | 0 | 0     | 0     | 0 | 0     | 0      | 0 | 0 |
| R/W :           | — | R/W   | R/W   | — | R/W   | R/W    | — | — |

**Bit 2—OSD ROM Enable (OSROME):** Controls the OSD character data ROM (OSDROM) access. When this bit is set to 1, the OSDROM can be accessed by the CPU, and when this bit is cleared to 0, the OSDROM cannot be accessed by the CPU but accessed by the OSD module.

Before writing to or erasing the OSDROM in the F-ZTAT version, be sure to set this bit to 1.

Note: During OSD display, the OSDROM cannot be accessed by the CPU. Before accessing the OSDROM by the CPU, be sure to clear the OSDON bit in the screen control register to 0 then set the OSROME bit to 1. If the OSROME bit is set to 1 during OSD display, the character data ROM cannot be accessed correctly by CPU.

### Bit 2

| OSROME | Description                                   |
|--------|-----------------------------------------------|
| 0      | OSDROM is accessed by the OSD (Initial value) |
| 1      | OSDROM is accessed by the CPU                 |



# Section 30 Power Supply Circuit

## 30.1 Overview

The H8S/2199R Series incorporates an internal power supply step-down circuit. Use of this circuit enables the internal power supply to be fixed at a constant level of approximately 3.0 V, independently of the voltage of the power supply connected to the external  $V_{CC}$  pin. As a result, the current consumed when an external power supply is used at 3.0 V or above can be held down to virtually the same low level as when used at approximately 3.0 V.

## 30.2 Power Supply Connection (Internal Power Supply Step-Down Circuit On-Chip)

Connect the external power supply to the  $V_{CC}$  pin, and connect a capacitance of approximately 0.1  $\mu\text{F}$  between  $V_{CL}$  and  $V_{SS}$ , as shown in figure 30.1. The internal step-down circuit is made effective simply by adding this external circuit.

- Notes:
1. In the external circuit interface, the external power supply voltage connected to  $V_{CC}$  and the GND potential connected to  $V_{SS}$  are the reference levels. For example, for port input/output levels, the  $V_{CC}$  level is the reference for the high level, and the  $V_{SS}$  level is that for the low level.
  2. The A/D converter, servo, and OSD analog power supply are not affected by internal step-down processing.

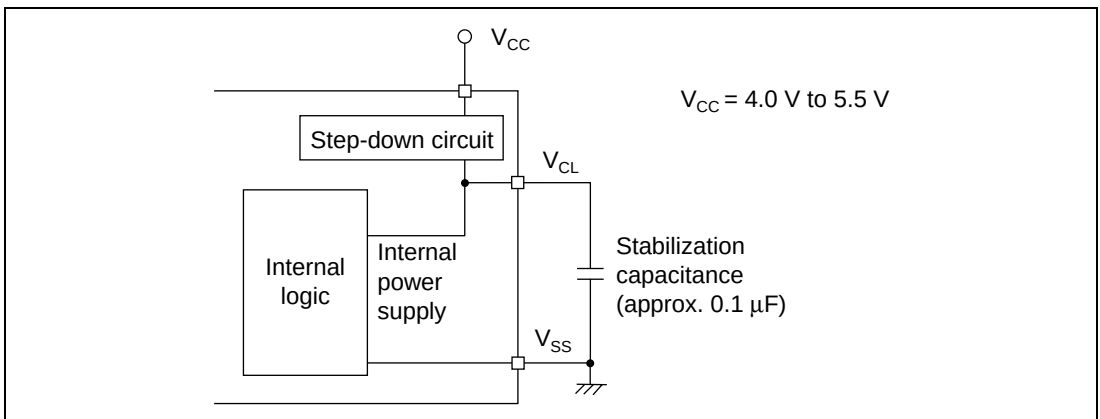


**Figure 30.1 Power Supply Connection (Internal Power Supply Step-Down Circuit On-Chip)**



# Section 31 Electrical Characteristics

## 31.1 Absolute Maximum Ratings

Table 31.1 lists the absolute maximum ratings.

**Table 31.1 Absolute Maximum Ratings**

| Item                                                  | Symbol | Value              | Unit |
|-------------------------------------------------------|--------|--------------------|------|
| Power supply voltage                                  | Vcc    | −0.3 to +7.0       | V    |
| Input voltage (ports other than port 0)               | Vin    | −0.3 to Vcc+0.3    | V    |
| Input voltage (port 0)                                | Vin    | −0.3 to AVcc+0.3   | V    |
| A/D converter power supply voltage                    | AVcc   | −0.3 to +7.0       | V    |
| A/D converter input voltage                           | AVin   | −0.3 to AVcc+0.3   | V    |
| Servo power supply voltage                            | SVcc   | −0.3 to +7.0       | V    |
| Servo amplifier input voltage                         | Vin    | −0.3 to SVcc + 0.3 | V    |
| OSD power supply voltage                              | OVcc   | −0.3 to +7.0       | V    |
| Operating temperature                                 | Topr   | −20 to +75         | °C   |
| Operating temperature (At Flash memory program/erase) | Topr   | 0 to +75           | °C   |
| Storage temperature                                   | Tstr   | −55 to +125        | °C   |

- Notes: 1. Permanent damage may occur to the chip if absolute maximum ratings are exceeded. Normal operation should be under the conditions specified in Electrical Characteristics. Exceeding these values can result in incorrect operation and reduced reliability.
2. All voltages are relative to Vss = SVss = OVss = AVss = 0.0 V.

## 31.2 Electrical Characteristics of HD6432199R, HD6432198R, HD6432197R, and HD6432196R

### 31.2.1 DC Characteristics of HD6432199R, HD6432198R, HD6432197R, and HD6432196R

**Table 31.2 DC Characteristics of HD6432199R, HD6432198R, HD6432197R, and HD6432196R**

(Conditions:  $V_{CC} = AV_{CC} = 4.0\text{ V to }5.5\text{ V}^{*1}$ ,  $V_{SS} = 0.0\text{ V}$ ,  $T_a = -20\text{ to }+75^{\circ}\text{C}$  unless otherwise specified.)

| Item               | Symbol   | Applicable Pins                                                                                | Test Conditions                       | Values       |     |              | Unit | Notes |
|--------------------|----------|------------------------------------------------------------------------------------------------|---------------------------------------|--------------|-----|--------------|------|-------|
|                    |          |                                                                                                |                                       | Min          | Typ | Max          |      |       |
| Input high voltage | $V_{IH}$ | MD0                                                                                            | $V_{CC}=2.5\text{ V to }5.5\text{ V}$ | $0.9 V_{CC}$ | —   | $V_{CC}+0.3$ | V    |       |
|                    |          | $\overline{RES}$ , $\overline{IC}$ , $\overline{IRQ0}$ to $\overline{IRQ5}$ , SYNCI            |                                       | $0.8 V_{CC}$ | —   | $V_{CC}+0.3$ |      |       |
|                    |          |                                                                                                | $V_{CC}=2.5\text{ V to }5.5\text{ V}$ | $0.9 V_{CC}$ | —   | $V_{CC}+0.3$ |      |       |
|                    |          | SCK1, SI1, FTIA, FTIB, FTIC, FTID, RPTRG, TMBI, $\overline{ADTRG}$                             |                                       | $0.8 V_{CC}$ | —   | $V_{CC}+0.3$ |      |       |
|                    |          | OSC1                                                                                           |                                       | $V_{CC}-0.5$ | —   | $V_{CC}+0.3$ |      |       |
|                    |          | P00 to P07, P10 to P17, P20 to P27, P30 to P37, P40 to P47, P60 to P67, P70 to P77, P80 to P87 |                                       | $0.7 V_{CC}$ | —   | $V_{CC}+0.3$ |      |       |
|                    |          |                                                                                                | $V_{CC}=2.5\text{ V to }5.5\text{ V}$ | $0.8 V_{CC}$ | —   | $V_{CC}+0.3$ |      |       |
|                    |          | Csync                                                                                          |                                       | $0.7 V_{CC}$ | —   | $V_{CC}+0.3$ |      |       |

| Item              | Symbol   | Applicable Pins                                                                                                     | Test Conditions                       | Values |     |              | Unit | Notes |
|-------------------|----------|---------------------------------------------------------------------------------------------------------------------|---------------------------------------|--------|-----|--------------|------|-------|
|                   |          |                                                                                                                     |                                       | Min    | Typ | Max          |      |       |
| Input low voltage | $V_{IL}$ | MD0                                                                                                                 | $V_{CC}=2.5\text{ V to }5.5\text{ V}$ | -0.3   | —   | 0.1 $V_{CC}$ | V    |       |
|                   |          | $\overline{RES}$ , $\overline{IC}$ ,<br>$\overline{IRQ0}$ to $\overline{IRQ5}$ ,<br>SYNCl                           | $V_{CC}=2.5\text{ V to }5.5\text{ V}$ | -0.3   | —   | 0.2 $V_{CC}$ |      |       |
|                   |          | SCK1, SI1, FTIA, FTIB,<br>FTIC, FTID, RPTRG,<br>TMBI, $\overline{ADTRG}$                                            |                                       | -0.3   | —   | 0.2 $V_{CC}$ |      |       |
|                   |          | OSC1                                                                                                                |                                       | -0.3   | —   | 0.5          |      |       |
|                   |          | P00 to P07,<br>P10 to P17,<br>P20 to P27,<br>P30 to P37,<br>P40 to P47,<br>P60 to P67,<br>P70 to P77,<br>P80 to P87 | $V_{CC}=2.5\text{ V to }5.5\text{ V}$ | -0.3   | —   | 0.3 $V_{CC}$ |      |       |
|                   |          |                                                                                                                     |                                       | -0.3   | —   | 0.2 $V_{CC}$ |      |       |
|                   |          | Csync                                                                                                               |                                       | -0.3   | —   | 0.2 $V_{CC}$ |      |       |

| Item                | Symbol   | Applicable Pins                                                                                                                                                                                                              | Test Conditions                                               | Values       |              |     | Unit | Notes           |
|---------------------|----------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------|--------------|--------------|-----|------|-----------------|
|                     |          |                                                                                                                                                                                                                              |                                                               | Min          | Typ          | Max |      |                 |
| Output high voltage | $V_{OH}$ | SO1, SCK1, PWM0, PWM1, PWM2, PWM3, PWM14, BUZZ, TMO, TMOW, FTOA, FTOB, PPG0 to PPG7, RP0 to RP7, RP8 to RPB, P10 to P17, P20 to P27, P30 to P37, P40 to P47, P60 to P67, P70 to P77, P80 to P87, SV1, SV2, R, G, B, YCO, YBO | $-I_{OH}=1.0\text{mA}$                                        | $V_{CC}-1.0$ | —            | —   | V    | Reference value |
|                     |          |                                                                                                                                                                                                                              | $-I_{OH}=0.5\text{mA}$                                        | —            | $V_{CC}-0.5$ | —   | V    |                 |
|                     |          |                                                                                                                                                                                                                              | $-I_{OH}=0.1\text{mA}$<br>$V_{CC}=2.5\text{V to }5.5\text{V}$ | $V_{CC}-0.5$ | —            | —   | V    |                 |
| Output low voltage  | $V_{OL}$ | SO1, SCK1, PWM0, PWM1, PWM2, PWM3, PWM14, BUZZ, TMO, TMOW, FTOA, FTOB, PPG0 to PPG7, RP0 to RP7, RP8 to RPB, P10 to P17, P20 to P27, P30 to P37, P40 to P47, P70 to P77, P80 to P87, SV1, SV2, R, G, B, YCO, YBO             | $I_{OL}=1.6\text{mA}$                                         | —            | —            | 0.6 | V    |                 |
|                     |          |                                                                                                                                                                                                                              | $I_{OL}=0.4\text{mA}$<br>$V_{CC}=2.5\text{ V to }5.5\text{V}$ | —            | —            | 0.4 | V    |                 |
|                     |          |                                                                                                                                                                                                                              |                                                               |              |              |     |      |                 |
|                     |          |                                                                                                                                                                                                                              |                                                               |              |              |     |      |                 |
|                     |          |                                                                                                                                                                                                                              |                                                               |              |              |     |      |                 |
|                     |          |                                                                                                                                                                                                                              |                                                               |              |              |     |      |                 |
|                     |          | P60 to P67,                                                                                                                                                                                                                  | $I_{OL}=20\text{mA}$                                          | —            | —            | 1.7 | V    |                 |
|                     |          |                                                                                                                                                                                                                              | $I_{OL}=1.6\text{mA}$                                         | —            | —            | 0.6 | V    |                 |
|                     |          |                                                                                                                                                                                                                              | $I_{OL}=0.4\text{mA}$<br>$V_{CC}=2.5\text{ V to }5.5\text{V}$ | —            | —            | 0.4 | V    |                 |

| Item                          | Symbol     | Applicable Pins                                                                           | Test Conditions                         | Values |     |     | Unit | Notes |
|-------------------------------|------------|-------------------------------------------------------------------------------------------|-----------------------------------------|--------|-----|-----|------|-------|
|                               |            |                                                                                           |                                         | Min    | Typ | Max |      |       |
| Input /output leakage current | $ I_{IL} $ | MD0                                                                                       | Vin=0.5 to Vcc–0.5V                     | —      | —   | 1.0 | μA   |       |
|                               |            | $\overline{RES}$ , $\overline{IRQ0}$ to $\overline{IRQ5}$ , $\overline{IC}$               | Vin=0.5 to Vcc–0.5V                     | —      | —   | 1.0 |      |       |
|                               |            | SCK1, SI1, SDA0, SCL0, SDA1, SCL1, FTIA, FTIB, FTIC, FTID, TRIG, TMBI, $\overline{ADTRG}$ | Vin=0.5 to Vcc–0.5V                     | —      | —   | 1.0 |      |       |
|                               |            | OSC1                                                                                      | Vin=0.5 to Vcc–0.5V                     | —      | —   | 1.0 |      |       |
|                               |            | P10 to P17, P20 to P27, P30 to P37, P40 to P47, P60 to P67, P70 to P77, P80 to P87,       | Vin=0.5 to Vcc–0.5V                     | —      | —   | 1.0 |      |       |
|                               |            | P00 to P07, AN8 to ANB                                                                    | Vin=0.5 to AVcc–0.5V                    | —      | —   | 1.0 |      |       |
| Pull-up MOS current           | –Ip        | P10 to P17, P20 to P27, P30 to P37                                                        | Vcc=5.0V, Vin=0V                        | 50     | —   | 300 | μA   | *2    |
| Input capacity                | Cin        | All input pins except power supply pins P23, P24, P25, and P26, and analog pins           | f <sub>in</sub> =1 MHz, Vin=0V, Ta=25°C | —      | —   | 15  | pF   |       |
|                               |            | P23, P24, P25, P26                                                                        | f <sub>in</sub> =1 MHz, Vin=0V, Ta=25°C | —      | —   | 20  | pF   |       |

| Item                                            | Symbol              | Applicable Pins | Test Conditions                                            | Values |     |     | Unit | Notes                                          |
|-------------------------------------------------|---------------------|-----------------|------------------------------------------------------------|--------|-----|-----|------|------------------------------------------------|
|                                                 |                     |                 |                                                            | Min    | Typ | Max |      |                                                |
| Active mode current dissipation (CPU operating) | I <sub>OPE</sub>    | Vcc             | Vcc=5V, f <sub>OSC</sub> =10 MHz, High-speed mode          | —      | 40  | 50  | mA   | * <sup>3</sup> , * <sup>4</sup>                |
|                                                 |                     |                 | Vcc=5V, f <sub>OSC</sub> =10 MHz, Medium-speed mode (1/64) | —      | 25  | —   | mA   | Reference value* <sup>4</sup>                  |
| Active mode current dissipation (reset)         | I <sub>RES</sub>    | Vcc             | Vcc=5V, f <sub>OSC</sub> =10 MHz                           | —      | 12  | 15  | mA   | * <sup>3</sup> , * <sup>4</sup>                |
| Sleep mode current dissipation                  | I <sub>SLEEP</sub>  | Vcc             | Vcc=5V, f <sub>OSC</sub> =10 MHz High-speed mode           | —      | 15  | 20  | mA   | * <sup>3</sup> , * <sup>4</sup>                |
| Subactive mode current dissipation              | I <sub>SUB</sub>    | Vcc             | Vcc=2.5V, 32kHz With crystal oscillator (φ sub=φw/2)       | —      | 90  | 150 | μA   | * <sup>3</sup> , * <sup>4</sup>                |
|                                                 |                     |                 | Vcc=2.5V, 32kHz With crystal oscillator (φ sub=φw/8)       | —      | 40  | —   |      | Reference value* <sup>3</sup> , * <sup>4</sup> |
| Subsleep mode current dissipation               | I <sub>SUBSLP</sub> | Vcc             | Vcc=2.5V, 32kHz With crystal oscillator (φ sub=φw/2)       | —      | 30  | 50  | μA   | * <sup>3</sup> , * <sup>4</sup>                |
|                                                 |                     |                 | Vcc=2.5V, 32kHz With crystal oscillator (φ sub=φw/8)       | —      | 20  | —   |      | Reference value* <sup>3</sup> , * <sup>4</sup> |



| Item                                       | Symbol            | Applicable Pins | Test Conditions                                          | Values |     |     | Unit    | Notes                                        |
|--------------------------------------------|-------------------|-----------------|----------------------------------------------------------|--------|-----|-----|---------|----------------------------------------------|
|                                            |                   |                 |                                                          | Min    | Typ | Max |         |                                              |
| Watch mode current dissipation             | $I_{WATCH}$       | Vcc             | Vcc=2.5V, 32kHz<br>With crystal oscillator               | —      | 6   | 12  | $\mu A$ | * <sup>3</sup> * <sup>4</sup>                |
|                                            |                   |                 | Vcc=5.0V, 32kHz<br>With crystal oscillator               | —      | 12  | —   | $\mu A$ | Reference value* <sup>3</sup> * <sup>4</sup> |
| Standby mode current dissipation           | $I_{STBY}$        | Vcc             | X1=V <sub>CL</sub> , 32kHz<br>Without crystal oscillator | —      | —   | 10  | $\mu A$ | * <sup>3</sup> * <sup>4</sup>                |
| RAM data retaining voltage in standby mode | V <sub>STBY</sub> |                 |                                                          | 2.0    |     |     | V       |                                              |

- Notes: 1. Do not open the AVcc and Avss pin even when the A/D converter is not in use.  
2. Current value when the relevant bit of the pull-up MOS select register (PUR1 to PUR3) is set to 1.  
3. The current on the pull-up MOS or the output buffer excluded.  
4. Excludes the current flowing in SVcc and OVcc.

**Table 31.3 Pin Status at Current Dissipation Measurement**

| Mode                                    | $\overline{RES}$ pin | Internal State                           | Pin | Oscillator Pin                                                              |
|-----------------------------------------|----------------------|------------------------------------------|-----|-----------------------------------------------------------------------------|
| Active mode<br>High-speed, medium-speed | Vcc                  | Operating                                | Vcc | Main clock:<br>Crystal oscillator<br>Sub clock:<br>X1 pin = V <sub>CL</sub> |
| Sleep mode<br>High-speed, medium-speed  | Vcc                  | Only CPU, servo circuits, and OSD halted | Vcc |                                                                             |
| Reset                                   | Vss                  | Reset                                    | Vcc |                                                                             |
| Standby mode                            | Vcc                  | All circuits halted                      | Vcc |                                                                             |
| Subactive mode                          | Vcc                  | Only CPU and timer A operating           | Vcc | Main clock:<br>Crystal oscillator<br>Sub clock:<br>Crystal oscillator       |
| Subsleep mode                           | Vcc                  | Only timer A operating                   | Vcc |                                                                             |
| Watch mode                              | Vcc                  | Only timer A operating                   | Vcc |                                                                             |

**Table 31.4 Bus Drive Characteristics of HD6432199R, HD6432198R, HD6432197R, and HD6432196R**

(Conditions:  $V_{CC} = AV_{CC} = 4.0\text{ V}$  to  $5.5\text{ V}$ ,  $V_{SS} = 0.0\text{ V}$ ,  $T_a = -20$  to  $+75^\circ\text{C}$ )

Applicable pin: SCL0, SCL1, SDA0, SDA1

| Item                         | Symbol              | Applicable Pins           | Test Conditions     | Values       |     |         | Unit | Notes |
|------------------------------|---------------------|---------------------------|---------------------|--------------|-----|---------|------|-------|
|                              |                     |                           |                     | Min          | Typ | Max     |      |       |
| Schmitt trigger input        | $V_T^-$             | SCL0, SDA0,<br>SCL1, SDA1 |                     | 0.2Vcc       | —   | —       | V    |       |
|                              | $V_T^+$             |                           |                     | —            | —   | 0.7Vcc  | V    |       |
|                              | $V_T^+$<br>$-V_T^-$ |                           |                     | 0.05Vcc      | —   | —       | V    |       |
| Input high level voltage     | $V_{IH}$            | SCL0, SDA0,<br>SCL1, SDA1 |                     | 0.7Vcc       | —   | Vcc+0.5 | V    |       |
| Input low level voltage      | $V_{IL}$            | SCL0, SDA0,<br>SCL1, SDA1 |                     | -0.5         | —   | 0.2Vcc  | V    |       |
| Output low level voltage     | $V_{OL}$            | SCL0, SDA0,<br>SCL1, SDA1 | $I_{OL}=8\text{mA}$ | —            | —   | 0.5     | V    |       |
|                              |                     |                           | $I_{OL}=3\text{mA}$ | —            | —   | 0.4     |      |       |
| SCL and SDA output fall time | $t_{of}$            | SCL0, SDA0,<br>SCL1, SDA1 |                     | 20+<br>0.1Cb | —   | 250     | ns   |       |

### 31.2.2 Allowable Output Currents of HD6432199R, HD6432198R, HD6432197R, and HD6432196R

The specifications for the digital pins are shown below.

**Table 31.5 Allowable Output Currents of HD6432199R, HD6432198R, HD6432197R, and HD6432196R**

(Conditions:  $V_{CC} = 2.5 \text{ V}$  to  $5.5 \text{ V}$ ,  $V_{SS} = 0.0 \text{ V}$ ,  $T_a = -20$  to  $+75^\circ\text{C}$ )

| Item                                       | Symbol        | Value | Unit | Notes |
|--------------------------------------------|---------------|-------|------|-------|
| Allowable input current (to chip)          | $I_o$         | 2     | mA   | 1     |
| Allowable input current (to chip)          | $I_o$         | 22    | mA   | 2     |
| Allowable input current (to chip)          | $I_o$         | 10    | mA   | 3     |
| Allowable output current (from chip)       | $-I_o$        | 2     | mA   | 4     |
| Total allowable input current (to chip)    | $\Sigma I_o$  | 80    | mA   | 5     |
| Total allowable output current (from chip) | $-\Sigma I_o$ | 50    | mA   | 6     |

- Notes:
1. The allowable input current is the maximum value of the current flowing from each I/O pin to  $V_{SS}$  (except for port 6, SCL0, SDA0, SCL1 and SDA1).
  2. The allowable input current is the maximum value of the current flowing from each I/O pin to  $V_{SS}$ . This applies to port 6.
  3. The allowable input current is the maximum value of the current flowing from each I/O pin to  $V_{SS}$ . This applies to SCL0, SDA0, SCL1 and SDA1.
  4. The allowable output current is the maximum value of the current flowing from  $V_{CC}$  to each I/O pin.
  5. The total allowable input current is the sum of the currents flowing from all I/O pins to  $V_{SS}$  simultaneously.
  6. The total allowable output current is the sum of the currents flowing from  $V_{CC}$  to all I/O pins.

### 31.2.3 AC Characteristics of HD6432199R, HD6432198R, HD6432197R, and HD6432196R

**Table 31.6 AC Characteristics of HD6432199R, HD6432198R, HD6432197R, and HD6432196R**

(Conditions:  $V_{CC} = AV_{CC} = 4.0\text{ V}$  to  $5.5\text{ V}$ ,  $V_{SS} = 0.0\text{ V}$ ,  $T_a = -20$  to  $+75^\circ\text{C}$  unless otherwise specified,  $OV_{CC} = SV_{CC} = 4.75\text{ V}$  to  $5.25\text{ V}$ .)

| Item                                    | Symbol       | Applicable Pins | Test Conditions                                                        | Values |        |     | Unit          | Notes       |
|-----------------------------------------|--------------|-----------------|------------------------------------------------------------------------|--------|--------|-----|---------------|-------------|
|                                         |              |                 |                                                                        | Min    | Typ    | Max |               |             |
| Clock oscillation frequency             | $f_{OSC}$    | OSC1, OSC2      |                                                                        | 8      | —      | 10  | MHz           |             |
| Clock cycle time                        | $t_{cyc}$    | OSC1, OSC2      |                                                                        | 100    | —      | 125 | ns            | Figure 31.1 |
| Subclock oscillation frequency          | $f_x$        | X1, X2          | $V_{CC} = 2.5\text{ V}$ to $5.5\text{ V}$                              | —      | 32.768 | —   | kHz           |             |
| Subclock cycle time                     | $t_{subcyc}$ | X1, X2          | $V_{CC} = 2.5\text{ V}$ to $5.5\text{ V}$                              | —      | 30.518 | —   | $\mu\text{s}$ |             |
| Oscillation stabilization time          | $t_{tc}$     | OSC1, OSC2      | Crystal oscillator                                                     | —      | —      | 10  | ms            |             |
|                                         |              | X1, X2          | 32kHz crystal oscillator ( $V_{CC} = 2.5\text{ V}$ to $5.5\text{ V}$ ) | —      | —      | 2   | s             |             |
| External clock high width               | $t_{CPH}$    | OSC1            |                                                                        | 40     | —      | —   | ns            | Figure 31.1 |
| External clock low width                | $t_{CPL}$    | OSC1            |                                                                        | 40     | —      | —   | ns            |             |
| External clock rise time                | $t_{CPr}$    | OSC1            |                                                                        | —      | —      | 10  | ns            |             |
| External clock fall time                | $t_{CPf}$    | OSC1            |                                                                        | —      | —      | 10  | ns            |             |
| External clock stabilization delay time | $t_{DEXT}$   | OSC1            |                                                                        | 500    | —      | —   | $\mu\text{s}$ | Figure 31.2 |

| Item                                        | Symbol           | Applicable Pins                                                                                                                                                 | Test Conditions                                   | Values |     |     | Unit                                    | Figure      |
|---------------------------------------------|------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------|--------|-----|-----|-----------------------------------------|-------------|
|                                             |                  |                                                                                                                                                                 |                                                   | Min    | Typ | Max |                                         |             |
| $\overline{\text{RES}}$ pin low level width | $t_{\text{REL}}$ | $\overline{\text{RES}}$                                                                                                                                         | $V_{\text{CC}} = 2.5 \text{ V to } 5.5 \text{ V}$ | 20     | —   | —   | $t_{\text{cyc}}$                        | Figure 31.3 |
| Input pin high level width                  | $t_{\text{IH}}$  | $\overline{\text{IRQ0 to IRQ5}}, \overline{\text{IC}}, \overline{\text{ADTRG}}, \text{TMBI}, \text{FTIA}, \text{FTIB}, \text{FTIC}, \text{FTID}, \text{RPTRIG}$ | $V_{\text{CC}} = 2.5 \text{ V to } 5.5 \text{ V}$ | 2      | —   | —   | $t_{\text{cyc}}$<br>$t_{\text{subcyc}}$ | Figure 31.4 |
| Input pin low level width                   | $t_{\text{IL}}$  | $\overline{\text{IRQ0 to IRQ5}}, \overline{\text{IC}}, \overline{\text{ADTRG}}, \text{TMBI}, \text{FTIA}, \text{FTIB}, \text{FTIC}, \text{FTID}, \text{RPTRIG}$ | $V_{\text{CC}} = 2.5 \text{ V to } 5.5 \text{ V}$ | 2      | —   | —   | $t_{\text{cyc}}$<br>$t_{\text{subcyc}}$ |             |

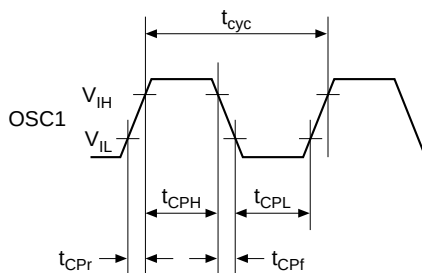


**Figure 31.1 System Clock Timing**

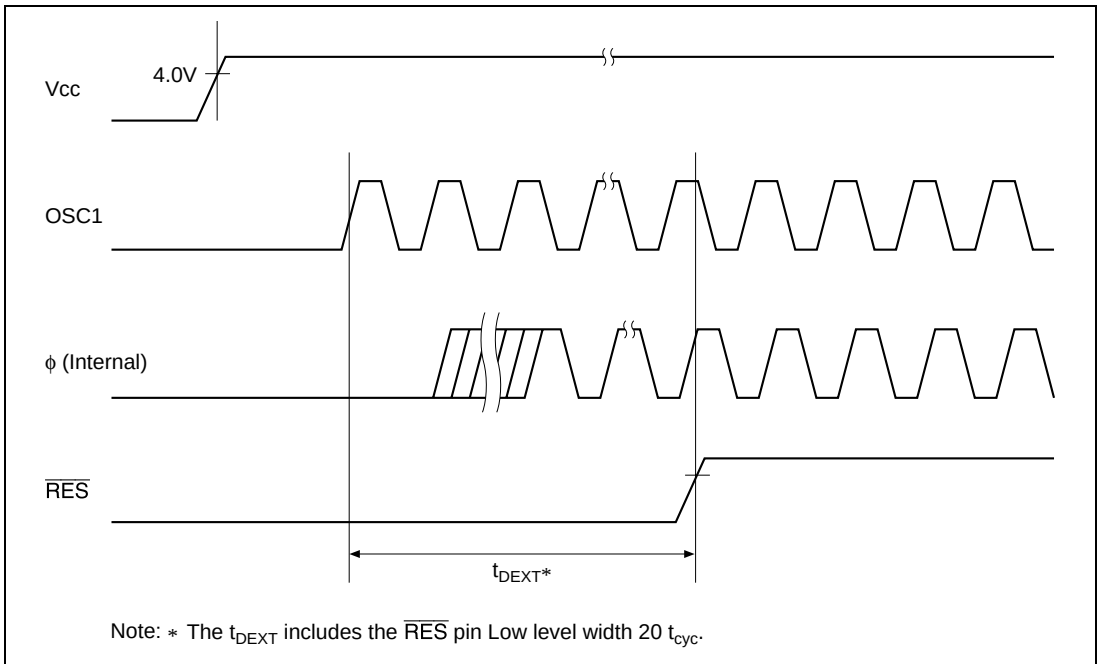


**Figure 31.2 External Clock Stabilization Delay Timing**

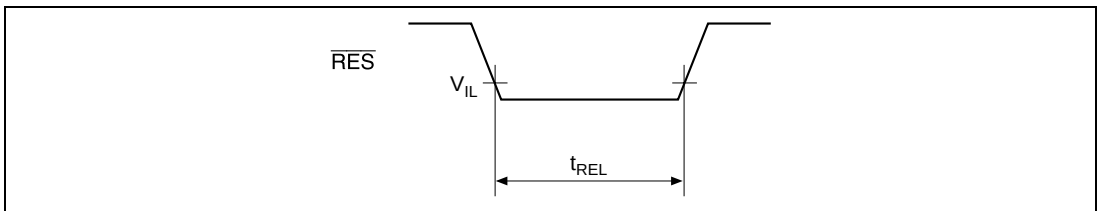


**Figure 31.3 Reset Input Timing**

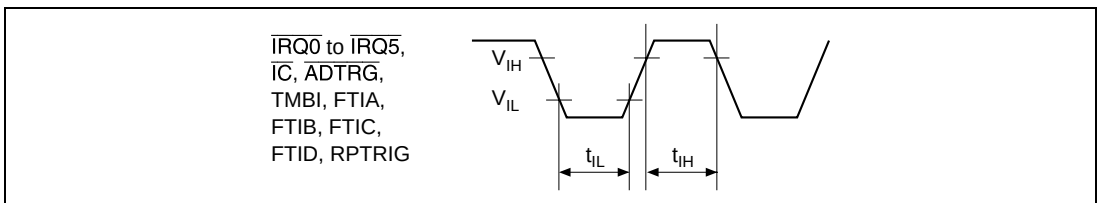


**Figure 31.4 Input Timing**

### 31.2.4 Serial Interface Timing of HD6432199R, HD6432198R, HD6432197R, and HD6432196R

**Table 31.7 Serial Interface Timing of HD6432199R, HD6432198R, HD6432197R, and HD6432196R**

(Conditions: Vcc = AVcc = 4.0 V to 5.5 V, Vss = 0.0 V, Ta = −20 to +75°C unless otherwise specified.)

| Item                                  | Symbol     | Applicable Pins | Test Conditions          | Values |     |     | Unit       | Figure      |
|---------------------------------------|------------|-----------------|--------------------------|--------|-----|-----|------------|-------------|
|                                       |            |                 |                          | Min    | Typ | Max |            |             |
| Input clock cycle                     | $t_{scyc}$ | SCK1            | Asynchroniza-<br>tion    | 4      | —   | —   | $t_{cyc}$  | Figure 31.5 |
|                                       |            |                 | Clock<br>synchronization | 6      | —   | —   |            |             |
| Input clock pulse width               | $t_{SCKW}$ | SCK1            |                          | 0.4    | —   | 0.6 | $t_{scyc}$ |             |
| Input clock rise time                 | $t_{SCKr}$ | SCK1            |                          | —      | —   | 1.5 | $t_{cyc}$  |             |
| Input clock fall time                 | $t_{SCKf}$ | SCK1            |                          | —      | —   | 1.5 | $t_{cyc}$  |             |
| Transmit data delay time (clock sync) | $t_{TXD}$  | SO1             |                          | —      | —   | 100 | ns         | Figure 31.6 |
| Receive data setup time (clock sync)  | $t_{RXS}$  | SI1             |                          | 100    | —   | —   | ns         |             |
| Receive data hold time (clock sync)   | $t_{RXH}$  | SI1             |                          | 100    | —   | —   | ns         |             |

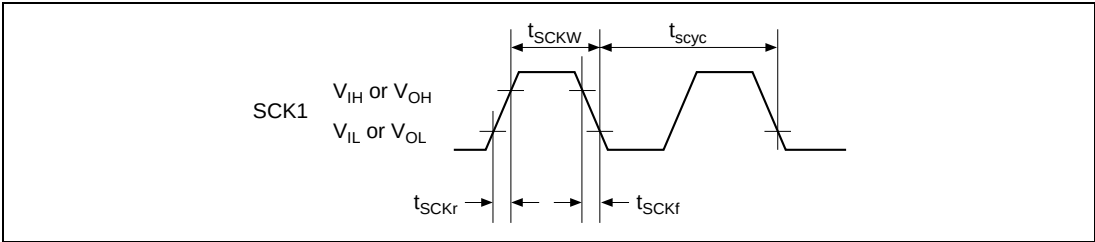


**Figure 31.5 SCK1 Clock Timing**

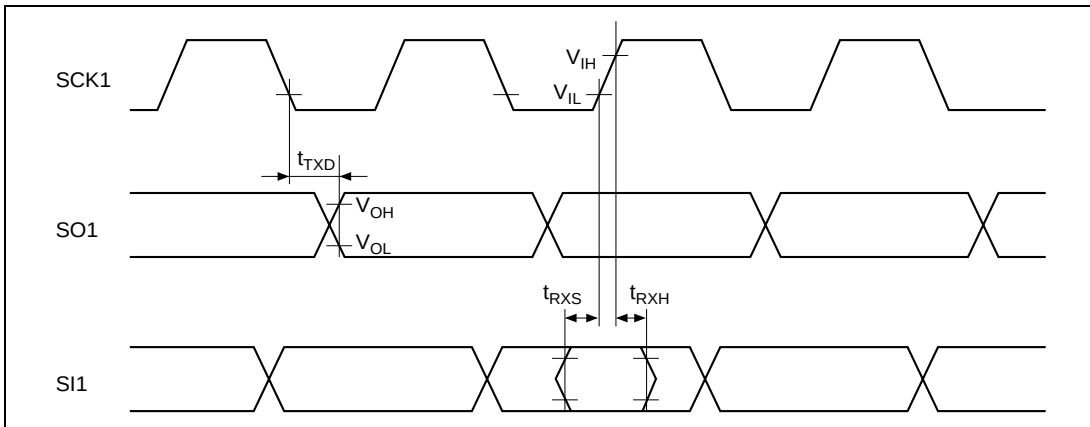


**Figure 31.6 SCI I/O Timing/Clock Synchronization Mode**

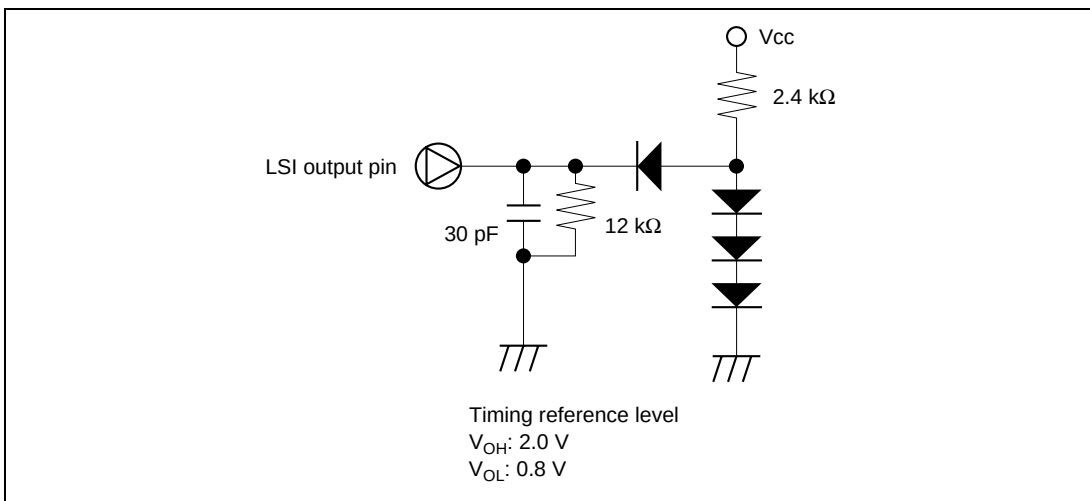


**Figure 31.7 Output Load Conditions**

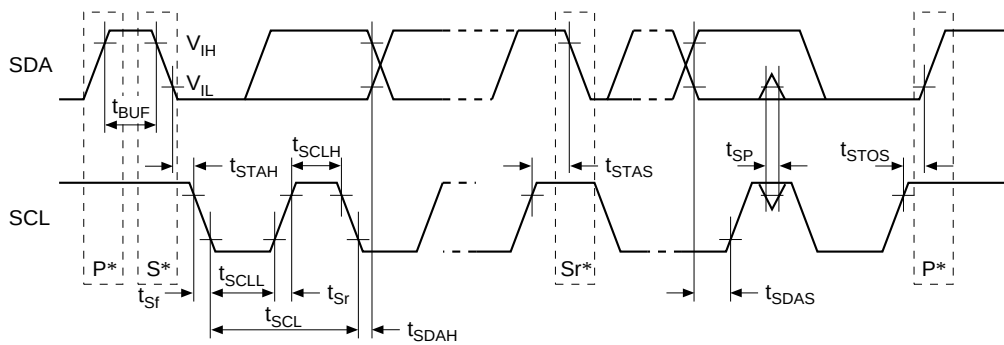


**Table 31.8 I<sup>2</sup>C Bus Interface Timing of HD6432199R, HD6432198R, HD6432197R, and HD6432196R**

(Conditions: V<sub>cc</sub> = A V<sub>cc</sub> = 4.0 V to 5.5 V, V<sub>ss</sub> = 0.0 V, T<sub>a</sub> = −20 to +75°C unless otherwise specified.)

| Item                                         | Symbol            | Test Conditions | Values |     |      | Unit             | Figure      |
|----------------------------------------------|-------------------|-----------------|--------|-----|------|------------------|-------------|
|                                              |                   |                 | Min    | Typ | Max  |                  |             |
| SCL input cycle time                         | t <sub>SCL</sub>  |                 | 12     | —   | —    | t <sub>cyc</sub> | Figure 31.8 |
| SCL input high pulse width                   | t <sub>SCLH</sub> |                 | 3      | —   | —    | t <sub>cyc</sub> |             |
| SCL input low pulse width                    | t <sub>SCLL</sub> |                 | 5      | —   | —    | t <sub>cyc</sub> |             |
| SCL, SDA input rise time                     | t <sub>sf</sub>   |                 | —      | —   | 7.5* | t <sub>cyc</sub> |             |
| SCL, SDA input fall time                     | t <sub>sf</sub>   |                 | —      | —   | 300  | ns               |             |
| SCL, SDA input spike pulse removal time      | t <sub>sp</sub>   |                 | —      | —   | 1    | t <sub>cyc</sub> |             |
| SDA input bus free time                      | t <sub>BUF</sub>  |                 | 5      | —   | —    | t <sub>cyc</sub> |             |
| Start condition input hold time              | t <sub>STAH</sub> |                 | 3      | —   | —    | t <sub>cyc</sub> |             |
| Re-transmit start condition input setup time | t <sub>STAS</sub> |                 | 3      | —   | —    | t <sub>cyc</sub> |             |
| Stop condition input setup time              | t <sub>STOS</sub> |                 | 3      | —   | —    | t <sub>cyc</sub> |             |
| Data input setup time                        | t <sub>SDAS</sub> |                 | 0.5    | —   | —    | t <sub>cyc</sub> |             |
| Data input hold time                         | t <sub>SDAH</sub> |                 | 0      | —   | —    | ns               |             |
| SCL, SDA capacity load                       | C <sub>b</sub>    |                 | —      | —   | 400  | pF               |             |

Note: \* Can also be set to 17.5 t<sub>cyc</sub> depending on the selection of clock to be used by the I<sup>2</sup>C module.



Note: \* S, P and Sr denote the following:  
 S : Start conditions  
 P : Stop conditions  
 Sr: Re-transmit start conditions

**Figure 31.8 I<sup>2</sup>C Bus Interface I/O Timing**

### 31.2.5 A/D Converter Characteristics of HD6432199R, HD6432198R, HD6432197R, and HD6432196R

**Table 31.9 A/D Converter Characteristics of HD6432199R, HD6432198R, HD6432197R, and HD6432196R**

(Conditions:  $V_{CC} = AV_{CC} = 4.0\text{ V}$  to  $5.5\text{ V}$ ,  $V_{SS} = AV_{SS} = 0.0\text{ V}$ ,  $T_a = -20$  to  $+75^\circ\text{C}$  unless otherwise specified.)

| Item                              | Symbol      | Applicable Pins        | Test Conditions                                                              | Values       |          |              | Unit          | Note            |
|-----------------------------------|-------------|------------------------|------------------------------------------------------------------------------|--------------|----------|--------------|---------------|-----------------|
|                                   |             |                        |                                                                              | Min          | Typ      | Max          |               |                 |
| Analog power supply voltage       | $AV_{CC}$   | $AV_{CC}$              |                                                                              | $V_{CC}-0.3$ | $V_{CC}$ | $V_{CC}+0.3$ | V             |                 |
| Analog input voltage              | $A_{VIN}$   | AN0 to AN7, AN8 to ANB |                                                                              | $AV_{SS}$    | —        | $AV_{CC}$    | V             |                 |
| Analog power supply current       | $A_{ICC}$   | $AV_{CC}$              | $AV_{CC} = 5.0\text{V}$                                                      | —            | —        | 2.0          | mA            |                 |
|                                   | $A_{ISTOP}$ | $AV_{CC}$              | $V_{CC} = 2.5\text{ V}$ to $5.5\text{ V}$<br>At reset and in power-down mode | —            | —        | 10           | $\mu\text{A}$ |                 |
| Analog input capacitance          | $C_{AIN}$   | AN0 to AN7, AN8 to ANB |                                                                              | —            | —        | 30           | pF            |                 |
| Allowable signal source impedance | $R_{AIN}$   | AN0 to AN7, AN8 to ANB |                                                                              | —            | —        | 10           | k $\Omega$    |                 |
| Resolution                        |             |                        |                                                                              | —            | —        | 10           | Bit           |                 |
| Absolute accuracy                 |             |                        | $V_{CC} = AV_{CC} = 5.0\text{ V}$                                            | —            | —        | $\pm 4$      | LSB           |                 |
|                                   |             |                        | $V_{CC} = AV_{CC} = 4.0\text{ V}$ to $5.0\text{ V}$                          | —            | $\pm 4$  | —            | LSB           | Reference value |
| Conversion time                   |             |                        |                                                                              | 13.4         | —        | 26.6         | $\mu\text{s}$ |                 |

Note: Do not open the  $AV_{CC}$  and  $AV_{SS}$  pin even when the A/D converter is not in use. Set  $AV_{CC} = V_{CC}$  and  $AV_{SS} = V_{SS}$ .

### 31.2.6 Servo Section Electrical Characteristics of HD6432199R, HD6432198R, HD6432197R, and HD6432196R

**Table 31.10 Servo Section Electrical Characteristics of HD6432199R, HD6432198R, HD6432197R, and HD6432196R (reference values)**

(Conditions:  $V_{CC} = SV_{CC} = 5.0\text{ V}$ ,  $V_{SS} = SV_{SS} = 0.0\text{ V}$ ,  $T_a = 25^\circ\text{C}$  unless otherwise specified.)

| Item                                | Symbol | Applicable Pins | Test Conditions                                                    | Reference Values |                      |      | Unit       | Note |
|-------------------------------------|--------|-----------------|--------------------------------------------------------------------|------------------|----------------------|------|------------|------|
|                                     |        |                 |                                                                    | Min              | Typ                  | Max  |            |      |
| PB-CTL input amplifier voltage gain |        | CTL (+)         | CTLGR3 = 0, CTLGR2 = 0, CTLGR1 = 0, CTLGR0 = 0, $f = 10\text{kHz}$ | 32.0             | 34.0                 | 36.0 | dB         |      |
|                                     |        |                 | CTLGR3 = 0, CTLGR2 = 0, CTLGR1 = 0, CTLGR0 = 1, $f = 10\text{kHz}$ | 34.5             | 36.5                 | 38.5 |            |      |
|                                     |        |                 | CTLGR3 = 0, CTLGR2 = 0, CTLGR1 = 1, CTLGR0 = 0, $f = 10\text{kHz}$ | 37.0             | 39.0                 | 41.0 |            |      |
|                                     |        |                 | CTLGR3 = 0, CTLGR2 = 0, CTLGR1 = 1, CTLGR0 = 1, $f = 10\text{kHz}$ | 39.5             | 41.5                 | 43.5 |            |      |
|                                     |        |                 | CTLGR3 = 0, CTLGR2 = 1, CTLGR1 = 0, CTLGR0 = 0, $f = 10\text{kHz}$ | 42.0             | 44.0                 | 46.0 |            |      |
|                                     |        |                 | CTLGR3 = 0, CTLGR2 = 1, CTLGR1 = 0, CTLGR0 = 1, $f = 10\text{kHz}$ | 44.5             | 46.5                 | 48.5 |            |      |
|                                     |        |                 | CTLGR3 = 0, CTLGR2 = 1, CTLGR1 = 1, CTLGR0 = 0, $f = 10\text{kHz}$ | 47.0             | 49.0                 | 51.0 |            |      |
|                                     |        |                 | CTLGR3 = 0, CTLGR2 = 1, CTLGR1 = 1, CTLGR0 = 1, $f = 10\text{kHz}$ | 49.5             | 51.5                 | 53.5 |            |      |
|                                     |        |                 | CTLGR3 = 1, CTLGR2 = 0, CTLGR1 = 0, CTLGR0 = 0, $f = 10\text{kHz}$ | 52.0             | 54.0                 | 56.0 |            |      |
|                                     |        |                 | CTLGR3 = 1, CTLGR2 = 0, CTLGR1 = 0, CTLGR0 = 1, $f = 10\text{kHz}$ | 54.5             | 56.5                 | 58.5 |            |      |
|                                     |        |                 | CTLGR3 = 1, CTLGR2 = 0, CTLGR1 = 1, CTLGR0 = 0, $f = 10\text{kHz}$ | 57.0             | 59.0                 | 61.0 |            |      |
|                                     |        |                 | CTLGR3 = 1, CTLGR2 = 0, CTLGR1 = 1, CTLGR0 = 1, $f = 10\text{kHz}$ | 59.5             | 61.5                 | 63.5 |            |      |
|                                     |        |                 | CTLGR3 = 1, CTLGR2 = 1, CTLGR1 = 0, CTLGR0 = 0, $f = 10\text{kHz}$ | 62.0             | 64.0                 | 66.0 |            |      |
|                                     |        |                 | CTLGR3 = 1, CTLGR2 = 1, CTLGR1 = 0, CTLGR0 = 1, $f = 10\text{kHz}$ | 64.5             | 66.5                 | 68.5 |            |      |
|                                     |        |                 | CTLGR3 = 1, CTLGR2 = 1, CTLGR1 = 1, CTLGR0 = 0, $f = 10\text{kHz}$ | 67.0             | 69.0                 | 71.0 |            |      |
|                                     |        |                 | CTLGR3 = 1, CTLGR2 = 1, CTLGR1 = 1, CTLGR0 = 1, $f = 10\text{kHz}$ | 69.5             | 71.5                 | 73.5 |            |      |
| PB-CTL Schmitt input                | V+TH   | CTLSMT (i)      | AC coupling, $C = 0.1\text{ }\mu\text{F}$ Typ (non pol)            | —                | 250                  | —    | mVp        |      |
|                                     | V-TH   |                 | AC coupling, $C = 0.1\text{ }\mu\text{F}$ Typ (non pol)            | —                | -250                 | —    |            |      |
| Analog switch ON resistance         | REB    | CTLFB           |                                                                    | —                | 150                  | —    | $\Omega$   |      |
| REC-CTL output current              | ICTL   | CTL (+)         | Series resistance = $0\text{ }\Omega$                              | —                | 12                   | —    | mA         |      |
|                                     |        | CTL (-)         |                                                                    | —                | 12                   | —    |            |      |
| REC-CTL pin-to-pin resistance       | RCTL   |                 |                                                                    | —                | 10                   | —    | k $\Omega$ |      |
| CTL reference output voltage        |        | CTLREF          |                                                                    | —                | $\frac{1}{2}SV_{CC}$ | —    | V          |      |

| Item                                          | Symbol   | Applicable Pins                                                                 | Test Conditions                                            | Reference Values        |                  |                          | Unit            | Note |
|-----------------------------------------------|----------|---------------------------------------------------------------------------------|------------------------------------------------------------|-------------------------|------------------|--------------------------|-----------------|------|
|                                               |          |                                                                                 |                                                            | Min                     | Typ              | Max                      |                 |      |
| CFG pin bias voltage                          |          | CFG                                                                             |                                                            | —                       | 1/2 $S_{V_{CC}}$ | —                        | V               |      |
| CFG input level                               |          | CFG                                                                             | AC coupling,<br>C = 1 $\mu$ F Typ,<br>f = 1 kHz            | 1.0                     | —                | —                        | V <sub>pp</sub> |      |
| CFG digital input high level                  | $V_{IH}$ | CFG                                                                             | When digital signal input method is selected (CFGCOMP = 1) | 0.8<br>V <sub>CC</sub>  | —                | V <sub>CC</sub> +<br>0.3 | V               |      |
| CFG digital input                             | $V_{IL}$ | CFG                                                                             | When digital signal input method is selected (CFGCOMP = 1) | −0.3                    | —                | 0.2<br>V <sub>CC</sub>   | V               |      |
| CFG input impedance                           |          | CFG                                                                             |                                                            | —                       | 10               | —                        | k $\Omega$      |      |
| CFG input threshold value                     | V+THCF   | CFG                                                                             | Rise threshold level                                       | —                       | 2.25             | —                        | V               |      |
|                                               | V−THCF   |                                                                                 | Fall threshold level                                       | —                       | 2.75             | —                        |                 |      |
| DFG Schmitt input                             | V+THDF   | DFG                                                                             | Rising edge Schmitt level                                  | —                       | 1.95             | —                        | V               |      |
|                                               | V−THDF   |                                                                                 | Falling edge Schmitt level                                 | —                       | 1.85             | —                        |                 |      |
| DPG Schmitt input                             | V+THDP   | DPG                                                                             | Rising edge Schmitt level                                  | —                       | 3.55             | —                        | V               |      |
|                                               | V−THDP   |                                                                                 | Falling edge Schmitt level                                 | —                       | 3.45             | —                        |                 |      |
| 3-level output voltage                        | $V_{OH}$ | Vpulse                                                                          | − $I_{OH}$ = 0.1 mA                                        | 4.0                     | —                | —                        | V               |      |
|                                               | $V_{OM}$ |                                                                                 | No load, Hiz = 1                                           | —                       | 2.5              | —                        |                 |      |
|                                               | $V_{OL}$ |                                                                                 | $I_{OL}$ = 0.1 mA                                          | —                       | —                | 1.0                      |                 |      |
| 3-level output pin divided voltage resistance |          | Vpulse                                                                          |                                                            | —                       | 15               | —                        | k $\Omega$      |      |
| Digital input high level                      | $V_{IH}$ | COMP,<br>EXCTL,<br>EXCAP,<br>EXTTRG                                             |                                                            | 0.8<br>V <sub>CC</sub>  | —                | V <sub>CC</sub> +<br>0.3 | V               |      |
| Digital input low level                       | $V_{IL}$ |                                                                                 |                                                            | −0.3                    | —                | 0.2<br>V <sub>CC</sub>   |                 |      |
| Digital output high level                     | $V_{OH}$ | H.AmpSW,<br>C.Rotary,<br>VIDEOFF,<br>AUDIOFF,<br>DRMPWM,<br>CAPPWM,<br>SV1, SV2 | − $I_{OH}$ = 1 mA                                          | V <sub>CC</sub><br>−1.0 | —                | —                        | V               |      |
| Digital output low level                      | $V_{OL}$ |                                                                                 | $I_{OL}$ = 1.6 mA                                          | —                       | —                | 0.6                      |                 |      |

| Item                | Symbol     | Applicable Pins | Test Conditions                                 | Reference Values |     |     |      | Note |
|---------------------|------------|-----------------|-------------------------------------------------|------------------|-----|-----|------|------|
|                     |            |                 |                                                 | Min              | Typ | Max | Unit |      |
| Current dissipation | $I_{CCSV}$ | SVcc            | At no load                                      | —                | 5   | 10  | mA   |      |
| CFG duty            |            | CFG             | AC coupling,<br>C = 1 $\mu$ F Typ,<br>f = 1 kHz | 48               | —   | 52  | %    |      |

### 31.2.7 OSD Electrical Characteristics of HD6432199R, HD6432198R, HD6432197R, and HD6432196R

**Table 31.11 OSD Electrical Characteristics of HD6432199R, HD6432198R, HD6432197R, and HD6432196R (Reference Value)**

(Conditions: Vcc = OVcc = 5.0 V, Vss = OVss = 0.0 V, Ta = 25°C unless otherwise specified)

| Item                          | Symbol                                                | Applicable Pins          | Test Conditions                                        | Reference Values |     |     |          | Note           |
|-------------------------------|-------------------------------------------------------|--------------------------|--------------------------------------------------------|------------------|-----|-----|----------|----------------|
|                               |                                                       |                          |                                                        | Min              | Typ | Max | Unit     |                |
| Composite video input voltage | $V_{CVIN}$                                            | $C_{Vin1}$<br>$C_{Vin2}$ | —                                                      |                  | 2   |     | $V_{PP}$ |                |
| Clamp voltage                 | $V_{CL1}$                                             | $CV_{in1}$               | —                                                      | 1.2              | 1.4 | 1.6 | V        |                |
|                               | $V_{CL2}$                                             | $CV_{in2}$               | —                                                      | 1.8              | 2   | 2.2 |          |                |
| C.Video gain                  | $G_{CVC}$                                             | $CV_{in1}$<br>$CV_{out}$ | At chroma-through<br>f = 3.58 MHz<br>$V_{IN}=500$ mVpp | −3               | −2  | 0   | dB       |                |
| Pedestal bias                 | $V_{PED}$                                             | $CV_{out}$               |                                                        |                  | 45  |     | IRE      | * <sup>1</sup> |
| Color burst bias              | $V_{BST}$                                             |                          |                                                        |                  | 40  |     | IRE      | * <sup>1</sup> |
| Background bias               | Black, blue, green, cyan, red, magenta, yellow, white | $V_{BL1}$                |                                                        |                  | 10  |     | IRE      | * <sup>2</sup> |
|                               |                                                       | $V_{BL2}$                |                                                        |                  | 30  |     |          |                |
|                               |                                                       | $V_{BL3}$                |                                                        |                  | 50  |     |          |                |
|                               |                                                       | $V_{BL4}$                |                                                        |                  | 70  |     |          |                |
| Cursor bias                   | Black                                                 | $V_{KBL1}$               |                                                        |                  | 0   |     | IRE      | * <sup>2</sup> |
|                               |                                                       | $V_{KBL2}$               |                                                        |                  | 25  |     |          |                |
|                               | Blue, green, cyan, red, magenta, yellow               | $V_{KOL1}$               |                                                        |                  | 25  |     |          |                |
|                               |                                                       | $V_{KOL2}$               |                                                        |                  | 45  |     |          |                |
|                               | White                                                 | $V_{KCL1}$               |                                                        |                  | 45  |     |          |                |
|                               |                                                       | $V_{KCL2}$               |                                                        |                  | 55  |     |          |                |

| Item                                                    |                                         | Symbol        | Applicable Pins | Test Conditions | Reference Values |          |     | Unit           | Note           |  |
|---------------------------------------------------------|-----------------------------------------|---------------|-----------------|-----------------|------------------|----------|-----|----------------|----------------|--|
|                                                         |                                         |               |                 |                 | Min              | Typ      | Max |                |                |  |
| Character bias                                          | Black                                   | $V_{CBL1}$    | $CV_{out}$      |                 |                  | 0        |     | IRE            | * <sup>2</sup> |  |
|                                                         |                                         | $V_{CBL2}$    |                 |                 |                  | 10       |     |                |                |  |
|                                                         |                                         | $V_{CBL3}$    |                 |                 |                  | 20       |     |                |                |  |
|                                                         |                                         | $V_{CBL4}$    |                 |                 |                  | 30       |     |                |                |  |
|                                                         | Blue, green, cyan, red, magenta, yellow | $V_{COL1}$    |                 |                 |                  | 25       |     |                |                |  |
|                                                         |                                         | $V_{COL2}$    |                 |                 |                  | 45       |     |                |                |  |
|                                                         |                                         | $V_{COL3}$    |                 |                 |                  | 55       |     |                |                |  |
|                                                         |                                         | $V_{COL4}$    |                 |                 |                  | 65       |     |                |                |  |
|                                                         | White                                   | $V_{CCL1}$    |                 |                 |                  | 45       |     |                |                |  |
|                                                         |                                         | $V_{CCL2}$    |                 |                 |                  | 70       |     |                |                |  |
|                                                         |                                         | $V_{CCL3}$    |                 |                 |                  | 80       |     |                |                |  |
|                                                         |                                         | $V_{CCL4}$    |                 |                 |                  | 90       |     |                |                |  |
| Edge brightness level                                   | $V_{EDG1}$                              |               |                 |                 | 0                |          | IRE | * <sup>2</sup> |                |  |
|                                                         | $V_{EDG2}$                              |               |                 |                 | 90               |          | IRE |                |                |  |
| Button brightness level                                 | $V_{BTN1}$                              |               |                 |                 | 15               |          | IRE | * <sup>2</sup> |                |  |
|                                                         | $V_{BTN2}$                              |               |                 |                 | 75               |          |     |                |                |  |
| Color burst amplitude                                   |                                         | $V_{BSTA}$    |                 |                 |                  | 40       |     | IRE            |                |  |
| Chroma amplitude (background, cursor, character)        | Blue, green, cyan, red, magenta, yellow | $V_{CRA1}$    |                 |                 |                  | 60       |     | IRE            |                |  |
|                                                         |                                         | $V_{CRA2}$    |                 |                 |                  | 80       |     |                |                |  |
| Chroma hue angle (background, cursor, character) (NTSC) | Colorburst                              | $\phi_{BSTN}$ |                 |                 |                  | 0        |     | rad            | * <sup>3</sup> |  |
|                                                         | Blue                                    | $\phi_{BLUN}$ |                 |                 |                  | $\pi$    |     |                |                |  |
|                                                         | Green                                   | $\phi_{GRNN}$ |                 |                 |                  | $7\pi/4$ |     |                |                |  |
|                                                         | Cyan                                    | $\phi_{CYNN}$ |                 |                 |                  | $3\pi/2$ |     |                |                |  |
|                                                         | Red                                     | $\phi_{REDN}$ |                 |                 |                  | $\pi/2$  |     |                |                |  |
|                                                         | Magenta                                 | $\phi_{MZTN}$ |                 |                 |                  | $3\pi/4$ |     |                |                |  |
|                                                         | Yellow                                  | $\phi_{YETN}$ |                 |                 |                  | 0        |     |                |                |  |

| Item                                                   | Symbol        | Applicable Pins                    | Test Conditions | Reference Values |              |              | Unit | Note           |
|--------------------------------------------------------|---------------|------------------------------------|-----------------|------------------|--------------|--------------|------|----------------|
|                                                        |               |                                    |                 | Min              | Typ          | Max          |      |                |
| Chroma hue angle (background, cursor, character) (PAL) | Colorburst    | $\phi$ BSTP                        | CVout           |                  | $\pm \pi/4$  |              | rad  | * <sup>3</sup> |
|                                                        | Blue          | $\phi$ BLUP                        |                 |                  | $\pm \pi$    |              |      |                |
|                                                        | Green         | $\phi$ GRNP                        |                 |                  | $\pm 7\pi/4$ |              |      |                |
|                                                        | Cyan          | $\phi$ CYNP                        |                 |                  | $\pm 3\pi/2$ |              |      |                |
|                                                        | Red           | $\phi$ REDP                        |                 |                  | $\pm \pi/2$  |              |      |                |
|                                                        | Magenta       | $\phi$ MZTP                        |                 |                  | $\pm 3\pi/4$ |              |      |                |
|                                                        | Yellow        | $\phi$ YELP                        |                 |                  | 0            |              |      |                |
| Csync separation comparator                            | CCMP1         | CVin2                              |                 | —                | 5            | —            | IRE  | * <sup>1</sup> |
|                                                        | CCMP2         |                                    |                 | —                | 10           | —            |      |                |
|                                                        | CCMP3         |                                    |                 | —                | 15           | —            |      |                |
|                                                        | CCMP4         |                                    |                 | —                | 20           | —            |      |                |
| EDS separation comparator                              | ECMP1         | CVin2                              |                 | —                | 0            | —            | IRE  | * <sup>2</sup> |
|                                                        | ECMP2         |                                    |                 | —                | 5            | —            |      |                |
|                                                        | ECMP3         |                                    |                 | —                | 15           | —            |      |                |
|                                                        | ECMP4         |                                    |                 | —                | 20           | —            |      |                |
|                                                        | ECMP5         |                                    |                 | —                | 25           | —            |      |                |
|                                                        | ECMP6         |                                    |                 | —                | 35           | —            |      |                |
|                                                        | ECMP7         |                                    |                 | —                | 40           | —            |      |                |
| Input high level                                       | $V_{IH\perp}$ | Csync/Hsync<br>$V_{LPF}/V_{sync}$  |                 | 0.85<br>OVcc     | —            | OVcc<br>+0.3 | V    |                |
|                                                        | $V_{iHT}$     |                                    |                 | 0.7<br>OVcc      | —            | OVcc<br>+0.3 | V    |                |
| Input low level                                        | $V_{iL\perp}$ | Csync/Hsync<br>VLPF/Vsync          |                 | −0.3             | —            | 0.3<br>OVcc  | V    |                |
|                                                        | $V_{iLT}$     |                                    |                 | −0.3             | —            | 0.15<br>OVcc | V    |                |
| Output high level                                      | $V_{OH}$      | Csync/Hsync $-I_{OH}=0.4\text{mA}$ |                 | OVcc<br>−1.4     | —            | —            | V    |                |
| Output low level                                       | $V_{OL}$      | Csync/Hsync $I_{OL}=0.4\text{mA}$  |                 | —                | —            | 1.4          | V    |                |



| Item                            | Symbol             | Applicable Pins       | Test Conditions          | Reference Values |                          |         | Unit | Note |
|---------------------------------|--------------------|-----------------------|--------------------------|------------------|--------------------------|---------|------|------|
|                                 |                    |                       |                          | Min              | Typ                      | Max     |      |      |
| Oscillation stabilizing time    | $t_{tc}$           | 4/2fscin<br>4/2fscout | Crystal oscillator       | —                | —                        | 40      | ms   |      |
| Oscillating frequency           | $4_{fsc}$          | 4/2fscin<br>4/2fscout | M/NTSC                   | —                | 14.31818                 | —       | MHz  |      |
|                                 |                    |                       | B,G,H/PAL<br>I/PAL       | —                | 17.734475<br>(17.734476) | —       | MHz  |      |
|                                 |                    |                       | D,K/PAL<br>4.43-NTSC     |                  |                          |         |      |      |
|                                 |                    |                       | B,G,H/SECAM<br>L/SECAM   |                  |                          |         |      |      |
|                                 |                    |                       | D,K,K1/SECAM             |                  |                          |         |      |      |
|                                 | $2_{fsc}$          | 4/2fscin<br>4/2fscout | N/PAL                    | —                | 14.328225                | —       | MHz  |      |
|                                 |                    |                       | M/PAL                    | —                | 14.30244596              | —       | MHz  |      |
|                                 |                    |                       | M/NTSC                   | —                | 7.15909                  | —       | MHz  |      |
|                                 |                    |                       | B,G,H/PAL<br>I/PAL       | —                | 8.8672375<br>(8.867238)  | —       | MHz  |      |
| External clock input level      | $V_{fsc}$          | 4/2fscin<br>4/2fscout | AC coupling<br>C=1μF typ | 0.3              | —                        | Vcc+0.3 | Vpp  |      |
|                                 |                    |                       |                          |                  |                          |         | V    |      |
|                                 |                    |                       |                          |                  |                          |         | V    |      |
|                                 |                    |                       |                          |                  |                          |         | V    |      |
| External clock duty             |                    | 4/2fscin              |                          | 47               | 50                       | 53      | %    |      |
|                                 |                    | 4/2fscout             |                          |                  |                          |         |      |      |
| AFC reference clock (dot clock) | AFC <sub>OSC</sub> | AFC <sub>OSC</sub>    | LC oscillation           | 6.3              | 9                        | 11.7    | MHz  |      |
|                                 |                    |                       |                          | 4.9              | 7                        | 9.1     | MHz  |      |
| Current dissipation             | I <sub>CCOSD</sub> | OVcc                  | At no signal             | —                | 14                       | —       | mA   |      |

- Notes:
- IRE: Units for video amplitude; 0.714 V video level is specified as 100 IRE
  - 4fsc and 2fsc must be adjusted within  $\pm 30$  ppm, including temperature dependency.
    1. Bias from the sync tip clamp level (reference value after  $-6$  dB).
    2. Bias from the pedestal level (reference value after  $-6$  dB).
    3. At 4fsc input.

## 31.3 Electrical Characteristics of HD6432197S and HD6432196S

### 31.3.1 DC Characteristics of HD6432197S and HD6432196S — Preliminary —

**Table 31.12 DC Characteristics of HD6432197S and HD6432196S**

(Conditions:  $V_{CC} = AV_{CC} = 4.0\text{ V}$  to  $5.5\text{ V}^{*1}$ ,  $V_{SS} = 0.0\text{ V}$ ,  $T_a = -20$  to  $+75^{\circ}\text{C}$  unless otherwise specified.)

| Item               | Symbol   | Applicable Pins                                                                                | Test Conditions                         | Values       |     |              | Unit | Notes |
|--------------------|----------|------------------------------------------------------------------------------------------------|-----------------------------------------|--------------|-----|--------------|------|-------|
|                    |          |                                                                                                |                                         | Min          | Typ | Max          |      |       |
| Input high voltage | $V_{IH}$ | MD0                                                                                            | $V_{CC}=2.5\text{ V}$ to $5.5\text{ V}$ | $0.9 V_{CC}$ | —   | $V_{CC}+0.3$ | V    |       |
|                    |          | $\overline{RES}$ , $\overline{IC}$ , $\overline{IRQ0}$ to $\overline{IRQ5}$                    |                                         | $0.8 V_{CC}$ | —   | $V_{CC}+0.3$ |      |       |
|                    |          |                                                                                                | $V_{CC}=2.5\text{ V}$ to $5.5\text{ V}$ | $0.9 V_{CC}$ | —   | $V_{CC}+0.3$ |      |       |
|                    |          | SCK1, SI1, RPTRG, TMBI, $\overline{ADTRG}$                                                     |                                         | $0.8 V_{CC}$ | —   | $V_{CC}+0.3$ |      |       |
|                    |          | OSC1                                                                                           |                                         | $V_{CC}-0.5$ | —   | $V_{CC}+0.3$ |      |       |
|                    |          | P00 to P07, P10 to P17, P20 to P27, P30 to P37, P40 to P47, P60 to P67, P70 to P77, P80 to P87 |                                         | $0.7 V_{CC}$ | —   | $V_{CC}+0.3$ |      |       |
|                    |          |                                                                                                | $V_{CC}=2.5\text{ V}$ to $5.5\text{ V}$ | $0.8 V_{CC}$ | —   | $V_{CC}+0.3$ |      |       |
|                    |          | Csync                                                                                          |                                         | $0.7 V_{CC}$ | —   | $V_{CC}+0.3$ |      |       |

| Item              | Symbol   | Applicable Pins                                                                                                     | Test Conditions                       | Values |     |              | Unit | Notes |
|-------------------|----------|---------------------------------------------------------------------------------------------------------------------|---------------------------------------|--------|-----|--------------|------|-------|
|                   |          |                                                                                                                     |                                       | Min    | Typ | Max          |      |       |
| Input low voltage | $V_{IL}$ | MD0                                                                                                                 | $V_{CC}=2.5\text{ V to }5.5\text{ V}$ | -0.3   | —   | 0.1 $V_{CC}$ | V    |       |
|                   |          | $\overline{RES}$ , $\overline{IC}$ , $\overline{IRQ0}$ to $\overline{IRQ5}$                                         |                                       | -0.3   | —   | 0.2 $V_{CC}$ |      |       |
|                   |          |                                                                                                                     | $V_{CC}=2.5\text{ V to }5.5\text{ V}$ | -0.3   | —   | 0.1 $V_{CC}$ |      |       |
|                   |          | SCK1, SI1, RPTRG, TMBI, $\overline{ADTRG}$                                                                          |                                       | -0.3   | —   | 0.2 $V_{CC}$ |      |       |
|                   |          | OSC1                                                                                                                |                                       | -0.3   | —   | 0.5          |      |       |
|                   |          | P00 to P07,<br>P10 to P17,<br>P20 to P27,<br>P30 to P37,<br>P40 to P47,<br>P60 to P67,<br>P70 to P77,<br>P80 to P87 |                                       | -0.3   | —   | 0.3 $V_{CC}$ |      |       |
|                   |          |                                                                                                                     | $V_{CC}=2.5\text{ V to }5.5\text{ V}$ | -0.3   | —   | 0.2 $V_{CC}$ |      |       |
|                   |          | Csync                                                                                                               |                                       | -0.3   | —   | 0.2 $V_{CC}$ |      |       |

| Item                | Symbol   | Applicable Pins                                                                                                                                                                               | Test Conditions                                                | Values       |              |     | Unit | Notes           |
|---------------------|----------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------|--------------|--------------|-----|------|-----------------|
|                     |          |                                                                                                                                                                                               |                                                                | Min          | Typ          | Max |      |                 |
| Output high voltage | $V_{OH}$ | SO1, SCK1, PWM0, PWM1, BUZZ, TMO, TMOW, PPG0 to PPG7, RP0 to RP7, RP8 to RPB, P10 to P17, P20 to P27, P30 to P37, P40 to P47, P60 to P67, P70 to P77, P80 to P87, SV1, SV2, R, G, B, YCO, YBO | $-I_{OH}=1.0\text{mA}$                                         | $V_{CC}-1.0$ | —            | —   | V    | Reference value |
|                     |          |                                                                                                                                                                                               | $-I_{OH}=0.5\text{mA}$                                         | —            | $V_{CC}-0.5$ | —   | V    |                 |
|                     |          |                                                                                                                                                                                               | $-I_{OH}=0.1\text{mA}$<br>$V_{CC}=2.5\text{V to } 5.5\text{V}$ | $V_{CC}-0.5$ | —            | —   | V    |                 |
| Output low voltage  | $V_{OL}$ | SO1, SCK1, PWM0, PWM1, BUZZ, TMO, TMOW, PPG0 to PPG7, RP0 to RP7, RP8 to RPB, P10 to P17, P20 to P27, P30 to P37, P40 to P47, P70 to P77, P80 to P87, SV1, SV2, R, G, B, YCO, YBO             | $I_{OL}=1.6\text{mA}$                                          | —            | —            | 0.6 | V    |                 |
|                     |          |                                                                                                                                                                                               | $I_{OL}=0.4\text{mA}$<br>$V_{CC}=2.5\text{ V to } 5.5\text{V}$ | —            | —            | 0.4 | V    |                 |
|                     |          |                                                                                                                                                                                               |                                                                |              |              |     |      |                 |
|                     |          |                                                                                                                                                                                               |                                                                |              |              |     |      |                 |
|                     |          |                                                                                                                                                                                               |                                                                |              |              |     |      |                 |
|                     |          |                                                                                                                                                                                               |                                                                |              |              |     |      |                 |
|                     |          | P60 to P67,                                                                                                                                                                                   | $I_{OL}=20\text{mA}$                                           | —            | —            | 1.7 | V    |                 |
|                     |          |                                                                                                                                                                                               | $I_{OL}=1.6\text{mA}$                                          | —            | —            | 0.6 | V    |                 |
|                     |          |                                                                                                                                                                                               | $I_{OL}=0.4\text{mA}$<br>$V_{CC}=2.5\text{ V to } 5.5\text{V}$ | —            | —            | 0.4 | V    |                 |

| Item                          | Symbol   | Applicable Pins                                                                     | Test Conditions                         | Values |     |     | Unit | Notes |
|-------------------------------|----------|-------------------------------------------------------------------------------------|-----------------------------------------|--------|-----|-----|------|-------|
|                               |          |                                                                                     |                                         | Min    | Typ | Max |      |       |
| Input /output leakage current | $I_{IL}$ | MD0                                                                                 | Vin=0.5 to Vcc–0.5V                     | —      | —   | 1.0 | μA   |       |
|                               |          | $\overline{RES}$ , $\overline{IRQ0}$ to $\overline{IRQ5}$ , $\overline{IC}$         | Vin=0.5 to Vcc–0.5V                     | —      | —   | 1.0 |      |       |
|                               |          | SCK1, SI1, SDA1, SCL1, TRIG, TMBI, ADTRG                                            | Vin=0.5 to Vcc–0.5V                     | —      | —   | 1.0 |      |       |
|                               |          | OSC1                                                                                | Vin=0.5 to Vcc–0.5V                     | —      | —   | 1.0 |      |       |
|                               |          | P10 to P17, P20 to P27, P30 to P37, P40 to P47, P60 to P67, P70 to P77, P80 to P87, | Vin=0.5 to Vcc–0.5V                     | —      | —   | 1.0 |      |       |
|                               |          | P00 to P07, AN8 to ANB                                                              | Vin=0.5 to AVcc–0.5V                    | —      | —   | 1.0 |      |       |
| Pull-up MOS current           | –Ip      | P10 to P17, P20 to P27, P30 to P37                                                  | Vcc=5.0V, Vin=0V                        | 50     | —   | 300 | μA   | *2    |
| Input capacity                | Cin      | All input pins except power supply pins P23 and P24, and analog pins                | f <sub>in</sub> =1 MHz, Vin=0V, Ta=25°C | —      | —   | 15  | pF   |       |
|                               |          | P23 and P24                                                                         | f <sub>in</sub> =1 MHz, Vin=0V, Ta=25°C | —      | —   | 20  | pF   |       |

| Item                                            | Symbol              | Applicable Pins | Test Conditions                                            | Values |     |     | Unit | Notes                                          |
|-------------------------------------------------|---------------------|-----------------|------------------------------------------------------------|--------|-----|-----|------|------------------------------------------------|
|                                                 |                     |                 |                                                            | Min    | Typ | Max |      |                                                |
| Active mode current dissipation (CPU operating) | I <sub>OPE</sub>    | Vcc             | Vcc=5V, f <sub>OSC</sub> =10 MHz, High-speed mode          | —      | 40  | 50  | mA   | * <sup>3</sup> , * <sup>4</sup>                |
|                                                 |                     |                 | Vcc=5V, f <sub>OSC</sub> =10 MHz, Medium-speed mode (1/64) | —      | 25  | —   | mA   | Reference value* <sup>4</sup>                  |
| Active mode current dissipation (reset)         | I <sub>RES</sub>    | Vcc             | Vcc=5V, f <sub>OSC</sub> =10 MHz                           | —      | 12  | 15  | mA   | * <sup>3</sup> , * <sup>4</sup>                |
| Sleep mode current dissipation                  | I <sub>SLEEP</sub>  | Vcc             | Vcc=5V, f <sub>OSC</sub> =10 MHz High-speed mode           | —      | 15  | 20  | mA   | * <sup>3</sup> , * <sup>4</sup>                |
| Subactive mode current dissipation              | I <sub>SUB</sub>    | Vcc             | Vcc=2.5V, 32kHz With crystal oscillator (φ sub=φw/2)       | —      | 90  | 150 | μA   | * <sup>3</sup> , * <sup>4</sup>                |
|                                                 |                     |                 | Vcc=2.5V, 32kHz With crystal oscillator (φ sub=φw/8)       | —      | 40  | —   |      | Reference value* <sup>3</sup> , * <sup>4</sup> |
| Subsleep mode current dissipation               | I <sub>SUBSLP</sub> | Vcc             | Vcc=2.5V, 32kHz With crystal oscillator (φ sub=φw/2)       | —      | 30  | 50  | μA   | * <sup>3</sup> , * <sup>4</sup>                |
|                                                 |                     |                 | Vcc=2.5V, 32kHz With crystal oscillator (φ sub=φw/8)       | —      | 20  | —   |      | Reference value* <sup>3</sup> , * <sup>4</sup> |

| Item                                       | Symbol            | Applicable Pins | Test Conditions                                          | Values |     |     | Unit    | Notes                                          |
|--------------------------------------------|-------------------|-----------------|----------------------------------------------------------|--------|-----|-----|---------|------------------------------------------------|
|                                            |                   |                 |                                                          | Min    | Typ | Max |         |                                                |
| Watch mode current dissipation             | $I_{WATCH}$       | Vcc             | Vcc=2.5V, 32kHz<br>With crystal oscillator               | —      | 6   | 12  | $\mu A$ | * <sup>3</sup> , * <sup>4</sup>                |
|                                            |                   |                 | Vcc=5.0V, 32kHz<br>With crystal oscillator               | —      | 12  | —   | $\mu A$ | Reference value* <sup>3</sup> , * <sup>4</sup> |
| Standby mode current dissipation           | $I_{STBY}$        | Vcc             | X1=V <sub>CL</sub> , 32kHz<br>Without crystal oscillator | —      | —   | 10  | $\mu A$ | * <sup>3</sup> , * <sup>4</sup>                |
| RAM data retaining voltage in standby mode | V <sub>STBY</sub> |                 |                                                          | 2.0    |     |     | V       |                                                |

- Notes: 1. Do not open the AVcc and Avss pin even when the A/D converter is not in use.  
2. Current value when the relevant bit of the pull-up MOS select register (PUR1 to PUR3) is set to 1.  
3. The current on the pull-up MOS or the output buffer excluded.  
4. Excludes the current flowing in SVcc and OVcc.

**Table 31.13 Pin Status at Current Dissipation Measurement**

| Mode                                    | $\overline{RES}$ pin | Internal State                           | Pin | Oscillator Pin                                                              |
|-----------------------------------------|----------------------|------------------------------------------|-----|-----------------------------------------------------------------------------|
| Active mode<br>High-speed, medium-speed | Vcc                  | Operating                                | Vcc | Main clock:<br>Crystal oscillator<br>Sub clock:<br>X1 pin = V <sub>CL</sub> |
| Sleep mode<br>High-speed, medium-speed  | Vcc                  | Only CPU, servo circuits, and OSD halted | Vcc |                                                                             |
| Reset                                   | Vss                  | Reset                                    | Vcc |                                                                             |
| Standby mode                            | Vcc                  | All circuits halted                      | Vcc |                                                                             |
| Subactive mode                          | Vcc                  | Only CPU and timer A operating           | Vcc | Main clock:<br>Crystal oscillator<br>Sub clock:<br>Crystal oscillator       |
| Subsleep mode                           | Vcc                  | Only timer A operating                   | Vcc |                                                                             |
| Watch mode                              | Vcc                  | Only timer A operating                   | Vcc |                                                                             |

**Table 31.14 Bus Drive Characteristics of HD6432197S and HD6432196S — Preliminary —**

(Conditions:  $V_{CC} = AV_{CC} = 4.0\text{ V}$  to  $5.5\text{ V}$ ,  $V_{SS} = 0.0\text{ V}$ ,  $T_a = -20$  to  $+75^{\circ}\text{C}$ )

Applicable pin: SCL1, SDA1

| Item                         | Symbol   | Applicable Pins | Test Conditions     | Values       |     |         | Unit | Notes |
|------------------------------|----------|-----------------|---------------------|--------------|-----|---------|------|-------|
|                              |          |                 |                     | Min          | Typ | Max     |      |       |
| Schmitt trigger input        | $V_T^-$  | SCL1, SDA1      |                     | 0.2Vcc       | —   | —       | V    |       |
|                              | $V_T^+$  |                 |                     | —            | —   | 0.7Vcc  | V    |       |
|                              | $V_T^+$  |                 |                     | 0.05Vcc      | —   | —       | V    |       |
|                              | $-V_T^-$ |                 |                     |              |     |         |      |       |
| Input high level voltage     | $V_{IH}$ | SCL1, SDA1      |                     | 0.7Vcc       | —   | Vcc+0.5 | V    |       |
| Input low level voltage      | $V_{IL}$ | SCL1, SDA1      |                     | −0.5         | —   | 0.2Vcc  | V    |       |
| Output low level voltage     | $V_{OL}$ | SCL1, SDA1      | $I_{OL}=8\text{mA}$ | —            | —   | 0.5     | V    |       |
|                              |          |                 | $I_{OL}=3\text{mA}$ | —            | —   | 0.4     |      |       |
| SCL and SDA output fall time | $t_{of}$ | SCL1, SDA1      |                     | 20+<br>0.1Cb | —   | 250     | ns   |       |



### 31.3.2 Allowable Output Currents of HD6432197S and HD6432196S

The specifications for the digital pins are shown below.

**Table 31.15 Allowable Output Currents of HD6432197S and HD6432196S**

(Conditions:  $V_{CC} = 2.5 \text{ V}$  to  $5.5 \text{ V}$ ,  $V_{SS} = 0.0 \text{ V}$ ,  $T_a = -20$  to  $+75^\circ\text{C}$ )

| Item                                       | Symbol        | Value | Unit | Notes |
|--------------------------------------------|---------------|-------|------|-------|
| Allowable input current (to chip)          | $I_o$         | 2     | mA   | 1     |
| Allowable input current (to chip)          | $I_o$         | 22    | mA   | 2     |
| Allowable input current (to chip)          | $I_o$         | 10    | mA   | 3     |
| Allowable output current (from chip)       | $-I_o$        | 2     | mA   | 4     |
| Total allowable input current (to chip)    | $\Sigma I_o$  | 80    | mA   | 5     |
| Total allowable output current (from chip) | $-\Sigma I_o$ | 50    | mA   | 6     |

- Notes:
1. The allowable input current is the maximum value of the current flowing from each I/O pin to  $V_{SS}$  (except for port 6, SCL1 and SDA1).
  2. The allowable input current is the maximum value of the current flowing from each I/O pin to  $V_{SS}$ . This applies to port 6.
  3. The allowable input current is the maximum value of the current flowing from each I/O pin to  $V_{SS}$ . This applies to SCL1 and SDA1.
  4. The allowable output current is the maximum value of the current flowing from  $V_{CC}$  to each I/O pin.
  5. The total allowable input current is the sum of the currents flowing from all I/O pins to  $V_{SS}$  simultaneously.
  6. The total allowable output current is the sum of the currents flowing from  $V_{CC}$  to all I/O pins.

### 31.3.3 AC Characteristics of HD6432197S and HD6432196S

**Table 31.16 AC Characteristics of HD6432197S and HD6432196S — Preliminary —**

(Conditions:  $V_{CC} = AV_{CC} = 4.0\text{ V}$  to  $5.5\text{ V}$ ,  $V_{SS} = 0.0\text{ V}$ ,  $T_a = -20$  to  $+75^\circ\text{C}$  unless otherwise specified,  $OV_{CC} = SV_{CC} = 4.75\text{ V}$  to  $5.25\text{ V}$ .)

| Item                                    | Symbol       | Applicable Pins | Test Conditions                                                        | Values |        |     | Unit          | Notes        |
|-----------------------------------------|--------------|-----------------|------------------------------------------------------------------------|--------|--------|-----|---------------|--------------|
|                                         |              |                 |                                                                        | Min    | Typ    | Max |               |              |
| Clock oscillation frequency             | $f_{OSC}$    | OSC1, OSC2      |                                                                        | 8      | —      | 10  | MHz           |              |
| Clock cycle time                        | $t_{cyc}$    | OSC1, OSC2      |                                                                        | 100    | —      | 125 | ns            | Figure 31.9  |
| Subclock oscillation frequency          | $f_X$        | X1, X2          | $V_{CC} = 2.5\text{ V}$ to $5.5\text{ V}$                              | —      | 32.768 | —   | kHz           |              |
| Subclock cycle time                     | $t_{subcyc}$ | X1, X2          | $V_{CC} = 2.5\text{ V}$ to $5.5\text{ V}$                              | —      | 30.518 | —   | $\mu\text{s}$ |              |
| Oscillation stabilization time          | $t_{rc}$     | OSC1, OSC2      | Crystal oscillator                                                     | —      | —      | 10  | ms            |              |
|                                         |              | X1, X2          | 32kHz crystal oscillator ( $V_{CC} = 2.5\text{ V}$ to $5.5\text{ V}$ ) | —      | —      | 2   | s             |              |
| External clock high width               | $t_{CPH}$    | OSC1            |                                                                        | 40     | —      | —   | ns            | Figure 31.9  |
| External clock low width                | $t_{CPL}$    | OSC1            |                                                                        | 40     | —      | —   | ns            |              |
| External clock rise time                | $t_{CPr}$    | OSC1            |                                                                        | —      | —      | 10  | ns            |              |
| External clock fall time                | $t_{CPf}$    | OSC1            |                                                                        | —      | —      | 10  | ns            |              |
| External clock stabilization delay time | $t_{DEXT}$   | OSC1            |                                                                        | 500    | —      | —   | $\mu\text{s}$ | Figure 31.10 |

| Item                                        | Symbol           | Applicable Pins                                                                                             | Test Conditions                                   | Values |     |     | Unit                                    | Figure       |
|---------------------------------------------|------------------|-------------------------------------------------------------------------------------------------------------|---------------------------------------------------|--------|-----|-----|-----------------------------------------|--------------|
|                                             |                  |                                                                                                             |                                                   | Min    | Typ | Max |                                         |              |
| $\overline{\text{RES}}$ pin low level width | $t_{\text{REL}}$ | $\overline{\text{RES}}$                                                                                     | $V_{\text{CC}} = 2.5 \text{ V to } 5.5 \text{ V}$ | 20     | —   | —   | $t_{\text{cyc}}$                        | Figure 31.11 |
| Input pin high level width                  | $t_{\text{IH}}$  | $\overline{\text{IRQ0 to IRQ5}}, \overline{\text{IC}}, \overline{\text{ADTRG}}, \text{TMBI}, \text{RPTRIG}$ | $V_{\text{CC}} = 2.5 \text{ V to } 5.5 \text{ V}$ | 2      | —   | —   | $t_{\text{cyc}}$<br>$t_{\text{subcyc}}$ | Figure 31.12 |
| Input pin low level width                   | $t_{\text{IL}}$  | $\overline{\text{IRQ0 to IRQ5}}, \overline{\text{IC}}, \overline{\text{ADTRG}}, \text{TMBI}, \text{RPTRIG}$ | $V_{\text{CC}} = 2.5 \text{ V to } 5.5 \text{ V}$ | 2      | —   | —   | $t_{\text{cyc}}$<br>$t_{\text{subcyc}}$ |              |

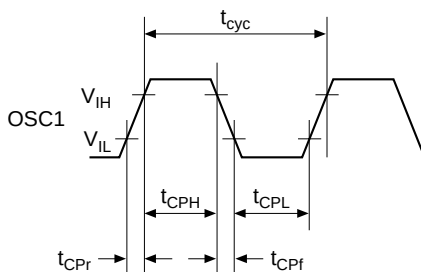


**Figure 31.9 System Clock Timing**

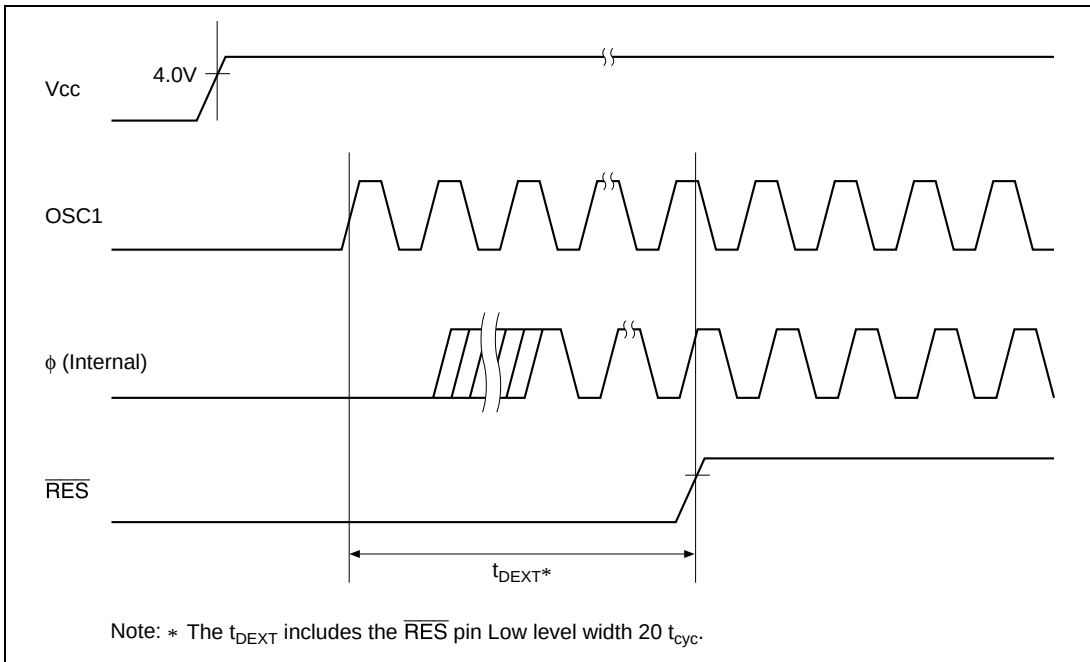


**Figure 31.10 External Clock Stabilization Delay Timing**

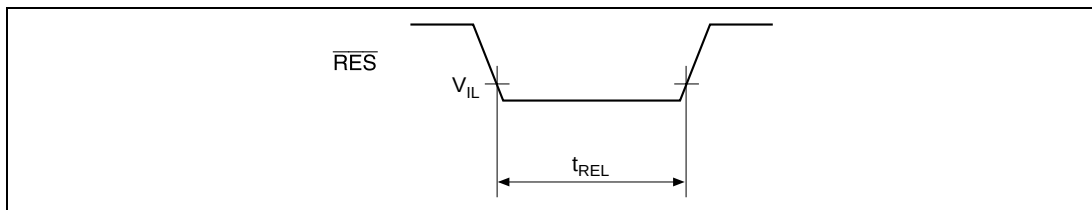


**Figure 31.11 Reset Input Timing**

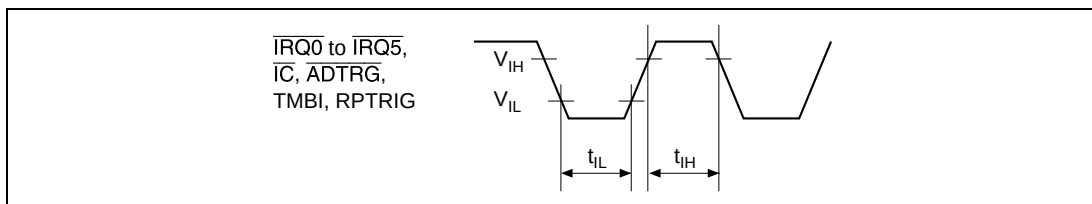


**Figure 31.12 Input Timing**

31.3.4 Serial Interface Timing of HD6432197S and HD6432196S

Table 31.17 Serial Interface Timing of HD6432197S and HD6432196S — Preliminary —

(Conditions: Vcc = AVcc = 4.0 V to 5.5 V, Vss = 0.0 V, Ta = -20 to +75°C unless otherwise specified.)

| Item                                  | Symbol            | Applicable Pins | Test Conditions       | Values |     |     | Unit              | Figure       |
|---------------------------------------|-------------------|-----------------|-----------------------|--------|-----|-----|-------------------|--------------|
|                                       |                   |                 |                       | Min    | Typ | Max |                   |              |
| Input clock cycle                     | $t_{\text{scyc}}$ | SCK1            | Asynchronization      | 4      | —   | —   | $t_{\text{cyc}}$  | Figure 31.13 |
|                                       |                   |                 | Clock synchronization | 6      | —   | —   |                   |              |
| Input clock pulse width               | $t_{\text{SCKW}}$ | SCK1            |                       | 0.4    | —   | 0.6 | $t_{\text{scyc}}$ |              |
| Input clock rise time                 | $t_{\text{SCKr}}$ | SCK1            |                       | —      | —   | 1.5 | $t_{\text{cyc}}$  |              |
| Input clock fall time                 | $t_{\text{SCKf}}$ | SCK1            |                       | —      | —   | 1.5 | $t_{\text{cyc}}$  |              |
| Transmit data delay time (clock sync) | $t_{\text{TXD}}$  | SO1             |                       | —      | —   | 100 | ns                | Figure 31.14 |
| Receive data setup time (clock sync)  | $t_{\text{RXS}}$  | SI1             |                       | 100    | —   | —   | ns                |              |
| Receive data hold time (clock sync)   | $t_{\text{RXH}}$  | SI1             |                       | 100    | —   | —   | ns                |              |

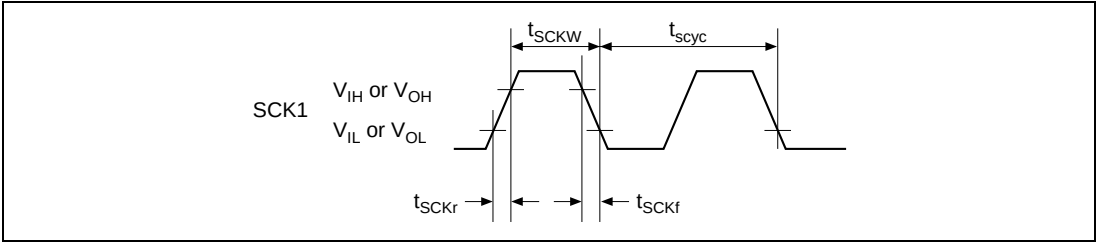


Figure 31.13 SCK1 Clock Timing

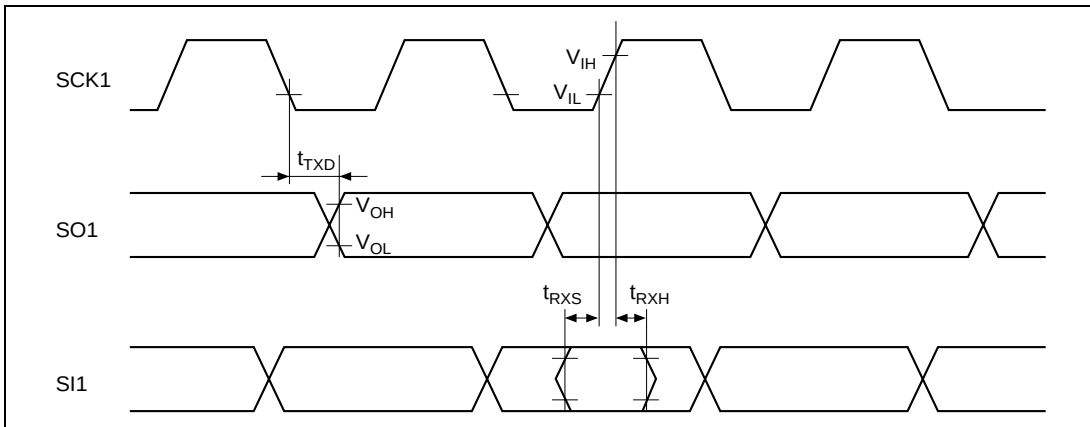


**Figure 31.14 SCI I/O Timing/Clock Synchronization Mode**

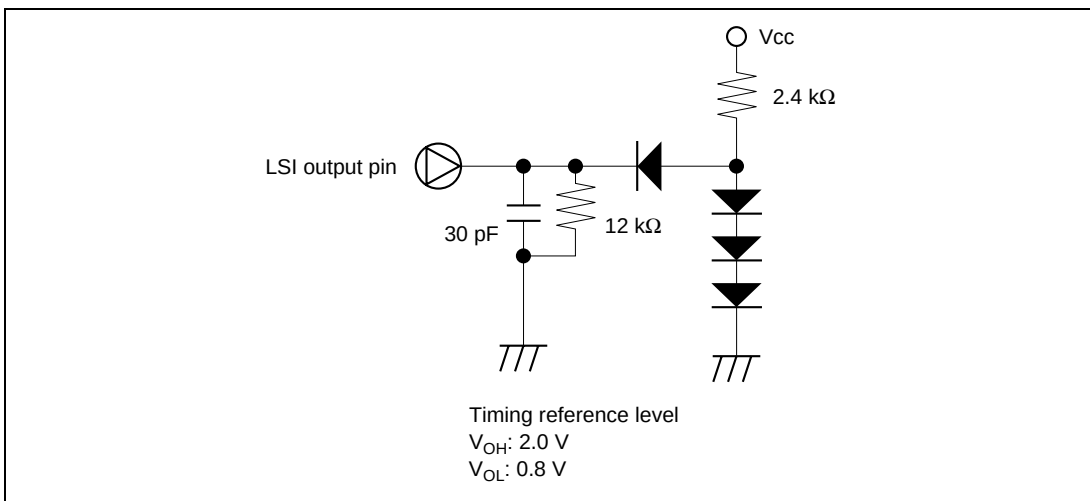



**Figure 31.15 Output Load Conditions**

**Table 31.18 I<sup>2</sup>C Bus Interface Timing of HD6432197S and HD6432196S — Preliminary —**

(Conditions: V<sub>CC</sub> = AV<sub>CC</sub> = 4.0 V to 5.5 V, V<sub>SS</sub> = 0.0 V, Ta = –20 to +75°C unless otherwise specified.)

| Item                                         | Symbol            | Test Conditions | Values |     |      | Unit             | Figure      |
|----------------------------------------------|-------------------|-----------------|--------|-----|------|------------------|-------------|
|                                              |                   |                 | Min    | Typ | Max  |                  |             |
| SCL input cycle time                         | t <sub>SCL</sub>  |                 | 12     | —   | —    | t <sub>cyc</sub> | Figure 31.8 |
| SCL input high pulse width                   | t <sub>SCLH</sub> |                 | 3      | —   | —    | t <sub>cyc</sub> |             |
| SCL input low pulse width                    | t <sub>SCLL</sub> |                 | 5      | —   | —    | t <sub>cyc</sub> |             |
| SCL, SDA input rise time                     | t <sub>sr</sub>   |                 | —      | —   | 7.5* | t <sub>cyc</sub> |             |
| SCL, SDA input fall time                     | t <sub>sf</sub>   |                 | —      | —   | 300  | ns               |             |
| SCL, SDA input spike pulse removal time      | t <sub>sp</sub>   |                 | —      | —   | 1    | t <sub>cyc</sub> |             |
| SDA input bus free time                      | t <sub>BUF</sub>  |                 | 5      | —   | —    | t <sub>cyc</sub> |             |
| Start condition input hold time              | t <sub>STAH</sub> |                 | 3      | —   | —    | t <sub>cyc</sub> |             |
| Re-transmit start condition input setup time | t <sub>STAS</sub> |                 | 3      | —   | —    | t <sub>cyc</sub> |             |
| Stop condition input setup time              | t <sub>STOS</sub> |                 | 3      | —   | —    | t <sub>cyc</sub> |             |
| Data input setup time                        | t <sub>SDAS</sub> |                 | 0.5    | —   | —    | t <sub>cyc</sub> |             |
| Data input hold time                         | t <sub>SDAH</sub> |                 | 0      | —   | —    | ns               |             |
| SCL, SDA capacity load                       | C <sub>b</sub>    |                 | —      | —   | 400  | pF               |             |

Note: \* Can also be set to 17.5 t<sub>cyc</sub> depending on the selection of clock to be used by the I<sup>2</sup>C module.

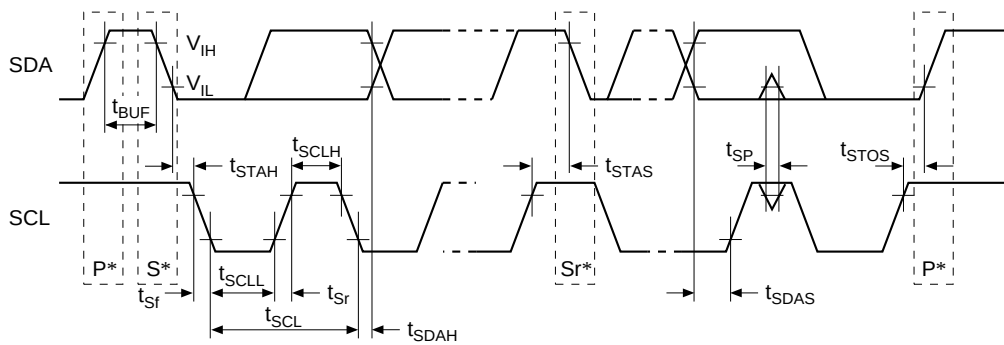

Note: \* S, P and Sr denote the following:  
 S : Start conditions  
 P : Stop conditions  
 Sr: Re-transmit start conditions

**Figure 31.16 I²C Bus Interface I/O Timing**



### 31.3.5 A/D Converter Characteristics of HD6432197S and HD6432196S

**Table 31.19 A/D Converter Characteristics of HD6432197S and HD6432196S**

— Preliminary —

(Conditions:  $V_{CC} = AV_{CC} = 4.0\text{ V}$  to  $5.5\text{ V}$ ,  $V_{SS} = AV_{SS} = 0.0\text{ V}$ ,  $T_a = -20$  to  $+75^\circ\text{C}$  unless otherwise specified.)

| Item                              | Symbol      | Applicable Pins           | Test Conditions                                                              | Values       |          |              | Unit          | Note            |
|-----------------------------------|-------------|---------------------------|------------------------------------------------------------------------------|--------------|----------|--------------|---------------|-----------------|
|                                   |             |                           |                                                                              | Min          | Typ      | Max          |               |                 |
| Analog power supply voltage       | $AV_{CC}$   | $AV_{CC}$                 |                                                                              | $V_{CC}-0.3$ | $V_{CC}$ | $V_{CC}+0.3$ | V             |                 |
| Analog input voltage              | $A_{VIN}$   | AN0 to AN7,<br>AN8 to ANB |                                                                              | $AV_{SS}$    | —        | $AV_{CC}$    | V             |                 |
| Analog power supply current       | $A_{ICC}$   | $AV_{CC}$                 | $AV_{CC} = 5.0\text{V}$                                                      | —            | —        | 2.0          | mA            |                 |
|                                   | $A_{ISTOP}$ | $AV_{CC}$                 | $V_{CC} = 2.5\text{ V}$ to $5.5\text{ V}$<br>At reset and in power-down mode | —            | —        | 10           | $\mu\text{A}$ |                 |
| Analog input capacitance          | $C_{AIN}$   | AN0 to AN7,<br>AN8 to ANB |                                                                              | —            | —        | 30           | pF            |                 |
| Allowable signal source impedance | $R_{AIN}$   | AN0 to AN7,<br>AN8 to ANB |                                                                              | —            | —        | 10           | k $\Omega$    |                 |
| Resolution                        |             |                           |                                                                              | —            | —        | 10           | Bit           |                 |
| Absolute accuracy                 |             |                           | $V_{CC} = AV_{CC} = 5.0\text{ V}$                                            | —            | —        | $\pm 4$      | LSB           |                 |
|                                   |             |                           | $V_{CC} = AV_{CC} = 4.0\text{ V}$ to $5.0\text{ V}$                          | —            | $\pm 4$  | —            | LSB           | Reference value |
| Conversion time                   |             |                           |                                                                              | 13.4         | —        | 26.6         | $\mu\text{s}$ |                 |

Note: Do not open the  $AV_{CC}$  and  $AV_{SS}$  pin even when the A/D converter is not in use. Set  $AV_{CC} = V_{CC}$  and  $AV_{SS} = V_{SS}$ .

### 31.3.6 Servo Section Electrical Characteristics of HD6432197S and HD6432196S

**Table 31.20 Servo Section Electrical Characteristics of HD6432197S and HD6432196S**  
— Preliminary —

(Conditions:  $V_{cc} = SV_{cc} = 5.0\text{ V}$ ,  $V_{ss} = SV_{ss} = 0.0\text{ V}$ ,  $T_a = 25^\circ\text{C}$  unless otherwise specified.)

| Item                                | Symbol | Applicable Pins | Test Conditions                                                    | Reference Values |                      |      | Unit       | Note |
|-------------------------------------|--------|-----------------|--------------------------------------------------------------------|------------------|----------------------|------|------------|------|
|                                     |        |                 |                                                                    | Min              | Typ                  | Max  |            |      |
| PB-CTL input amplifier voltage gain |        | CTL (+)         | CTLGR3 = 0, CTLGR2 = 0, CTLGR1 = 0, CTLGR0 = 0, $f = 10\text{kHz}$ | 32.0             | 34.0                 | 36.0 | dB         |      |
|                                     |        |                 | CTLGR3 = 0, CTLGR2 = 0, CTLGR1 = 0, CTLGR0 = 1, $f = 10\text{kHz}$ | 34.5             | 36.5                 | 38.5 |            |      |
|                                     |        |                 | CTLGR3 = 0, CTLGR2 = 0, CTLGR1 = 1, CTLGR0 = 0, $f = 10\text{kHz}$ | 37.0             | 39.0                 | 41.0 |            |      |
|                                     |        |                 | CTLGR3 = 0, CTLGR2 = 0, CTLGR1 = 1, CTLGR0 = 1, $f = 10\text{kHz}$ | 39.5             | 41.5                 | 43.5 |            |      |
|                                     |        |                 | CTLGR3 = 0, CTLGR2 = 1, CTLGR1 = 0, CTLGR0 = 0, $f = 10\text{kHz}$ | 42.0             | 44.0                 | 46.0 |            |      |
|                                     |        |                 | CTLGR3 = 0, CTLGR2 = 1, CTLGR1 = 0, CTLGR0 = 1, $f = 10\text{kHz}$ | 44.5             | 46.5                 | 48.5 |            |      |
|                                     |        |                 | CTLGR3 = 0, CTLGR2 = 1, CTLGR1 = 1, CTLGR0 = 0, $f = 10\text{kHz}$ | 47.0             | 49.0                 | 51.0 |            |      |
|                                     |        |                 | CTLGR3 = 0, CTLGR2 = 1, CTLGR1 = 1, CTLGR0 = 1, $f = 10\text{kHz}$ | 49.5             | 51.5                 | 53.5 |            |      |
|                                     |        |                 | CTLGR3 = 1, CTLGR2 = 0, CTLGR1 = 0, CTLGR0 = 0, $f = 10\text{kHz}$ | 52.0             | 54.0                 | 56.0 |            |      |
|                                     |        |                 | CTLGR3 = 1, CTLGR2 = 0, CTLGR1 = 0, CTLGR0 = 1, $f = 10\text{kHz}$ | 54.5             | 56.5                 | 58.5 |            |      |
|                                     |        |                 | CTLGR3 = 1, CTLGR2 = 0, CTLGR1 = 1, CTLGR0 = 0, $f = 10\text{kHz}$ | 57.0             | 59.0                 | 61.0 |            |      |
|                                     |        |                 | CTLGR3 = 1, CTLGR2 = 0, CTLGR1 = 1, CTLGR0 = 1, $f = 10\text{kHz}$ | 59.5             | 61.5                 | 63.5 |            |      |
|                                     |        |                 | CTLGR3 = 1, CTLGR2 = 1, CTLGR1 = 0, CTLGR0 = 0, $f = 10\text{kHz}$ | 62.0             | 64.0                 | 66.0 |            |      |
|                                     |        |                 | CTLGR3 = 1, CTLGR2 = 1, CTLGR1 = 0, CTLGR0 = 1, $f = 10\text{kHz}$ | 64.5             | 66.5                 | 68.5 |            |      |
|                                     |        |                 | CTLGR3 = 1, CTLGR2 = 1, CTLGR1 = 1, CTLGR0 = 0, $f = 10\text{kHz}$ | 67.0             | 69.0                 | 71.0 |            |      |
|                                     |        |                 | CTLGR3 = 1, CTLGR2 = 1, CTLGR1 = 1, CTLGR0 = 1, $f = 10\text{kHz}$ | 69.5             | 71.5                 | 73.5 |            |      |
| PB-CTL Schmitt input                | V+TH   | CTLSMT (i)      | AC coupling, $C = 0.1\text{ }\mu\text{F}$ Typ (non pol)            | —                | 250                  | —    | mVp        |      |
|                                     | V-TH   |                 | AC coupling, $C = 0.1\text{ }\mu\text{F}$ Typ (non pol)            | —                | -250                 | —    |            |      |
| Analog switch ON resistance         | REB    | CTLFB           |                                                                    | —                | 150                  | —    | $\Omega$   |      |
| REC-CTL output current              | ICTL   | CTL (+)         | Series resistance = $0\text{ }\Omega$                              | —                | 12                   | —    | mA         |      |
|                                     |        | CTL (-)         |                                                                    | —                | 12                   | —    |            |      |
| REC-CTL pin-to-pin resistance       | RCTL   |                 |                                                                    | —                | 10                   | —    | k $\Omega$ |      |
| CTL reference output voltage        |        | CTLREF          |                                                                    | —                | $\frac{1}{2}SV_{cc}$ | —    | V          |      |

| Item                                          | Symbol          | Applicable Pins                                                                 | Test Conditions                                            | Reference Values        |                  |                          | Unit            | Note |
|-----------------------------------------------|-----------------|---------------------------------------------------------------------------------|------------------------------------------------------------|-------------------------|------------------|--------------------------|-----------------|------|
|                                               |                 |                                                                                 |                                                            | Min                     | Typ              | Max                      |                 |      |
| CFG pin bias voltage                          |                 | CFG                                                                             |                                                            | —                       | 1/2 $S_{V_{CC}}$ | —                        | V               |      |
| CFG input level                               |                 | CFG                                                                             | AC coupling,<br>C = 1 $\mu$ F Typ,<br>f = 1 kHz            | 1.0                     | —                | —                        | V <sub>pp</sub> |      |
| CFG digital input high level                  | V <sub>IH</sub> | CFG                                                                             | When digital signal input method is selected (CFGCOMP = 1) | 0.8<br>V <sub>CC</sub>  | —                | V <sub>CC</sub> +<br>0.3 | V               |      |
| CFG digital input                             | V <sub>IL</sub> | CFG                                                                             | When digital signal input method is selected (CFGCOMP = 1) | −0.3                    | —                | 0.2<br>V <sub>CC</sub>   | V               |      |
| CFG input impedance                           |                 | CFG                                                                             |                                                            | —                       | 10               | —                        | k $\Omega$      |      |
| CFG input threshold value                     | V+THCF          | CFG                                                                             | Rise threshold level                                       | —                       | 2.25             | —                        | V               |      |
|                                               | V−THCF          |                                                                                 | Fall threshold level                                       | —                       | 2.75             | —                        |                 |      |
| DFG Schmitt input                             | V+THDF          | DFG                                                                             | Rising edge Schmitt level                                  | —                       | 1.95             | —                        | V               |      |
|                                               | V−THDF          |                                                                                 | Falling edge Schmitt level                                 | —                       | 1.85             | —                        |                 |      |
| DPG Schmitt input                             | V+THDP          | DPG                                                                             | Rising edge Schmitt level                                  | —                       | 3.55             | —                        | V               |      |
|                                               | V−THDP          |                                                                                 | Falling edge Schmitt level                                 | —                       | 3.45             | —                        |                 |      |
| 3-level output voltage                        | V <sub>OH</sub> | Vpulse                                                                          | −I <sub>OH</sub> = 0.1 mA                                  | 4.0                     | —                | —                        | V               |      |
|                                               | V <sub>OM</sub> |                                                                                 | No load, Hiz = 1                                           | —                       | 2.5              | —                        |                 |      |
|                                               | V <sub>OL</sub> |                                                                                 | I <sub>OL</sub> = 0.1 mA                                   | —                       | —                | 1.0                      |                 |      |
| 3-level output pin divided voltage resistance |                 | Vpulse                                                                          |                                                            | —                       | 15               | —                        | k $\Omega$      |      |
| Digital input high level                      | V <sub>IH</sub> | COMP,<br>EXCTL,<br>EXCAP,<br>EXTTRG                                             |                                                            | 0.8<br>V <sub>CC</sub>  | —                | V <sub>CC</sub> +<br>0.3 | V               |      |
| Digital input low level                       | V <sub>IL</sub> |                                                                                 |                                                            | −0.3                    | —                | 0.2<br>V <sub>CC</sub>   |                 |      |
| Digital output high level                     | V <sub>OH</sub> | H.AmpSW,<br>C.Rotary,<br>VIDEOFF,<br>AUDIOFF,<br>DRMPWM,<br>CAPPWM,<br>SV1, SV2 | −I <sub>OH</sub> = 1 mA                                    | V <sub>CC</sub><br>−1.0 | —                | —                        | V               |      |
| Digital output low level                      | V <sub>OL</sub> |                                                                                 | I <sub>OL</sub> = 1.6 mA                                   | —                       | —                | 0.6                      |                 |      |

| Item                | Symbol            | Applicable Pins | Test Conditions                            | Reference Values |     |     | Unit | Note |
|---------------------|-------------------|-----------------|--------------------------------------------|------------------|-----|-----|------|------|
|                     |                   |                 |                                            | Min              | Typ | Max |      |      |
| Current dissipation | I <sub>CCSV</sub> | SVcc            | At no load                                 | —                | 5   | 10  | mA   |      |
| CFG duty            |                   | CFG             | AC coupling,<br>C = 1 μF Typ,<br>f = 1 kHz | 48               | —   | 52  | %    |      |

### 31.3.7 OSD Electrical Characteristics of HD6432197S and HD6432196S

**Table 31.21 OSD Electrical Characteristics of HD6432197S and HD6432196S (Reference Value) — Preliminary —**

(Conditions:  $V_{CC} = OV_{CC} = 5.0$  V,  $V_{SS} = OV_{SS} = 0.0$  V,  $T_a = 25^\circ\text{C}$  unless otherwise specified)

| Item                          |                                                       | Symbol            | Applicable Pins                        | Test Conditions                                                | Reference Values |     |     | Unit            | Note           |
|-------------------------------|-------------------------------------------------------|-------------------|----------------------------------------|----------------------------------------------------------------|------------------|-----|-----|-----------------|----------------|
|                               |                                                       |                   |                                        |                                                                | Min              | Typ | Max |                 |                |
| Composite video input voltage |                                                       | V <sub>CVIN</sub> | C <sub>Vin1</sub><br>C <sub>Vin2</sub> | —                                                              |                  | 2   |     | V <sub>PP</sub> |                |
| Clamp voltage                 |                                                       | V <sub>CL1</sub>  | CV <sub>in1</sub>                      | —                                                              | 1.2              | 1.4 | 1.6 | V               |                |
|                               |                                                       | V <sub>CL2</sub>  | CV <sub>in2</sub>                      | —                                                              | 1.8              | 2   | 2.2 |                 |                |
| C.Video gain                  |                                                       | G <sub>CVC</sub>  | CV <sub>in1</sub><br>CV <sub>out</sub> | At chroma-through<br>f = 3.58 MHz<br>V <sub>in</sub> =500 mVpp | −3               | −2  | 0   | dB              |                |
| Pedestal bias                 |                                                       | V <sub>PED</sub>  | CV <sub>out</sub>                      |                                                                |                  | 45  |     | IRE             | * <sup>1</sup> |
| Color burst bias              |                                                       | V <sub>BST</sub>  |                                        |                                                                |                  | 40  |     | IRE             | * <sup>1</sup> |
| Background bias               | Black, blue, green, cyan, red, magenta, yellow, white | V <sub>BL1</sub>  |                                        |                                                                |                  | 10  |     | IRE             | * <sup>2</sup> |
|                               |                                                       | V <sub>BL2</sub>  |                                        |                                                                |                  | 30  |     |                 |                |
|                               |                                                       | V <sub>BL3</sub>  |                                        |                                                                |                  | 50  |     |                 |                |
|                               |                                                       | V <sub>BL4</sub>  |                                        |                                                                |                  | 70  |     |                 |                |
| Cursor bias                   | Black                                                 | V <sub>KBL1</sub> |                                        |                                                                | 0                |     | IRE | * <sup>2</sup>  |                |
|                               |                                                       | V <sub>KBL2</sub> |                                        |                                                                | 25               |     |     |                 |                |
|                               | Blue, green, cyan, red, magenta, yellow               | V <sub>KOL1</sub> |                                        |                                                                | 25               |     |     |                 |                |
|                               |                                                       | V <sub>KOL2</sub> |                                        |                                                                | 45               |     |     |                 |                |
|                               | White                                                 | V <sub>KCL1</sub> |                                        |                                                                | 45               |     |     |                 |                |
|                               |                                                       | V <sub>KCL2</sub> |                                        |                                                                | 55               |     |     |                 |                |

| Item                                                    |                                         | Symbol        | Applicable Pins | Test Conditions | Reference Values |          |     | Unit           | Note           |  |
|---------------------------------------------------------|-----------------------------------------|---------------|-----------------|-----------------|------------------|----------|-----|----------------|----------------|--|
|                                                         |                                         |               |                 |                 | Min              | Typ      | Max |                |                |  |
| Character bias                                          | Black                                   | $V_{CBL1}$    | $CV_{out}$      |                 |                  | 0        |     | IRE            | * <sup>2</sup> |  |
|                                                         |                                         | $V_{CBL2}$    |                 |                 |                  | 10       |     |                |                |  |
|                                                         |                                         | $V_{CBL3}$    |                 |                 |                  | 20       |     |                |                |  |
|                                                         |                                         | $V_{CBL4}$    |                 |                 |                  | 30       |     |                |                |  |
|                                                         | Blue, green, cyan, red, magenta, yellow | $V_{COL1}$    |                 |                 |                  | 25       |     |                |                |  |
|                                                         |                                         | $V_{COL2}$    |                 |                 |                  | 45       |     |                |                |  |
|                                                         |                                         | $V_{COL3}$    |                 |                 |                  | 55       |     |                |                |  |
|                                                         |                                         | $V_{COL4}$    |                 |                 |                  | 65       |     |                |                |  |
|                                                         | White                                   | $V_{CCL1}$    |                 |                 |                  | 45       |     |                |                |  |
|                                                         |                                         | $V_{CCL2}$    |                 |                 |                  | 70       |     |                |                |  |
|                                                         |                                         | $V_{CCL3}$    |                 |                 |                  | 80       |     |                |                |  |
|                                                         |                                         | $V_{CCL4}$    |                 |                 |                  | 90       |     |                |                |  |
| Edge brightness level                                   | $V_{EDG1}$                              |               |                 |                 | 0                |          | IRE | * <sup>2</sup> |                |  |
|                                                         | $V_{EDG2}$                              |               |                 |                 | 90               |          | IRE |                |                |  |
| Button brightness level                                 | $V_{BTN1}$                              |               |                 |                 | 15               |          | IRE | * <sup>2</sup> |                |  |
|                                                         | $V_{BTN2}$                              |               |                 |                 | 75               |          |     |                |                |  |
| Color burst amplitude                                   |                                         | $V_{BSTA}$    |                 |                 |                  | 40       |     | IRE            |                |  |
| Chroma amplitude (background, cursor, character)        | Blue, green, cyan, red, magenta, yellow | $V_{CRA1}$    |                 |                 |                  | 60       |     | IRE            |                |  |
|                                                         |                                         | $V_{CRA2}$    |                 |                 |                  | 80       |     |                |                |  |
| Chroma hue angle (background, cursor, character) (NTSC) | Colorburst                              | $\phi_{BSTN}$ |                 |                 |                  | 0        |     | rad            | * <sup>3</sup> |  |
|                                                         | Blue                                    | $\phi_{BLUN}$ |                 |                 |                  | $\pi$    |     |                |                |  |
|                                                         | Green                                   | $\phi_{GRNN}$ |                 |                 |                  | $7\pi/4$ |     |                |                |  |
|                                                         | Cyan                                    | $\phi_{CYNN}$ |                 |                 |                  | $3\pi/2$ |     |                |                |  |
|                                                         | Red                                     | $\phi_{REDN}$ |                 |                 |                  | $\pi/2$  |     |                |                |  |
|                                                         | Magenta                                 | $\phi_{MZTN}$ |                 |                 |                  | $3\pi/4$ |     |                |                |  |
|                                                         | Yellow                                  | $\phi_{YETN}$ |                 |                 |                  | 0        |     |                |                |  |

| Item                                                   | Symbol        | Applicable Pins                    | Test Conditions | Reference Values |              |              | Unit | Note           |
|--------------------------------------------------------|---------------|------------------------------------|-----------------|------------------|--------------|--------------|------|----------------|
|                                                        |               |                                    |                 | Min              | Typ          | Max          |      |                |
| Chroma hue angle (background, cursor, character) (PAL) | Colorburst    | $\phi$ BSTP                        | CVout           |                  | $\pm \pi/4$  |              | rad  | * <sup>3</sup> |
|                                                        | Blue          | $\phi$ BLUP                        |                 |                  | $\pm \pi$    |              |      |                |
|                                                        | Green         | $\phi$ GRNP                        |                 |                  | $\pm 7\pi/4$ |              |      |                |
|                                                        | Cyan          | $\phi$ CYNP                        |                 |                  | $\pm 3\pi/2$ |              |      |                |
|                                                        | Red           | $\phi$ REDP                        |                 |                  | $\pm \pi/2$  |              |      |                |
|                                                        | Magenta       | $\phi$ MZTP                        |                 |                  | $\pm 3\pi/4$ |              |      |                |
|                                                        | Yellow        | $\phi$ YELP                        |                 |                  | 0            |              |      |                |
| Csync separation comparator                            | CCMP1         | CVin2                              |                 | —                | 5            | —            | IRE  | * <sup>1</sup> |
|                                                        | CCMP2         |                                    |                 | —                | 10           | —            |      |                |
|                                                        | CCMP3         |                                    |                 | —                | 15           | —            |      |                |
|                                                        | CCMP4         |                                    |                 | —                | 20           | —            |      |                |
| EDS separation comparator                              | ECMP1         | CVin2                              |                 | —                | 0            | —            | IRE  | * <sup>2</sup> |
|                                                        | ECMP2         |                                    |                 | —                | 5            | —            |      |                |
|                                                        | ECMP3         |                                    |                 | —                | 15           | —            |      |                |
|                                                        | ECMP4         |                                    |                 | —                | 20           | —            |      |                |
|                                                        | ECMP5         |                                    |                 | —                | 25           | —            |      |                |
|                                                        | ECMP6         |                                    |                 | —                | 35           | —            |      |                |
|                                                        | ECMP7         |                                    |                 | —                | 40           | —            |      |                |
| Input high level                                       | $V_{IH\perp}$ | Csync/Hsync<br>$V_{LPF}/V_{sync}$  |                 | 0.85<br>OVcc     | —            | OVcc<br>+0.3 | V    |                |
|                                                        | $V_{iHT}$     |                                    |                 | 0.7<br>OVcc      | —            | OVcc<br>+0.3 | V    |                |
| Input low level                                        | $V_{iL\perp}$ | Csync/Hsync<br>VLPF/Vsync          |                 | −0.3             | —            | 0.3<br>OVcc  | V    |                |
|                                                        | $V_{iLT}$     |                                    |                 | −0.3             | —            | 0.15<br>OVcc | V    |                |
| Output high level                                      | $V_{OH}$      | Csync/Hsync $-I_{OH}=0.4\text{mA}$ |                 | OVcc<br>−1.4     | —            | —            | V    |                |
| Output low level                                       | $V_{OL}$      | Csync/Hsync $I_{OL}=0.4\text{mA}$  |                 | —                | —            | 1.4          | V    |                |

| Item                            | Symbol      | Applicable Pins       | Test Conditions                | Reference Values |                          |              | Unit | Note |
|---------------------------------|-------------|-----------------------|--------------------------------|------------------|--------------------------|--------------|------|------|
|                                 |             |                       |                                | Min              | Typ                      | Max          |      |      |
| Oscillation stabilizing time    | $t_{tc}$    | 4/2fscin<br>4/2fscout | Crystal oscillator             | —                | —                        | 40           | ms   |      |
| Oscillating frequency           | $4_{fsc}$   | 4/2fscin<br>4/2fscout | M/NTSC                         | —                | 14.31818                 | —            | MHz  |      |
|                                 |             |                       | B,G,H/PAL<br>I/PAL             | —                | 17.734475<br>(17.734476) | —            | MHz  |      |
|                                 |             |                       | D,K/PAL<br>4.43-NTSC           |                  |                          |              |      |      |
|                                 |             |                       | B,G,H/SECAM<br>L/SECAM         |                  |                          |              |      |      |
|                                 |             |                       | D,K,K1/SECAM                   |                  |                          |              |      |      |
|                                 | $2_{fsc}$   | 4/2fscin<br>4/2fscout | N/PAL                          | —                | 14.328225                | —            | MHz  |      |
|                                 |             |                       | M/PAL                          | —                | 14.30244596              | —            | MHz  |      |
|                                 |             |                       | M/NTSC                         | —                | 7.15909                  | —            | MHz  |      |
|                                 |             |                       | B,G,H/PAL<br>I/PAL             | —                | 8.8672375<br>(8.867238)  | —            | MHz  |      |
| External clock input level      | $V_{fsc}$   | 4/2fscin<br>4/2fscout | AC coupling<br>C=1 $\mu$ F typ | 0.3              | —                        | $V_{cc}+0.3$ | Vpp  |      |
|                                 |             |                       |                                |                  |                          |              |      |      |
|                                 |             |                       |                                |                  |                          |              |      |      |
|                                 |             |                       |                                |                  |                          |              |      |      |
| External clock duty             | $V_{IH}$    | 4/2fscin              |                                | 0.7Vcc           | —                        | $V_{cc}+0.3$ | V    |      |
|                                 | $V_{IL}$    |                       |                                | −0.3             | —                        | 0.3Vcc       |      |      |
|                                 |             | 4/2fscin<br>4/2fscout |                                | 47               | 50                       | 53           | %    |      |
| AFC reference clock (dot clock) | $AFC_{osc}$ | $AFC_{osc}$           | LC oscillation                 | 6.3              | 9                        | 11.7         | MHz  |      |
|                                 |             |                       |                                | 4.9              | 7                        | 9.1          | MHz  |      |
| Current dissipation             | $I_{CCOSD}$ | OVcc                  | At no signal                   | —                | 14                       | —            | mA   |      |

- Notes:
- IRE: Units for video amplitude; 0.714 V video level is specified as 100 IRE
  - 4fsc and 2fsc must be adjusted within  $\pm 30$  ppm, including temperature dependency.
    1. Bias from the sync tip clamp level (reference value after −6 dB).
    2. Bias from the pedestal level (reference value after −6 dB).
    3. At 4fsc input.

## 31.4 Electrical Characteristics of HD64F2199R

### 31.4.1 DC Characteristics of HD64F2199R

**Table 31.22 DC Characteristics of HD64F2199R**

(Conditions:  $V_{CC} = AV_{CC} = 4.0\text{ V to }5.5\text{ V}^{*1}$ ,  $V_{SS} = 0.0\text{ V}$ ,  $T_a = -20\text{ to }+75^{\circ}\text{C}$  unless otherwise specified.)

| Item               | Symbol   | Applicable Pins                                                                                                        | Test Conditions                       | Values       |     |              | Unit | Notes |
|--------------------|----------|------------------------------------------------------------------------------------------------------------------------|---------------------------------------|--------------|-----|--------------|------|-------|
|                    |          |                                                                                                                        |                                       | Min          | Typ | Max          |      |       |
| Input high voltage | $V_{IH}$ | MD0                                                                                                                    | $V_{CC}=2.7\text{ V to }5.5\text{ V}$ | $0.9 V_{CC}$ | —   | $V_{CC}+0.3$ | V    |       |
|                    |          | $\overline{RES}$ , $\overline{FWE}$ , $\overline{IC}$ , $\overline{IRQ0}$<br>to $\overline{IRQ5}$ , $\overline{SYNCI}$ |                                       | $0.8 V_{CC}$ | —   | $V_{CC}+0.3$ |      |       |
|                    |          |                                                                                                                        | $V_{CC}=2.7\text{ V to }5.5\text{ V}$ | $0.9 V_{CC}$ | —   | $V_{CC}+0.3$ |      |       |
|                    |          | SCK1, SI1, FTIA,<br>FTIB, FTIC, FTID,<br>RPTRG, TMBI,<br>$\overline{ADTRG}$                                            |                                       | $0.8 V_{CC}$ | —   | $V_{CC}+0.3$ |      |       |
|                    |          | OSC1                                                                                                                   |                                       | $V_{CC}-0.5$ | —   | $V_{CC}+0.3$ |      |       |
|                    |          | P00 to P07,<br>P10 to P17,<br>P20 to P27,<br>P30 to P37,<br>P40 to P47,<br>P60 to P67,<br>P70 to P77,<br>P80 to P87    | $V_{CC}=2.7\text{ V to }5.5\text{ V}$ | $0.7 V_{CC}$ | —   | $V_{CC}+0.3$ |      |       |
|                    |          | Csync                                                                                                                  |                                       | $0.7 V_{CC}$ | —   | $V_{CC}+0.3$ |      |       |



| Item              | Symbol   | Applicable Pins                                                                                                     | Test Conditions                       | Values |     |              | Unit | Notes |
|-------------------|----------|---------------------------------------------------------------------------------------------------------------------|---------------------------------------|--------|-----|--------------|------|-------|
|                   |          |                                                                                                                     |                                       | Min    | Typ | Max          |      |       |
| Input low voltage | $V_{IL}$ | MD0                                                                                                                 | $V_{CC}=2.7\text{ V to }5.5\text{ V}$ | -0.3   | —   | 0.1 $V_{CC}$ | V    |       |
|                   |          | $\overline{RES}$ , FWE, $\overline{IC}$ ,<br>$\overline{IRQ0}$ to $\overline{IRQ5}$ , SYNCI                         |                                       | -0.3   | —   | 0.2 $V_{CC}$ |      |       |
|                   |          |                                                                                                                     | $V_{CC}=2.7\text{ V to }5.5\text{ V}$ | -0.3   | —   | 0.1 $V_{CC}$ |      |       |
|                   |          | SCK1, SI1, FTIA, FTIB,<br>FTIC, FTID, RPTRG,<br>TMBI, $\overline{ADTRG}$                                            |                                       | -0.3   | —   | 0.2 $V_{CC}$ |      |       |
|                   |          | OSC1                                                                                                                |                                       | -0.3   | —   | 0.5          |      |       |
|                   |          | P00 to P07,<br>P10 to P17,<br>P20 to P27,<br>P30 to P37,<br>P40 to P47,<br>P60 to P67,<br>P70 to P77,<br>P80 to P87 | $V_{CC}=2.7\text{ V to }5.5\text{ V}$ | -0.3   | —   | 0.3 $V_{CC}$ |      |       |
|                   |          |                                                                                                                     |                                       | -0.3   | —   | 0.2 $V_{CC}$ |      |       |
|                   |          | Csync                                                                                                               |                                       | -0.3   | —   | 0.2 $V_{CC}$ |      |       |

| Item                | Symbol   | Applicable Pins                                                                                                                                                                                                              | Test Conditions                                                | Values       |              |     | Unit | Notes           |
|---------------------|----------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------|--------------|--------------|-----|------|-----------------|
|                     |          |                                                                                                                                                                                                                              |                                                                | Min          | Typ          | Max |      |                 |
| Output high voltage | $V_{OH}$ | SO1, SCK1, PWM0, PWM1, PWM2, PWM3, PWM14, BUZZ, TMO, TMOW, FTOA, FTOB, PPG0 to PPG7, RP0 to RP7, RP8 to RPB, P10 to P17, P20 to P27, P30 to P37, P40 to P47, P60 to P67, P70 to P77, P80 to P87, SV1, SV2, R, G, B, YCO, YBO | $-I_{OH}=1.0\text{mA}$                                         | $V_{CC}-1.0$ | —            | —   | V    | Reference value |
|                     |          |                                                                                                                                                                                                                              | $-I_{OH}=0.5\text{mA}$                                         | —            | $V_{CC}-0.5$ | —   | V    |                 |
|                     |          |                                                                                                                                                                                                                              | $-I_{OH}=0.1\text{mA}$<br>$V_{CC}=2.7\text{ V to }5.5\text{V}$ | $V_{CC}-0.5$ | —            | —   | V    |                 |
| Output low voltage  | $V_{OL}$ | SO1, SCK1, PWM0, PWM1, PWM2, PWM3, PWM14, BUZZ, TMO, TMOW, FTOA, FTOB, PPG0 to PPG7, RP0 to RP7, RP8 to RPB, P10 to P17, P20 to P27, P30 to P37, P40 to P47, P70 to P77, P80 to P87, SV1, SV2, R, G, B, YCO, YBO             | $I_{OL}=1.6\text{mA}$                                          | —            | —            | 0.6 | V    |                 |
|                     |          |                                                                                                                                                                                                                              | $I_{OL}=0.4\text{mA}$<br>$V_{CC}=2.7\text{ V to }5.5\text{V}$  | —            | —            | 0.4 | V    |                 |
|                     |          |                                                                                                                                                                                                                              |                                                                |              |              |     |      |                 |
|                     |          |                                                                                                                                                                                                                              |                                                                |              |              |     |      |                 |
|                     |          |                                                                                                                                                                                                                              |                                                                |              |              |     |      |                 |
|                     |          |                                                                                                                                                                                                                              |                                                                |              |              |     |      |                 |
|                     |          | P60 to P67,                                                                                                                                                                                                                  | $I_{OL}=20\text{mA}$                                           | —            | —            | 1.7 | V    |                 |
|                     |          |                                                                                                                                                                                                                              | $I_{OL}=1.6\text{mA}$                                          | —            | —            | 0.6 | V    |                 |
|                     |          |                                                                                                                                                                                                                              | $I_{OL}=0.4\text{mA}$<br>$V_{CC}=2.7\text{ V to }5.5\text{V}$  | —            | —            | 0.4 | V    |                 |

| Item                          | Symbol     | Applicable Pins                                                                           | Test Conditions                         | Values |     |     | Unit | Notes |
|-------------------------------|------------|-------------------------------------------------------------------------------------------|-----------------------------------------|--------|-----|-----|------|-------|
|                               |            |                                                                                           |                                         | Min    | Typ | Max |      |       |
| Input /output leakage current | $ I_{IL} $ | MD0, FWE                                                                                  | Vin=0.5 to Vcc–0.5V                     | —      | —   | 1.0 | μA   |       |
|                               |            | $\overline{RES}$ , $\overline{IRQ0}$ to $\overline{IRQ5}$ , $\overline{IC}$               | Vin=0.5 to Vcc–0.5V                     | —      | —   | 1.0 |      |       |
|                               |            | SCK1, SI1, SDA0, SCL0, SDA1, SCL1, FTIA, FTIB, FTIC, FTID, TRIG, TMBI, $\overline{ADTRG}$ | Vin=0.5 to Vcc–0.5V                     | —      | —   | 1.0 |      |       |
|                               |            | OSC1                                                                                      | Vin=0.5 to Vcc–0.5V                     | —      | —   | 1.0 |      |       |
|                               |            | P10 to P17, P20 to P27, P30 to P37, P40 to P47, P60 to P67, P70 to P77, P80 to P87,       | Vin=0.5 to Vcc–0.5V                     | —      | —   | 1.0 |      |       |
|                               |            | P00 to P07, AN8 to ANB                                                                    | Vin=0.5 to AVcc–0.5V                    | —      | —   | 1.0 |      |       |
| Pull-up MOS current           | –Ip        | P10 to P17, P20 to P27, P30 to P37                                                        | Vcc=5.0V, Vin=0V                        | 50     | —   | 300 | μA   | *2    |
| Input capacity                | Cin        | All input pins except power supply pins P23, P24, P25, and P26, and analog pins           | f <sub>in</sub> =1 MHz, Vin=0V, Ta=25°C | —      | —   | 15  | pF   |       |
|                               |            | P23, P24, P25, P26                                                                        | f <sub>in</sub> =1 MHz, Vin=0V, Ta=25°C | —      | —   | 20  | pF   |       |

| Item                                            | Symbol              | Applicable Pins | Test Conditions                                            | Values |     |     | Unit | Notes                                          |
|-------------------------------------------------|---------------------|-----------------|------------------------------------------------------------|--------|-----|-----|------|------------------------------------------------|
|                                                 |                     |                 |                                                            | Min    | Typ | Max |      |                                                |
| Active mode current dissipation (CPU operating) | I <sub>OPE</sub>    | Vcc             | Vcc=5V, f <sub>OSC</sub> =10 MHz, High-speed mode          | —      | 40  | 50  | mA   | * <sup>3</sup> , * <sup>4</sup>                |
|                                                 |                     |                 | Vcc=5V, f <sub>OSC</sub> =10 MHz, Medium-speed mode (1/64) | —      | 25  | —   | mA   | Reference value* <sup>3</sup> , * <sup>4</sup> |
| Active mode current dissipation (reset)         | I <sub>RES</sub>    | Vcc             | Vcc=5V, f <sub>OSC</sub> =10 MHz                           | —      | 12  | 15  | mA   | * <sup>3</sup> , * <sup>4</sup>                |
| Sleep mode current dissipation                  | I <sub>SLEEP</sub>  | Vcc             | Vcc=5V, f <sub>OSC</sub> =10 MHz High-speed mode           | —      | 15  | 20  | mA   | * <sup>3</sup> , * <sup>4</sup>                |
| Subactive mode current dissipation              | I <sub>SUB</sub>    | Vcc             | Vcc=2.7V, 32kHz With crystal oscillator (φ sub=φw/2)       | —      | 90  | 150 | μA   | * <sup>3</sup> , * <sup>4</sup>                |
|                                                 |                     |                 | Vcc=2.7V, 32kHz With crystal oscillator (φ sub=φw/8)       | —      | 40  | —   |      | Reference value* <sup>3</sup> , * <sup>4</sup> |
| Subsleep mode current dissipation               | I <sub>SUBSLP</sub> | Vcc             | Vcc=2.7V, 32kHz With crystal oscillator (φ sub=φw/2)       | —      | 30  | 50  | μA   | * <sup>3</sup> , * <sup>4</sup>                |
|                                                 |                     |                 | Vcc=2.7V, 32kHz With crystal oscillator (φ sub=φw/8)       | —      | 20  | —   |      | Reference value* <sup>3</sup> , * <sup>4</sup> |

| Item                                       | Symbol            | Applicable Pins | Test Conditions                                          | Values |     |     | Unit    | Notes                                        |
|--------------------------------------------|-------------------|-----------------|----------------------------------------------------------|--------|-----|-----|---------|----------------------------------------------|
|                                            |                   |                 |                                                          | Min    | Typ | Max |         |                                              |
| Watch mode current dissipation             | $I_{WATCH}$       | Vcc             | Vcc=2.7V, 32kHz<br>With crystal oscillator               | —      | 6   | 12  | $\mu A$ | * <sup>3</sup> * <sup>4</sup>                |
|                                            |                   |                 | Vcc=5.0V, 32kHz<br>With crystal oscillator               | —      | 12  | —   | $\mu A$ | Reference value* <sup>3</sup> * <sup>4</sup> |
| Standby mode current dissipation           | $I_{STBY}$        | Vcc             | X1=V <sub>CL</sub> , 32kHz<br>Without crystal oscillator | —      | —   | 10  | $\mu A$ | * <sup>3</sup> * <sup>4</sup>                |
| RAM data retaining voltage in standby mode | V <sub>STBY</sub> |                 |                                                          | 2.0    |     |     | V       |                                              |

- Notes: 1. Do not open the AVcc and AVss pin even when the A/D converter is not in use.  
2. Current value when the relevant bit of the pull-up MOS select register (PUR1 to PUR3) is set to 1.  
3. The current on the pull-up MOS or the output buffer excluded.  
4. Excludes the current flowing in SVcc and OVcc.

**Table 31.23 Pin Status at Current Dissipation Measurement**

| Mode                                    | $\overline{RES}$ pin | Internal State                           | Pin | Oscillator Pin                                                              |
|-----------------------------------------|----------------------|------------------------------------------|-----|-----------------------------------------------------------------------------|
| Active mode<br>High-speed, medium-speed | Vcc                  | Operating                                | Vcc | Main clock:<br>Crystal oscillator<br>Sub clock:<br>X1 pin = V <sub>CL</sub> |
| Sleep mode<br>High-speed, medium-speed  | Vcc                  | Only CPU, servo circuits, and OSD halted | Vcc |                                                                             |
| Reset                                   | Vss                  | Reset                                    | Vcc |                                                                             |
| Standby mode                            | Vcc                  | All circuits halted                      | Vcc |                                                                             |
| Subactive mode                          | Vcc                  | CPU and timer A operating                | Vcc | Main clock:<br>Crystal oscillator<br>Sub clock:<br>Crystal oscillator       |
| Subsleep mode                           | Vcc                  | Timer A operating                        | Vcc |                                                                             |
| Watch mode                              | Vcc                  | Timer A operating                        | Vcc |                                                                             |

**Table 31.24 Bus Drive Characteristics of HD64F2199R**(Conditions:  $V_{CC} = AV_{CC} = 4.0\text{ V}$  to  $5.5\text{ V}$ ,  $V_{SS} = 0.0\text{ V}$ ,  $T_a = -20$  to  $+75^{\circ}\text{C}$ .)

Applicable pin: SCL0, SCL1, SDA0, SDA1

| Item                         | Symbol   | Applicable Pins           | Test Conditions     | Values       |     |         | Unit | Notes |
|------------------------------|----------|---------------------------|---------------------|--------------|-----|---------|------|-------|
|                              |          |                           |                     | Min          | Typ | Max     |      |       |
| Schmitt trigger input        | $V_T^-$  | SCL0, SDA0,<br>SCL1, SDA1 |                     | 0.2Vcc       | —   | —       | V    |       |
|                              | $V_T^+$  |                           |                     | —            | —   | 0.7Vcc  | V    |       |
|                              | $V_T^+$  |                           |                     | 0.05Vcc      | —   | —       | V    |       |
|                              | $-V_T^-$ |                           |                     |              |     |         |      |       |
| Input high level voltage     | $V_{IH}$ | SCL0, SDA0,<br>SCL1, SDA1 |                     | 0.7Vcc       | —   | Vcc+0.5 | V    |       |
| Input low level voltage      | $V_{IL}$ | SCL0, SDA0,<br>SCL1, SDA1 |                     | −0.5         | —   | 0.2Vcc  | V    |       |
| Output low level voltage     | $V_{OL}$ | SCL0, SDA0,<br>SCL1, SDA1 | $I_{OL}=8\text{mA}$ | —            | —   | 0.5     | V    |       |
|                              |          |                           | $I_{OL}=3\text{mA}$ | —            | —   | 0.4     |      |       |
| SCL and SDA output fall time | $t_{of}$ | SCL0, SDA0,<br>SCL1, SDA1 |                     | 20+<br>0.1Cb | —   | 250     | ns   |       |

### 31.4.2 Allowable Output Currents of HD64F2199R

The specifications for the digital pins are shown below.

**Table 31.25 Allowable Output Currents of HD64F2199R**

(Conditions:  $V_{CC} = 2.7 \text{ V}$  to  $5.5 \text{ V}$ ,  $V_{SS} = 0.0 \text{ V}$ ,  $T_a = -20$  to  $+75^\circ\text{C}$ )

| Item                                       | Symbol        | Value | Unit | Notes          |
|--------------------------------------------|---------------|-------|------|----------------|
| Allowable input current (to chip)          | $I_o$         | 2     | mA   | * <sup>1</sup> |
| Allowable input current (to chip)          | $I_o$         | 22    | mA   | * <sup>2</sup> |
| Allowable input current (to chip)          | $I_o$         | 10    | mA   | * <sup>3</sup> |
| Allowable output current (from chip)       | $-I_o$        | 2     | mA   | * <sup>4</sup> |
| Total allowable input current (to chip)    | $\Sigma I_o$  | 80    | mA   | * <sup>5</sup> |
| Total allowable output current (from chip) | $-\Sigma I_o$ | 50    | mA   | * <sup>6</sup> |

- Notes:
1. The allowable input current is the maximum value of the current flowing from each I/O pin to  $V_{SS}$  (except for port 6, SCL0, SDA0, SCL1 and SDA1).
  2. The allowable input current is the maximum value of the current flowing from each I/O pin to  $V_{SS}$ . This applies to port 6.
  3. The allowable input current is the maximum value of the current flowing from each I/O pin to  $V_{SS}$ . This applies to SCL0, SDA0, SCL1 and SDA1.
  4. The allowable output current is the maximum value of the current flowing from  $V_{CC}$  to each I/O pin.
  5. The total allowable input current is the sum of the currents flowing from all I/O pins to  $V_{SS}$  simultaneously.
  6. The total allowable output current is the sum of the currents flowing from  $V_{CC}$  to all I/O pins.

### 31.4.3 AC Characteristics of HD64F2199R

**Table 31.26 AC Characteristics of HD64F2199R**

(Conditions:  $V_{CC} = AV_{CC} = 4.0\text{ V}$  to  $5.5\text{ V}$ ,  $V_{SS} = 0.0\text{ V}$ ,  $T_a = -20$  to  $+75^\circ\text{C}$  unless otherwise specified,  $OV_{CC} = SV_{CC} = 4.75\text{ V}$  to  $5.25\text{ V}$ .)

| Item                                    | Symbol       | Applicable Pins | Test Conditions                                                        | Values |        |     | Unit          | Notes        |
|-----------------------------------------|--------------|-----------------|------------------------------------------------------------------------|--------|--------|-----|---------------|--------------|
|                                         |              |                 |                                                                        | Min    | Typ    | Max |               |              |
| Clock oscillation frequency             | $f_{OSC}$    | OSC1, OSC2      |                                                                        | 8      | —      | 10  | MHz           |              |
| Clock cycle time                        | $t_{cyc}$    | OSC1, OSC2      |                                                                        | 100    | —      | 125 | ns            | Figure 31.17 |
| Subclock oscillation frequency          | $f_X$        | X1, X2          | $V_{CC} = 2.7\text{ V}$ to $5.5\text{ V}$                              | —      | 32.768 | —   | kHz           |              |
| Subclock cycle time                     | $t_{subcyc}$ | X1, X2          | $V_{CC} = 2.7\text{ V}$ to $5.5\text{ V}$                              | —      | 30.518 | —   | $\mu\text{s}$ |              |
| Oscillation stabilization time          | $t_{tc}$     | OSC1, OSC2      | Crystal oscillator                                                     | —      | —      | 10  | ms            |              |
|                                         |              | X1, X2          | 32kHz crystal oscillator ( $V_{CC} = 2.7\text{ V}$ to $5.5\text{ V}$ ) | —      | —      | 2   | s             |              |
| External clock high width               | $t_{CPH}$    | OSC1            |                                                                        | 40     | —      | —   | ns            | Figure 31.17 |
| External clock low width                | $t_{CPL}$    | OSC1            |                                                                        | 40     | —      | —   | ns            |              |
| External clock rise time                | $t_{CPr}$    | OSC1            |                                                                        | —      | —      | 10  | ns            |              |
| External clock fall time                | $t_{CPf}$    | OSC1            |                                                                        | —      | —      | 10  | ns            |              |
| External clock stabilization delay time | $t_{DEXT}$   | OSC1            |                                                                        | 500    | —      | —   | $\mu\text{s}$ | Figure 31.18 |



| Item                                        | Symbol           | Applicable Pins                                                                                                                                                 | Test Conditions                                   | Values |     |     | Unit                                    | Figure       |
|---------------------------------------------|------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------|--------|-----|-----|-----------------------------------------|--------------|
|                                             |                  |                                                                                                                                                                 |                                                   | Min    | Typ | Max |                                         |              |
| $\overline{\text{RES}}$ pin low level width | $t_{\text{REL}}$ | $\overline{\text{RES}}$                                                                                                                                         | $V_{\text{CC}} = 2.7 \text{ V to } 5.5 \text{ V}$ | 20     | —   | —   | $t_{\text{cyc}}$                        | Figure 31.19 |
| Input pin high level width                  | $t_{\text{IH}}$  | $\overline{\text{IRQ0 to IRQ5}}, \overline{\text{IC}}, \overline{\text{ADTRG}}, \text{TMBI}, \text{FTIA}, \text{FTIB}, \text{FTIC}, \text{FTID}, \text{RPTRIG}$ | $V_{\text{CC}} = 2.7 \text{ V to } 5.5 \text{ V}$ | 2      | —   | —   | $t_{\text{cyc}}$<br>$t_{\text{subcyc}}$ | Figure 31.20 |
| Input pin low level width                   | $t_{\text{IL}}$  | $\overline{\text{IRQ0 to IRQ5}}, \overline{\text{IC}}, \overline{\text{ADTRG}}, \text{TMBI}, \text{FTIA}, \text{FTIB}, \text{FTIC}, \text{FTID}, \text{RPTRIG}$ | $V_{\text{CC}} = 2.7 \text{ V to } 5.5 \text{ V}$ | 2      | —   | —   | $t_{\text{cyc}}$<br>$t_{\text{subcyc}}$ |              |

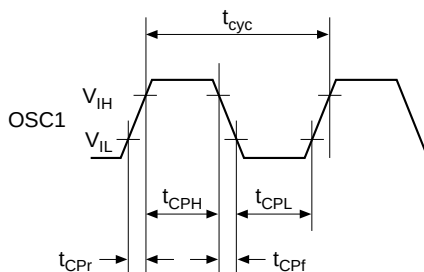


**Figure 31.17 System Clock Timing**

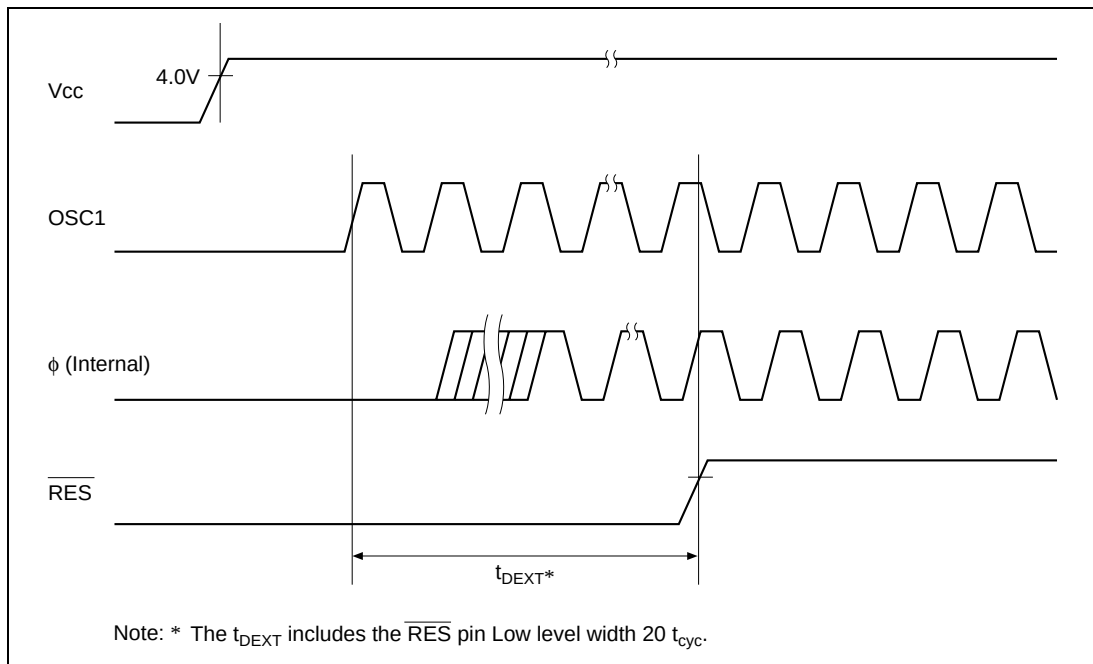


**Figure 31.18 External Clock Stabilization Delay Timing**

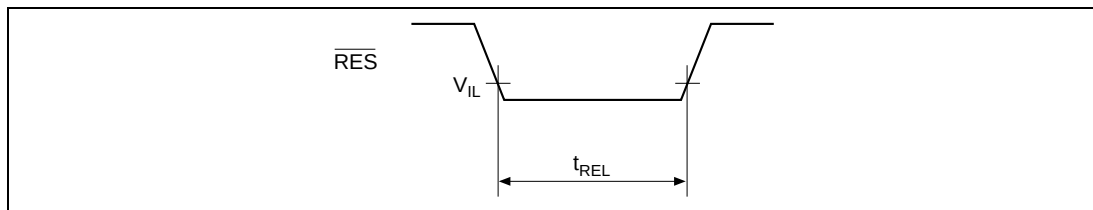


**Figure 31.19 Reset Input Timing**

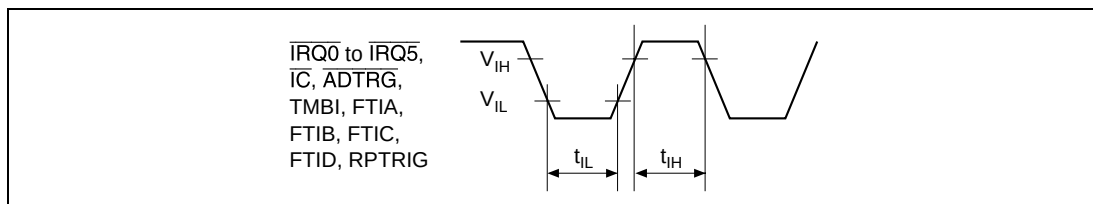


**Figure 31.20 Input Timing**

31.4.4 Serial Interface Timing of HD64F2199R

Table 31.27 Serial Interface Timing of HD64F2199R

(Conditions: Vcc = AVcc = 4.0 V to 5.5 V, Vss = 0.0 V, Ta = -20 to +75°C unless otherwise specified.)

| Item                                  | Symbol            | Applicable Pins | Test Conditions       | Values |     |     | Unit              | Figure       |
|---------------------------------------|-------------------|-----------------|-----------------------|--------|-----|-----|-------------------|--------------|
|                                       |                   |                 |                       | Min    | Typ | Max |                   |              |
| Input clock cycle                     | $t_{\text{scyc}}$ | SCK1            | Asynchronization      | 4      | —   | —   | $t_{\text{cyc}}$  | Figure 31.21 |
|                                       |                   |                 | Clock synchronization | 6      | —   | —   |                   |              |
| Input clock pulse width               | $t_{\text{SCKW}}$ | SCK1            |                       | 0.4    | —   | 0.6 | $t_{\text{scyc}}$ |              |
| Input clock rise time                 | $t_{\text{SCKr}}$ | SCK1            |                       | —      | —   | 1.5 | $t_{\text{cyc}}$  |              |
| Input clock fall time                 | $t_{\text{SCKf}}$ | SCK1            |                       | —      | —   | 1.5 | $t_{\text{cyc}}$  |              |
| Transmit data delay time (clock sync) | $t_{\text{TxD}}$  | SO1             |                       | —      | —   | 100 | ns                | Figure 31.22 |
| Receive data setup time (clock sync)  | $t_{\text{RXS}}$  | SI1             |                       | 100    | —   | —   | ns                |              |
| Receive data hold time (clock sync)   | $t_{\text{RXH}}$  | SI1             |                       | 100    | —   | —   | ns                |              |

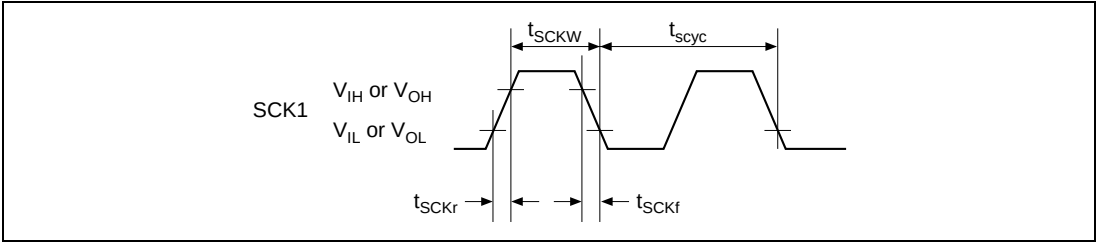


Figure 31.21 SCK1 Clock Timing

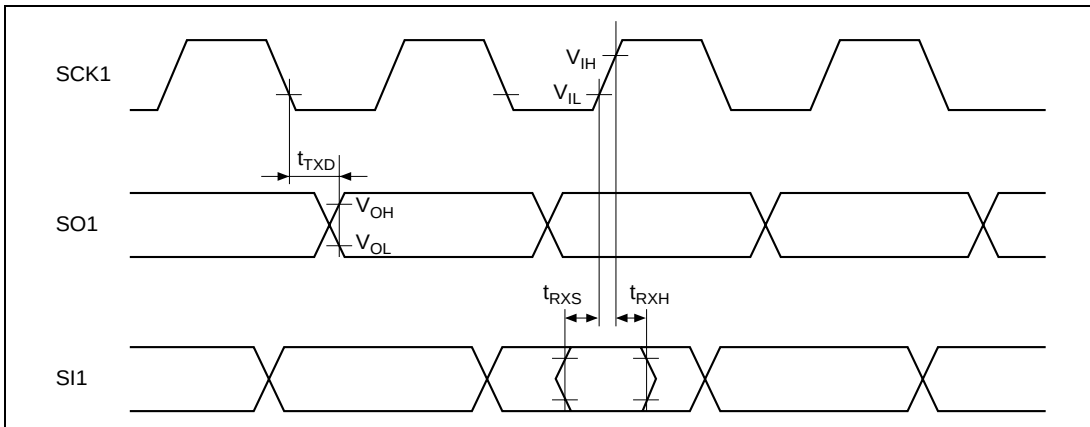


**Figure 31.22 SCI I/O Timing/Clock Synchronization Mode**

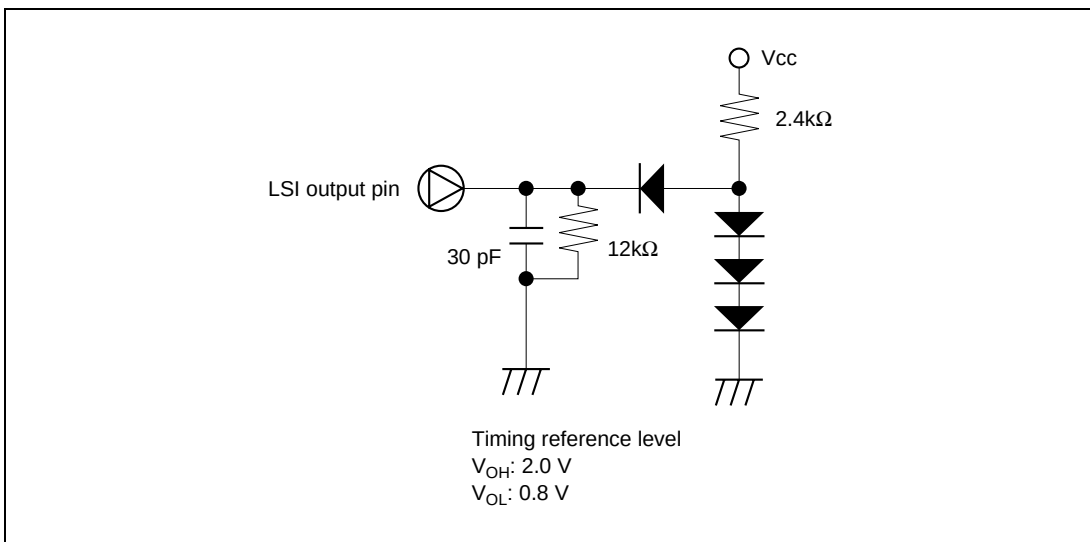



**Figure 31.23 Output Load Conditions**

**Table 31.28 I<sup>2</sup>C Bus Interface Timing of HD64F2199R**

(Conditions: V<sub>CC</sub> = A V<sub>CC</sub> = 4.0 V to 5.5 V, V<sub>SS</sub> = 0.0 V, T<sub>a</sub> = –20 to +75°C unless otherwise specified.)

| Item                                         | Symbol            | Test Conditions | Values |     |      | Unit             | Figure       |
|----------------------------------------------|-------------------|-----------------|--------|-----|------|------------------|--------------|
|                                              |                   |                 | Min    | Typ | Max  |                  |              |
| SCL input cycle time                         | t <sub>SCL</sub>  |                 | 12     | —   | —    | t <sub>cyc</sub> | Figure 31.24 |
| SCL input high pulse width                   | t <sub>SCLH</sub> |                 | 3      | —   | —    | t <sub>cyc</sub> |              |
| SCL input low pulse width                    | t <sub>SCLL</sub> |                 | 5      | —   | —    | t <sub>cyc</sub> |              |
| SCL, SDA input rise time                     | t <sub>sr</sub>   |                 | —      | —   | 7.5* | t <sub>cyc</sub> |              |
| SCL, SDA input fall time                     | t <sub>sf</sub>   |                 | —      | —   | 300  | ns               |              |
| SCL, SDA input spike pulse removal time      | t <sub>sp</sub>   |                 | —      | —   | 1    | t <sub>cyc</sub> |              |
| SDA input bus free time                      | t <sub>BUF</sub>  |                 | 5      | —   | —    | t <sub>cyc</sub> |              |
| Start condition input hold time              | t <sub>STAH</sub> |                 | 3      | —   | —    | t <sub>cyc</sub> |              |
| Re-transmit start condition input setup time | t <sub>STAS</sub> |                 | 3      | —   | —    | t <sub>cyc</sub> |              |
| Stop condition input setup time              | t <sub>STOS</sub> |                 | 3      | —   | —    | t <sub>cyc</sub> |              |
| Data input setup time                        | t <sub>SDAS</sub> |                 | 0.5    | —   | —    | t <sub>cyc</sub> |              |
| Data input hold time                         | t <sub>SDAH</sub> |                 | 0      | —   | —    | ns               |              |
| SCL, SDA capacity load                       | C <sub>b</sub>    |                 | —      | —   | 400  | pF               |              |

Note: Can also be set to 17.5 t<sub>cyc</sub> depending on the selection of clock to be used by the I<sup>2</sup>C module.

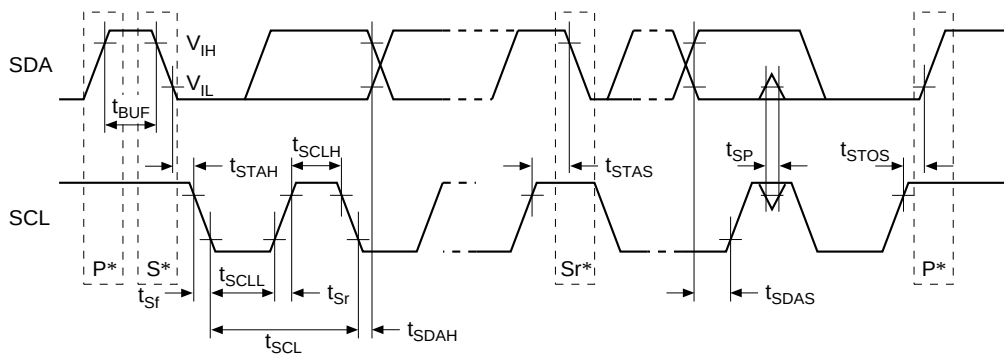

Note: \* S, P and Sr denote the following:  
 S : Start conditions  
 P : Stop conditions  
 Sr: Re-transmit start conditions

**Figure 31.24 I²C Bus Interface I/O Timing**

### 31.4.5 A/D Converter Characteristics of HD64F2199R

**Table 31.29 A/D Converter Characteristics of HD64F2199R**

(Conditions:  $V_{CC} = AV_{CC} = 4.0\text{ V}$  to  $5.5\text{ V}$ ,  $V_{SS} = AV_{SS} = 0.0\text{ V}$ ,  $T_a = -20$  to  $+75^\circ\text{C}$  unless otherwise specified.)

| Item                              | Symbol      | Applicable Pins        | Test Conditions                                                              | Values       |          |              | Unit          | Note            |
|-----------------------------------|-------------|------------------------|------------------------------------------------------------------------------|--------------|----------|--------------|---------------|-----------------|
|                                   |             |                        |                                                                              | Min          | Typ      | Max          |               |                 |
| Analog power supply voltage       | $AV_{CC}$   | $AV_{CC}$              |                                                                              | $V_{CC}-0.3$ | $V_{CC}$ | $V_{CC}+0.3$ | V             |                 |
| Analog input voltage              | $A_{VIN}$   | AN0 to AN7, AN8 to ANB |                                                                              | $AV_{SS}$    | —        | $AV_{CC}$    | V             |                 |
| Analog power supply current       | $A_{ICC}$   | $AV_{CC}$              | $AV_{CC} = 5.0\text{ V}$                                                     | —            | —        | 2.0          | mA            |                 |
|                                   | $A_{ISTOP}$ | $AV_{CC}$              | $V_{CC} = 2.7\text{ V}$ to $5.5\text{ V}$<br>At reset and in power-down mode | —            | —        | 10           | $\mu\text{A}$ |                 |
| Analog input capacitance          | $C_{AIN}$   | AN0 to AN7, AN8 to ANB |                                                                              | —            | —        | 30           | pF            |                 |
| Allowable signal source impedance | $R_{AIN}$   | AN0 to AN7, AN8 to ANB |                                                                              | —            | —        | 10           | $k\Omega$     |                 |
| Resolution                        |             |                        |                                                                              | —            | —        | 10           | Bit           |                 |
| Absolute accuracy                 |             |                        | $V_{CC} = AV_{CC} = 5.0\text{ V}$                                            | —            | —        | $\pm 4$      | LSB           |                 |
|                                   |             |                        | $V_{CC} = AV_{CC} = 4.0\text{ V}$ to $5.0\text{ V}$                          | —            | $\pm 4$  | —            | LSB           | Reference value |
| Conversion time                   |             |                        |                                                                              | 13.4         | —        | 26.6         | $\mu\text{s}$ |                 |

Note: Do not open the  $AV_{CC}$  and  $AV_{SS}$  pin even when the A/D converter is not in use. Set  $AV_{CC} = V_{CC}$  and  $AV_{SS} = V_{SS}$ .

### 31.4.6 Servo Section Electrical Characteristics of HD64F2199R

**Table 31.30 Servo Section Electrical Characteristics of HD64F2199R (reference values)**

(Conditions:  $V_{cc} = SV_{cc} = 5.0\text{ V}$ ,  $V_{ss} = SV_{ss} = 0.0\text{ V}$ ,  $T_a = 25^\circ\text{C}$  unless otherwise specified.)

| Item                                | Symbol | Applicable Pins | Test Conditions                                                    | Reference Values |                      |      | Unit             | Note |
|-------------------------------------|--------|-----------------|--------------------------------------------------------------------|------------------|----------------------|------|------------------|------|
|                                     |        |                 |                                                                    | Min              | Typ                  | Max  |                  |      |
| PB-CTL input amplifier voltage gain |        | CTL (+)         | CTLGR3 = 0, CTLGR2 = 0, CTLGR1 = 0, CTLGR0 = 0, $f = 10\text{kHz}$ | 32.0             | 34.0                 | 36.0 | dB               |      |
|                                     |        |                 | CTLGR3 = 0, CTLGR2 = 0, CTLGR1 = 0, CTLGR0 = 1, $f = 10\text{kHz}$ | 34.5             | 36.5                 | 38.5 |                  |      |
|                                     |        |                 | CTLGR3 = 0, CTLGR2 = 0, CTLGR1 = 1, CTLGR0 = 0, $f = 10\text{kHz}$ | 37.0             | 39.0                 | 41.0 |                  |      |
|                                     |        |                 | CTLGR3 = 0, CTLGR2 = 0, CTLGR1 = 1, CTLGR0 = 1, $f = 10\text{kHz}$ | 39.5             | 41.5                 | 43.5 |                  |      |
|                                     |        |                 | CTLGR3 = 0, CTLGR2 = 1, CTLGR1 = 0, CTLGR0 = 0, $f = 10\text{kHz}$ | 42.0             | 44.0                 | 46.0 |                  |      |
|                                     |        |                 | CTLGR3 = 0, CTLGR2 = 1, CTLGR1 = 0, CTLGR0 = 1, $f = 10\text{kHz}$ | 44.5             | 46.5                 | 48.5 |                  |      |
|                                     |        |                 | CTLGR3 = 0, CTLGR2 = 1, CTLGR1 = 1, CTLGR0 = 0, $f = 10\text{kHz}$ | 47.0             | 49.0                 | 51.0 |                  |      |
|                                     |        |                 | CTLGR3 = 0, CTLGR2 = 1, CTLGR1 = 1, CTLGR0 = 1, $f = 10\text{kHz}$ | 49.5             | 51.5                 | 53.5 |                  |      |
|                                     |        |                 | CTLGR3 = 1, CTLGR2 = 0, CTLGR1 = 0, CTLGR0 = 0, $f = 10\text{kHz}$ | 52.0             | 54.0                 | 56.0 |                  |      |
|                                     |        |                 | CTLGR3 = 1, CTLGR2 = 0, CTLGR1 = 0, CTLGR0 = 1, $f = 10\text{kHz}$ | 54.5             | 56.5                 | 58.5 |                  |      |
|                                     |        |                 | CTLGR3 = 1, CTLGR2 = 0, CTLGR1 = 1, CTLGR0 = 0, $f = 10\text{kHz}$ | 57.0             | 59.0                 | 61.0 |                  |      |
|                                     |        |                 | CTLGR3 = 1, CTLGR2 = 0, CTLGR1 = 1, CTLGR0 = 1, $f = 10\text{kHz}$ | 59.5             | 61.5                 | 63.5 |                  |      |
|                                     |        |                 | CTLGR3 = 1, CTLGR2 = 1, CTLGR1 = 0, CTLGR0 = 0, $f = 10\text{kHz}$ | 62.0             | 64.0                 | 66.0 |                  |      |
|                                     |        |                 | CTLGR3 = 1, CTLGR2 = 1, CTLGR1 = 0, CTLGR0 = 1, $f = 10\text{kHz}$ | 64.5             | 66.5                 | 68.5 |                  |      |
|                                     |        |                 | CTLGR3 = 1, CTLGR2 = 1, CTLGR1 = 1, CTLGR0 = 0, $f = 10\text{kHz}$ | 67.0             | 69.0                 | 71.0 |                  |      |
|                                     |        |                 | CTLGR3 = 1, CTLGR2 = 1, CTLGR1 = 1, CTLGR0 = 1, $f = 10\text{kHz}$ | 69.5             | 71.5                 | 73.5 |                  |      |
| PB-CTL Schmitt input                | V+TH   | CTLSMT (i)      | AC coupling, $C = 0.1\text{ }\mu\text{F}$ Typ (non pol)            | —                | 250                  | —    | mVp              |      |
|                                     | V-TH   |                 | AC coupling, $C = 0.1\text{ }\mu\text{F}$ Typ (non pol)            | —                | -250                 | —    |                  |      |
| Analog switch ON resistance         | REB    | CTLFB           |                                                                    | —                | 150                  | —    | $\Omega$         |      |
| REC-CTL output current              | ICTL   | CTL (+)         | Series resistance = $0\text{ }\Omega$                              | —                | 12                   | —    | mA               |      |
|                                     |        | CTL (-)         |                                                                    | —                | 12                   | —    |                  |      |
| REC-CTL pin-to-pin resistance       | RCTL   |                 |                                                                    | —                | 10                   | —    | $\text{k}\Omega$ |      |
| CTL reference output voltage        |        | CTLREF          |                                                                    | —                | $\frac{1}{2}SV_{cc}$ | —    | V                |      |



| Item                                          | Symbol   | Applicable Pins                                                                 | Test Conditions                                            | Reference Values |              |                 | Unit            | Note |
|-----------------------------------------------|----------|---------------------------------------------------------------------------------|------------------------------------------------------------|------------------|--------------|-----------------|-----------------|------|
|                                               |          |                                                                                 |                                                            | Min              | Typ          | Max             |                 |      |
| CFG pin bias voltage                          |          | CFG                                                                             |                                                            | —                | 1/2 $V_{CC}$ | —               | V               |      |
| CFG input level                               |          | CFG                                                                             | AC coupling,<br>C = 1 $\mu$ F Typ<br>f = 1 kHz             | 1.0              | —            | —               | V <sub>pp</sub> |      |
| CFG digital input high level                  | $V_{IH}$ | CFG                                                                             | When digital signal input method is selected (CFGCOMP = 1) | 0.8<br>$V_{CC}$  | —            | $V_{CC}+0.3$    | V               |      |
| CFG digital input low level                   | $V_{IL}$ | CFG                                                                             | When digital signal input method is selected (CFGCOMP = 1) | −0.3             | —            | 0.2<br>$V_{CC}$ | V               |      |
| CFG input impedance                           |          | CFG                                                                             |                                                            | —                | 10           | —               | k $\Omega$      |      |
| CFG input threshold value                     | V+THCF   | CFG                                                                             | Rise threshold level                                       | —                | 2.25         | —               | V               |      |
|                                               | V−THCF   |                                                                                 | Fall threshold level                                       | —                | 2.75         | —               |                 |      |
| DFG Schmitt input                             | V+THDF   | DFG                                                                             | Rising edge Schmitt level                                  | —                | 1.95         | —               | V               |      |
|                                               | V−THDF   |                                                                                 | Falling edge Schmitt level                                 | —                | 1.85         | —               |                 |      |
| DPG Schmitt input                             | V+THDP   | DPG                                                                             | Rising edge Schmitt level                                  | —                | 3.55         | —               | V               |      |
|                                               | V−THDP   |                                                                                 | Falling edge Schmitt level                                 | —                | 3.45         | —               |                 |      |
| 3-level output voltage                        | $V_{OH}$ | Vpulse                                                                          | − $I_{OH}$ = 0.1 mA                                        | 4.0              | —            | —               | V               |      |
|                                               | $V_{OM}$ |                                                                                 | No load, Hiz = 1                                           | —                | 2.5          | —               |                 |      |
|                                               | $V_{OL}$ |                                                                                 | $I_{OL}$ = 0.1 mA                                          | —                | —            | 1.0             |                 |      |
| 3-level output pin divided voltage resistance |          | Vpulse                                                                          |                                                            | —                | 15           | —               | k $\Omega$      |      |
| Digital input high level                      | $V_{IH}$ | COMP,<br>EXCTL,<br>EXCAP,<br>EXTTRG                                             |                                                            | 0.8<br>$V_{CC}$  | —            | $V_{CC}+0.3$    | V               |      |
| Digital input low level                       | $V_{IL}$ |                                                                                 |                                                            | −0.3             | —            | 0.2<br>$V_{CC}$ |                 |      |
| Digital output high level                     | $V_{OH}$ | H.AmpSW,<br>C.Rotary,<br>VIDEOFF,<br>AUDIOFF,<br>DRMPWM,<br>CAPPWM,<br>SV1, SV2 | − $I_{OH}$ = 1 mA                                          | $V_{CC}$<br>−1.0 | —            | —               | V               |      |
| Digital output low level                      | $V_{OL}$ |                                                                                 | $I_{OL}$ = 1.6 mA                                          | —                | —            | 0.6             |                 |      |

| Item                | Symbol     | Applicable Pins | Test Conditions                                 | Reference Values |     |     |      | Note |
|---------------------|------------|-----------------|-------------------------------------------------|------------------|-----|-----|------|------|
|                     |            |                 |                                                 | Min              | Typ | Max | Unit |      |
| Current dissipation | $I_{CCSV}$ | SVcc            | At no load                                      | —                | 5   | 10  | mA   |      |
| CFG duty            |            | CFG             | AC coupling,<br>C = 1 $\mu$ F Typ,<br>f = 1 kHz | 48               | —   | 52  | %    |      |

### 31.4.7 OSD Electrical Characteristics of HD64F2199R

**Table 31.31 OSD Electrical Characteristics of HD64F2199R (Reference Value)**

(Conditions:  $V_{CC} = OV_{CC} = 5.0$  V,  $V_{SS} = OV_{SS} = 0.0$  V,  $T_a = 25^\circ\text{C}$  unless otherwise specified)

| Item                          | Symbol                                                | Applicable Pins          | Test Conditions                                          | Reference Values |     |     |  | Unit     | Note           |
|-------------------------------|-------------------------------------------------------|--------------------------|----------------------------------------------------------|------------------|-----|-----|--|----------|----------------|
|                               |                                                       |                          |                                                          | Min              | Typ | Max |  |          |                |
| Composite video input voltage | $V_{CVIN}$                                            | $C_{Vin1}$<br>$C_{Vin2}$ | —                                                        |                  | 2   |     |  | $V_{PP}$ |                |
| Clamp voltage                 | $V_{CL1}$                                             | $CV_{in1}$               | —                                                        | 1.2              | 1.4 | 1.6 |  | V        |                |
|                               | $V_{CL2}$                                             | $CV_{in2}$               | —                                                        | 1.8              | 2   | 2.2 |  |          |                |
| C.Video gain                  | $G_{CVC}$                                             | $CV_{in1}$<br>$CV_{out}$ | At chroma-through<br>f = 3.58 MHz<br>$V_{IN} = 500$ mVpp | −3               | −2  | 0   |  | dB       |                |
| Pedestal bias                 | $V_{PED}$                                             | $CV_{out}$               |                                                          |                  | 45  |     |  | IRE      | * <sup>1</sup> |
| Color burst bias              | $V_{BST}$                                             |                          |                                                          |                  | 40  |     |  | IRE      | * <sup>1</sup> |
| Background bias               | Black, blue, green, cyan, red, magenta, yellow, white | $V_{BL1}$                |                                                          |                  | 10  |     |  | IRE      | * <sup>2</sup> |
|                               |                                                       | $V_{BL2}$                |                                                          |                  | 30  |     |  |          |                |
|                               |                                                       | $V_{BL3}$                |                                                          |                  | 50  |     |  |          |                |
|                               |                                                       | $V_{BL4}$                |                                                          |                  | 70  |     |  |          |                |
| Cursor bias                   | Black                                                 | $V_{KBL1}$               |                                                          |                  | 0   |     |  | IRE      | * <sup>2</sup> |
|                               |                                                       | $V_{KBL2}$               |                                                          |                  | 25  |     |  |          |                |
|                               | Blue, green, cyan, red, magenta, yellow               | $V_{KOL1}$               |                                                          |                  | 25  |     |  |          |                |
|                               |                                                       | $V_{KOL2}$               |                                                          |                  | 45  |     |  |          |                |
|                               | White                                                 | $V_{KCL1}$               |                                                          |                  | 45  |     |  |          |                |
|                               |                                                       | $V_{KCL2}$               |                                                          |                  | 55  |     |  |          |                |

| Item                                                    |                                         | Symbol        | Applicable Pins | Test Conditions | Reference Values |          |     | Unit           | Note           |  |
|---------------------------------------------------------|-----------------------------------------|---------------|-----------------|-----------------|------------------|----------|-----|----------------|----------------|--|
|                                                         |                                         |               |                 |                 | Min              | Typ      | Max |                |                |  |
| Character bias                                          | Black                                   | $V_{CBL1}$    | $CV_{out}$      |                 |                  | 0        |     | IRE            | * <sup>2</sup> |  |
|                                                         |                                         | $V_{CBL2}$    |                 |                 |                  | 10       |     |                |                |  |
|                                                         |                                         | $V_{CBL3}$    |                 |                 |                  | 20       |     |                |                |  |
|                                                         |                                         | $V_{CBL4}$    |                 |                 |                  | 30       |     |                |                |  |
|                                                         | Blue, green, cyan, red, magenta, yellow | $V_{COL1}$    |                 |                 |                  | 25       |     |                |                |  |
|                                                         |                                         | $V_{COL2}$    |                 |                 |                  | 45       |     |                |                |  |
|                                                         |                                         | $V_{COL3}$    |                 |                 |                  | 55       |     |                |                |  |
|                                                         |                                         | $V_{COL4}$    |                 |                 |                  | 65       |     |                |                |  |
|                                                         | White                                   | $V_{CCL1}$    |                 |                 |                  | 45       |     |                |                |  |
|                                                         |                                         | $V_{CCL2}$    |                 |                 |                  | 70       |     |                |                |  |
|                                                         |                                         | $V_{CCL3}$    |                 |                 |                  | 80       |     |                |                |  |
|                                                         |                                         | $V_{CCL4}$    |                 |                 |                  | 90       |     |                |                |  |
| Edge brightness level                                   | $V_{EDG1}$                              |               |                 |                 | 0                |          | IRE | * <sup>2</sup> |                |  |
|                                                         | $V_{EDG2}$                              |               |                 |                 | 90               |          | IRE |                |                |  |
| Button brightness level                                 | $V_{BTN1}$                              |               |                 |                 | 15               |          | IRE | * <sup>2</sup> |                |  |
|                                                         | $V_{BTN2}$                              |               |                 |                 | 75               |          |     |                |                |  |
| Color burst amplitude                                   |                                         | $V_{BSTA}$    |                 |                 |                  | 40       |     | IRE            |                |  |
| Chroma amplitude (background, cursor, character)        | Blue, green, cyan, red, magenta, yellow | $V_{CRA1}$    |                 |                 |                  | 60       |     | IRE            |                |  |
|                                                         |                                         | $V_{CRA2}$    |                 |                 |                  | 80       |     |                |                |  |
| Chroma hue angle (background, cursor, character) (NTSC) | Colorburst                              | $\phi_{BSTN}$ |                 |                 |                  | 0        |     | rad            | * <sup>3</sup> |  |
|                                                         | Blue                                    | $\phi_{BLUN}$ |                 |                 |                  | $\pi$    |     |                |                |  |
|                                                         | Green                                   | $\phi_{GRNN}$ |                 |                 |                  | $7\pi/4$ |     |                |                |  |
|                                                         | Cyan                                    | $\phi_{CYNN}$ |                 |                 |                  | $3\pi/2$ |     |                |                |  |
|                                                         | Red                                     | $\phi_{REDN}$ |                 |                 |                  | $\pi/2$  |     |                |                |  |
|                                                         | Magenta                                 | $\phi_{MZTN}$ |                 |                 |                  | $3\pi/4$ |     |                |                |  |
|                                                         | Yellow                                  | $\phi_{YETN}$ |                 |                 |                  | 0        |     |                |                |  |

| Item                                                   | Symbol        | Applicable Pins                   | Test Conditions | Reference Values |              |              | Unit | Note           |
|--------------------------------------------------------|---------------|-----------------------------------|-----------------|------------------|--------------|--------------|------|----------------|
|                                                        |               |                                   |                 | Min              | Typ          | Max          |      |                |
| Chroma hue angle (background, cursor, character) (PAL) | Colorburst    | $\phi$ BSTP                       | CVout           |                  | $\pm \pi/4$  |              | rad  | * <sup>3</sup> |
|                                                        | Blue          | $\phi$ BLUP                       |                 |                  | $\pm \pi$    |              |      |                |
|                                                        | Green         | $\phi$ GRNP                       |                 |                  | $\pm 7\pi/4$ |              |      |                |
|                                                        | Cyan          | $\phi$ CYNP                       |                 |                  | $\pm 3\pi/2$ |              |      |                |
|                                                        | Red           | $\phi$ REDP                       |                 |                  | $\pm \pi/2$  |              |      |                |
|                                                        | Magenta       | $\phi$ MZTP                       |                 |                  | $\pm 3\pi/4$ |              |      |                |
|                                                        | Yellow        | $\phi$ YELP                       |                 |                  | 0            |              |      |                |
| Csync separation comparator                            | CCMP1         | CVin2                             |                 | —                | 5            | —            | IRE  | * <sup>1</sup> |
|                                                        | CCMP2         |                                   |                 | —                | 10           | —            |      |                |
|                                                        | CCMP3         |                                   |                 | —                | 15           | —            |      |                |
|                                                        | CCMP4         |                                   |                 | —                | 20           | —            |      |                |
| EDS separation comparator                              | ECMP1         | CVin2                             |                 | —                | 0            | —            | IRE  | * <sup>2</sup> |
|                                                        | ECMP2         |                                   |                 | —                | 5            | —            |      |                |
|                                                        | ECMP3         |                                   |                 | —                | 15           | —            |      |                |
|                                                        | ECMP4         |                                   |                 | —                | 20           | —            |      |                |
|                                                        | ECMP5         |                                   |                 | —                | 25           | —            |      |                |
|                                                        | ECMP6         |                                   |                 | —                | 35           | —            |      |                |
|                                                        | ECMP7         |                                   |                 | —                | 40           | —            |      |                |
| Input high level                                       | $V_{iH\perp}$ | Csync/Hsync<br>$V_{LPF}/V_{sync}$ |                 | 0.85<br>OVcc     | —            | OVcc<br>+0.3 | V    |                |
|                                                        | $V_{iHT}$     |                                   |                 | 0.7<br>OVcc      | —            | OVcc<br>+0.3 | V    |                |
| Input low level                                        | $V_{iL\perp}$ | Csync/Hsync<br>VLPF/Vsync         |                 | −0.3             | —            | 0.3<br>OVcc  | V    |                |
|                                                        | $V_{iLT}$     |                                   |                 | −0.3             | —            | 0.15<br>OVcc | V    |                |
| Output high level                                      | $V_{OH}$      | Csync/Hsync $-I_{OH}=0.4mA$       |                 | OVcc<br>−1.4     | —            | —            | V    |                |
| Output low level                                       | $V_{OL}$      | Csync/Hsync $I_{OL}=0.4mA$        |                 | —                | —            | 1.4          | V    |                |

| Item                            | Symbol      | Applicable Pins       | Test Conditions                | Reference Values |                          |              | Unit | Note |
|---------------------------------|-------------|-----------------------|--------------------------------|------------------|--------------------------|--------------|------|------|
|                                 |             |                       |                                | Min              | Typ                      | Max          |      |      |
| Oscillation stabilizing time    | $t_{tc}$    | 4/2fscin<br>4/2fscout | Crystal oscillator             | —                | —                        | 40           | ms   |      |
| Oscillating frequency           | $4_{fsc}$   | 4/2fscin<br>4/2fscout | M/NTSC                         | —                | 14.31818                 | —            | MHz  |      |
|                                 |             |                       | B,G,H/PAL<br>I/PAL             | —                | 17.734475<br>(17.734476) | —            | MHz  |      |
|                                 |             |                       | D,K/PAL<br>4.43-NTSC           |                  |                          |              |      |      |
|                                 |             |                       | B,G,H/SECAM<br>L/SECAM         |                  |                          |              |      |      |
|                                 |             |                       | D,K,K1/SECAM                   |                  |                          |              |      |      |
|                                 | $2_{fsc}$   | 4/2fscin<br>4/2fscout | N/PAL                          | —                | 14.328225                | —            | MHz  |      |
|                                 |             |                       | M/PAL                          | —                | 14.30244596              | —            | MHz  |      |
|                                 |             |                       | M/NTSC                         | —                | 7.15909                  | —            | MHz  |      |
|                                 |             |                       | B,G,H/PAL<br>I/PAL             | —                | 8.8672375<br>(8.867238)  | —            | MHz  |      |
| External clock input level      | $V_{fsc}$   | 4/2fscin<br>4/2fscout | AC coupling<br>C=1 $\mu$ F typ | 0.3              | —                        | $V_{cc}+0.3$ | Vpp  |      |
|                                 |             |                       |                                |                  |                          |              |      |      |
|                                 |             |                       |                                |                  |                          |              |      |      |
|                                 |             |                       |                                |                  |                          |              |      |      |
| External clock duty             | $V_{IH}$    | 4/2fscin              |                                | 0.7Vcc           | —                        | $V_{cc}+0.3$ | V    |      |
|                                 | $V_{IL}$    |                       |                                | −0.3             | —                        | 0.3Vcc       |      |      |
|                                 |             | 4/2fscin<br>4/2fscout |                                | 47               | 50                       | 53           | %    |      |
| AFC reference clock (dot clock) | $AFC_{osc}$ | $AFC_{osc}$           | LC oscillation                 | 6.3              | 9                        | 11.7         | MHz  |      |
|                                 |             |                       |                                | 4.9              | 7                        | 9.1          | MHz  |      |
| Current dissipation             | $I_{CCOSD}$ | OVcc                  | At no signal                   | —                | 14                       | —            | mA   |      |

- Notes:
- IRE: Units for video amplitude; 0.714 V video level is specified as 100 IRE
  - 4fsc and 2fsc must be adjusted within  $\pm 30$  ppm, including temperature dependency.
    1. Bias from the sync tip clamp level (reference value after −6 dB).
    2. Bias from the pedestal level (reference value after −6 dB).
    3. At 4fsc input.

### 31.4.8 Flash Memory Characteristics

**Table 31.32 Flash Memory Characteristics**

Conditions:  $V_{CC} = AV_{CC} = 4.5\text{ V to }5.5\text{ V}$ ,  $V_{SS} = AV_{SS} = 0\text{ V}$ ,  
 $T_a = 0^{\circ}\text{C to }+75^{\circ}\text{C}$  (program/erase operating temperature range)

| Item                                                             |                                                                   | Symbol             | Min | Typ | Max  | Unit         | Notes                            |
|------------------------------------------------------------------|-------------------------------------------------------------------|--------------------|-----|-----|------|--------------|----------------------------------|
| Programming time* <sup>1</sup> , * <sup>2</sup> , * <sup>4</sup> |                                                                   | t <sub>P</sub>     | —   | 10  | 200  | ms/128 bytes |                                  |
| Erase time* <sup>1</sup> , * <sup>3</sup> , * <sup>5</sup>       |                                                                   | t <sub>E</sub>     | —   | 100 | 1200 | ms/block     |                                  |
| Rewrite time                                                     |                                                                   | N <sub>WEC</sub>   | —   | —   | 100  | Times        |                                  |
| Programming                                                      | Wait time after SWE1 (2) bit setting* <sup>1</sup>                | t <sub>sswe</sub>  | 1   | 1   | —    | μs           |                                  |
|                                                                  | Wait time after PSU1 (2) bit setting* <sup>1</sup>                | t <sub>psu</sub>   | 50  | 50  | —    | μs           |                                  |
|                                                                  | Wait time after P1 (2) bit setting* <sup>1</sup> , * <sup>4</sup> | t <sub>sp30</sub>  | 28  | 30  | 32   | μs           | Programming time wait            |
|                                                                  |                                                                   | t <sub>sp200</sub> | 198 | 200 | 202  | μs           | Programming time wait            |
|                                                                  |                                                                   | t <sub>sp10</sub>  | 8   | 10  | 12   | μs           | Additional-programming time wait |
|                                                                  | Wait time after P1 (2) bit clearing* <sup>1</sup>                 | t <sub>cp</sub>    | 5   | 5   | —    | μs           |                                  |
|                                                                  | Wait time after PSU1 (2) bit clearing* <sup>1</sup>               | t <sub>cpsu</sub>  | 5   | 5   | —    | μs           |                                  |
|                                                                  | Wait time after PV1 (2) bit setting* <sup>1</sup>                 | t <sub>spv</sub>   | 4   | 4   | —    | μs           |                                  |
|                                                                  | Wait time after H'FF dummy write* <sup>1</sup>                    | t <sub>spvr</sub>  | 2   | 2   | —    | μs           |                                  |
|                                                                  | Wait time after PV1 (2) bit clearing* <sup>1</sup>                | t <sub>cpv</sub>   | 2   | 2   | —    | μs           |                                  |
|                                                                  | Wait time after SWE1 (2) bit clearing* <sup>1</sup>               | t <sub>cswe</sub>  | 100 | 100 | —    | μs           |                                  |
|                                                                  | Maximum number of writes* <sup>1</sup> , * <sup>4</sup>           | N                  | —   | —   | 1000 | Times        |                                  |
| Erasing                                                          | Wait time after SWE1 (2) bit setting* <sup>1</sup>                | t <sub>sswe</sub>  | 1   | 1   | —    | μs           |                                  |
|                                                                  | Wait time after ESU1 (2) bit setting* <sup>1</sup>                | t <sub>sesu</sub>  | 100 | 100 | —    | μs           |                                  |
|                                                                  | Wait time after E1 (2) bit setting* <sup>1</sup> , * <sup>5</sup> | t <sub>se</sub>    | 10  | 10  | 100  | ms           | Erase time wait                  |
|                                                                  | Wait time after E1 (2) bit clearing* <sup>1</sup>                 | t <sub>ce</sub>    | 10  | 10  | —    | μs           |                                  |
|                                                                  | Wait time after ESU1 (2) bit clearing* <sup>1</sup>               | t <sub>cesu</sub>  | 10  | 10  | —    | μs           |                                  |
|                                                                  | Wait time after EV1 (2) bit setting* <sup>1</sup>                 | t <sub>sev</sub>   | 20  | 20  | —    | μs           |                                  |
|                                                                  | Wait time after H'FF dummy write* <sup>1</sup>                    | t <sub>sevr</sub>  | 2   | 2   | —    | μs           |                                  |
|                                                                  | Wait time after EV1 (2) bit clearing* <sup>1</sup>                | t <sub>cev</sub>   | 4   | 4   | —    | μs           |                                  |
|                                                                  | Wait time after SWE1 (2) bit clearing* <sup>1</sup>               | t <sub>cswe</sub>  | 100 | 100 | —    | μs           |                                  |
|                                                                  | Maximum number of erases* <sup>1</sup> , * <sup>5</sup>           | N                  | 12  | —   | 120  | Times        |                                  |

- Notes: 1. Follow the program/erase algorithms when making the time settings.  
2. Programming time per 128 bytes. (Indicates the total time during which the P1 (2) bit is set in flash memory control register 1 (FLMCR1 (2)). Does not include the program-verify time.)  
3. Time to erase one block. (Indicates the time during which the E1 (2) bit is set in FLMCR1 (2). Does not include the erase-verify time.)

4. To specify the maximum programming time value ( $t_p(\max)$ ) in the 128-byte programming algorithm, set the max. value (1000) for the maximum number of writes (N).

The wait time after P1(2) bit setting should be changed as follows according to the value of the programming counter (n).

Programming counter (n) = 1 to 6:

$$t_{sp30} = 30 \mu s$$

Programming counter (n) = 7 to 1000:

$$t_{sp200} = 200 \mu s$$

Programming counter (n) [in additional programming] = 1 to 6:

$$t_{sp10} = 10 \mu s$$

5. For the maximum erase time ( $t_e(\max)$ ), the following relationship applies between the wait time after E1 (2) bit setting ( $t_{se}$ ) and the maximum number of erase (N):

$$(t_e(\max) = \text{Wait time after E1 (2) bit setting } (t_{se}) \times \text{maximum number of erases (N)})$$

To specify the maximum erase time, the values of  $t_{se}$  and N should be set so as to satisfy the above formula.

Examples: When  $t_{se} = 100$  [ms], N = 12

When  $t_{se} = 10$  [ms], N = 120





# Appendix A Instruction Set

## A.1 Instructions

### Operation Notation

|                |                                                                  |
|----------------|------------------------------------------------------------------|
| Rd             | General register (destination)* <sup>1</sup>                     |
| Rs             | General register (source)* <sup>1</sup>                          |
| Rn             | General register* <sup>1</sup>                                   |
| ERn            | General register (32-bit register)                               |
| MAC            | Multiplication-Addition register (32-bit register)* <sup>2</sup> |
| (EAd)          | Destination operand                                              |
| (EAs)          | Source operand                                                   |
| EXR            | Extend register                                                  |
| CCR            | Condition code register                                          |
| N              | N (negative flag) in CCR                                         |
| Z              | Z (zero) flag in CCR                                             |
| V              | V (overflow) flag in CCR                                         |
| C              | C (carry) flag in CCR                                            |
| PC             | Program counter                                                  |
| SP             | Stack pointer                                                    |
| #IMM           | Immediate data                                                   |
| disp           | Displacement                                                     |
| +              | Addition                                                         |
| −              | Subtraction                                                      |
| ×              | Multiplication                                                   |
| ÷              | Division                                                         |
| ^              | Logical AND                                                      |
| ∨              | Logical OR                                                       |
| ⊕              | Exclusive logical OR                                             |
| →              | Move from the left to the right                                  |
| ~              | Logical complement                                               |
| ( ) <>         | Contents of operand                                              |
| :8/:16/:24/:32 | 8/16/24/32 bit length                                            |

Notes: 1. General register is 8-bit (R0H to R7H, R0L to R7L), 16-bit (R0 to R7) or 32-bit (ER0 to ER7).

2. MAC register cannot be used in this LSI.

## Condition Code Notation

| Symbol | Description                                      |
|--------|--------------------------------------------------|
| ↑      | Modified according to the instruction result     |
| *      | Not fixed (value not guaranteed)                 |
| 0      | Always cleared to 0                              |
| 1      | Always set to 1                                  |
| —      | Not affected by the instruction execution result |

**Table A.1 Data Transfer Instruction**

| Mnemonic          |                        | Size                       | Addressing Mode and Instruction Length (Bytes) |    |      |           |             |     |          |                                                         | Operation                | Condition Code |                |   |   |            | No of Execution States <sup>*1</sup> |
|-------------------|------------------------|----------------------------|------------------------------------------------|----|------|-----------|-------------|-----|----------|---------------------------------------------------------|--------------------------|----------------|----------------|---|---|------------|--------------------------------------|
|                   |                        |                            | #xx                                            | Rn | @ERn | @ (d,ERn) | @-ERn/@ERn+ | @aa | @ (d,PC) | @@aa                                                    |                          |                | Condition Code |   |   |            |                                      |
|                   |                        |                            |                                                |    |      |           |             |     |          |                                                         |                          |                | I              | H | N | Z          | V                                    |
| MOV               | MOV.B #xx:8,Rd         | B                          | 2                                              |    |      |           |             |     |          |                                                         | #xx:8→Rd8                | —              | ↑              | ↑ | 0 | —          | 1                                    |
|                   | MOV.B Rs,Rd            | B                          | 2                                              |    |      |           |             |     |          |                                                         | Rs8→Rd8                  | —              | ↑              | ↑ | 0 | —          | 1                                    |
|                   | MOV.B @ERs,Rd          | B                          |                                                |    | 2    |           |             |     |          |                                                         | @ERs→Rd8                 | —              | ↑              | ↑ | 0 | —          | 2                                    |
|                   | MOV.B @(d:16,ERs),Rd   | B                          |                                                |    |      | 4         |             |     |          |                                                         | @ (d:16,ERs)→Rd8         | —              | ↑              | ↑ | 0 | —          | 3                                    |
|                   | MOV.B @(d:32,ERs),Rd   | B                          |                                                |    |      |           | 8           |     |          |                                                         | @ (d:32,ERs)→Rd8         | —              | ↑              | ↑ | 0 | —          | 5                                    |
|                   | MOV.B @ERs+,Rd         | B                          |                                                |    |      |           | 2           |     |          |                                                         | @ERs→Rd8,ERs32+1→ERs32   | —              | ↑              | ↑ | 0 | —          | 3                                    |
|                   | MOV.B @aa:8,Rd         | B                          |                                                |    |      |           |             | 2   |          |                                                         | @aa:8→Rd8                | —              | ↑              | ↑ | 0 | —          | 2                                    |
|                   | MOV.B @aa:16,Rd        | B                          |                                                |    |      |           |             | 4   |          |                                                         | @aa:16→Rd8               | —              | ↑              | ↑ | 0 | —          | 3                                    |
|                   | MOV.B @aa:32,Rd        | B                          |                                                |    |      |           |             |     | 6        |                                                         | @aa:32→Rd8               | —              | ↑              | ↑ | 0 | —          | 4                                    |
|                   | MOV.B Rs,@ERd          | B                          |                                                |    | 2    |           |             |     |          |                                                         | Rs8→@ERd                 | —              | ↑              | ↑ | 0 | —          | 2                                    |
|                   | MOV.B Rs,@ (d:16,ERd)  | B                          |                                                |    |      | 4         |             |     |          |                                                         | Rs8→@ (d:16,ERd)         | —              | ↑              | ↑ | 0 | —          | 3                                    |
|                   | MOV.B Rs,@ (d:32,ERd)  | B                          |                                                |    |      |           | 8           |     |          |                                                         | Rs8→@ (d:32,ERd)         | —              | ↑              | ↑ | 0 | —          | 5                                    |
|                   | MOV.B Rs,@-ERd         | B                          |                                                |    |      |           | 2           |     |          |                                                         | ERd32-1→ERd32,Rs8→@ERd   | —              | ↑              | ↑ | 0 | —          | 3                                    |
|                   | MOV.B Rs,@aa:8         | B                          |                                                |    |      |           |             | 2   |          |                                                         | Rs8→@aa:8                | —              | ↑              | ↑ | 0 | —          | 2                                    |
|                   | MOV.B Rs,@aa:16        | B                          |                                                |    |      |           |             | 4   |          |                                                         | Rs8→@aa:16               | —              | ↑              | ↑ | 0 | —          | 3                                    |
|                   | MOV.B Rs,@aa:32        | B                          |                                                |    |      |           |             |     | 6        |                                                         | Rs8→@aa:32               | —              | ↑              | ↑ | 0 | —          | 4                                    |
|                   | MOV.W #xx:16,Rd        | W                          | 4                                              |    |      |           |             |     |          |                                                         | #xx:16→Rd16              | —              | ↑              | ↑ | 0 | —          | 2                                    |
|                   | MOV.W Rs,Rd            | W                          |                                                | 2  |      |           |             |     |          |                                                         | Rs16→Rd16                | —              | ↑              | ↑ | 0 | —          | 1                                    |
|                   | MOV.W @ERs,Rd          | W                          |                                                |    | 2    |           |             |     |          |                                                         | @ERs→Rd16                | —              | ↑              | ↑ | 0 | —          | 2                                    |
|                   | MOV.W @ (d:16,ERs),Rd  | W                          |                                                |    |      | 4         |             |     |          |                                                         | @ (d:16,ERs)→Rd16        | —              | ↑              | ↑ | 0 | —          | 3                                    |
|                   | MOV.W @ (d:32,ERs),Rd  | W                          |                                                |    |      |           | 8           |     |          |                                                         | @ (d:32,ERs)→Rd16        | —              | ↑              | ↑ | 0 | —          | 5                                    |
|                   | MOV.W @ERs+,Rd         | W                          |                                                |    |      |           | 2           |     |          |                                                         | @ERs→Rd16,ERs32+2→ERs32  | —              | ↑              | ↑ | 0 | —          | 3                                    |
|                   | MOV.W @aa:16,Rd        | W                          |                                                |    |      |           |             | 4   |          |                                                         | @aa:16→Rd16              | —              | ↑              | ↑ | 0 | —          | 3                                    |
|                   | MOV.W @aa:32,Rd        | W                          |                                                |    |      |           |             |     | 6        |                                                         | @aa:32→Rd16              | —              | ↑              | ↑ | 0 | —          | 4                                    |
|                   | MOV.W Rs,@ERd          | W                          |                                                |    | 2    |           |             |     |          |                                                         | Rs16→@ERd                | —              | ↑              | ↑ | 0 | —          | 2                                    |
|                   | MOV.W Rs,@ (d:16,ERd)  | W                          |                                                |    |      | 4         |             |     |          |                                                         | Rs16→@ (d:16,ERd)        | —              | ↑              | ↑ | 0 | —          | 3                                    |
|                   | MOV.W Rs,@ (d:32,ERd)  | W                          |                                                |    |      |           | 8           |     |          |                                                         | Rs16→@ (d:32,ERd)        | —              | ↑              | ↑ | 0 | —          | 5                                    |
|                   | MOV.W Rs,@-ERd         | W                          |                                                |    |      |           | 2           |     |          |                                                         | ERd32-2→ERd32,Rs16→@ERd  | —              | ↑              | ↑ | 0 | —          | 3                                    |
|                   | MOV.W Rs,@aa:16        | W                          |                                                |    |      |           |             | 4   |          |                                                         | Rs16→@aa:16              | —              | ↑              | ↑ | 0 | —          | 3                                    |
|                   | MOV.W Rs,@aa:32        | W                          |                                                |    |      |           |             |     | 6        |                                                         | Rs16→@aa:32              | —              | ↑              | ↑ | 0 | —          | 4                                    |
|                   | MOV.L #xx:32,ERd       | L                          | 6                                              |    |      |           |             |     |          |                                                         | #xx:32→ERd32             | —              | ↑              | ↑ | 0 | —          | 3                                    |
|                   | MOV.L ERs,ERd          | L                          |                                                | 2  |      |           |             |     |          |                                                         | ERs32→ERd32              | —              | ↑              | ↑ | 0 | —          | 1                                    |
|                   | MOV.L @ERs,ERd         | L                          |                                                |    | 4    |           |             |     |          |                                                         | @ERs→ERd32               | —              | ↑              | ↑ | 0 | —          | 4                                    |
|                   | MOV.L @ (d:16,ERs),ERd | L                          |                                                |    |      | 6         |             |     |          |                                                         | @ (d:16,ERs)→ERd32       | —              | ↑              | ↑ | 0 | —          | 5                                    |
|                   | MOV.L @ (d:32,ERs),ERd | L                          |                                                |    |      |           | 10          |     |          |                                                         | @ (d:32,ERs)→ERd32       | —              | ↑              | ↑ | 0 | —          | 7                                    |
|                   | MOV.L @ERs+,ERd        | L                          |                                                |    |      |           | 4           |     |          |                                                         | @ERs→ERd32,ERs32+4→ERs32 | —              | ↑              | ↑ | 0 | —          | 5                                    |
|                   | MOV.L @aa:16,ERd       | L                          |                                                |    |      |           |             | 6   |          |                                                         | @aa:16→ERd32             | —              | ↑              | ↑ | 0 | —          | 5                                    |
|                   | MOV.L @aa:32,ERd       | L                          |                                                |    |      |           |             |     | 8        |                                                         | @aa:32→ERd32             | —              | ↑              | ↑ | 0 | —          | 6                                    |
|                   | MOV.L ERs,@ERd         | L                          |                                                |    | 4    |           |             |     |          |                                                         | ERs32→@ERd               | —              | ↑              | ↑ | 0 | —          | 4                                    |
|                   | MOV.L ERs,@ (d:16,ERd) | L                          |                                                |    |      | 6         |             |     |          |                                                         | ERs32→@ (d:16,ERd)       | —              | ↑              | ↑ | 0 | —          | 5                                    |
|                   | MOV.L ERs,@ (d:32,ERd) | L                          |                                                |    |      |           | 10          |     |          |                                                         | ERs32→@ (d:32,ERd)       | —              | ↑              | ↑ | 0 | —          | 7                                    |
|                   | MOV.L ERs,@-ERd        | L                          |                                                |    |      |           | 4           |     |          |                                                         | ERd32-4→ERd32,ERs32→@ERd | —              | ↑              | ↑ | 0 | —          | 5                                    |
|                   | MOV.L ERs,@aa:16       | L                          |                                                |    |      |           |             | 6   |          |                                                         | ERs32→@aa:16             | —              | ↑              | ↑ | 0 | —          | 5                                    |
|                   | MOV.L ERs,@aa:32       | L                          |                                                |    |      |           |             |     | 8        |                                                         | ERs32→@aa:32             | —              | ↑              | ↑ | 0 | —          | 6                                    |
| POP               | POP.W Rn               | W                          |                                                |    |      |           |             |     | 2        | @SP→Rn16,SP+2→SP                                        | —                        | ↑              | ↑              | 0 | — | 3          |                                      |
|                   | POP.L ERn              | L                          |                                                |    |      |           |             |     | 4        | @SP→ERn32,SP+4→SP                                       | —                        | ↑              | ↑              | 0 | — | 5          |                                      |
| PUSH              | PUSH.W Rn              | W                          |                                                |    |      |           |             |     | 2        | SP-2→SP,Rn16→@SP                                        | —                        | ↑              | ↑              | 0 | — | 3          |                                      |
|                   | PUSH.L ERn             | L                          |                                                |    |      |           |             |     | 4        | SP-4→SP,ERn32→@SP                                       | —                        | ↑              | ↑              | 0 | — | 5          |                                      |
| LDM <sup>*4</sup> | LDM @SP+,(ERm-ERn)     | L                          |                                                |    |      |           |             |     | 4        | (@SP→ERn32,SP+4→SP)<br>Repeat for the number of returns | —                        | —              | —              | — | — | 7/9/11 [1] |                                      |
| STM <sup>*4</sup> | STM (ERm-ERn),@-SP     | L                          |                                                |    |      |           |             |     | 4        | (SP-4→SP,ERn32→@SP)<br>Repeat for the number of returns | —                        | —              | —              | — | — | 7/9/11 [1] |                                      |
| MOVFPE            | MOVFPE @aa:16,Rd       | Cannot be used in this LSI |                                                |    |      |           |             |     |          |                                                         |                          |                |                |   |   |            | [2]                                  |
| MOVTPPE           | MOVTPPE Rs,@aa:16      | Cannot be used in this LSI |                                                |    |      |           |             |     |          |                                                         |                          |                |                |   |   |            | [2]                                  |









**Table A.2 Arithmetic Instructions**

| Mnemonic | Size             | Addressing Mode and Instruction Length (Bytes) |    |      |          |             |     |         |      | Operation                                                          | Condition Code |     |     |     |   | No of Execution States <sup>1</sup> |
|----------|------------------|------------------------------------------------|----|------|----------|-------------|-----|---------|------|--------------------------------------------------------------------|----------------|-----|-----|-----|---|-------------------------------------|
|          |                  | #xx                                            | Rn | @ERn | @(d,ERn) | @-ERn/@ERn+ | @aa | @(d,PC) | @@aa |                                                                    | I              | H   | N   | Z   | V |                                     |
|          |                  |                                                |    |      |          |             |     |         |      |                                                                    |                |     |     |     |   | Advanced Mode                       |
| ADD      | ADD.B #xx:8,Rd   | B                                              | 2  |      |          |             |     |         |      | Rd8+ $\text{#xx:8}$ →Rd8                                           | —              | ↑   | ↑   | ↑   | ↑ | 1                                   |
|          | ADD.B Rs,Rd      | B                                              | 2  |      |          |             |     |         |      | Rd8+Rs8→Rd8                                                        | —              | ↑   | ↑   | ↑   | ↑ | 1                                   |
|          | ADD.W #xx:16,Rd  | W                                              | 4  |      |          |             |     |         |      | Rd16+ $\text{#xx:16}$ →Rd16                                        | —              | [3] | ↑   | ↑   | ↑ | 2                                   |
|          | ADD.W Rs,Rd      | W                                              | 2  |      |          |             |     |         |      | Rd16+Rs16→Rd16                                                     | —              | [3] | ↑   | ↑   | ↑ | 1                                   |
|          | ADD.L #xx:32,ERd | L                                              | 6  |      |          |             |     |         |      | ERd32+ $\text{#xx:32}$ →ERd32                                      | —              | [4] | ↑   | ↑   | ↑ | 3                                   |
|          | ADD.L ERs,ERd    | L                                              | 2  |      |          |             |     |         |      | ERd32+ERs32→ERd32                                                  | —              | [4] | ↑   | ↑   | ↑ | 1                                   |
| ADDX     | ADDX #xx:8,Rd    | B                                              | 2  |      |          |             |     |         |      | Rd8+ $\text{#xx:8}$ +C→Rd8                                         | —              | ↑   | ↑   | [5] | ↑ | 1                                   |
|          | ADDX Rs,Rd       | B                                              | 2  |      |          |             |     |         |      | Rd8+Rs8+C→Rd8                                                      | —              | ↑   | ↑   | [5] | ↑ | 1                                   |
| ADDS     | ADDS #1,ERd      | L                                              | 2  |      |          |             |     |         |      | ERd32+1→ERd32                                                      | —              | —   | —   | —   | — | 1                                   |
|          | ADDS #2,ERd      | L                                              | 2  |      |          |             |     |         |      | ERd32+2→ERd32                                                      | —              | —   | —   | —   | — | 1                                   |
|          | ADDS #4,ERd      | L                                              | 2  |      |          |             |     |         |      | ERd32+4→ERd32                                                      | —              | —   | —   | —   | — | 1                                   |
| INC      | INC.B Rd         | B                                              | 2  |      |          |             |     |         |      | Rd8+1→Rd8                                                          | —              | —   | ↑   | ↑   | ↑ | 1                                   |
|          | INC.W #1,Rd      | W                                              | 2  |      |          |             |     |         |      | Rd16+1→Rd16                                                        | —              | —   | ↑   | ↑   | ↑ | 1                                   |
|          | INC.W #2,Rd      | W                                              | 2  |      |          |             |     |         |      | Rd16+2→Rd16                                                        | —              | —   | ↑   | ↑   | ↑ | 1                                   |
|          | INC.L #1,ERd     | L                                              | 2  |      |          |             |     |         |      | ERd32+1→ERd32                                                      | —              | —   | ↑   | ↑   | ↑ | 1                                   |
|          | INC.L #2,ERd     | L                                              | 2  |      |          |             |     |         |      | ERd32+2→ERd32                                                      | —              | —   | ↑   | ↑   | ↑ | 1                                   |
|          | INC.L #4,ERd     | L                                              | 2  |      |          |             |     |         |      | ERd32+4→ERd32                                                      | —              | —   | ↑   | ↑   | ↑ | 1                                   |
| DAA      | DAA Rd           | B                                              | 2  |      |          |             |     |         |      | Rd8 10 Decimal adjust →Rd8                                         | —              | *   | ↑   | ↑   | * | 1                                   |
| SUB      | SUB.B Rs,Rd      | B                                              | 2  |      |          |             |     |         |      | Rd8-Rs8→Rd8                                                        | —              | ↑   | ↑   | ↑   | ↑ | 1                                   |
|          | SUB.W #xx:16,Rd  | W                                              | 4  |      |          |             |     |         |      | Rd16- $\text{#xx:16}$ →Rd16                                        | —              | [3] | ↑   | ↑   | ↑ | 2                                   |
|          | SUB.W Rs,Rd      | W                                              | 2  |      |          |             |     |         |      | Rd16-Rs16→Rd16                                                     | —              | [3] | ↑   | ↑   | ↑ | 1                                   |
|          | SUB.L #xx:32,ERd | L                                              | 6  |      |          |             |     |         |      | ERd32- $\text{#xx:32}$ →ERd32                                      | —              | [4] | ↑   | ↑   | ↑ | 3                                   |
|          | SUB.L ERs,ERd    | L                                              | 2  |      |          |             |     |         |      | ERd32-ERs32→ERd32                                                  | —              | [4] | ↑   | ↑   | ↑ | 1                                   |
| SUBX     | SUBX #xx:8,Rd    | B                                              | 2  |      |          |             |     |         |      | Rd8- $\text{#xx:8}$ -C→Rd8                                         | —              | ↑   | ↑   | [5] | ↑ | 1                                   |
|          | SUBX Rs,Rd       | B                                              | 2  |      |          |             |     |         |      | Rd8-Rs8-C→Rd8                                                      | —              | ↑   | ↑   | [5] | ↑ | 1                                   |
| SUBS     | SUBS #1,ERd      | L                                              | 2  |      |          |             |     |         |      | ERd32-1→ERd32                                                      | —              | —   | —   | —   | — | 1                                   |
|          | SUBS #2,ERd      | L                                              | 2  |      |          |             |     |         |      | ERd32-2→ERd32                                                      | —              | —   | —   | —   | — | 1                                   |
|          | SUBS #4,ERd      | L                                              | 2  |      |          |             |     |         |      | ERd32-4→ERd32                                                      | —              | —   | —   | —   | — | 1                                   |
| DEC      | DEC.B Rd         | B                                              | 2  |      |          |             |     |         |      | Rd8-1→Rd8                                                          | —              | —   | ↑   | ↑   | ↑ | 1                                   |
|          | DEC.W #1,Rd      | W                                              | 2  |      |          |             |     |         |      | Rd16-1→Rd16                                                        | —              | —   | ↑   | ↑   | ↑ | 1                                   |
|          | DEC.W #2,Rd      | W                                              | 2  |      |          |             |     |         |      | Rd16-2→Rd16                                                        | —              | —   | ↑   | ↑   | ↑ | 1                                   |
|          | DEC.L #1,ERd     | L                                              | 2  |      |          |             |     |         |      | ERd32-1→ERd32                                                      | —              | —   | ↑   | ↑   | ↑ | 1                                   |
|          | DEC.L #2,ERd     | L                                              | 2  |      |          |             |     |         |      | ERd32-2→ERd32                                                      | —              | —   | ↑   | ↑   | ↑ | 1                                   |
| DAS      | DAS Rd           | B                                              | 2  |      |          |             |     |         |      | Rd8 10 Decimal adjust →Rd8                                         | —              | *   | ↑   | ↑   | * | 1                                   |
| MULXU    | MULXU.B Rs,Rd    | B                                              | 2  |      |          |             |     |         |      | Rd8×Rs8→Rd16(Multiplication w/o sign)                              | —              | —   | —   | —   | — | 12                                  |
|          | MULXU.W Rs,ERd   | W                                              | 2  |      |          |             |     |         |      | Rd16×Rs16→ERd32(Multiplication w/o sign)                           | —              | —   | —   | —   | — | 20                                  |
| MULXS    | MULXS.B Rs,Rd    | B                                              | 4  |      |          |             |     |         |      | Rd8×Rs8→Rd16(Multiplication w/o sign)                              | —              | —   | ↑   | ↑   | — | 13                                  |
|          | MULXS.W Rs,ERd   | W                                              | 4  |      |          |             |     |         |      | Rd16×Rs16→ERd32(Multiplication w/o sign)                           | —              | —   | ↑   | ↑   | — | 21                                  |
| DIVXU    | DIVXU.B Rs,Rd    | B                                              | 2  |      |          |             |     |         |      | Rd16-Rs8→Rd16 (RdH: Remainder, RdL: Quotient)(Division w/o sign)   | —              | —   | [6] | [7] | — | 12                                  |
|          | DIVXU.W Rs,ERd   | W                                              | 2  |      |          |             |     |         |      | ERd32-Rs16→ERd32 (Ed: Remainder, Rd: Quotient)(Division with sign) | —              | —   | [6] | [7] | — | 20                                  |
| DIVXS    | DIVXS.B Rs,Rd    | B                                              | 4  |      |          |             |     |         |      | Rd16-Rs8→Rd16(RdH: Remainder, RdL: Quotient)(Division w/o sign)    | —              | —   | [8] | [7] | — | 13                                  |
|          | DIVXS.W Rs,ERd   | W                                              | 4  |      |          |             |     |         |      | ERd32-Rs16→ERd32 (Ed: Remainder, Rd: Quotient)(Division with sign) | —              | —   | [8] | [7] | — | 21                                  |
| CMP      | CMP.B #xx:8,Rd   | B                                              | 2  |      |          |             |     |         |      | Rd8- $\text{#xx:8}$                                                | —              | ↑   | ↑   | ↑   | ↑ | 1                                   |
|          | CMP.B Rs,Rd      | B                                              | 2  |      |          |             |     |         |      | Rd8-Rs8                                                            | —              | ↑   | ↑   | ↑   | ↑ | 1                                   |
|          | CMP.W #xx:16,Rd  | W                                              | 4  |      |          |             |     |         |      | Rd16- $\text{#xx:16}$                                              | —              | [3] | ↑   | ↑   | ↑ | 2                                   |
|          | CMP.W Rs,Rd      | W                                              | 2  |      |          |             |     |         |      | Rd16-Rs16                                                          | —              | [3] | ↑   | ↑   | ↑ | 1                                   |
|          | CMP.L #xx:32,ERd | L                                              | 6  |      |          |             |     |         |      | ERd32- $\text{#xx:32}$                                             | —              | [4] | ↑   | ↑   | ↑ | 3                                   |
|          | CMP.L ERs,ERd    | L                                              | 2  |      |          |             |     |         |      | ERd32-ERs32                                                        | —              | [4] | ↑   | ↑   | ↑ | 1                                   |
| NEG      | NEG.B Rd         | B                                              | 2  |      |          |             |     |         |      | 0-Rd8→Rd8                                                          | —              | ↑   | ↑   | ↑   | ↑ | 1                                   |
|          | NEG.W Rd         | W                                              | 2  |      |          |             |     |         |      | 0-Rd16→Rd16                                                        | —              | ↑   | ↑   | ↑   | ↑ | 1                                   |
|          | NEG.L ERd        | L                                              | 2  |      |          |             |     |         |      | 0-ERd32→ERd32                                                      | —              | ↑   | ↑   | ↑   | ↑ | 1                                   |
| EXTU     | EXTU.W Rd        | W                                              | 2  |      |          |             |     |         |      | 0→(<Bits 15 to 8> of Rd16)                                         | —              | —   | 0   | ↑   | 0 | 1                                   |
|          | EXTU.L ERd       | L                                              | 2  |      |          |             |     |         |      | 0→(<Bits 31 to 16> of ERd32)                                       | —              | —   | 0   | ↑   | 0 | 1                                   |
| EXTS     | EXTS.W Rd        | W                                              | 2  |      |          |             |     |         |      | (<Bit7> of Rd16)→(<Bits 15 to 8> of Rd16)                          | —              | —   | ↑   | ↑   | 0 | 1                                   |
|          | EXTS.L ERd       | L                                              | 2  |      |          |             |     |         |      | (<Bit15> of ERd32)→(<Bits31 to 16> of ERd32)                       | —              | —   | ↑   | ↑   | 0 | 1                                   |
| TAS      | TAS @ERd*2       | B                                              |    |      | 4        |             |     |         |      | @ERd-0→CCR set, (1)→(<Bit7> of @ERd)                               | —              | —   | ↑   | ↑   | 0 | 4                                   |
| MAC      | MAC @ERn+,@ERm+  | Cannot be used in this LSI                     |    |      |          |             |     |         |      |                                                                    |                |     |     |     |   | [2]                                 |
| CLRMAC   | CLRMAC           |                                                |    |      |          |             |     |         |      |                                                                    |                |     |     |     |   |                                     |
| LDMAC    | LDMAC ERs,MACH   |                                                |    |      |          |             |     |         |      |                                                                    |                |     |     |     |   |                                     |
|          | LDMAC ERs,MACL   |                                                |    |      |          |             |     |         |      |                                                                    |                |     |     |     |   |                                     |
| STMAC    | STMAC MACH,ERd   |                                                |    |      |          |             |     |         |      |                                                                    |                |     |     |     |   |                                     |
|          | STMAC MACL,ERd   |                                                |    |      |          |             |     |         |      |                                                                    |                |     |     |     |   |                                     |

**Table A.3 Logic Operations Instructions**

| Mnemonic |                  | Size | Addressing Mode and Instruction Length (Bytes) |    |      |           |             |     |          |      | Operation          | Condition Code |                |   |   |   |   | No of Execution States <sup>*1</sup> |
|----------|------------------|------|------------------------------------------------|----|------|-----------|-------------|-----|----------|------|--------------------|----------------|----------------|---|---|---|---|--------------------------------------|
|          |                  |      | #xx                                            | Rn | @ERn | @ (d,ERn) | @-ERn/@ERn+ | @aa | @ (d,PC) | @@aa |                    |                | Condition Code |   |   |   |   |                                      |
|          |                  |      |                                                |    |      |           |             |     |          |      |                    |                | I              | H | N | Z | V | C                                    |
| AND      | AND.B #xx:8,Rd   | B    | 2                                              |    |      |           |             |     |          |      | Rd8^#xx:8→Rd8      | —              | —              | ↑ | ↑ | 0 | — | 1                                    |
|          | AND.B Rs,Rd      | B    | 2                                              |    |      |           |             |     |          |      | Rd8^Rs8→Rd8        | —              | —              | ↑ | ↑ | 0 | — | 1                                    |
|          | AND.W #xx:16,Rd  | W    | 4                                              |    |      |           |             |     |          |      | Rd16^#xx:16→Rd16   | —              | —              | ↑ | ↑ | 0 | — | 2                                    |
|          | AND.W Rs,Rd      | W    | 2                                              |    |      |           |             |     |          |      | Rd16^Rs16→Rd16     | —              | —              | ↑ | ↑ | 0 | — | 1                                    |
|          | AND.L #xx:32,ERd | L    | 6                                              |    |      |           |             |     |          |      | ERd32^#xx:32→ERd32 | —              | —              | ↑ | ↑ | 0 | — | 3                                    |
|          | AND.L ERs,ERd    | L    | 4                                              |    |      |           |             |     |          |      | ERd32^ERs32→ERd32  | —              | —              | ↑ | ↑ | 0 | — | 2                                    |
| OR       | OR.B #xx:8,Rd    | B    | 2                                              |    |      |           |             |     |          |      | Rd8∨#xx:8→Rd8      | —              | —              | ↑ | ↑ | 0 | — | 1                                    |
|          | OR.B Rs,Rd       | B    | 2                                              |    |      |           |             |     |          |      | Rd8∨Rs8→Rd8        | —              | —              | ↑ | ↑ | 0 | — | 1                                    |
|          | OR.W #xx:16,Rd   | W    | 4                                              |    |      |           |             |     |          |      | Rd16∨#xx:16→Rd16   | —              | —              | ↑ | ↑ | 0 | — | 2                                    |
|          | OR.W Rs,Rd       | W    | 2                                              |    |      |           |             |     |          |      | Rd16∨Rs16→Rd16     | —              | —              | ↑ | ↑ | 0 | — | 1                                    |
|          | OR.L #xx:32,ERd  | L    | 6                                              |    |      |           |             |     |          |      | ERd32∨#xx:32→ERd32 | —              | —              | ↑ | ↑ | 0 | — | 3                                    |
|          | OR.L ERs,ERd     | L    | 4                                              |    |      |           |             |     |          |      | ERd32∨ERs32→ERd32  | —              | —              | ↑ | ↑ | 0 | — | 2                                    |
| XOR      | XOR.B #xx:8,Rd   | B    | 2                                              |    |      |           |             |     |          |      | Rd8⊕#xx:8→Rd8      | —              | —              | ↑ | ↑ | 0 | — | 1                                    |
|          | XOR.B Rs,Rd      | B    | 2                                              |    |      |           |             |     |          |      | Rd8⊕Rs8→Rd8        | —              | —              | ↑ | ↑ | 0 | — | 1                                    |
|          | XOR.W #xx:16,Rd  | W    | 4                                              |    |      |           |             |     |          |      | Rd16⊕#xx:16→Rd16   | —              | —              | ↑ | ↑ | 0 | — | 2                                    |
|          | XOR.W Rs,Rd      | W    | 2                                              |    |      |           |             |     |          |      | Rd16⊕Rs16→Rd16     | —              | —              | ↑ | ↑ | 0 | — | 1                                    |
|          | XOR.L #xx:32,ERd | L    | 6                                              |    |      |           |             |     |          |      | ERd32⊕#xx:32→ERd32 | —              | —              | ↑ | ↑ | 0 | — | 3                                    |
|          | XOR.L ERs,ERd    | L    | 4                                              |    |      |           |             |     |          |      | ERd32⊕ERs32→ERd32  | —              | —              | ↑ | ↑ | 0 | — | 2                                    |
| NOT      | NOT.B Rd         | B    | 2                                              |    |      |           |             |     |          |      | ~Rd8→Rd8           | —              | —              | ↑ | ↑ | 0 | — | 1                                    |
|          | NOT.W Rd         | W    | 2                                              |    |      |           |             |     |          |      | ~Rd16→Rd16         | —              | —              | ↑ | ↑ | 0 | — | 1                                    |
|          | NOT.L ERd        | L    | 2                                              |    |      |           |             |     |          |      | ~ERd32→ERd32       | —              | —              | ↑ | ↑ | 0 | — | 1                                    |

**Table A.4 Shift Instructions**

| Mnemonic |                | Size | Addressing Mode and Instruction Length (Bytes) |    |      |           |             |     |          |      |  | Operation                                                                           | Condition Code |   |   |   |   |   | No of Execution States* <sup>1</sup> |
|----------|----------------|------|------------------------------------------------|----|------|-----------|-------------|-----|----------|------|--|-------------------------------------------------------------------------------------|----------------|---|---|---|---|---|--------------------------------------|
|          |                |      | #xx                                            | Rn | @ERn | @ (d,ERn) | @-ERn/@ERn+ | @aa | @ (d,PC) | @@aa |  |                                                                                     | I              | H | N | Z | V | C |                                      |
|          |                |      |                                                |    |      |           |             |     |          |      |  |                                                                                     |                |   |   |   |   |   |                                      |
| SHAL     | SHAL.B Rd      | B    | 2                                              |    |      |           |             |     |          |      |  |    | —              | — | ↑ | ↑ | ↑ | ↑ | 1                                    |
|          | SHAL.B #2,Rd   | B    | 2                                              |    |      |           |             |     |          |      |  |                                                                                     | —              | — | ↑ | ↑ | ↑ | ↑ | 1                                    |
|          | SHAL.W Rd      | W    | 2                                              |    |      |           |             |     |          |      |  |                                                                                     | —              | — | ↑ | ↑ | ↑ | ↑ | 1                                    |
|          | SHAL.W #2,Rd   | W    | 2                                              |    |      |           |             |     |          |      |  |                                                                                     | —              | — | ↑ | ↑ | ↑ | ↑ | 1                                    |
|          | SHAL.L ERd     | L    | 2                                              |    |      |           |             |     |          |      |  |                                                                                     | —              | — | ↑ | ↑ | ↑ | ↑ | 1                                    |
|          | SHAL.L #2,ERd  | L    | 2                                              |    |      |           |             |     |          |      |  |                                                                                     | —              | — | ↑ | ↑ | ↑ | ↑ | 1                                    |
| SHAR     | SHAR.B Rd      | B    | 2                                              |    |      |           |             |     |          |      |  |    | —              | — | ↑ | ↑ | 0 | ↑ | 1                                    |
|          | SHAR.B #2,Rd   | B    | 2                                              |    |      |           |             |     |          |      |  |                                                                                     | —              | — | ↑ | ↑ | 0 | ↑ | 1                                    |
|          | SHAR.W Rd      | W    | 2                                              |    |      |           |             |     |          |      |  |                                                                                     | —              | — | ↑ | ↑ | 0 | ↑ | 1                                    |
|          | SHAR.W #2,Rd   | W    | 2                                              |    |      |           |             |     |          |      |  |                                                                                     | —              | — | ↑ | ↑ | 0 | ↑ | 1                                    |
|          | SHAR.L ERd     | L    | 2                                              |    |      |           |             |     |          |      |  |                                                                                     | —              | — | ↑ | ↑ | 0 | ↑ | 1                                    |
|          | SHAR.L #2,ERd  | L    | 2                                              |    |      |           |             |     |          |      |  |                                                                                     | —              | — | ↑ | ↑ | 0 | ↑ | 1                                    |
| SHLL     | SHLL.B Rd      | B    | 2                                              |    |      |           |             |     |          |      |  |    | —              | — | ↑ | ↑ | 0 | ↑ | 1                                    |
|          | SHLL.B #2,Rd   | B    | 2                                              |    |      |           |             |     |          |      |  |                                                                                     | —              | — | ↑ | ↑ | 0 | ↑ | 1                                    |
|          | SHLL.W Rd      | W    | 2                                              |    |      |           |             |     |          |      |  |                                                                                     | —              | — | ↑ | ↑ | 0 | ↑ | 1                                    |
|          | SHLL.W #2,Rd   | W    | 2                                              |    |      |           |             |     |          |      |  |                                                                                     | —              | — | ↑ | ↑ | 0 | ↑ | 1                                    |
|          | SHLL.L ERd     | L    | 2                                              |    |      |           |             |     |          |      |  |                                                                                     | —              | — | ↑ | ↑ | 0 | ↑ | 1                                    |
|          | SHLL.L #2,ERd  | L    | 2                                              |    |      |           |             |     |          |      |  |                                                                                     | —              | — | ↑ | ↑ | 0 | ↑ | 1                                    |
| SHLR     | SHLR.B Rd      | B    | 2                                              |    |      |           |             |     |          |      |  |    | —              | — | 0 | ↑ | 0 | ↑ | 1                                    |
|          | SHLR.B #2,Rd   | B    | 2                                              |    |      |           |             |     |          |      |  |                                                                                     | —              | — | 0 | ↑ | 0 | ↑ | 1                                    |
|          | SHLR.W Rd      | W    | 2                                              |    |      |           |             |     |          |      |  |                                                                                     | —              | — | 0 | ↑ | 0 | ↑ | 1                                    |
|          | SHLR.W #2,Rd   | W    | 2                                              |    |      |           |             |     |          |      |  |                                                                                     | —              | — | 0 | ↑ | 0 | ↑ | 1                                    |
|          | SHLR.L ERd     | L    | 2                                              |    |      |           |             |     |          |      |  |                                                                                     | —              | — | 0 | ↑ | 0 | ↑ | 1                                    |
|          | SHLR.L #2,ERd  | L    | 2                                              |    |      |           |             |     |          |      |  |                                                                                     | —              | — | 0 | ↑ | 0 | ↑ | 1                                    |
| ROTXL    | ROTXL.B Rd     | B    | 2                                              |    |      |           |             |     |          |      |  |    | —              | — | ↑ | ↑ | 0 | ↑ | 1                                    |
|          | ROTXL.B #2,Rd  | B    | 2                                              |    |      |           |             |     |          |      |  |                                                                                     | —              | — | ↑ | ↑ | 0 | ↑ | 1                                    |
|          | ROTXL.W Rd     | W    | 2                                              |    |      |           |             |     |          |      |  |                                                                                     | —              | — | ↑ | ↑ | 0 | ↑ | 1                                    |
|          | ROTXL.W #2,Rd  | W    | 2                                              |    |      |           |             |     |          |      |  |                                                                                     | —              | — | ↑ | ↑ | 0 | ↑ | 1                                    |
|          | ROTXL.L ERd    | L    | 2                                              |    |      |           |             |     |          |      |  |                                                                                     | —              | — | ↑ | ↑ | 0 | ↑ | 1                                    |
|          | ROTXL.L #2,ERd | L    | 2                                              |    |      |           |             |     |          |      |  |                                                                                     | —              | — | ↑ | ↑ | 0 | ↑ | 1                                    |
| ROTXR    | ROTXR.B Rd     | B    | 2                                              |    |      |           |             |     |          |      |  |    | —              | — | ↑ | ↑ | 0 | ↑ | 1                                    |
|          | ROTXR.B #2,Rd  | B    | 2                                              |    |      |           |             |     |          |      |  |                                                                                     | —              | — | ↑ | ↑ | 0 | ↑ | 1                                    |
|          | ROTXR.W Rd     | W    | 2                                              |    |      |           |             |     |          |      |  |                                                                                     | —              | — | ↑ | ↑ | 0 | ↑ | 1                                    |
|          | ROTXR.W #2,Rd  | W    | 2                                              |    |      |           |             |     |          |      |  |                                                                                     | —              | — | ↑ | ↑ | 0 | ↑ | 1                                    |
|          | ROTXR.L ERd    | L    | 2                                              |    |      |           |             |     |          |      |  |                                                                                     | —              | — | ↑ | ↑ | 0 | ↑ | 1                                    |
|          | ROTXR.L #2,ERd | L    | 2                                              |    |      |           |             |     |          |      |  |                                                                                     | —              | — | ↑ | ↑ | 0 | ↑ | 1                                    |
| ROTL     | ROTL.B Rd      | B    | 2                                              |    |      |           |             |     |          |      |  |    | —              | — | ↑ | ↑ | 0 | ↑ | 1                                    |
|          | ROTL.B #2,Rd   | B    | 2                                              |    |      |           |             |     |          |      |  |                                                                                     | —              | — | ↑ | ↑ | 0 | ↑ | 1                                    |
|          | ROTL.W Rd      | W    | 2                                              |    |      |           |             |     |          |      |  |                                                                                     | —              | — | ↑ | ↑ | 0 | ↑ | 1                                    |
|          | ROTL.W #2,Rd   | W    | 2                                              |    |      |           |             |     |          |      |  |                                                                                     | —              | — | ↑ | ↑ | 0 | ↑ | 1                                    |
|          | ROTL.L ERd     | L    | 2                                              |    |      |           |             |     |          |      |  |                                                                                     | —              | — | ↑ | ↑ | 0 | ↑ | 1                                    |
|          | ROTL.L #2,ERd  | L    | 2                                              |    |      |           |             |     |          |      |  |                                                                                     | —              | — | ↑ | ↑ | 0 | ↑ | 1                                    |
| ROTR     | ROTR.B Rd      | B    | 2                                              |    |      |           |             |     |          |      |  |  | —              | — | ↑ | ↑ | 0 | ↑ | 1                                    |
|          | ROTR.B #2,Rd   | B    | 2                                              |    |      |           |             |     |          |      |  |                                                                                     | —              | — | ↑ | ↑ | 0 | ↑ | 1                                    |
|          | ROTR.W Rd      | W    | 2                                              |    |      |           |             |     |          |      |  |                                                                                     | —              | — | ↑ | ↑ | 0 | ↑ | 1                                    |
|          | ROTR.W #2,Rd   | W    | 2                                              |    |      |           |             |     |          |      |  |                                                                                     | —              | — | ↑ | ↑ | 0 | ↑ | 1                                    |
|          | ROTR.L ERd     | L    | 2                                              |    |      |           |             |     |          |      |  |                                                                                     | —              | — | ↑ | ↑ | 0 | ↑ | 1                                    |
|          | ROTR.L #2,ERd  | L    | 2                                              |    |      |           |             |     |          |      |  |                                                                                     | —              | — | ↑ | ↑ | 0 | ↑ | 1                                    |



| Mnemonic |                    | Size | Addressing Mode and Instruction Length (Bytes) |    |      |           |             |     |          |      |  | Operation                 | Condition Code |   |   |   |   | No of Execution States <sup>*1</sup> |               |
|----------|--------------------|------|------------------------------------------------|----|------|-----------|-------------|-----|----------|------|--|---------------------------|----------------|---|---|---|---|--------------------------------------|---------------|
|          |                    |      | #xx                                            | Rn | @ERn | @ (d,ERn) | @-ERn/@ERn+ | @aa | @ (d,PC) | @@aa |  |                           | I              | H | N | Z | V | C                                    | Advanced Mode |
|          |                    |      |                                                |    |      |           |             |     |          |      |  |                           |                |   |   |   |   |                                      |               |
| BIAND    | BIAND #xx:3,Rd     | B    | 2                                              |    |      |           |             |     |          |      |  | C^ [~(#xx:3 of Rd8)]→C    | —              | — | — | — | ↑ | —                                    | 1             |
|          | BIAND #xx:3,@ERd   | B    |                                                | 4  |      |           |             |     |          |      |  | C^ [~(#xx:3 of @ERd)]→C   | —              | — | — | — | ↑ | —                                    | 3             |
|          | BIAND #xx:3,@aa:8  | B    |                                                |    |      |           | 4           |     |          |      |  | C^ [~(#xx:3 of @aa:8)]→C  | —              | — | — | — | ↑ | —                                    | 3             |
|          | BIAND #xx:3,@aa:16 | B    |                                                |    |      |           | 6           |     |          |      |  | C^ [~(#xx:3 of @aa:16)]→C | —              | — | — | — | ↑ | —                                    | 4             |
|          | BIAND #xx:3,@aa:32 | B    |                                                |    |      |           | 8           |     |          |      |  | C^ [~(#xx:3 of @aa:32)]→C | —              | — | — | — | ↑ | —                                    | 5             |
| BOR      | BOR #xx:3,Rd       | B    | 2                                              |    |      |           |             |     |          |      |  | Cv(#xx:3 of Rd8)→C        | —              | — | — | — | ↑ | —                                    | 1             |
|          | BOR #xx:3,@ERd     | B    |                                                | 4  |      |           |             |     |          |      |  | Cv(#xx:3 of @ERd)→C       | —              | — | — | — | ↑ | —                                    | 3             |
|          | BOR #xx:3,@aa:8    | B    |                                                |    |      |           | 4           |     |          |      |  | Cv(#xx:3 of @aa:8)→C      | —              | — | — | — | ↑ | —                                    | 3             |
|          | BOR #xx:3,@aa:16   | B    |                                                |    |      |           | 6           |     |          |      |  | Cv(#xx:3 of @aa:16)→C     | —              | — | — | — | ↑ | —                                    | 4             |
|          | BOR #xx:3,@aa:32   | B    |                                                |    |      |           | 8           |     |          |      |  | Cv(#xx:3 of @aa:32)→C     | —              | — | — | — | ↑ | —                                    | 5             |
| BIOR     | BIOR #xx:3,Rd      | B    | 2                                              |    |      |           |             |     |          |      |  | Cv [~(#xx:3 of Rd8)]→C    | —              | — | — | — | ↑ | —                                    | 1             |
|          | BIOR #xx:3,@ERd    | B    |                                                | 4  |      |           |             |     |          |      |  | Cv [~(#xx:3 of @ERd)]→C   | —              | — | — | — | ↑ | —                                    | 3             |
|          | BIOR #xx:3,@aa:8   | B    |                                                |    |      |           | 4           |     |          |      |  | Cv [~(#xx:3 of @aa:8)]→C  | —              | — | — | — | ↑ | —                                    | 3             |
|          | BIOR #xx:3,@aa:16  | B    |                                                |    |      |           | 6           |     |          |      |  | Cv [~(#xx:3 of @aa:16)]→C | —              | — | — | — | ↑ | —                                    | 4             |
|          | BIOR #xx:3,@aa:32  | B    |                                                |    |      |           | 8           |     |          |      |  | Cv [~(#xx:3 of @aa:32)]→C | —              | — | — | — | ↑ | —                                    | 5             |
| BXOR     | BXOR #xx:3,Rd      | B    | 2                                              |    |      |           |             |     |          |      |  | C⊕ (#xx:3 of Rd8)→C       | —              | — | — | — | ↑ | —                                    | 1             |
|          | BXOR #xx:3,@ERd    | B    |                                                | 4  |      |           |             |     |          |      |  | C⊕ (#xx:3 of @ERd)→C      | —              | — | — | — | ↑ | —                                    | 3             |
|          | BXOR #xx:3,@aa:8   | B    |                                                |    |      |           | 4           |     |          |      |  | C⊕ (#xx:3 of @aa:8)→C     | —              | — | — | — | ↑ | —                                    | 3             |
|          | BXOR #xx:3,@aa:16  | B    |                                                |    |      |           | 6           |     |          |      |  | C⊕ (#xx:3 of @aa:16)→C    | —              | — | — | — | ↑ | —                                    | 4             |
|          | BXOR #xx:3,@aa:32  | B    |                                                |    |      |           | 8           |     |          |      |  | C⊕ (#xx:3 of @aa:32)→C    | —              | — | — | — | ↑ | —                                    | 5             |
| BIXOR    | BIXOR #xx:3,Rd     | B    | 2                                              |    |      |           |             |     |          |      |  | C⊕ [~(#xx:3 of Rd8)]→C    | —              | — | — | — | ↑ | —                                    | 1             |
|          | BIXOR #xx:3,@ERd   | B    |                                                | 4  |      |           |             |     |          |      |  | C⊕ [~(#xx:3 of @ERd)]→C   | —              | — | — | — | ↑ | —                                    | 3             |
|          | BIXOR #xx:3,@aa:8  | B    |                                                |    |      |           | 4           |     |          |      |  | C⊕ [~(#xx:3 of @aa:8)]→C  | —              | — | — | — | ↑ | —                                    | 3             |
|          | BIXOR #xx:3,@aa:16 | B    |                                                |    |      |           | 6           |     |          |      |  | C⊕ [~(#xx:3 of @aa:16)]→C | —              | — | — | — | ↑ | —                                    | 4             |
|          | BIXOR #xx:3,@aa:32 | B    |                                                |    |      |           | 8           |     |          |      |  | C⊕ [~(#xx:3 of @aa:32)]→C | —              | — | — | — | ↑ | —                                    | 5             |



**Table A.6 Branch Instructions**

| Mnemonic | Size               | Addressing Mode and Instruction Length (Bytes) |    |      |          |             |     |         |      | Operation                                           | Operation Code |                  |   |   |   |   | No of Execution States <sup>*1</sup> |   |
|----------|--------------------|------------------------------------------------|----|------|----------|-------------|-----|---------|------|-----------------------------------------------------|----------------|------------------|---|---|---|---|--------------------------------------|---|
|          |                    | #xx                                            | Rn | @ERn | @(d,ERn) | @-ERn/@ERn+ | @aa | @(d,PC) | @@aa |                                                     |                |                  |   |   |   |   |                                      |   |
|          |                    |                                                |    |      |          |             |     |         |      |                                                     |                | Branch Condition | I | H | N | Z | V                                    | C |
| Bcc      | BRA d:8(BT d:8)    | —                                              |    |      |          |             |     | 2       |      | if condition is true then<br>PC←-PC+d<br>else next; | Always         | —                | — | — | — | — | —                                    | 2 |
|          | BRA d:16(BT d:16)  | —                                              |    |      |          |             |     | 4       |      |                                                     |                | —                | — | — | — | — | —                                    | 3 |
|          | BRN d:8(BF d:8)    | —                                              |    |      |          |             |     | 2       |      |                                                     | Never          | —                | — | — | — | — | —                                    | 2 |
|          | BRN d:16(BF d:16)  | —                                              |    |      |          |             |     | 4       |      |                                                     |                | —                | — | — | — | — | —                                    | 3 |
|          | BHI d:8            | —                                              |    |      |          |             |     | 2       |      |                                                     | CvZ=0          | —                | — | — | — | — | —                                    | 2 |
|          | BHI d:16           | —                                              |    |      |          |             |     | 4       |      |                                                     |                | —                | — | — | — | — | —                                    | 3 |
|          | BLS d:8            | —                                              |    |      |          |             |     | 2       |      |                                                     | CvZ=1          | —                | — | — | — | — | —                                    | 2 |
|          | BLS d:16           | —                                              |    |      |          |             |     | 4       |      |                                                     |                | —                | — | — | — | — | —                                    | 3 |
|          | BCC d:8(BHS d:8)   | —                                              |    |      |          |             |     | 2       |      |                                                     | C=0            | —                | — | — | — | — | —                                    | 2 |
|          | BCC d:16(BHS d:16) | —                                              |    |      |          |             |     | 4       |      |                                                     |                | —                | — | — | — | — | —                                    | 3 |
|          | BCS d:8(BLO d:8)   | —                                              |    |      |          |             |     | 2       |      |                                                     | C=1            | —                | — | — | — | — | —                                    | 2 |
|          | BCS d:16(BLO d:16) | —                                              |    |      |          |             |     | 4       |      |                                                     |                | —                | — | — | — | — | —                                    | 3 |
|          | BNE d:8            | —                                              |    |      |          |             |     | 2       |      |                                                     | Z=0            | —                | — | — | — | — | —                                    | 2 |
|          | BNE d:16           | —                                              |    |      |          |             |     | 4       |      |                                                     |                | —                | — | — | — | — | —                                    | 3 |
|          | BEQ d:8            | —                                              |    |      |          |             |     | 2       |      |                                                     | Z=1            | —                | — | — | — | — | —                                    | 2 |
|          | BEQ d:16           | —                                              |    |      |          |             |     | 4       |      |                                                     |                | —                | — | — | — | — | —                                    | 3 |
|          | BVC d:8            | —                                              |    |      |          |             |     | 2       |      |                                                     | V=0            | —                | — | — | — | — | —                                    | 2 |
|          | BVC d:16           | —                                              |    |      |          |             |     | 4       |      |                                                     |                | —                | — | — | — | — | —                                    | 3 |
|          | BVS d:8            | —                                              |    |      |          |             |     | 2       |      |                                                     | V=1            | —                | — | — | — | — | —                                    | 2 |
|          | BVS d:16           | —                                              |    |      |          |             |     | 4       |      |                                                     |                | —                | — | — | — | — | —                                    | 3 |
|          | BPL d:8            | —                                              |    |      |          |             |     | 2       |      |                                                     | N=0            | —                | — | — | — | — | —                                    | 2 |
|          | BPL d:16           | —                                              |    |      |          |             |     | 4       |      |                                                     |                | —                | — | — | — | — | —                                    | 3 |
|          | BMI d:8            | —                                              |    |      |          |             |     | 2       |      |                                                     | N=1            | —                | — | — | — | — | —                                    | 2 |
|          | BMI d:16           | —                                              |    |      |          |             |     | 4       |      |                                                     |                | —                | — | — | — | — | —                                    | 3 |
|          | BGE d:8            | —                                              |    |      |          |             |     | 2       |      |                                                     | N@V=0          | —                | — | — | — | — | —                                    | 2 |
|          | BGE d:16           | —                                              |    |      |          |             |     | 4       |      |                                                     |                | —                | — | — | — | — | —                                    | 3 |
|          | BLT d:8            | —                                              |    |      |          |             |     | 2       |      |                                                     | N@V=1          | —                | — | — | — | — | —                                    | 2 |
|          | BLT d:16           | —                                              |    |      |          |             |     | 4       |      |                                                     |                | —                | — | — | — | — | —                                    | 3 |
|          | BGT d:8            | —                                              |    |      |          |             |     | 2       |      |                                                     | Zv(N@V)=0      | —                | — | — | — | — | —                                    | 2 |
|          | BGT d:16           | —                                              |    |      |          |             |     | 4       |      |                                                     |                | —                | — | — | — | — | —                                    | 3 |
|          | BLE d:8            | —                                              |    |      |          |             |     | 2       |      |                                                     | Zv(N@V)=1      | —                | — | — | — | — | —                                    | 2 |
|          | BLE d:16           | —                                              |    |      |          |             |     | 4       |      |                                                     |                | —                | — | — | — | — | —                                    | 3 |
| JMP      | JMP @ERn           | —                                              |    | 2    |          |             |     |         |      | PC←ERn                                              |                | —                | — | — | — | — | —                                    | 2 |
|          | JMP @aa:24         | —                                              |    |      |          |             | 4   |         |      | PC←aa:24                                            |                | —                | — | — | — | — | —                                    | 3 |
|          | JMP @@aa:8         | —                                              |    |      |          |             |     |         | 2    | PC←@aa:8                                            |                | —                | — | — | — | — | —                                    | 5 |
| BSR      | BSR d:8            | —                                              |    |      |          |             |     | 2       |      | PC→@-SP,PC←PC+d:8                                   |                | —                | — | — | — | — | —                                    | 4 |
|          | BSR d:16           | —                                              |    |      |          |             |     | 4       |      | PC→@-SP,PC←PC+d:16                                  |                | —                | — | — | — | — | —                                    | 5 |
| JSR      | JSR @ERn           | —                                              |    | 2    |          |             |     |         |      | PC→@-SP,PC←ERn                                      |                | —                | — | — | — | — | —                                    | 4 |
|          | JSR @aa:24         | —                                              |    |      |          |             | 4   |         |      | PC→@-SP,PC←aa:24                                    |                | —                | — | — | — | — | —                                    | 5 |
|          | JSR @@aa:8         | —                                              |    |      |          |             |     |         | 2    | PC→@-SP,PC←@aa:8                                    |                | —                | — | — | — | — | —                                    | 6 |
| RTS      | RTS                | —                                              |    |      |          |             |     |         | 2    | PC←@SP+                                             |                | —                | — | — | — | — | —                                    | 5 |

**Table A.7 System Control Instructions**

| Mnemonic |                        | Size | Addressing Mode and Instruction Length (Bytes) |    |      |           |             |     |          |      | Operation | Condition Code                            |   |   |   |   |   | No of Execution States* <sup>1</sup> |
|----------|------------------------|------|------------------------------------------------|----|------|-----------|-------------|-----|----------|------|-----------|-------------------------------------------|---|---|---|---|---|--------------------------------------|
|          |                        |      | #xx                                            | Rn | @ERn | @ (d,ERn) | @-ERn/@ERn+ | @aa | @ (d,PC) | @@aa |           | I                                         | I | H | N | Z | V |                                      |
|          |                        |      |                                                |    |      |           |             |     |          |      |           |                                           |   |   |   |   |   | Advanced Mode                        |
| TRAPA    | TRAPA #x:2             | —    |                                                |    |      |           |             |     |          |      |           | PC→@-SP,CCR→@-SP,<br>EXR→@-SP,<Vector>→PC | 1 | — | — | — | — | 8 [9]                                |
| RTE      | RTE                    | —    |                                                |    |      |           |             |     |          |      |           | EXR←@SP+,CCR←@SP+,<br>PC←@SP+             | ↑ | ↑ | ↑ | ↑ | ↑ | 5 [9]                                |
| SLEEP    | SLEEP                  | —    |                                                |    |      |           |             |     |          |      |           | Transition to power-down state            | — | — | — | — | — | 2                                    |
| LDC      | LDC #xx:8,CCR          | B    | 2                                              |    |      |           |             |     |          |      |           | #xx:8→CCR                                 | ↑ | ↑ | ↑ | ↑ | ↑ | 1                                    |
|          | LDC #xx:8,EXR          | B    | 4                                              |    |      |           |             |     |          |      |           | #xx:8→EXR                                 | — | — | — | — | — | 2                                    |
|          | LDC Rs,CCR             | B    |                                                | 2  |      |           |             |     |          |      |           | Rs8→CCR                                   | ↑ | ↑ | ↑ | ↑ | ↑ | 1                                    |
|          | LDC Rs,EXR             | B    |                                                | 2  |      |           |             |     |          |      |           | Rs8→EXR                                   | — | — | — | — | — | 1                                    |
|          | LDC @ERs,CCR           | W    |                                                |    | 4    |           |             |     |          |      |           | @ERs→CCR                                  | ↑ | ↑ | ↑ | ↑ | ↑ | 3                                    |
|          | LDC @ERs,EXR           | W    |                                                |    | 4    |           |             |     |          |      |           | @ERs→EXR                                  | — | — | — | — | — | 3                                    |
|          | LDC @ (d:16,ERs),CCR   | W    |                                                |    |      | 6         |             |     |          |      |           | @ (d:16,ERs)→CCR                          | ↑ | ↑ | ↑ | ↑ | ↑ | 4                                    |
|          | LDC @ (d:16,ERs),EXR   | W    |                                                |    |      | 6         |             |     |          |      |           | @ (d:16,ERs)→EXR                          | — | — | — | — | — | 4                                    |
|          | LDC @ (d:32,ERs),CCR   | W    |                                                |    |      | 10        |             |     |          |      |           | @ (d:32,ERs)→CCR                          | ↑ | ↑ | ↑ | ↑ | ↑ | 6                                    |
|          | LDC @ (d:32,ERs),EXR   | W    |                                                |    |      | 10        |             |     |          |      |           | @ (d:32,ERs)→EXR                          | — | — | — | — | — | 6                                    |
|          | LDC @ERs+,CCR          | W    |                                                |    |      |           | 4           |     |          |      |           | @ERs→CCR,ERs32+2→ERs32                    | ↑ | ↑ | ↑ | ↑ | ↑ | 4                                    |
|          | LDC @ERs+,EXR          | W    |                                                |    |      |           | 4           |     |          |      |           | @ERs→EXR,ERs32+2→ERs32                    | — | — | — | — | — | 4                                    |
|          | LDC @aa:16,CCR         | W    |                                                |    |      |           |             | 6   |          |      |           | @aa:16→CCR                                | ↑ | ↑ | ↑ | ↑ | ↑ | 4                                    |
|          | LDC @aa:16,EXR         | W    |                                                |    |      |           |             | 6   |          |      |           | @aa:16→EXR                                | — | — | — | — | — | 4                                    |
|          | LDC @aa:32,CCR         | W    |                                                |    |      |           |             |     | 8        |      |           | @aa:32→CCR                                | ↑ | ↑ | ↑ | ↑ | ↑ | 5                                    |
|          | LDC @aa:32,EXR         | W    |                                                |    |      |           |             |     | 8        |      |           | @aa:32→EXR                                | — | — | — | — | — | 5                                    |
| STC      | STC.B CCR,Rd           | B    |                                                | 2  |      |           |             |     |          |      |           | CCR→Rd8                                   | — | — | — | — | — | 1                                    |
|          | STC.B EXR,Rd           | B    |                                                | 2  |      |           |             |     |          |      |           | EXR→Rd8                                   | — | — | — | — | — | 1                                    |
|          | STC.W CCR,@ERd         | W    |                                                |    | 4    |           |             |     |          |      |           | CCR→@ERd                                  | — | — | — | — | — | 3                                    |
|          | STC.W EXR,@ERd         | W    |                                                |    | 4    |           |             |     |          |      |           | EXR→@ERd                                  | — | — | — | — | — | 3                                    |
|          | STC.W CCR,@ (d:16,ERd) | W    |                                                |    |      | 6         |             |     |          |      |           | CCR→@ (d:16,ERd)                          | — | — | — | — | — | 4                                    |
|          | STC.W EXR,@ (d:16,ERd) | W    |                                                |    |      | 6         |             |     |          |      |           | EXR→@ (d:16,ERd)                          | — | — | — | — | — | 4                                    |
|          | STC.W CCR,@ (d:32,ERd) | W    |                                                |    |      | 10        |             |     |          |      |           | CCR→@ (d:32,ERd)                          | — | — | — | — | — | 6                                    |
|          | STC.W EXR,@ (d:32,ERd) | W    |                                                |    |      | 10        |             |     |          |      |           | EXR→@ (d:32,ERd)                          | — | — | — | — | — | 6                                    |
|          | STC.W CCR,@-ERd        | W    |                                                |    |      |           | 4           |     |          |      |           | ERd32-2→ERd32,CCR→@ERd                    | — | — | — | — | — | 4                                    |
|          | STC.W EXR,@-ERd        | W    |                                                |    |      |           | 4           |     |          |      |           | ERd32-2→ERd32,EXR→@ERd                    | — | — | — | — | — | 4                                    |
|          | STC.W CCR,@aa:16       | W    |                                                |    |      |           |             | 6   |          |      |           | CCR→@aa:16                                | — | — | — | — | — | 4                                    |
|          | STC.W EXR,@aa:16       | W    |                                                |    |      |           |             | 6   |          |      |           | EXR→@aa:16                                | — | — | — | — | — | 4                                    |
|          | STC.W CCR,@aa:32       | W    |                                                |    |      |           |             |     | 8        |      |           | CCR→@aa:32                                | — | — | — | — | — | 5                                    |
|          | STC.W EXR,@aa:32       | W    |                                                |    |      |           |             |     | 8        |      |           | EXR→@aa:32                                | — | — | — | — | — | 5                                    |
| ANDC     | ANDC #xx:8,CCR         | B    | 2                                              |    |      |           |             |     |          |      |           | CCR^#xx:8→CCR                             | ↑ | ↑ | ↑ | ↑ | ↑ | 1                                    |
|          | ANDC #xx:8,EXR         | B    | 4                                              |    |      |           |             |     |          |      |           | EXR^#xx:8→EXR                             | — | — | — | — | — | 2                                    |
| ORC      | ORC #xx:8,CCR          | B    | 2                                              |    |      |           |             |     |          |      |           | CCRv#xx:8→CCR                             | ↑ | ↑ | ↑ | ↑ | ↑ | 1                                    |
|          | ORC #xx:8,EXR          | B    | 4                                              |    |      |           |             |     |          |      |           | EXRv#xx:8→EXR                             | — | — | — | — | — | 2                                    |
| XORC     | XORC #xx:8,CCR         | B    | 2                                              |    |      |           |             |     |          |      |           | CCR@#xx:8→CCR                             | ↑ | ↑ | ↑ | ↑ | ↑ | 1                                    |
|          | XORC #xx:8,EXR         | B    | 4                                              |    |      |           |             |     |          |      |           | EXR@#xx:8→EXR                             | — | — | — | — | — | 2                                    |
| NOP      | NOP                    | —    |                                                |    |      |           |             |     |          | 2    | PC←PC+2   | —                                         | — | — | — | — | — | 1                                    |

**Table A.8 Block Transfer Instructions**

| Mnemonic | Size     | Addressing Mode and Instruction Length (Bytes) |    |      |          |             |     |         |      |   | Operation                                                                                        | Condition Code |   |   |   |   |   | No of Execution States <sup>*1</sup> |
|----------|----------|------------------------------------------------|----|------|----------|-------------|-----|---------|------|---|--------------------------------------------------------------------------------------------------|----------------|---|---|---|---|---|--------------------------------------|
|          |          | #xx                                            | Rn | @ERn | @(d,ERn) | @-ERn/@ERn+ | @aa | @(d,PC) | @@aa |   |                                                                                                  | I              | H | N | Z | V | C |                                      |
|          |          |                                                |    |      |          |             |     |         |      |   |                                                                                                  |                |   |   |   |   |   | Advanced Mode                        |
| EEPMOV   | EEPMOV.B | —                                              |    |      |          |             |     |         |      | 4 | if R4L≠0<br>Repeat @ER5→@ER6<br>ER5+1→ER5<br>ER6+1→ER6<br>R4L-1→R4L<br>Until R4L=0<br>else next; | —              | — | — | — | — | — | 4+2n*3                               |
|          | EEPMOV.W | —                                              |    |      |          |             |     |         |      | 4 | if R4≠0<br>Repeat @ER5→@ER6<br>ER5+1→ER5<br>ER6+1→ER6<br>R4-1→R4<br>Until R4=0<br>else next;     | —              | — | — | — | — | — | 4+2n*3                               |

- Notes: 1. The values indicated in the column of number of execution states apply when instruction code and operand exist in the on-chip memory.
2. Only register ER0, ER1, ER4, or ER5 should be used when using the TAS instruction.
3. n is the initial setting value of R4L or R4.
4. Only registers ER0 to ER6 should be used when using the STM/LDM instruction.
- [1] 7 states when the number of return/retract registers is 2, 9 states when the number of registers is 3, and 11 states when the number of registers is 4.
- [2] Cannot be used in this LSI.
- [3] Set to 1 when a carry or borrow occurs at bit 11, otherwise cleared to 0.
- [4] Set to 1 when a carry or borrow occurs at bit 27, otherwise cleared to 0.
- [5] Retains the value before computation when the computation result is 0, otherwise cleared to 0.
- [6] Set to 1 when the divisor is negative, otherwise cleared to 0.
- [7] Set to 1 when the divisor is 0, otherwise cleared to 0.
- [8] Set to 1 when the quotient is negative, otherwise cleared to 0.
- [9] 1 is added to the number of execution states when EXR is valid.

## A.2 Instruction Codes

Table A.9 Instruction Codes

| Instruction | Mnemonic            | Op/CS | Instruction Format |          |          |          |          |          |          |          |          |           |
|-------------|---------------------|-------|--------------------|----------|----------|----------|----------|----------|----------|----------|----------|-----------|
|             |                     |       | 1st byte           | 2nd byte | 3rd byte | 4th byte | 5th byte | 6th byte | 7th byte | 8th byte | 9th byte | 10th byte |
| ADD         | ADD.B #xx:8,Rd      | B     | 8                  | rd       | IMM      |          |          |          |          |          |          |           |
|             | ADD.B Rs,Rd         | B     | 0                  | 8        | rs       | rd       |          |          |          |          |          |           |
|             | ADD.W #xx:16,Rd     | W     | 7                  | 9        | 1        | rd       |          |          |          |          |          |           |
|             | ADD.W Rs,Rd         | W     | 0                  | 9        | rs       | rd       |          |          |          |          |          |           |
|             | ADD.L #xx:32,ERd    | L     | 7                  | A        | 1        | 0:erd    |          |          |          |          |          |           |
|             | ADD.L ERs,ERd       | L     | 0                  | A        | 1:ers    | 0:erd    | IMM      |          |          |          |          |           |
| ADDS        | ADDS #1,ERd         | L     | 0                  | B        | 0        | 0:erd    |          |          |          |          |          |           |
|             | ADDS #2,ERd         | L     | 0                  | B        | 8        | 0:erd    |          |          |          |          |          |           |
|             | ADDS #4,ERd         | L     | 0                  | B        | 9        | 0:erd    |          |          |          |          |          |           |
|             | ADDS #x:8,Rd        | B     | 9                  | rd       | IMM      |          |          |          |          |          |          |           |
| ADDX        | ADDX Rs,Rd          | B     | 0                  | E        | rs       | rd       |          |          |          |          |          |           |
|             | ADDX #xx:8,Rd       | B     | E                  | rd       | IMM      |          |          |          |          |          |          |           |
|             | ADDX Rs,Rd          | B     | 1                  | 6        | rs       | rd       |          |          |          |          |          |           |
|             | ADDX #xx:16,Rd      | W     | 7                  | 9        | 6        | rd       | IMM      |          |          |          |          |           |
| AND         | AND.W Rs,Rd         | W     | 6                  | 6        | rs       | rd       |          |          |          |          |          |           |
|             | AND.L #xx:32,ERd    | L     | 7                  | A        | 6        | 0:erd    |          |          |          |          |          |           |
|             | AND.L ERs,ERd       | L     | 0                  | F        | 0        | 0:ers    | 0:erd    |          |          |          |          |           |
|             | ANDC #xx:8,CCR      | B     | 0                  | 6        | IMM      |          |          |          |          |          |          |           |
|             | ANDC #xx:8,EXR      | B     | 0                  | 1        | 4        | 1        | 0        | 6        | IMM      |          |          |           |
|             | BAND #xx:3,Rd       | B     | 7                  | 6        | 0:IMM    | rd       |          |          |          |          |          |           |
| BAND        | BAND #xx:3,@ERd     | B     | 7                  | C        | 0:erd    | 0        | 7        | 6        | 0:IMM    | 0        |          |           |
|             | BAND #xx:3,@aax:8   | B     | 7                  | E        | abs      | 0        | 7        | 6        | 0:IMM    | 0        |          |           |
|             | BAND #xx:3,@aax:16  | B     | 6                  | A        | 1        | 0        | abs      |          |          |          |          |           |
|             | BAND #xx:3,@aax:32  | B     | 6                  | A        | 3        | 0        | abs      |          |          |          |          |           |
|             | BRA d:8,(BT d:8)    | —     | 4                  | 0        | disp     |          |          |          | 7        | 6        | 0:IMM    | 0         |
|             | BRA d:16,(BT d:16)  | —     | 5                  | 8        | 0        | 0        | disp     |          |          |          |          |           |
| Bcc         | BRN d:8,(BF d:8)    | —     | 4                  | 1        | disp     |          |          |          |          |          |          |           |
|             | BRN d:16,(BF d:16)  | —     | 5                  | 8        | 1        | 0        | disp     |          |          |          |          |           |
|             | BHI d:8             | —     | 4                  | 2        | disp     |          |          |          |          |          |          |           |
|             | BHI d:16            | —     | 5                  | 8        | 2        | 0        | disp     |          |          |          |          |           |
|             | BLS d:8             | —     | 4                  | 3        | disp     |          |          |          |          |          |          |           |
|             | BLS d:16            | —     | 5                  | 8        | 3        | 0        | disp     |          |          |          |          |           |
|             | BCC d:8,(BHS d:8)   | —     | 4                  | 4        | disp     |          |          |          |          |          |          |           |
|             | BCC d:16,(BHS d:16) | —     | 5                  | 8        | 4        | 0        | disp     |          |          |          |          |           |
|             | BCS d:8,(BLO d:8)   | —     | 4                  | 5        | disp     |          |          |          |          |          |          |           |
|             | BCS d:16,(BLO d:16) | —     | 5                  | 8        | 5        | 0        | disp     |          |          |          |          |           |
|             | BNE d:8             | —     | 4                  | 6        | disp     |          |          |          |          |          |          |           |
|             | BNE d:16            | —     | 5                  | 8        | 6        | 0        | disp     |          |          |          |          |           |
|             | BEQ d:8             | —     | 4                  | 7        | disp     |          |          |          |          |          |          |           |
|             | BEQ d:16            | —     | 5                  | 8        | 7        | 0        | disp     |          |          |          |          |           |
|             | BVC d:8             | —     | 4                  | 8        | disp     |          |          |          |          |          |          |           |
|             | BVC d:16            | —     | 5                  | 8        | 8        | 0        | disp     |          |          |          |          |           |
|             | BVS d:8             | —     | 4                  | 9        | disp     |          |          |          |          |          |          |           |
|             | BVS d:16            | —     | 5                  | 8        | 9        | 0        | disp     |          |          |          |          |           |

| Instruction    | Mnemonic           | Size | Instruction Format |          |          |          |          |          |          |          |          |           |
|----------------|--------------------|------|--------------------|----------|----------|----------|----------|----------|----------|----------|----------|-----------|
|                |                    |      | 1st Byte           | 2nd byte | 3rd byte | 4th byte | 5th byte | 6th byte | 7th byte | 8th byte | 9th byte | 10th byte |
| Bcc<br>(Cont.) | BPL d8             | —    | 4 : A              | disp     |          |          |          |          |          |          |          |           |
|                | BPL d16            | —    | 5 : 8<br>A : 0     | disp     |          |          |          |          |          |          |          |           |
|                | BMI d8             | —    | 4 : B              | disp     |          |          |          |          |          |          |          |           |
|                | BMI d16            | —    | 5 : 8<br>B : 0     | disp     |          |          |          |          |          |          |          |           |
|                | BGE d8             | —    | 4 : C              | disp     |          |          |          |          |          |          |          |           |
|                | BGE d16            | —    | 5 : 8<br>C : 0     | disp     |          |          |          |          |          |          |          |           |
|                | BLT d8             | —    | 4 : D              | disp     |          |          |          |          |          |          |          |           |
|                | BLT d16            | —    | 5 : 8<br>D : 0     | disp     |          |          |          |          |          |          |          |           |
|                | BGT d8             | —    | 4 : E              | disp     |          |          |          |          |          |          |          |           |
|                | BGT d16            | —    | 5 : 8<br>E : 0     | disp     |          |          |          |          |          |          |          |           |
| BCLR           | BLE d8             | —    | 4 : F              | disp     |          |          |          |          |          |          |          |           |
|                | BLE d16            | —    | 5 : 8<br>F : 0     | disp     |          |          |          |          |          |          |          |           |
|                | BCLR #xx:3.Rd      | B    | 7 : 2<br>0:IMM; rd |          |          |          |          |          |          |          |          |           |
|                | BCLR #xx:3.@ERd    | B    | 7 : D<br>0:erd; 0  |          |          |          |          |          |          |          |          |           |
|                | BCLR #xx:3.@aa:8   | B    | 7 : F<br>abs       |          |          |          |          |          |          |          |          |           |
|                | BCLR #xx:3.@aa:16  | B    | 6 : A<br>1 : 8     |          |          |          |          |          |          |          |          |           |
|                | BCLR #xx:3.@aa:32  | B    | 6 : A<br>3 : 8     |          |          |          |          |          |          |          |          |           |
|                | BCLR Rn.Rd         | B    | 6 : 2<br>rd        |          |          |          |          |          |          |          |          |           |
|                | BCLR Rn.@ERd       | B    | 7 : D<br>0:erd; 0  |          |          |          |          |          |          |          |          |           |
|                | BCLR Rn.@aa:8      | B    | 7 : F<br>abs       |          |          |          |          |          |          |          |          |           |
| BIAND          | BCLR Rn.@aa:16     | B    | 6 : A<br>1 : 8     |          |          |          |          |          |          |          |          |           |
|                | BCLR Rn.@aa:32     | B    | 6 : A<br>3 : 8     |          |          |          |          |          |          |          |          |           |
|                | BIAND #xx:3.Rd     | B    | 7 : 6<br>1:IMM; rd |          |          |          |          |          |          |          |          |           |
|                | BIAND #xx:3.@ERd   | B    | 7 : C<br>0:erd; 0  |          |          |          |          |          |          |          |          |           |
|                | BIAND #xx:3.@aa:8  | B    | 7 : E<br>abs       |          |          |          |          |          |          |          |          |           |
|                | BIAND #xx:3.@aa:16 | B    | 6 : A<br>1 : 0     |          |          |          |          |          |          |          |          |           |
|                | BIAND #xx:3.@aa:32 | B    | 6 : A<br>3 : 0     |          |          |          |          |          |          |          |          |           |
|                | BILD #xx:3.Rd      | B    | 7 : 7<br>1:IMM; rd |          |          |          |          |          |          |          |          |           |
|                | BILD #xx:3.@ERd    | B    | 7 : C<br>0:erd; 0  |          |          |          |          |          |          |          |          |           |
|                | BILD #xx:3.@aa:8   | B    | 7 : E<br>abs       |          |          |          |          |          |          |          |          |           |
| BIOR           | BILD #xx:3.@aa:16  | B    | 6 : A<br>1 : 0     |          |          |          |          |          |          |          |          |           |
|                | BILD #xx:3.@aa:32  | B    | 6 : A<br>3 : 0     |          |          |          |          |          |          |          |          |           |
|                | BIOR #xx:3.Rd      | B    | 7 : 4<br>1:IMM; rd |          |          |          |          |          |          |          |          |           |
|                | BIOR #xx:3.@ERd    | B    | 7 : C<br>0:erd; 0  |          |          |          |          |          |          |          |          |           |
|                | BIOR #xx:3.@aa:8   | B    | 7 : E<br>abs       |          |          |          |          |          |          |          |          |           |
|                | BIOR #xx:3.@aa:16  | B    | 6 : A<br>1 : 0     |          |          |          |          |          |          |          |          |           |
|                | BIOR #xx:3.@aa:32  | B    | 6 : A<br>3 : 0     |          |          |          |          |          |          |          |          |           |
|                | BIST #xx:3.Rd      | B    | 6 : 7<br>1:IMM; rd |          |          |          |          |          |          |          |          |           |
|                | BIST #xx:3.@ERd    | B    | 7 : D<br>0:erd; 0  |          |          |          |          |          |          |          |          |           |
|                | BIST #xx:3.@aa:8   | B    | 7 : F<br>abs       |          |          |          |          |          |          |          |          |           |
| BIST           | BIST #xx:3.@aa:16  | B    | 6 : A<br>1 : 8     |          |          |          |          |          |          |          |          |           |
|                | BIST #xx:3.@aa:32  | B    | 6 : A<br>3 : 8     |          |          |          |          |          |          |          |          |           |

| Instruction | Mnemonic          | O<br>Size | Instruction Format |          |           |          |          |          |          |          |          |           |
|-------------|-------------------|-----------|--------------------|----------|-----------|----------|----------|----------|----------|----------|----------|-----------|
|             |                   |           | 1st byte           | 2nd byte | 3rd byte  | 4th byte | 5th byte | 6th byte | 7th byte | 8th byte | 9th byte | 10th byte |
| BIXOR       | BIXOR #xx:3,Rd    | B         | 7                  | 5        | 1:IMM; rd |          |          |          |          |          |          |           |
|             | BIXOR #xx:3,@ERd  | B         | 7                  | C        | 0:erd     | 0        | 7        | 5        | 1:IMM; 0 |          |          |           |
|             | BIXOR #xx:3,@aa8  | B         | 7                  | E        | abs       |          | 7        | 5        | 1:IMM; 0 |          |          |           |
|             | BIXOR #xx:3,@aa16 | B         | 6                  | A        | 1         | 1        | 0        | 0        |          |          |          |           |
|             | BIXOR #xx:3,@aa32 | B         | 6                  | A        | 3         | 0        | 0        |          |          |          |          |           |
| BLD         | BLD #xx:3,Rd      | B         | 7                  | 7        | 0:IMM; rd |          |          |          |          |          |          |           |
|             | BLD #xx:3,@ERd    | B         | 7                  | C        | 0:erd     | 0        | 7        | 7        | 0:IMM; 0 |          |          |           |
|             | BLD #xx:3,@aa8    | B         | 7                  | E        | abs       |          | 7        | 7        | 0:IMM; 0 |          |          |           |
|             | BLD #xx:3,@aa16   | B         | 6                  | A        | 1         | 1        | 0        | 0        |          |          |          |           |
|             | BLD #xx:3,@aa32   | B         | 6                  | A        | 3         | 0        | 0        |          |          |          |          |           |
| BNOT        | BNOT #xx:3,Rd     | B         | 7                  | 1        | 0:IMM; rd |          |          |          |          |          |          |           |
|             | BNOT #xx:3,@ERd   | B         | 7                  | D        | 0:erd     | 0        | 7        | 1        | 0:IMM; 0 |          |          |           |
|             | BNOT #xx:3,@aa8   | B         | 7                  | F        | abs       |          | 7        | 1        | 0:IMM; 0 |          |          |           |
|             | BNOT #xx:3,@aa16  | B         | 6                  | A        | 1         | 8        |          |          |          |          |          |           |
|             | BNOT #xx:3,@aa32  | B         | 6                  | A        | 3         | 8        |          |          |          |          |          |           |
|             | BNOT Rn,Rd        | B         | 6                  | 1        | rd        |          |          |          |          |          |          |           |
|             | BNOT Rn,@ERd      | B         | 7                  | D        | 0:erd     | 0        | 6        | 1        | rd       | 0        |          |           |
|             | BNOT Rn,@aa8      | B         | 7                  | F        | abs       |          | 6        | 1        | rd       | 0        |          |           |
|             | BNOT Rn,@aa16     | B         | 6                  | A        | 1         | 8        |          |          |          |          |          |           |
|             | BNOT Rn,@aa32     | B         | 6                  | A        | 3         | 8        |          |          |          |          |          |           |
| BOR         | BOR #xx:3,Rd      | B         | 7                  | 4        | 0:IMM; rd |          |          |          |          |          |          |           |
|             | BOR #xx:3,@ERd    | B         | 7                  | C        | 0:erd     | 0        | 7        | 4        | 0:IMM; 0 |          |          |           |
|             | BOR #xx:3,@aa8    | B         | 7                  | E        | abs       |          | 7        | 4        | 0:IMM; 0 |          |          |           |
|             | BOR #xx:3,@aa16   | B         | 6                  | A        | 1         | 0        |          |          |          |          |          |           |
|             | BOR #xx:3,@aa32   | B         | 6                  | A        | 3         | 0        |          |          |          |          |          |           |
| BSET        | BSET #xx:3,Rd     | B         | 7                  | 0        | 0:IMM; rd |          |          |          |          |          |          |           |
|             | BSET #xx:3,@ERd   | B         | 7                  | D        | 0:erd     | 0        | 7        | 0        | 0:IMM; 0 |          |          |           |
|             | BSET #xx:3,@aa:8  | B         | 7                  | F        | abs       |          | 7        | 0        | 0:IMM; 0 |          |          |           |
|             | BSET #xx:3,@aa:16 | B         | 6                  | A        | 1         | 8        |          |          |          |          |          |           |
|             | BSET #xx:3,@aa:32 | B         | 6                  | A        | 3         | 8        |          |          |          |          |          |           |
|             | BSET Rn,Rd        | B         | 6                  | 0        | rd        |          |          |          |          |          |          |           |
|             | BSET Rn,@ERd      | B         | 7                  | D        | 0:erd     | 0        | 6        | 0        | rd       | 0        |          |           |
| BSR         | BSET Rn,@aa:8     | B         | 7                  | F        | abs       |          | 6        | 0        | rd       | 0        |          |           |
|             | BSET Rn,@aa:16    | B         | 6                  | A        | 1         | 8        |          |          |          |          |          |           |
|             | BSET Rn,@aa:32    | B         | 6                  | A        | 3         | 8        |          |          |          |          |          |           |
|             | BSR d:8           | —         | 5                  | 5        | disp      |          |          |          |          |          |          |           |
|             | BSR d:16          | —         | 5                  | C        | 0         | 0        |          |          |          |          |          |           |
|             | BST #xx:3,Rd      | B         | 6                  | 7        | 0:IMM; rd |          |          |          |          |          |          |           |
|             | BST #xx:3,@ERd    | B         | 7                  | D        | 0:erd     | 0        | 6        | 7        | 0:IMM; 0 |          |          |           |
| BST         | BST #xx:3,@aa8    | B         | 7                  | F        | abs       |          | 6        | 7        | 0:IMM; 0 |          |          |           |
|             | BST #xx:3,@aa:16  | B         | 6                  | A        | 1         | 8        |          |          |          |          |          |           |
|             | BST #xx:3,@aa:32  | B         | 6                  | A        | 3         | 8        |          |          |          |          |          |           |

| Instruction | Mnemonic          | Size | Instruction Format         |          |           |          |          |          |          |          |          |           |
|-------------|-------------------|------|----------------------------|----------|-----------|----------|----------|----------|----------|----------|----------|-----------|
|             |                   |      | 1st byte                   | 2nd byte | 3rd byte  | 4th byte | 5th byte | 6th byte | 7th byte | 8th byte | 9th byte | 10th byte |
| BTST        | BTST #xx:3,Rd     | B    | 7                          | 3        | 0:IMM; rd |          |          |          |          |          |          |           |
|             | BTST #xx:3,@ERd   | B    | 7                          | C        | 0:erd     | 0        | 7        | 3        | 0:IMM; 0 |          |          |           |
|             | BTST #xx:3,@aa:8  | B    | 7                          | E        | abs       |          | 7        | 3        | 0:IMM; 0 |          |          |           |
|             | BTST #xx:3,@aa:16 | B    | 6                          | A        | 1         | 0        | abs      |          |          |          |          |           |
|             | BTST #xx:3,@aa:32 | B    | 6                          | A        | 3         | 0        |          |          | 7        | 3        | 0:IMM; 0 |           |
|             | BTST Rn,Rd        | B    | 6                          | 3        | rd        |          |          |          |          |          |          |           |
| BXOR        | BTST Rn,@ERd      | B    | 7                          | C        | 0:erd     | 0        | 6        | 3        | m        | 0        |          |           |
|             | BTST Rn,@aa:8     | B    | 7                          | E        | abs       |          | 6        | 3        | m        | 0        |          |           |
|             | BTST Rn,@aa:16    | B    | 6                          | A        | 1         | 0        | abs      |          |          |          |          |           |
|             | BTST Rn,@aa:32    | B    | 6                          | A        | 3         | 0        |          |          | 6        | 3        | m        | 0         |
|             | BXOR #xx:3,Rd     | B    | 7                          | 5        | 0:IMM; rd |          | abs      |          |          |          |          |           |
|             | BXOR #xx:3,@ERd   | B    | 7                          | C        | 0:erd     | 0        | 7        | 5        | 0:IMM; 0 |          |          |           |
| CLRMAC      | BXOR #xx:3,@aa:8  | B    | 7                          | E        | abs       |          | 7        | 5        | 0:IMM; 0 |          |          |           |
|             | BXOR #xx:3,@aa:16 | B    | 6                          | A        | 1         | 0        | abs      |          |          |          |          |           |
|             | BXOR #xx:3,@aa:32 | B    | 6                          | A        | 3         | 0        |          |          | 7        | 5        | 0:IMM; 0 |           |
|             | CLRMAC            | —    | Cannot be used in this LSI |          |           |          |          |          |          |          |          |           |
|             | CMP.B #xx:8,Rd    | B    | A                          | rd       | IMM       |          |          |          |          |          |          |           |
|             | CMP.B Rs,Rd       | B    | 1                          | C        | rs        | rd       |          |          |          |          |          |           |
| CMP         | CMP.W #xx:16,Rd   | W    | 7                          | 9        | 2         | rd       | IMM      |          |          |          |          |           |
|             | CMP.W Rs,Rd       | W    | 1                          | D        | rs        | rd       |          |          |          |          |          |           |
|             | CMP.L #xx:32,ERd  | L    | 7                          | A        | 2         | 0:erd    |          |          |          |          |          |           |
|             | CMP.L ERs,ERd     | L    | 1                          | F        | 1:ers     | 0:erd    | IMM      |          |          |          |          |           |
|             | DAA Rd            | B    | 0                          | F        | 0         | rd       |          |          |          |          |          |           |
|             | DAS Rd            | B    | 1                          | F        | 0         | rd       |          |          |          |          |          |           |
| DEC         | DEC.B Rd          | B    | 1                          | A        | 0         | rd       |          |          |          |          |          |           |
|             | DEC.W #1,Rd       | W    | 1                          | B        | 5         | rd       |          |          |          |          |          |           |
|             | DEC.W #2,Rd       | W    | 1                          | B        | D         | rd       |          |          |          |          |          |           |
|             | DEC.L #1,ERd      | L    | 1                          | B        | 7         | 0:erd    |          |          |          |          |          |           |
|             | DEC.L #2,ERd      | L    | 1                          | B        | F         | 0:erd    |          |          |          |          |          |           |
|             | DIVXS.B Rs,Rd     | B    | 0                          | 1        | D         | 0        | 5        | 1        | rs       | rd       |          |           |
| DIVXU       | DIVXS.W Rs,ERd    | W    | 0                          | 1        | D         | 0        | 5        | 3        | rs       | 0:erd    |          |           |
|             | DIVXU.B Rs,Rd     | B    | 5                          | 1        | rs        | rd       |          |          |          |          |          |           |
|             | DIVXU.W Rs,ERd    | W    | 5                          | 3        | rs        | 0:erd    |          |          |          |          |          |           |
|             | EEPMOV.B          | —    | 7                          | B        | 5         | C        | 5        | 9        | 8        | F        |          |           |
|             | EEPMOV.W          | —    | 7                          | B        | D         | 4        | 5        | 9        | 8        | F        |          |           |
|             | EXTS.W Rd         | W    | 1                          | 7        | D         | rd       |          |          |          |          |          |           |
| EXTU        | EXTS.L ERd        | L    | 1                          | 7        | F         | 0:erd    |          |          |          |          |          |           |
|             | EXTU.W Rd         | W    | 1                          | 7        | 5         | rd       |          |          |          |          |          |           |
|             | EXTU.L ERd        | L    | 1                          | 7        | 7         | 0:erd    |          |          |          |          |          |           |

| Instruction | Mnemonic                | size (B) | Instruction Format         |          |          |          |          |          |          |          |          |         |
|-------------|-------------------------|----------|----------------------------|----------|----------|----------|----------|----------|----------|----------|----------|---------|
|             |                         |          | 1st byte                   | 2nd byte | 3rd byte | 4th byte | 5th byte | 6th byte | 7th byte | 8th byte | 9th byte | 10 byte |
| INC         | INC.B Rd                | B        | 0                          | A        | 0        | rd       |          |          |          |          |          |         |
|             | INC.W #1,Rd             | W        | 0                          | B        | 5        | rd       |          |          |          |          |          |         |
|             | INC.W #2,Rd             | W        | 0                          | B        | D        | rd       |          |          |          |          |          |         |
|             | INCL #1,ERd             | L        | 0                          | B        | 7        | 0:erd    |          |          |          |          |          |         |
|             | INCL #2,ERd             | L        | 0                          | B        | F        | 0:erd    |          |          |          |          |          |         |
| JMP         | JMP @ERn                | —        | 5                          | 9        | 0:ern; 0 |          |          |          |          |          |          |         |
|             | JMP @aa:24              | —        | 5                          | A        | abs      |          |          |          |          |          |          |         |
|             | JMP @aa:8               | —        | 5                          | B        | abs      |          |          |          |          |          |          |         |
|             | JMP @aa:24              | —        | 5                          | D        | 0:ern; 0 |          |          |          |          |          |          |         |
| JSR         | JSR @ERn                | —        | 5                          | E        | abs      |          |          |          |          |          |          |         |
|             | JSR @aa:8               | —        | 5                          | F        | abs      |          |          |          |          |          |          |         |
|             | LDC #xx:8,CCR           | B        | 0                          | 7        | IMM      |          |          |          |          |          |          |         |
|             | LDC #xx:8,EXR           | B        | 0                          | 1        | 4        | 1        | 0        | 7        | IMM      |          |          |         |
| LDC         | LDC Rs,CCR              | B        | 0                          | 3        | 0        | rs       |          |          |          |          |          |         |
|             | LDC Rs,EXR              | B        | 0                          | 3        | 1        | rs       |          |          |          |          |          |         |
|             | LDC @ERs,CCR            | W        | 0                          | 1        | 4        | 0        | 6        | 9        | 0:ers    | 0        |          |         |
|             | LDC @ERs,EXR            | W        | 0                          | 1        | 4        | 0        | 6        | 9        | 0:ers    | 0        |          |         |
|             | LDC @(d:16,ERs),CCR     | W        | 0                          | 1        | 4        | 0        | 6        | F        | 0:ers    | 0        |          |         |
|             | LDC @(d:16,ERs),EXR     | W        | 0                          | 1        | 4        | 0        | 7        | 8        | 0:ers    | 0        |          |         |
|             | LDC @(d:32,ERs),CCR     | W        | 0                          | 1        | 4        | 0        | 7        | 8        | 0:ers    | 0        |          |         |
|             | LDC @(d:32,ERs),EXR     | W        | 0                          | 1        | 4        | 0        | 7        | 8        | 0:ers    | 0        |          |         |
|             | LDC @ERs+,CCR           | W        | 0                          | 1        | 4        | 0        | 6        | D        | 0:ers    | 0        |          |         |
|             | LDC @ERs+,EXR           | W        | 0                          | 1        | 4        | 0        | 6        | D        | 0:ers    | 0        |          |         |
|             | LDC @aa:16,CCR          | W        | 0                          | 1        | 4        | 0        | 6        | B        | 0        | 0        |          |         |
|             | LDC @aa:16,EXR          | W        | 0                          | 1        | 4        | 0        | 6        | B        | 0        | 0        |          |         |
|             | LDC @aa:32,CCR          | W        | 0                          | 1        | 4        | 0        | 6        | B        | 2        | 0        |          |         |
|             | LDC @aa:32,EXR          | W        | 0                          | 1        | 4        | 0        | 6        | B        | 2        | 0        |          |         |
|             | LDM.L @SP+, (ERn-ERn+1) | L        | 0                          | 1        | 1        | 0        | 6        | D        | 7        | 0:ern+1  |          |         |
| LDM*+3      | LDM.L @SP+, (ERn-ERn+2) | L        | 0                          | 1        | 2        | 0        | 6        | D        | 7        | 0:ern+2  |          |         |
|             | LDM.L @SP+, (ERn-ERn+3) | L        | 0                          | 1        | 3        | 0        | 6        | D        | 7        | 0:ern+3  |          |         |
|             | LDMAC                   | L        |                            |          |          |          |          |          |          |          |          |         |
| MAC         | LDMAC ERs,MACL          | L        | Cannot be used in this LS1 |          |          |          |          |          |          |          |          |         |
|             | MAC @ERn+:@ERn+         | —        |                            |          |          |          |          |          |          |          |          |         |
|             | MOV.B #xx:8,Rd          | B        | F                          | rd       | IMM      |          |          |          |          |          |          |         |
|             | MOV.B Rs,Rd             | B        | 0                          | C        | rs       | rd       |          |          |          |          |          |         |
|             | MOV.B @ERs,Rd           | B        | 6                          | 8        | 0:ers    | rd       |          |          |          |          |          |         |
|             | MOV.B @(d:16,ERs),Rd    | B        | 6                          | E        | 0:ers    | rd       |          |          |          |          |          |         |
|             | MOV.B @(d:32,ERs),Rd    | B        | 7                          | 8        | 0:ers    | 0        | disp     |          |          |          |          |         |
|             | MOV.B @ERs+,Rd          | B        | 6                          | C        | 0:ers    | rd       | 6        | A        | 2        | rd       |          |         |
|             | MOV.B @aa:8,Rd          | B        | 2                          | rd       | abs      |          |          |          |          |          |          |         |
|             | MOV.B @aa:16,Rd         | B        | 6                          | A        | 0        | rd       | abs      |          |          |          |          |         |
|             | MOV.B @aa:32,Rd         | B        | 6                          | A        | 2        | rd       | abs      |          |          |          |          |         |
|             | MOV.B Rs,@ERd           | B        | 6                          | 8        | 1:erd    | rs       |          |          |          |          |          |         |
|             | MOV.B Rs,@(d:16,ERd)    | B        | 6                          | E        | 1:erd    | rs       | disp     |          |          |          |          |         |
|             | MOV.B Rs,@(d:32,ERd)    | B        | 7                          | 8        | 0:erd    | 0        | 6        | A        | A        | rs       |          |         |
|             |                         |          |                            |          |          |          |          |          |          |          |          |         |
|             |                         |          |                            |          |          |          |          |          |          |          |          |         |
|             |                         |          |                            |          |          |          |          |          |          |          |          |         |
|             |                         |          |                            |          |          |          |          |          |          |          |          |         |



| Instruction                                               | Mnemonic                | Size | Instruction Format         |          |          |          |          |          |          |          |          |           |
|-----------------------------------------------------------|-------------------------|------|----------------------------|----------|----------|----------|----------|----------|----------|----------|----------|-----------|
|                                                           |                         |      | 1st byte                   | 2nd byte | 3rd byte | 4th byte | 5th byte | 6th byte | 7th byte | 8th byte | 9th byte | 10th byte |
| MOV<br>(Cont.)                                            | MOV.B Rs,@ERd           | B    | 6                          | C        | 1:erd    | rs       |          |          |          |          |          |           |
|                                                           | MOV.B Rs,@aa:8          | B    | 3                          | rs       | abs      |          |          |          |          |          |          |           |
|                                                           | MOV.B Rs,@aa:16         | B    | 6                          | A        | 8        | rs       | abs      |          |          |          |          |           |
|                                                           | MOV.B Rs,@aa:32         | B    | 6                          | A        | A        | rs       | abs      |          |          |          |          |           |
|                                                           | MOV.W #xx:16,Rd         | W    | 7                          | 9        | 0        | rd       |          |          |          |          |          |           |
|                                                           | MOV.W Rs,Rd             | W    | 0                          | D        | rs       | rd       |          |          |          |          |          |           |
|                                                           | MOV.W @ERs,Rd           | W    | 6                          | 9        | 0:ers    | rd       |          |          |          |          |          |           |
|                                                           | MOV.W @(d:16,ERs),Rd    | W    | 6                          | F        | 0:ers    | rd       |          |          |          |          |          |           |
|                                                           | MOV.W @(d:32,ERs),Rd    | W    | 7                          | 8        | 0:ers    | 0        |          |          | disp     |          |          |           |
|                                                           | MOV.W @ERs+,Rd          | W    | 6                          | D        | 0:ers    | rd       |          |          |          |          |          |           |
|                                                           | MOV.W @aa:16,Rd         | W    | 6                          | B        | 0        | rd       | abs      |          |          |          |          |           |
|                                                           | MOV.W @aa:32,Rd         | W    | 6                          | B        | 2        | rd       | abs      |          |          |          |          |           |
|                                                           | MOV.W Rs,@ERd           | W    | 6                          | 9        | 1:erd    | rs       |          |          |          |          |          |           |
|                                                           | MOV.W Rs,@(d:16,ERd)    | W    | 6                          | F        | 1:erd    | rs       |          |          |          |          |          |           |
|                                                           | MOV.W Rs,@(d:32,ERd)    | W    | 7                          | 8        | 0:erd    | 0        |          |          | disp     |          |          |           |
|                                                           | MOV.W Rs,@-ERd          | W    | 6                          | D        | 1:erd    | rs       |          |          |          |          |          |           |
|                                                           | MOV.W Rs,@aa:16         | W    | 6                          | B        | 8        | rs       | abs      |          |          |          |          |           |
|                                                           | MOV.W Rs,@aa:32         | W    | 6                          | B        | A        | rs       | abs      |          |          |          |          |           |
|                                                           | MOV.L #xx:32,Rd         | W    | 7                          | A        | 0        | 0:erd    |          |          |          |          |          |           |
|                                                           | MOV.L ERs,ERd           | L    | 0                          | F        | 1:ers    | 0:erd    | IMM      |          |          |          |          |           |
| MOVFPPE<br>MOVFPPE<br>MULXS<br>MULXU<br>NEG<br>NEG<br>NOP | MOV.L @ERs,ERd          | L    | 0                          | 1        | 0        | 0        | 6        | 9        | 0:ers    | 0:erd    |          |           |
|                                                           | MOV.L @(d:16,ERs),ERd   | L    | 0                          | 1        | 0        | 0        | 6        | F        | 0:ers    | 0:erd    |          |           |
|                                                           | MOV.L @(d:32,ERs),ERd   | L    | 0                          | 1        | 0        | 0        | 7        | 8        | 0:ers    | 0        |          |           |
|                                                           | MOV.L @ERs+,ERd         | L    | 0                          | 1        | 0        | 0        | 6        | D        | 0:ers    | 0:erd    |          |           |
|                                                           | MOV.L @aa:16,ERd        | L    | 0                          | 1        | 0        | 0        | 6        | B        | 0        | 0:erd    |          |           |
|                                                           | MOV.L @aa:32,ERd        | L    | 0                          | 1        | 0        | 0        | 6        | B        | 2        | 0:erd    |          |           |
|                                                           | MOV.L ERs,@ERd          | L    | 0                          | 1        | 0        | 0        | 6        | 9        | 1:erd    | 0:ers    |          |           |
|                                                           | MOV.L ERs,@(d:16,ERd)   | L    | 0                          | 1        | 0        | 0        | 6        | F        | 1:erd    | 0:ers    |          |           |
|                                                           | MOV.L ERs,@(d:32,ERd)*L | L    | 0                          | 1        | 0        | 0        | 7        | 8        | 0:erd    | 0        |          |           |
|                                                           | MOV.L ERs,@-ERd         | L    | 0                          | 1        | 0        | 0        | 6        | D        | 1:erd    | 0:ers    |          |           |
|                                                           | MOV.L ERs,@aa:16        | L    | 0                          | 1        | 0        | 0        | 6        | B        | 8        | 0:ers    |          |           |
|                                                           | MOV.L ERs,@aa:32        | L    | 0                          | 1        | 0        | 0        | 6        | B        | A        | 0:ers    |          |           |
|                                                           | MOVFPPE @aa:16,Rd       | B    | Cannot be used in this LSI |          |          |          |          |          |          |          |          |           |
|                                                           | MOVFPPE Rs,@aa:16       | B    | 0                          | 1        | C        | 0        | 5        | 0        | rs       | rd       |          |           |
| MULXS<br>MULXU<br>NEG<br>NEG<br>NOP                       | MULXS.B Rs,Rd           | B    | 0                          | 1        | C        | 0        | 5        | 0        | rs       | rd       |          |           |
|                                                           | MULXS.W Rs,ERd          | W    | 0                          | 1        | C        | 0        | 5        | 2        | rs       | 0:erd    |          |           |
|                                                           | MULXU.B Rs,Rd           | B    | 5                          | 0        | rs       | rd       |          |          |          |          |          |           |
|                                                           | MULXU.W Rs,ERd          | W    | 5                          | 2        | rs       | 0:erd    |          |          |          |          |          |           |
|                                                           | NEG.B Rd                | B    | 1                          | 7        | 8        | rd       |          |          |          |          |          |           |
| NEG<br>NOP                                                | NEG.W Rd                | W    | 1                          | 7        | 9        | rd       |          |          |          |          |          |           |
|                                                           | NEGL ERd                | L    | 1                          | 7        | B        | 0:erd    |          |          |          |          |          |           |
| NOP                                                       | NOP                     | —    | 0                          | 0        | 0        | 0        |          |          |          |          |          |           |

| Instruction | Mnemonic        | size (b) | Instruction Format |             |          |                   |          |          |          |          |          |           |
|-------------|-----------------|----------|--------------------|-------------|----------|-------------------|----------|----------|----------|----------|----------|-----------|
|             |                 |          | 1st byte           | 2nd byte    | 3rd byte | 4th byte          | 5th byte | 6th byte | 7th byte | 8th byte | 9th byte | 10th byte |
| NOT         | NOT.B Rd        | B        | 1 7                | 0 : rd      |          |                   |          |          |          |          |          |           |
|             | NOT.W Rd        | W        | 1 7                | 1 : rd      |          |                   |          |          |          |          |          |           |
|             | NOT.L ERd       | L        | 1 7                | 3 : 0 : erd |          |                   |          |          |          |          |          |           |
| OR          | OR.B #xx:8.Rd   | B        | C : rd             | IMM         |          |                   |          |          |          |          |          |           |
|             | OR.B Rs.Rd      | B        | 1 4                | rs : rd     |          |                   |          |          |          |          |          |           |
|             | OR.W #xx:16.Rd  | W        | 7 9                | 4 : rd      |          |                   |          |          |          |          |          |           |
|             | OR.W Rs.Rd      | W        | 6 4                | rs : rd     |          | IMM               |          |          |          |          |          |           |
|             | OR.L #xx:32.ERd | L        | 7 A                | 4 : 0 : erd |          |                   |          |          |          |          |          |           |
|             | OR.L ERs.ERd    | L        | 0 1                | F : 0       | 6 : 4    | 0 : ers : 0 : erd | IMM      |          |          |          |          |           |
|             | ORC #xx:8.CCR   | B        | 0 4                | IMM         |          |                   |          |          |          |          |          |           |
| ORC         | ORC #xx:8.EXR   | B        | 0 1                | 4 : 1       | 0 : 4    | IMM               |          |          |          |          |          |           |
|             | POP.W Rn        | W        | 6 D                | 7 : m       |          |                   |          |          |          |          |          |           |
| POP         | POP.L ERn       | L        | 0 1                | 0 : 0       | 6 : D    | 7 : 0 : ern       |          |          |          |          |          |           |
|             | PUSH.W Rn       | W        | 6 D                | F : m       |          |                   |          |          |          |          |          |           |
| ROT         | PUSH.L ERn      | L        | 0 1                | 0 : 0       | 6 : D    | F : 0 : ern       |          |          |          |          |          |           |
|             | ROT.L B Rd      | B        | 1 2                | 8 : rd      |          |                   |          |          |          |          |          |           |
|             | ROT.L B #2, Rd  | B        | 1 2                | C : rd      |          |                   |          |          |          |          |          |           |
|             | ROT.L W Rd      | W        | 1 2                | 9 : rd      |          |                   |          |          |          |          |          |           |
|             | ROT.L W #2, Rd  | W        | 1 2                | D : rd      |          |                   |          |          |          |          |          |           |
|             | ROT.L L ERd     | L        | 1 2                | B : 0 : erd |          |                   |          |          |          |          |          |           |
|             | ROT.L L #2, ERd | L        | 1 2                | F : 0 : erd |          |                   |          |          |          |          |          |           |
|             | ROTR.B Rd       | B        | 1 3                | 8 : rd      |          |                   |          |          |          |          |          |           |
|             | ROTR.B #2, Rd   | B        | 1 3                | C : rd      |          |                   |          |          |          |          |          |           |
|             | ROTR.W Rd       | W        | 1 3                | 9 : rd      |          |                   |          |          |          |          |          |           |
| ROTR        | ROTR.W #2, Rd   | W        | 1 3                | D : rd      |          |                   |          |          |          |          |          |           |
|             | ROTR.L ERd      | L        | 1 3                | B : 0 : erd |          |                   |          |          |          |          |          |           |
|             | ROTR.L #2, ERd  | L        | 1 3                | F : 0 : erd |          |                   |          |          |          |          |          |           |
|             | ROTXL.B Rd      | B        | 1 2                | 0 : rd      |          |                   |          |          |          |          |          |           |
|             | ROTXL.B #2, Rd  | B        | 1 2                | 4 : rd      |          |                   |          |          |          |          |          |           |
| ROTXL       | ROTXL.W Rd      | W        | 1 2                | 1 : rd      |          |                   |          |          |          |          |          |           |
|             | ROTXL.W #2, Rd  | W        | 1 2                | 5 : rd      |          |                   |          |          |          |          |          |           |
|             | ROTXL.L ERd     | L        | 1 2                | 3 : 0 : erd |          |                   |          |          |          |          |          |           |
|             | ROTXL.L #2, ERd | L        | 1 2                | 7 : 0 : erd |          |                   |          |          |          |          |          |           |
|             | ROTXR.B Rd      | B        | 1 3                | 0 : rd      |          |                   |          |          |          |          |          |           |
|             | ROTXR.B #2, Rd  | B        | 1 3                | 4 : rd      |          |                   |          |          |          |          |          |           |
|             | ROTXR.W Rd      | W        | 1 3                | 1 : rd      |          |                   |          |          |          |          |          |           |
| ROTXR       | ROTXR.W #2, Rd  | W        | 1 3                | 5 : rd      |          |                   |          |          |          |          |          |           |
|             | ROTXR.L ERd     | L        | 1 3                | 3 : 0 : erd |          |                   |          |          |          |          |          |           |
|             | ROTXR.L #2, ERd | L        | 1 3                | 7 : 0 : erd |          |                   |          |          |          |          |          |           |
|             | RTE             | —        | 5                  | 6           | 7        | 0                 |          |          |          |          |          |           |
| RTS         | RTS             | —        | 5                  | 4           | 7        | 0                 |          |          |          |          |          |           |

| Instruction | Mnemonic              | 9/10     |          |          |          |          |          |          |          |          |           |   |   |   |  |  |  |  |      |  |  | Instruction Format |  |  |  |  |  |  |  |  |  |
|-------------|-----------------------|----------|----------|----------|----------|----------|----------|----------|----------|----------|-----------|---|---|---|--|--|--|--|------|--|--|--------------------|--|--|--|--|--|--|--|--|--|
|             |                       | 1st byte | 2nd byte | 3rd byte | 4th byte | 5th byte | 6th byte | 7th byte | 8th byte | 9th byte | 10th byte |   |   |   |  |  |  |  |      |  |  |                    |  |  |  |  |  |  |  |  |  |
| SHAL        | SHAL.B Rd             | B        | 1        | 0        | 8        | rd       |          |          |          |          |           |   |   |   |  |  |  |  |      |  |  |                    |  |  |  |  |  |  |  |  |  |
|             | SHAL.B #2, Rd         | B        | 1        | 0        | C        | rd       |          |          |          |          |           |   |   |   |  |  |  |  |      |  |  |                    |  |  |  |  |  |  |  |  |  |
|             | SHAL.W Rd             | W        | 1        | 0        | 9        | rd       |          |          |          |          |           |   |   |   |  |  |  |  |      |  |  |                    |  |  |  |  |  |  |  |  |  |
|             | SHAL.W #2, Rd         | W        | 1        | 0        | D        | rd       |          |          |          |          |           |   |   |   |  |  |  |  |      |  |  |                    |  |  |  |  |  |  |  |  |  |
|             | SHAL.L ERd            | L        | 1        | 0        | B        | 0 : erd  |          |          |          |          |           |   |   |   |  |  |  |  |      |  |  |                    |  |  |  |  |  |  |  |  |  |
|             | SHAL.L #2, ERd        | L        | 1        | 0        | F        | 0 : erd  |          |          |          |          |           |   |   |   |  |  |  |  |      |  |  |                    |  |  |  |  |  |  |  |  |  |
| SHAR        | SHAR.B Rd             | B        | 1        | 1        | 8        | rd       |          |          |          |          |           |   |   |   |  |  |  |  |      |  |  |                    |  |  |  |  |  |  |  |  |  |
|             | SHAR.B #2, Rd         | B        | 1        | 1        | C        | rd       |          |          |          |          |           |   |   |   |  |  |  |  |      |  |  |                    |  |  |  |  |  |  |  |  |  |
|             | SHAR.W Rd             | W        | 1        | 1        | 9        | rd       |          |          |          |          |           |   |   |   |  |  |  |  |      |  |  |                    |  |  |  |  |  |  |  |  |  |
|             | SHAR.W #2, Rd         | W        | 1        | 1        | D        | rd       |          |          |          |          |           |   |   |   |  |  |  |  |      |  |  |                    |  |  |  |  |  |  |  |  |  |
|             | SHAR.L ERd            | L        | 1        | 1        | B        | 0 : erd  |          |          |          |          |           |   |   |   |  |  |  |  |      |  |  |                    |  |  |  |  |  |  |  |  |  |
|             | SHAR.L #2, ERd        | L        | 1        | 1        | F        | 0 : erd  |          |          |          |          |           |   |   |   |  |  |  |  |      |  |  |                    |  |  |  |  |  |  |  |  |  |
| SHLL        | SHLL.B Rd             | B        | 1        | 0        | 0        | rd       |          |          |          |          |           |   |   |   |  |  |  |  |      |  |  |                    |  |  |  |  |  |  |  |  |  |
|             | SHLL.B #2, Rd         | B        | 1        | 0        | 4        | rd       |          |          |          |          |           |   |   |   |  |  |  |  |      |  |  |                    |  |  |  |  |  |  |  |  |  |
|             | SHLL.W Rd             | W        | 1        | 0        | 1        | rd       |          |          |          |          |           |   |   |   |  |  |  |  |      |  |  |                    |  |  |  |  |  |  |  |  |  |
|             | SHLL.W #2, Rd         | W        | 1        | 0        | 5        | rd       |          |          |          |          |           |   |   |   |  |  |  |  |      |  |  |                    |  |  |  |  |  |  |  |  |  |
|             | SHLL.L ERd            | L        | 1        | 0        | 3        | 0 : erd  |          |          |          |          |           |   |   |   |  |  |  |  |      |  |  |                    |  |  |  |  |  |  |  |  |  |
|             | SHLL.L #2, ERd        | L        | 1        | 0        | 7        | 0 : erd  |          |          |          |          |           |   |   |   |  |  |  |  |      |  |  |                    |  |  |  |  |  |  |  |  |  |
| SHLR        | SHLR.B Rd             | B        | 1        | 1        | 0        | rd       |          |          |          |          |           |   |   |   |  |  |  |  |      |  |  |                    |  |  |  |  |  |  |  |  |  |
|             | SHLR.B #2, Rd         | B        | 1        | 1        | 4        | rd       |          |          |          |          |           |   |   |   |  |  |  |  |      |  |  |                    |  |  |  |  |  |  |  |  |  |
|             | SHLR.W Rd             | W        | 1        | 1        | 1        | rd       |          |          |          |          |           |   |   |   |  |  |  |  |      |  |  |                    |  |  |  |  |  |  |  |  |  |
|             | SHLR.W #2, Rd         | W        | 1        | 1        | 5        | rd       |          |          |          |          |           |   |   |   |  |  |  |  |      |  |  |                    |  |  |  |  |  |  |  |  |  |
|             | SHLR.L ERd            | L        | 1        | 1        | 3        | 0 : erd  |          |          |          |          |           |   |   |   |  |  |  |  |      |  |  |                    |  |  |  |  |  |  |  |  |  |
|             | SHLR.L #2, ERd        | L        | 1        | 1        | 7        | 0 : erd  |          |          |          |          |           |   |   |   |  |  |  |  |      |  |  |                    |  |  |  |  |  |  |  |  |  |
| SLEEP       | SLEEP                 | —        | 0        | 1        | 8        | 0        |          |          |          |          |           |   |   |   |  |  |  |  |      |  |  |                    |  |  |  |  |  |  |  |  |  |
| STC         | STC.B CCR,Rd          | B        | 0        | 2        | 0        | rd       |          |          |          |          |           |   |   |   |  |  |  |  |      |  |  |                    |  |  |  |  |  |  |  |  |  |
|             | STC.B EXR,Rd          | B        | 0        | 2        | 1        | rd       |          |          |          |          |           |   |   |   |  |  |  |  |      |  |  |                    |  |  |  |  |  |  |  |  |  |
|             | STC.W CCR,@ERd        | W        | 0        | 1        | 4        | 0        | 6        | 9        | 1 : erd  | 0        |           |   |   |   |  |  |  |  |      |  |  |                    |  |  |  |  |  |  |  |  |  |
|             | STC.W EXR,@ERd        | W        | 0        | 1        | 4        | 1        | 6        | 9        | 1 : erd  | 0        |           |   |   |   |  |  |  |  |      |  |  |                    |  |  |  |  |  |  |  |  |  |
|             | STC.W CCR,@(d:16,ERd) | W        | 0        | 1        | 4        | 0        | 6        | F        | 1 : erd  | 0        |           |   |   |   |  |  |  |  |      |  |  |                    |  |  |  |  |  |  |  |  |  |
|             | STC.W EXR,@(d:16,ERd) | W        | 0        | 1        | 4        | 1        | 6        | F        | 1 : erd  | 0        |           |   |   |   |  |  |  |  |      |  |  |                    |  |  |  |  |  |  |  |  |  |
|             | STC.W CCR,@(d:32,ERd) | W        | 0        | 1        | 4        | 0        | 7        | 8        | 0 : erd  | 0        | 6         | B | A | 0 |  |  |  |  | disp |  |  |                    |  |  |  |  |  |  |  |  |  |
|             | STC.W EXR,@(d:32,ERd) | W        | 0        | 1        | 4        | 1        | 7        | 8        | 0 : erd  | 0        | 6         | B | A | 0 |  |  |  |  | disp |  |  |                    |  |  |  |  |  |  |  |  |  |
|             | STC.W CCR,@ERd        | W        | 0        | 1        | 4        | 0        | 6        | D        | 1 : erd  | 0        |           |   |   |   |  |  |  |  |      |  |  |                    |  |  |  |  |  |  |  |  |  |
|             | STC.W EXR,@ERd        | W        | 0        | 1        | 4        | 1        | 6        | D        | 1 : erd  | 0        |           |   |   |   |  |  |  |  |      |  |  |                    |  |  |  |  |  |  |  |  |  |
| STM*+3      | STC.W CCR,@aa:16      | W        | 0        | 1        | 4        | 0        | 6        | B        | 8        | 0        |           |   |   |   |  |  |  |  |      |  |  |                    |  |  |  |  |  |  |  |  |  |
|             | STC.W EXR,@aa:16      | W        | 0        | 1        | 4        | 1        | 6        | B        | 8        | 0        |           |   |   |   |  |  |  |  |      |  |  |                    |  |  |  |  |  |  |  |  |  |
|             | STC.W CCR,@aa:32      | W        | 0        | 1        | 4        | 0        | 6        | B        | A        | 0        |           |   |   |   |  |  |  |  |      |  |  |                    |  |  |  |  |  |  |  |  |  |
|             | STC.W EXR,@aa:32      | W        | 0        | 1        | 4        | 1        | 6        | B        | A        | 0        |           |   |   |   |  |  |  |  |      |  |  |                    |  |  |  |  |  |  |  |  |  |
|             | STM.L(ERn-ERn+1),@SP  | L        | 0        | 1        | 1        | 0        | 6        | D        | F        | 0 : ern  |           |   |   |   |  |  |  |  |      |  |  |                    |  |  |  |  |  |  |  |  |  |
|             | STM.L(ERn-ERn+2),@SP  | L        | 0        | 1        | 2        | 0        | 6        | D        | F        | 0 : ern  |           |   |   |   |  |  |  |  |      |  |  |                    |  |  |  |  |  |  |  |  |  |
| STM*+3      | STM.L(ERn-ERn+3),@SP  | L        | 0        | 1        | 3        | 0        | 6        | D        | F        | 0 : ern  |           |   |   |   |  |  |  |  |      |  |  |                    |  |  |  |  |  |  |  |  |  |
|             | STM*+3                |          |          |          |          |          |          |          |          |          |           |   |   |   |  |  |  |  |      |  |  |                    |  |  |  |  |  |  |  |  |  |
|             |                       |          |          |          |          |          |          |          |          |          |           |   |   |   |  |  |  |  |      |  |  |                    |  |  |  |  |  |  |  |  |  |
| STM*+3      | STM*+3                |          |          |          |          |          |          |          |          |          |           |   |   |   |  |  |  |  |      |  |  |                    |  |  |  |  |  |  |  |  |  |
|             |                       |          |          |          |          |          |          |          |          |          |           |   |   |   |  |  |  |  |      |  |  |                    |  |  |  |  |  |  |  |  |  |
|             |                       |          |          |          |          |          |          |          |          |          |           |   |   |   |  |  |  |  |      |  |  |                    |  |  |  |  |  |  |  |  |  |
| STM*+3      | STM*+3                |          |          |          |          |          |          |          |          |          |           |   |   |   |  |  |  |  |      |  |  |                    |  |  |  |  |  |  |  |  |  |
|             |                       |          |          |          |          |          |          |          |          |          |           |   |   |   |  |  |  |  |      |  |  |                    |  |  |  |  |  |  |  |  |  |
|             |                       |          |          |          |          |          |          |          |          |          |           |   |   |   |  |  |  |  |      |  |  |                    |  |  |  |  |  |  |  |  |  |
| STM*+3      | STM*+3                |          |          |          |          |          |          |          |          |          |           |   |   |   |  |  |  |  |      |  |  |                    |  |  |  |  |  |  |  |  |  |
|             |                       |          |          |          |          |          |          |          |          |          |           |   |   |   |  |  |  |  |      |  |  |                    |  |  |  |  |  |  |  |  |  |
|             |                       |          |          |          |          |          |          |          |          |          |           |   |   |   |  |  |  |  |      |  |  |                    |  |  |  |  |  |  |  |  |  |
| STM*+3      | STM*+3                |          |          |          |          |          |          |          |          |          |           |   |   |   |  |  |  |  |      |  |  |                    |  |  |  |  |  |  |  |  |  |
|             |                       |          |          |          |          |          |          |          |          |          |           |   |   |   |  |  |  |  |      |  |  |                    |  |  |  |  |  |  |  |  |  |
|             |                       |          |          |          |          |          |          |          |          |          |           |   |   |   |  |  |  |  |      |  |  |                    |  |  |  |  |  |  |  |  |  |
| STM*+3      | STM*+3                |          |          |          |          |          |          |          |          |          |           |   |   |   |  |  |  |  |      |  |  |                    |  |  |  |  |  |  |  |  |  |
|             |                       |          |          |          |          |          |          |          |          |          |           |   |   |   |  |  |  |  |      |  |  |                    |  |  |  |  |  |  |  |  |  |
|             |                       |          |          |          |          |          |          |          |          |          |           |   |   |   |  |  |  |  |      |  |  |                    |  |  |  |  |  |  |  |  |  |
| STM*+3      | STM*+3                |          |          |          |          |          |          |          |          |          |           |   |   |   |  |  |  |  |      |  |  |                    |  |  |  |  |  |  |  |  |  |
|             |                       |          |          |          |          |          |          |          |          |          |           |   |   |   |  |  |  |  |      |  |  |                    |  |  |  |  |  |  |  |  |  |
|             |                       |          |          |          |          |          |          |          |          |          |           |   |   |   |  |  |  |  |      |  |  |                    |  |  |  |  |  |  |  |  |  |
| STM*+3      | STM*+3                |          |          |          |          |          |          |          |          |          |           |   |   |   |  |  |  |  |      |  |  |                    |  |  |  |  |  |  |  |  |  |
|             |                       |          |          |          |          |          |          |          |          |          |           |   |   |   |  |  |  |  |      |  |  |                    |  |  |  |  |  |  |  |  |  |
|             |                       |          |          |          |          |          |          |          |          |          |           |   |   |   |  |  |  |  |      |  |  |                    |  |  |  |  |  |  |  |  |  |
| STM*+3      | STM*+3                |          |          |          |          |          |          |          |          |          |           |   |   |   |  |  |  |  |      |  |  |                    |  |  |  |  |  |  |  |  |  |
|             |                       |          |          |          |          |          |          |          |          |          |           |   |   |   |  |  |  |  |      |  |  |                    |  |  |  |  |  |  |  |  |  |
|             |                       |          |          |          |          |          |          |          |          |          |           |   |   |   |  |  |  |  |      |  |  |                    |  |  |  |  |  |  |  |  |  |
| STM*+3      | STM*+3                |          |          |          |          |          |          |          |          |          |           |   |   |   |  |  |  |  |      |  |  |                    |  |  |  |  |  |  |  |  |  |
|             |                       |          |          |          |          |          |          |          |          |          |           |   |   |   |  |  |  |  |      |  |  |                    |  |  |  |  |  |  |  |  |  |
|             |                       |          |          |          |          |          |          |          |          |          |           |   |   |   |  |  |  |  |      |  |  |                    |  |  |  |  |  |  |  |  |  |
| STM*+3      | STM*+3                |          |          |          |          |          |          |          |          |          |           |   |   |   |  |  |  |  |      |  |  |                    |  |  |  |  |  |  |  |  |  |
|             |                       |          |          |          |          |          |          |          |          |          |           |   |   |   |  |  |  |  |      |  |  |                    |  |  |  |  |  |  |  |  |  |
|             |                       |          |          |          |          |          |          |          |          |          |           |   |   |   |  |  |  |  |      |  |  |                    |  |  |  |  |  |  |  |  |  |
| STM*+3      | STM*+3                |          |          |          |          |          |          |          |          |          |           |   |   |   |  |  |  |  |      |  |  |                    |  |  |  |  |  |  |  |  |  |
|             |                       |          |          |          |          |          |          |          |          |          |           |   |   |   |  |  |  |  |      |  |  |                    |  |  |  |  |  |  |  |  |  |
|             |                       |          |          |          |          |          |          |          |          |          |           |   |   |   |  |  |  |  |      |  |  |                    |  |  |  |  |  |  |  |  |  |
| STM*+3      | STM*+3                |          |          |          |          |          |          |          |          |          |           |   |   |   |  |  |  |  |      |  |  |                    |  |  |  |  |  |  |  |  |  |
|             |                       |          |          |          |          |          |          |          |          |          |           |   |   |   |  |  |  |  |      |  |  |                    |  |  |  |  |  |  |  |  |  |
|             |                       |          |          |          |          |          |          |          |          |          |           |   |   |   |  |  |  |  |      |  |  |                    |  |  |  |  |  |  |  |  |  |
| STM*+3      | STM*+3                |          |          |          |          |          |          |          |          |          |           |   |   |   |  |  |  |  |      |  |  |                    |  |  |  |  |  |  |  |  |  |
|             |                       |          |          |          |          |          |          |          |          |          |           |   |   |   |  |  |  |  |      |  |  |                    |  |  |  |  |  |  |  |  |  |
|             |                       |          |          |          |          |          |          |          |          |          |           |   |   |   |  |  |  |  |      |  |  |                    |  |  |  |  |  |  |  |  |  |
| STM*+3      | STM*+3                |          |          |          |          |          |          |          |          |          |           |   |   |   |  |  |  |  |      |  |  |                    |  |  |  |  |  |  |  |  |  |
|             |                       |          |          |          |          |          |          |          |          |          |           |   |   |   |  |  |  |  |      |  |  |                    |  |  |  |  |  |  |  |  |  |
|             |                       |          |          |          |          |          |          |          |          |          |           |   |   |   |  |  |  |  |      |  |  |                    |  |  |  |  |  |  |  |  |  |
| STM*+3      | STM*+3                |          |          |          |          |          |          |          |          |          |           |   |   |   |  |  |  |  |      |  |  |                    |  |  |  |  |  |  |  |  |  |
|             |                       |          |          |          |          |          |          |          |          |          |           |   |   |   |  |  |  |  |      |  |  |                    |  |  |  |  |  |  |  |  |  |
|             |                       |          |          |          |          |          |          |          |          |          |           |   |   |   |  |  |  |  |      |  |  |                    |  |  |  |  |  |  |  |  |  |
| STM*+3      | STM*+3                |          |          |          |          |          |          |          |          |          |           |   |   |   |  |  |  |  |      |  |  |                    |  |  |  |  |  |  |  |  |  |
|             |                       |          |          |          |          |          |          |          |          |          |           |   |   |   |  |  |  |  |      |  |  |                    |  |  |  |  |  |  |  |  |  |
|             |                       |          |          |          |          |          |          |          |          |          |           |   |   |   |  |  |  |  |      |  |  |                    |  |  |  |  |  |  |  |  |  |
| STM*+3      | STM*+3                |          |          |          |          |          |          |          |          |          |           |   |   |   |  |  |  |  |      |  |  |                    |  |  |  |  |  |  |  |  |  |
|             |                       |          |          |          |          |          |          |          |          |          |           |   |   |   |  |  |  |  |      |  |  |                    |  |  |  |  |  |  |  |  |  |
|             |                       |          |          |          |          |          |          |          |          |          |           |   |   |   |  |  |  |  |      |  |  |                    |  |  |  |  |  |  |  |  |  |

| Instruction | Mnemonic         | Size (bits) | Instruction Format |             |          |             |          |          |          |          |          |           |
|-------------|------------------|-------------|--------------------|-------------|----------|-------------|----------|----------|----------|----------|----------|-----------|
|             |                  |             | 1st byte           | 2nd byte    | 3rd byte | 4th byte    | 5th byte | 6th byte | 7th byte | 8th byte | 9th byte | 10th byte |
| SUB         | SUB.B Rs,Rd      | B           | 1 8                | rs rd       |          |             |          |          |          |          |          |           |
|             | SUB.W #xx:16,Rd  | W           | 7 9                | 3 rd        |          |             |          |          |          |          |          |           |
|             | SUB.W Rs,Rd      | W           | 1 9                | rs rd       |          | IMM         |          |          |          |          |          |           |
|             | SUB.L #xx:32,ERd | L           | 7 A                | 3 0:erd     |          |             | IMM      |          |          |          |          |           |
|             | SUB.L ERs,ERd    | L           | 1 A                | 1:ers 0:erd |          |             |          |          |          |          |          |           |
| SUBS        | SUBS #1,ERd      | L           | 1 B                | 0 0:erd     |          |             |          |          |          |          |          |           |
|             | SUBS #2,ERd      | L           | 1 B                | 8 0:erd     |          |             |          |          |          |          |          |           |
|             | SUBS #4,ERd      | L           | 1 B                | 9 0:erd     |          |             |          |          |          |          |          |           |
|             | SUBS #xx:8,Rd    | B           | B                  | IMM         |          |             |          |          |          |          |          |           |
|             | SUBX Rs,Rd       | B           | 1 E                | rs rd       |          |             |          |          |          |          |          |           |
| TAS         | TAS @ERd*2       | B           | 0 1                | E 0         | 7 B      | 0:erd C     |          |          |          |          |          |           |
| TRAPA       | TRAPA #x:2       | —           | 5 7                | 00:IMM 0    |          |             |          |          |          |          |          |           |
| XOR         | XOR.B #xx:8,Rd   | B           | D rd               | IMM         |          |             |          |          |          |          |          |           |
|             | XOR.B Rs,Rd      | B           | 1 5                | rs rd       |          |             |          |          |          |          |          |           |
|             | XOR.W #xx:16,Rd  | W           | 7 9                | 5 rd        |          |             |          |          |          |          |          |           |
|             | XOR.W Rs,Rd      | W           | 6 5                | rs rd       |          | IMM         |          |          |          |          |          |           |
|             | XOR.L #xx:32,ERd | L           | 7 A                | 5 0:erd     |          |             | IMM      |          |          |          |          |           |
| XORC        | XOR.L ERs,ERd    | L           | 0 1                | F 0         | 6 5      | 0:ers 0:erd |          |          |          |          |          |           |
|             | XORC #xx:8,CCR   | B           | 0 5                | IMM         |          |             |          |          |          |          |          |           |
|             | XORC #xx:8,EXR   | B           | 0 1                | 4 1         | 0 5      | IMM         |          |          |          |          |          |           |

#### Legend:

IMM : Immediate data (2, 3, 8, 16, 32 bits)

abs : Absolute address (8, 16, 24, 32 bits)

disp : Displacement (8, 16, 32 bits)

rs, rd, rn : Register fields (8-bit register or 16-bit register is selected in 4 bits. rs, rd and rn correspond to the operand type Rs, Rd, and Rn respectively.)  
 ers, erd, erm, erm : Register fields (address register or 32-bit register is selected in 3 bits. ers, erd and erm correspond to the operand type ERs, ERd, ERn and Rm respectively.)

- Notes:
1. Either 1 or 0 can be set to bit 7 in 4th byte of MOV.L ERs, @(d: 32, ERd) instruction.
  2. Only register ER0, ER1, ER4, or ER5 should be used when using the TAS instruction.
  3. Only registers ER0 to ER6 should be used when using the STM/LDM instruction.

The following table shows the correspondence between the register field and the general register.

**Address Register, 32-bit Register**

|                       |                         | <b>16-bit Register</b> |                         | <b>8-bit Register</b> |                         |
|-----------------------|-------------------------|------------------------|-------------------------|-----------------------|-------------------------|
| <b>Register Field</b> | <b>General Register</b> | <b>Register Field</b>  | <b>General Register</b> | <b>Register Field</b> | <b>General Register</b> |
| 000                   | ER0                     | 0000                   | R0                      | 0000                  | R0H                     |
| 001                   | ER1                     | 0001                   | R1                      | 0001                  | R1H                     |
| :                     | :                       | :                      | :                       | :                     | :                       |
| :                     | :                       | :                      | :                       | :                     | :                       |
| :                     | :                       | :                      | :                       | :                     | :                       |
| :                     | :                       | :                      | :                       | :                     | :                       |
| 111                   | ER7                     | 0111                   | R7                      | 0111                  | R7H                     |
|                       |                         | 1000                   | E0                      | 1000                  | R0L                     |
|                       |                         | 1001                   | E1                      | 1001                  | R1L                     |
|                       |                         | :                      | :                       | :                     | :                       |
|                       |                         | :                      | :                       | :                     | :                       |
|                       |                         | :                      | :                       | :                     | :                       |
|                       |                         | :                      | :                       | :                     | :                       |
|                       |                         | 1111                   | E7                      | 1111                  | R7L                     |

A.3 Operation Code Map

Table A.10 shows an operation code map.

Table A.10 Operation Code Map

Instruction code:

|          |    |          |    |
|----------|----|----------|----|
| 1st byte |    | 2nd byte |    |
| AH       | AL | BH       | BL |

BH highest bit is set to 0.

BL highest bit is set to 1.

| AL | 0         | 1         | 2         | 3         | 4    | 5    | 6    | 7         | 8         | 9         | A         | B         | C         | D         | E    | F         |
|----|-----------|-----------|-----------|-----------|------|------|------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|------|-----------|
| AH | NOP       | Table A.2 | STC       | LDC       | ORC  | XORC | ANDC | LDC       | ADD       | Table A.2 | Table A.2 | Table A.2 | Table A.2 | MOV       | ADDX | Table A.2 |
|    | Table A.2 | Table A.2 | Table A.2 | Table A.2 | OR   | XOR  | AND  | Table A.2 | SUB       | Table A.2 | Table A.2 | Table A.2 | Table A.2 | CMP       | SUBX | Table A.2 |
| 2  | MOV.B     |           |           |           |      |      |      |           |           |           |           |           |           |           |      |           |
| 3  |           |           |           |           |      |      |      |           |           |           |           |           |           |           |      |           |
| 4  | BRA       | BRN       | BHI       | BLS       | BCC  | BCS  | BNE  | BEQ       | BVC       | BVS       | BPL       | BMI       | BGE       | BLT       | BGT  | BLE       |
| 5  | MULXU     | DIVXU     | MULXU     | DIVXU     | RTS  | BSR  | RTE  | TRAPA     | Table A.2 | Table A.2 | JMP       | BSR       | JSR       |           |      |           |
| 6  | BSET      | BNOT      | BCLR      | BTST      | OR   | XOR  | AND  | BSR       | Table A.2 | MOV       | Table A.2 | MOV       |           |           |      |           |
| 7  | BOR       |           | BXOR      |           | BXOR |      | BXOR |           | BLD       | MOV       | Table A.2 | Table A.2 | Table A.2 | Table A.2 |      |           |
| 8  | ADD       |           |           |           |      |      |      |           |           |           |           |           |           |           |      |           |
| 9  | ADDX      |           |           |           |      |      |      |           |           |           |           |           |           |           |      |           |
| A  | CMP       |           |           |           |      |      |      |           |           |           |           |           |           |           |      |           |
| B  | SUBX      |           |           |           |      |      |      |           |           |           |           |           |           |           |      |           |
| C  | OR        |           |           |           |      |      |      |           |           |           |           |           |           |           |      |           |
| D  | XOR       |           |           |           |      |      |      |           |           |           |           |           |           |           |      |           |
| E  | AND       |           |           |           |      |      |      |           |           |           |           |           |           |           |      |           |
| F  | MOV       |           |           |           |      |      |      |           |           |           |           |           |           |           |      |           |

Note: \* Cannot be used in this LSI


Instruction code:

| 1st byte |    | 2nd byte |    |
|----------|----|----------|----|
| AH       | AL | BH       | BL |

| BH<br>AH/AL | 0     | 1         | 2   | 3         | 4          | 5    | 6    | 7     | 8     | 9    | A       | B   | C         | D         | E   | F         |  |  |  |
|-------------|-------|-----------|-----|-----------|------------|------|------|-------|-------|------|---------|-----|-----------|-----------|-----|-----------|--|--|--|
| 01          | MOV   | LDM       | STM |           | LDC<br>STC |      | MAC* |       | SLEEP |      | CLRMAC* |     | Table A.2 | Table A.2 | TAS | Table A.2 |  |  |  |
| 0A          | INC   | ADD       |     |           |            |      |      |       |       |      |         |     |           |           |     |           |  |  |  |
| 0B          | ADDS  |           |     |           |            | INC  |      | INC   |       | ADDS |         |     |           | INC       |     | INC       |  |  |  |
| 0F          | DAA   | MOV       |     |           |            |      |      |       |       |      |         |     |           |           |     |           |  |  |  |
| 10          | SHLL  |           |     |           | SHLL       |      |      | SHLL  | SHAL  |      |         |     | SHAL      |           |     | SHAL      |  |  |  |
| 11          | SHLR  |           |     |           | SHLR       |      |      | SHLR  | SHAR  |      |         |     | SHAR      |           |     | SHAR      |  |  |  |
| 12          | ROTXL |           |     |           | ROTXL      |      |      | ROTXL | ROTL  |      |         |     | ROTL      |           |     | ROTL      |  |  |  |
| 13          | ROTXR |           |     |           | ROTXR      |      |      | ROTXR | ROTR  |      |         |     | ROTR      |           |     | ROTR      |  |  |  |
| 17          | NOT   |           |     | NOT       |            | EXTU |      | EXTU  | NEG   |      |         | NEG |           | EXTS      |     | EXTS      |  |  |  |
| 1A          | DEC   | SUB       |     |           |            |      |      |       |       |      |         |     |           |           |     |           |  |  |  |
| 1B          | SUBS  |           |     |           |            | DEC  |      | DEC   | SUBS  |      |         |     |           | DEC       |     | DEC       |  |  |  |
| 1F          | DAS   | CMP       |     |           |            |      |      |       |       |      |         |     |           |           |     |           |  |  |  |
| 58          | BRA   | BRN       | BHI | BLS       | BCC        | BCS  | BNE  | BEQ   | BVC   | BVS  | BPL     | BMI | BGE       | BLT       | BGT | BLE       |  |  |  |
| 6A          | MOV   | Table A.2 | MOV | Table A.2 | MOVFP*     |      |      |       | MOV   |      | MOV     |     | MOVTP*    |           |     |           |  |  |  |
| 79          | MOV   | ADD       | CMP | SUB       | OR         | XOR  | AND  |       |       |      |         |     |           |           |     |           |  |  |  |
| 7A          | MOV   | ADD       | CMP | SUB       | OR         | XOR  | AND  |       |       |      |         |     |           |           |     |           |  |  |  |

Note: \* Cannot be used in this LSI

|                   |    |          |    |          |    |          |    |  |  |
|-------------------|----|----------|----|----------|----|----------|----|--|--|
| Instruction code: |    |          |    |          |    |          |    |  |  |
| 1st byte          |    | 2nd byte |    | 3rd byte |    | 4th byte |    |  |  |
| AH                | AL | BH       | BL | CH       | CL | DH       | DL |  |  |




| CL             | 0     | 1     | 2     | 3     | 4           | 5             | 6             | 7                          | 8 | 9 | A | B | C | D | E | F |
|----------------|-------|-------|-------|-------|-------------|---------------|---------------|----------------------------|---|---|---|---|---|---|---|---|
| AH/AL/BH/BL/CH | MULXS | MULXS | MULXS |       |             |               |               |                            |   |   |   |   |   |   |   |   |
| 01C05          | MULXS |       |       |       |             |               |               |                            |   |   |   |   |   |   |   |   |
| 01D05          |       | DIVXS |       | DIVXS |             |               |               |                            |   |   |   |   |   |   |   |   |
| 01F06          |       |       |       |       | OR          | XOR           | AND           |                            |   |   |   |   |   |   |   |   |
| 7C06 *1        |       |       |       | BTST  |             |               |               |                            |   |   |   |   |   |   |   |   |
| 7C07 *1        |       |       |       | BTST  | BOR<br>BIOR | BXOR<br>BIXOR | BAND<br>BIAND | BLD<br>BILD<br>BST<br>BIST |   |   |   |   |   |   |   |   |
| 7Dr06 *1       | BSET  | BNOT  | BCLR  |       |             |               |               |                            |   |   |   |   |   |   |   |   |
| 7Dr07 *1       | BSET  | BNOT  | BCLR  |       |             |               |               |                            |   |   |   |   |   |   |   |   |
| 7Eaa6 *2       |       |       |       | BTST  |             |               |               |                            |   |   |   |   |   |   |   |   |
| 7Eaa7 *2       |       |       |       | BTST  | BOR<br>BIOR | BXOR<br>BIXOR | BAND<br>BIAND | BLD<br>BILD<br>BST<br>BIST |   |   |   |   |   |   |   |   |
| 7Faa6 *2       | BSET  | BNOT  | BCLR  |       |             |               |               |                            |   |   |   |   |   |   |   |   |
| 7Faa7 *2       | BSET  | BNOT  | BCLR  |       |             |               |               |                            |   |   |   |   |   |   |   |   |

Notes: 1. r is the register specification section.  
2. Absolute address is set at aa.



Instruction code:


| 1st byte |    | 2nd byte |    | 3rd byte |    | 4th byte |    | 5th byte |    | 6th byte |    |
|----------|----|----------|----|----------|----|----------|----|----------|----|----------|----|
| AH       | AL | BH       | BL | CH       | CL | DH       | DL | EH       | EL | FH       | FL |



| EL<br>AHLBHLCHCLDLHLER | 0          | 1    | 2    | 3    | 4    | 5     | 6     | 7    | 8 | 9 | A | B | C | D | E | F |
|------------------------|------------|------|------|------|------|-------|-------|------|---|---|---|---|---|---|---|---|
|                        | 6A10aaaa6* |      |      | BTST | BOR  | BXOR  | BAND  | BLD  |   |   |   |   |   |   |   |   |
|                        | 6A10aaaa7* |      |      |      | BIOR | BIXOR | BIAND | BILD |   |   |   |   |   |   |   |   |
|                        | 6A18aaaa6* |      |      |      |      |       |       | BST  |   |   |   |   |   |   |   |   |
|                        | 6A18aaaa7* | BSET | BNOT | BCLR |      |       |       | BIST |   |   |   |   |   |   |   |   |

Instruction code:

| 1st byte |    | 2nd byte |    | 3rd byte |    | 4th byte |    | 5th byte |    | 6th byte |    | 7th byte |    | 8th byte |    |
|----------|----|----------|----|----------|----|----------|----|----------|----|----------|----|----------|----|----------|----|
| AH       | AL | BH       | BL | CH       | CL | DH       | DL | EH       | EL | FH       | FL | GH       | GL | HH       | HL |



| GL<br>AHLBHL...PHELGH | 0              | 1    | 2    | 3    | 4    | 5     | 6     | 7    | 8 | 9 | A | B | C | D | E | F |
|-----------------------|----------------|------|------|------|------|-------|-------|------|---|---|---|---|---|---|---|---|
|                       | 6A30aaaaaaaa6* |      |      |      |      |       |       |      |   |   |   |   |   |   |   |   |
|                       | 6A30aaaaaaaa7* |      |      | BTST | BOR  | BXOR  | BAND  | BLD  |   |   |   |   |   |   |   |   |
|                       | 6A38aaaaaaaa6* |      |      |      | BIOR | BIXOR | BIAND | BILD |   |   |   |   |   |   |   |   |
|                       | 6A38aaaaaaaa7* | BSET | BNOT | BCLR |      |       |       | BST  |   |   |   |   |   |   |   |   |

Note: \* Absolute address is set at aa.

## A.4 Number of Execution States

This section explains execution state and how to calculate the number of execution states for each instruction of the H8S/2000 CPU.

Table A.12 indicates number of cycles of instruction fetch and data read/write during instruction execution, and table A.11 indicates number of states required for each instruction size.

The number of execution states can be obtained from the equation below.

$$\text{Number of execution states} = I \cdot S_I + J \cdot S_J + K \cdot S_K + L \cdot S_L + M \cdot S_M + N \cdot S_N$$

### Examples of Execution State Number Calculation

The conditions are as follows: In advanced mode, program and stack areas are set in the on-chip memory, a wait is inserted every 2 states in the on-chip supporting module access with 8-bit bus width.

1. BSET #0, @FFFFC7:8

From Table A.12,

$$I = L = 2, J = K = M = N = 0$$

From Table A.11,

$$S_I = 1, S_L = 2$$

$$\text{Number of execution states} = 2 \times 1 + 2 \times 2 = 6$$

2. JSR @@30

From Table A.12,

$$I = J = K = 2, L = M = N = 0$$

From Table A.11,

$$S_I = S_J = S_K = 1$$

$$\text{Number of execution states} = 2 \times 1 + 2 \times 1 + 2 \times 1 = 6$$

**Table A.11 Number of States Required for Each Execution Status (Cycle)**

| Execution Status (Cycle)  | Target of Access |                           |            |
|---------------------------|------------------|---------------------------|------------|
|                           | On-Chip Memory   | On-Chip Supporting Module |            |
|                           |                  | 8-bit bus                 | 16-bit bus |
| Instruction fetch $S_i$   | 1                | —                         | —          |
| Branch address read $S_j$ |                  |                           |            |
| Stack operation $S_k$     |                  |                           |            |
| Byte data access $S_L$    |                  | 2                         | 2          |
| Word data access $S_M$    |                  | 4                         |            |
| Internal operation $S_N$  | 1                |                           |            |

**Table A.12 Instruction Execution Status (Number of Cycles)**

| Instruction | Mnemonic            | Instruction<br>Fetch | Branch<br>Address<br>Read | Stack<br>Operation | Byte Data<br>Access | Word Data<br>Access | Internal<br>Operation |
|-------------|---------------------|----------------------|---------------------------|--------------------|---------------------|---------------------|-----------------------|
|             |                     | I                    | J                         | K                  | L                   | M                   | N                     |
| ADD         | ADD.B #xx:8,Rd      | 1                    |                           |                    |                     |                     |                       |
|             | ADD.B Rs, Rd        | 1                    |                           |                    |                     |                     |                       |
|             | ADD.W #xx:16,Rd     | 2                    |                           |                    |                     |                     |                       |
|             | ADD.W Rs,Rd         | 1                    |                           |                    |                     |                     |                       |
|             | ADD.L #xx:32,ERd    | 3                    |                           |                    |                     |                     |                       |
|             | ADD.L ERs,ERd       | 1                    |                           |                    |                     |                     |                       |
| ADDS        | ADDS #1/2/4,ERd     | 1                    |                           |                    |                     |                     |                       |
| ADDX        | ADDX #xx:8,Rd       | 1                    |                           |                    |                     |                     |                       |
|             | ADDX Rs,Rd          | 1                    |                           |                    |                     |                     |                       |
| AND         | AND.B #xx:8,Rd      | 1                    |                           |                    |                     |                     |                       |
|             | AND.B Rs,Rd         | 1                    |                           |                    |                     |                     |                       |
|             | AND.W #xx:16,Rd     | 2                    |                           |                    |                     |                     |                       |
|             | AND.W Rs,Rd         | 1                    |                           |                    |                     |                     |                       |
|             | AND.L #xx:32,ERd    | 3                    |                           |                    |                     |                     |                       |
|             | AND.L ERs,ERd       | 2                    |                           |                    |                     |                     |                       |
| ANDC        | ANDC #xx:8,CCR      | 1                    |                           |                    |                     |                     |                       |
|             | ANDC #xx:8,EXR      | 2                    |                           |                    |                     |                     |                       |
| BAND        | BAND #xx:3,Rd       | 1                    |                           |                    |                     |                     |                       |
|             | BAND #xx:3,@ERd     | 2                    |                           |                    | 1                   |                     |                       |
|             | BAND #xx:3@aa:8     | 2                    |                           |                    | 1                   |                     |                       |
|             | BAND #xx:3@aa:16    | 3                    |                           |                    | 1                   |                     |                       |
|             | BAND #xx:3@aa:32    | 4                    |                           |                    | 1                   |                     |                       |
| Bcc         | BRA d:8 (BT d:8)    | 2                    |                           |                    |                     |                     |                       |
|             | BRN d:8 (BF d:8)    | 2                    |                           |                    |                     |                     |                       |
|             | BHI d:8             | 2                    |                           |                    |                     |                     |                       |
|             | BLS d:8             | 2                    |                           |                    |                     |                     |                       |
|             | BCC d:8 (BHS d:8)   | 2                    |                           |                    |                     |                     |                       |
|             | BCS d:8 (BLO d:8)   | 2                    |                           |                    |                     |                     |                       |
|             | BNE d:8             | 2                    |                           |                    |                     |                     |                       |
|             | BEQ d:8             | 2                    |                           |                    |                     |                     |                       |
|             | BVC d:8             | 2                    |                           |                    |                     |                     |                       |
|             | BVS d:8             | 2                    |                           |                    |                     |                     |                       |
|             | BPL d:8             | 2                    |                           |                    |                     |                     |                       |
|             | BMI d:8             | 2                    |                           |                    |                     |                     |                       |
|             | BGE d:8             | 2                    |                           |                    |                     |                     |                       |
|             | BLT d:8             | 2                    |                           |                    |                     |                     |                       |
|             | BGT d:8             | 2                    |                           |                    |                     |                     |                       |
|             | BLE d:8             | 2                    |                           |                    |                     |                     |                       |
|             | BRA d:16 (BT d:16)  | 2                    |                           |                    |                     |                     | 1                     |
|             | BRN d:16 (BF d:16)  | 2                    |                           |                    |                     |                     | 1                     |
|             | BHI d:16            | 2                    |                           |                    |                     |                     | 1                     |
|             | BLS d:16            | 2                    |                           |                    |                     |                     | 1                     |
|             | BCC d:16 (BHS d:16) | 2                    |                           |                    |                     |                     | 1                     |
|             | BCS d:16 (BLO d:16) | 2                    |                           |                    |                     |                     | 1                     |
|             | BNE d:16            | 2                    |                           |                    |                     |                     | 1                     |
|             | BEQ d:16            | 2                    |                           |                    |                     |                     | 1                     |
|             | BVC d:16            | 2                    |                           |                    |                     |                     | 1                     |
|             | BVS d:16            | 2                    |                           |                    |                     |                     | 1                     |
|             | BPL d:16            | 2                    |                           |                    |                     |                     | 1                     |
|             | BMI d:16            | 2                    |                           |                    |                     |                     | 1                     |
|             | BGE d:16            | 2                    |                           |                    |                     |                     | 1                     |
|             | BLT d:16            | 2                    |                           |                    |                     |                     | 1                     |

| Instruction | Mnemonic           | Instruction<br>Fetch | Branch<br>Address<br>Read | Stack<br>Operation | Byte Data<br>Access | Word Data<br>Access | Internal<br>Operation |
|-------------|--------------------|----------------------|---------------------------|--------------------|---------------------|---------------------|-----------------------|
|             |                    | I                    | J                         | K                  | L                   | M                   | N                     |
| Bcc         | BGT d:16           | 2                    |                           |                    |                     |                     | 1                     |
|             | BLE d:16           | 2                    |                           |                    |                     |                     | 1                     |
| BCLR        | BCLR #xx:3,Rd      | 1                    |                           |                    |                     |                     |                       |
|             | BCLR #xx:3,@ERd    | 2                    |                           |                    | 2                   |                     |                       |
|             | BCLR #xx:3,@aa:8   | 2                    |                           |                    | 2                   |                     |                       |
|             | BCLR #xx:3,@aa:16  | 3                    |                           |                    | 2                   |                     |                       |
|             | BCLR #xx:3,@aa:32  | 4                    |                           |                    | 2                   |                     |                       |
|             | BCLR Rn,Rd         | 1                    |                           |                    |                     |                     |                       |
|             | BCLR Rn,@ERd       | 2                    |                           |                    | 2                   |                     |                       |
|             | BCLR Rn,@aa:8      | 2                    |                           |                    | 2                   |                     |                       |
|             | BCLR Rn,@aa:16     | 3                    |                           |                    | 2                   |                     |                       |
|             | BCLR Rn,@aa:32     | 4                    |                           |                    | 2                   |                     |                       |
| BIAND       | BIAND #xx:3,Rd     | 1                    |                           |                    |                     |                     |                       |
|             | BIAND #xx:3,@ERd   | 2                    |                           |                    | 1                   |                     |                       |
|             | BIAND #xx:3,@aa:8  | 2                    |                           |                    | 1                   |                     |                       |
|             | BIAND #xx:3,@aa:16 | 3                    |                           |                    | 1                   |                     |                       |
|             | BIAND #xx:3,@aa:32 | 4                    |                           |                    | 1                   |                     |                       |
| BILD        | BILD #xx:3,Rd      | 1                    |                           |                    |                     |                     |                       |
|             | BILD #xx:3,@ERd    | 2                    |                           |                    | 1                   |                     |                       |
|             | BILD #xx:3,@aa:8   | 2                    |                           |                    | 1                   |                     |                       |
|             | BILD #xx:3,@aa:16  | 3                    |                           |                    | 1                   |                     |                       |
|             | BILD #xx:3,@aa:32  | 4                    |                           |                    | 1                   |                     |                       |
| BIOR        | BIOR #xx:8,Rd      | 1                    |                           |                    |                     |                     |                       |
|             | BIOR #xx:8,@ERd    | 2                    |                           |                    | 1                   |                     |                       |
|             | BIOR #xx:8,@aa:8   | 2                    |                           |                    | 1                   |                     |                       |
|             | BIOR #xx:8,@aa:16  | 3                    |                           |                    | 1                   |                     |                       |
|             | BIOR #xx:8,@aa:32  | 4                    |                           |                    | 1                   |                     |                       |
| BIST        | BIST #xx:3,Rd      | 1                    |                           |                    |                     |                     |                       |
|             | BIST #xx:3,@ERd    | 2                    |                           |                    | 2                   |                     |                       |
|             | BIST #xx:3,@aa:8   | 2                    |                           |                    | 2                   |                     |                       |
|             | BIST #xx:3,@aa:16  | 3                    |                           |                    | 2                   |                     |                       |
|             | BIST #xx:3,@aa:32  | 4                    |                           |                    | 2                   |                     |                       |
| BIXOR       | BIXOR #xx:3,Rd     | 1                    |                           |                    |                     |                     |                       |
|             | BIXOR #xx:3,@ERd   | 2                    |                           |                    | 1                   |                     |                       |
|             | BIXOR #xx:3,@aa:8  | 2                    |                           |                    | 1                   |                     |                       |
|             | BIXOR #xx:3,@aa:16 | 3                    |                           |                    | 1                   |                     |                       |
|             | BIXOR #xx:3,@aa:32 | 4                    |                           |                    | 1                   |                     |                       |
| BLD         | BLD #xx:3,Rd       | 1                    |                           |                    |                     |                     |                       |
|             | BLD #xx:3,@ERd     | 2                    |                           |                    | 1                   |                     |                       |
|             | BLD #xx:3,@aa:8    | 2                    |                           |                    | 1                   |                     |                       |
|             | BLD #xx:3,@aa:16   | 3                    |                           |                    | 1                   |                     |                       |
|             | BLD #xx:3,@aa:32   | 4                    |                           |                    | 1                   |                     |                       |
| BNOT        | BNOT #xx:3,Rd      | 1                    |                           |                    |                     |                     |                       |
|             | BNOT #xx:3,@ERd    | 2                    |                           |                    | 2                   |                     |                       |
|             | BNOT #xx:3,@aa:8   | 2                    |                           |                    | 2                   |                     |                       |
|             | BNOT #xx:3,@aa:16  | 3                    |                           |                    | 2                   |                     |                       |
|             | BNOT #xx:3,@aa:32  | 4                    |                           |                    | 2                   |                     |                       |
|             | BNOT Rn,Rd         | 1                    |                           |                    |                     |                     |                       |
|             | BNOT Rn,@ERd       | 2                    |                           |                    | 2                   |                     |                       |
|             | BNOT Rn,@aa:8      | 2                    |                           |                    | 2                   |                     |                       |
|             | BNOT Rn,@aa:16     | 3                    |                           |                    | 2                   |                     |                       |

| Instruction | Mnemonic          | Instruction                 | Branch  | Stack | Byte Data | Word Data | Internal |
|-------------|-------------------|-----------------------------|---------|-------|-----------|-----------|----------|
|             |                   | Fetch                       | Address |       |           |           |          |
|             |                   | I                           | J       | K     | L         | M         | N        |
| BNOT        | BNOT Rn,@aa:32    | 4                           |         |       | 2         |           |          |
| BOR         | BOR #xx:3,Rd      | 1                           |         |       |           |           |          |
|             | BOR #xx:3,@ERd    | 2                           |         |       | 1         |           |          |
|             | BOR #xx:3,@aa:8   | 2                           |         |       | 1         |           |          |
|             | BOR #xx:3,@aa:16  | 3                           |         |       | 1         |           |          |
|             | BOR #xx:3,@aa:32  | 4                           |         |       | 1         |           |          |
| BSET        | BSET #xx:3,Rd     | 1                           |         |       |           |           |          |
|             | BSET #xx:3,@ERd   | 2                           |         |       | 2         |           |          |
|             | BSET #xx:3,@aa:8  | 2                           |         |       | 2         |           |          |
|             | BSET #xx:3,@aa:16 | 3                           |         |       | 2         |           |          |
|             | BSET #xx:3,@aa:32 | 4                           |         |       | 2         |           |          |
|             | BSET Rn,Rd        | 1                           |         |       |           |           |          |
|             | BSET Rn,@ERd      | 2                           |         |       | 2         |           |          |
|             | BSET Rn,@aa:8     | 2                           |         |       | 2         |           |          |
|             | BSET Rn,@aa:16    | 3                           |         |       | 2         |           |          |
|             | BSET Rn,@aa:32    | 4                           |         |       | 2         |           |          |
| BSR         | BSR d:8           | 2                           |         | 2     |           |           |          |
|             | BSR d:16          | 2                           |         | 2     |           |           | 1        |
| BST         | BST #xx:3,Rd      | 1                           |         |       |           |           |          |
|             | BST #xx:3,@ERd    | 2                           |         |       | 2         |           |          |
|             | BST #xx:3,@aa:8   | 2                           |         |       | 2         |           |          |
|             | BST #xx:3,@aa:16  | 3                           |         |       | 2         |           |          |
|             | BST #xx:3,@aa:32  | 4                           |         |       | 2         |           |          |
| BTST        | BTST #xx:3,Rd     | 1                           |         |       |           |           |          |
|             | BTST #xx:3,@ERd   | 2                           |         |       | 1         |           |          |
|             | BTST #xx:3,@aa:8  | 2                           |         |       | 1         |           |          |
|             | BTST #xx:3,@aa:16 | 3                           |         |       | 1         |           |          |
|             | BTST #xx:3,@aa:32 | 4                           |         |       | 1         |           |          |
|             | BTST Rn,Rd        | 1                           |         |       |           |           |          |
|             | BTST Rn,@ERd      | 2                           |         |       | 1         |           |          |
|             | BTST Rn,@aa:8     | 2                           |         |       | 1         |           |          |
|             | BTST Rn,@aa:16    | 3                           |         |       | 1         |           |          |
|             | BTST Rn,@aa:32    | 4                           |         |       | 1         |           |          |
| BXOR        | BXOR #xx:3,Rd     | 1                           |         |       |           |           |          |
|             | BXOR #xx:3,@ERd   | 2                           |         |       | 1         |           |          |
|             | BXOR #xx:3,@aa:8  | 2                           |         |       | 1         |           |          |
|             | BXOR #xx:3,@aa:16 | 3                           |         |       | 1         |           |          |
|             | BXOR #xx:3,@aa:32 | 4                           |         |       | 1         |           |          |
| CLRMAC      | CLRMAC            | Cannot be used in this LSI. |         |       |           |           |          |
| CMP         | CMP.B #xx:8,Rd    | 1                           |         |       |           |           |          |
|             | CMP.B Rs,Rd       | 1                           |         |       |           |           |          |
|             | CMP.W #xx:16,Rd   | 2                           |         |       |           |           |          |
|             | CMP.W Rs,Rd       | 1                           |         |       |           |           |          |
|             | CMP.L #xx:32,ERd  | 3                           |         |       |           |           |          |
|             | CMP.L ERs,ERd     | 1                           |         |       |           |           |          |
| DAA         | DAA Rd            | 1                           |         |       |           |           |          |
| DAS         | DAS Rd            | 1                           |         |       |           |           |          |

| Instruction       | Mnemonic            | Branch                      |                 |                    |                     |                     |                       |
|-------------------|---------------------|-----------------------------|-----------------|--------------------|---------------------|---------------------|-----------------------|
|                   |                     | Instruction<br>Fetch        | Address<br>Read | Stack<br>Operation | Byte Data<br>Access | Word Data<br>Access | Internal<br>Operation |
|                   |                     | I                           | J               | K                  | L                   | M                   | N                     |
| DEC               | DEC.B Rd            | 1                           |                 |                    |                     |                     |                       |
|                   | DEC.W #1/2,Rd       | 1                           |                 |                    |                     |                     |                       |
|                   | DEC.L #1/2 ERd      | 1                           |                 |                    |                     |                     |                       |
| DIVXS             | DIVXS.B Rs,Rd       | 2                           |                 |                    |                     |                     | 11                    |
|                   | DIVXS.W Rs,ERd      | 2                           |                 |                    |                     |                     | 19                    |
| DIVXU             | DIVXU.B Rs,Rd       | 1                           |                 |                    |                     |                     | 11                    |
|                   | DIVXU.W Rs,ERd      | 1                           |                 |                    |                     |                     | 19                    |
| EEPMOV            | EEPMOV.B            | 2                           |                 |                    | $2n+2^{*2}$         |                     |                       |
|                   | EEPMOV.W            | 2                           |                 |                    | $2n+2^{*2}$         |                     |                       |
| EXTS              | EXTS.W Rd           | 1                           |                 |                    |                     |                     |                       |
|                   | EXTS.L ERd          | 1                           |                 |                    |                     |                     |                       |
| EXTU              | EXTU.W Rd           | 1                           |                 |                    |                     |                     |                       |
|                   | EXTU.L ERd          | 1                           |                 |                    |                     |                     |                       |
| INC               | INC.B Rd            | 1                           |                 |                    |                     |                     |                       |
|                   | INC.W #1/2,Rd       | 1                           |                 |                    |                     |                     |                       |
|                   | INC.L #1/2,ERd      | 1                           |                 |                    |                     |                     |                       |
| JMP               | JMP @ERN            | 2                           |                 |                    |                     |                     |                       |
|                   | JMP @aa:24          | 2                           |                 |                    |                     |                     | 1                     |
|                   | JMP @@aa:8          | 2                           | 2               |                    |                     |                     | 1                     |
| JSR               | JSR @ERn            | 2                           |                 | 2                  |                     |                     |                       |
|                   | JSR @aa:24          | 2                           |                 | 2                  |                     |                     | 1                     |
|                   | JSR @@aa:8          | 2                           | 2               | 2                  |                     |                     |                       |
| LDC               | LDC #xx:8,CCR       | 1                           |                 |                    |                     |                     |                       |
|                   | LDC #xx:8,EXR       | 2                           |                 |                    |                     |                     |                       |
|                   | LDC Rs,CCR          | 1                           |                 |                    |                     |                     |                       |
|                   | LDC Rs,EXR          | 1                           |                 |                    |                     |                     |                       |
|                   | LDC @ERs,CCR        | 2                           |                 |                    |                     | 1                   |                       |
|                   | LDC @ERs,EXR        | 2                           |                 |                    |                     | 1                   |                       |
|                   | LDC @(d:16,ERs),CCR | 3                           |                 |                    |                     | 1                   |                       |
|                   | LDC @(d:16,ERs),EXR | 3                           |                 |                    |                     | 1                   |                       |
|                   | LDC @(d:32,ERs),CCR | 5                           |                 |                    |                     | 1                   |                       |
|                   | LDC @(d:32,ERs),EXR | 5                           |                 |                    |                     | 1                   |                       |
|                   | LDC @ERs+,CCR       | 2                           |                 |                    |                     | 1                   | 1                     |
|                   | LDC @ERs+,EXR       | 2                           |                 |                    |                     | 1                   | 1                     |
|                   | LDC @aa:16,CCR      | 3                           |                 |                    |                     | 1                   |                       |
|                   | LDC @aa:16,EXR      | 3                           |                 |                    |                     | 1                   |                       |
|                   | LDC @aa:32,CCR      | 4                           |                 |                    |                     | 1                   |                       |
|                   | LDC @aa:32,EXR      | 4                           |                 |                    |                     | 1                   |                       |
| LDM <sup>*4</sup> | LDM.L               | 2                           |                 | 4                  |                     |                     | 1                     |
|                   | @SP+,(ERn-ERn+1)    |                             |                 |                    |                     |                     |                       |
|                   | LDM.L               | 2                           |                 | 6                  |                     |                     | 1                     |
|                   | @SP+,(ERn-ERn+2)    |                             |                 |                    |                     |                     |                       |
|                   | LDM.L               | 2                           |                 | 8                  |                     |                     | 1                     |
|                   | @SP+,(ERn-ERn+3)    |                             |                 |                    |                     |                     |                       |
| LDMAC             | LDMAC ERs,MACH      | Cannot be used in this LSI. |                 |                    |                     |                     |                       |
|                   | LDMAC ERs,MACL      |                             |                 |                    |                     |                     |                       |
| MAC               | MAC @ERn+,@ERm+     |                             |                 |                    |                     |                     |                       |

| Instruction | Mnemonic              | Instruction<br>Fetch        | Branch<br>Address<br>Read | Stack<br>Operation | Byte Data<br>Access | Word Data<br>Access | Internal<br>Operation |
|-------------|-----------------------|-----------------------------|---------------------------|--------------------|---------------------|---------------------|-----------------------|
|             |                       | I                           | J                         | K                  | L                   | M                   | N                     |
| MOV         | MOV.B #xx:8,Rd        | 1                           |                           |                    |                     |                     |                       |
|             | MOV.B Rs,Rd           | 1                           |                           |                    |                     |                     |                       |
|             | MOV.B @ERs,Rd         | 1                           |                           |                    | 1                   |                     |                       |
|             | MOV.B @(d:16,ERs),Rd  | 2                           |                           |                    | 1                   |                     |                       |
|             | MOV.B @(d:32,ERs),Rd  | 4                           |                           |                    | 1                   |                     |                       |
|             | MOV.B @ERs+,Rd        | 1                           |                           |                    | 1                   |                     | 1                     |
|             | MOV.B @aa:8,Rd        | 1                           |                           |                    | 1                   |                     |                       |
|             | MOV.B @aa:16,Rd       | 2                           |                           |                    | 1                   |                     |                       |
|             | MOV.B @aa:32,Rd       | 3                           |                           |                    | 1                   |                     |                       |
|             | MOV.B Rs,@ERd         | 1                           |                           |                    | 1                   |                     |                       |
|             | MOV.B Rs,@(d:16,ERd)  | 2                           |                           |                    | 1                   |                     |                       |
|             | MOV.B Rs,@(d:32,ERd)  | 4                           |                           |                    | 1                   |                     |                       |
|             | MOV.B Rs,@-ERd        | 1                           |                           |                    | 1                   |                     | 1                     |
|             | MOV.B Rs,@aa:8        | 1                           |                           |                    | 1                   |                     |                       |
|             | MOV.B Rs,@aa:16       | 2                           |                           |                    | 1                   |                     |                       |
|             | MOV.B Rs,@aa:32       | 3                           |                           |                    | 1                   |                     |                       |
|             | MOV.W #xx:16,Rd       | 2                           |                           |                    |                     |                     |                       |
|             | MOV.W Rs,Rd           | 1                           |                           |                    |                     |                     |                       |
|             | MOV.W @ERs,Rd         | 1                           |                           |                    |                     | 1                   |                       |
|             | MOV.W @(d:16,ERs),Rd  | 2                           |                           |                    |                     | 1                   |                       |
|             | MOV.W @(d:32,ERs),Rd  | 4                           |                           |                    |                     | 1                   |                       |
|             | MOV.W @ERs+,Rd        | 1                           |                           |                    |                     | 1                   | 1                     |
|             | MOV.W @aa:16,Rd       | 2                           |                           |                    |                     | 1                   |                       |
|             | MOV.W @aa:32,Rd       | 3                           |                           |                    |                     | 1                   |                       |
|             | MOV.W Rs,@ERd         | 1                           |                           |                    |                     | 1                   |                       |
|             | MOV.W Rs,@(d:16,ERd)  | 2                           |                           |                    |                     | 1                   |                       |
|             | MOV.W Rs,@(d:32,ERd)  | 4                           |                           |                    |                     | 1                   |                       |
|             | MOV.W Rs,@-ERd        | 1                           |                           |                    |                     | 1                   | 1                     |
|             | MOV.W Rs,@aa:16       | 2                           |                           |                    |                     | 1                   |                       |
|             | MOV.W Rs,@aa:32       | 3                           |                           |                    |                     | 1                   |                       |
|             | MOV.L #xx:32,ERd      | 3                           |                           |                    |                     |                     |                       |
|             | MOV.L ERs,ERd         | 1                           |                           |                    |                     |                     |                       |
|             | MOV.L @ERs,ERd        | 2                           |                           |                    |                     | 2                   |                       |
|             | MOV.L @(d:16,ERs),ERd | 3                           |                           |                    |                     | 2                   |                       |
|             | MOV.L @(d:32,ERs),ERd | 5                           |                           |                    |                     | 2                   |                       |
|             | MOV.L @ERs+,ERd       | 2                           |                           |                    |                     | 2                   | 1                     |
|             | MOV.L @aa:16,ERd      | 3                           |                           |                    |                     | 2                   |                       |
|             | MOV.L @aa:32,ERd      | 4                           |                           |                    |                     | 2                   |                       |
|             | MOV.L ERs,@ERd        | 2                           |                           |                    |                     | 2                   |                       |
|             | MOV.L ERs,@(d:16,ERd) | 3                           |                           |                    |                     | 2                   |                       |
|             | MOV.L ERs,@(d:32,ERd) | 5                           |                           |                    |                     | 2                   |                       |
|             | MOV.L ERs,@-ERd       | 2                           |                           |                    |                     | 2                   | 1                     |
|             | MOV.L ERs,@aa:16      | 3                           |                           |                    |                     | 2                   |                       |
|             | MOV.L ERs,@aa:32      | 4                           |                           |                    |                     | 2                   |                       |
| MOVFP       | MOVFP @aa:16,Rd       | Cannot be used in this LSI. |                           |                    |                     |                     |                       |
| MOVTPE      | MOVTPE Rs,@aa:16      |                             |                           |                    |                     |                     |                       |
| MULXS       | MULXS.B Rs,Rd         | 2                           |                           |                    |                     |                     | 11                    |
|             | MULXS.W Rs,ERd        | 2                           |                           |                    |                     |                     | 19                    |
| MULXU       | MULXU.B Rs,Rd         | 1                           |                           |                    |                     |                     | 11                    |
|             | MULXU.W Rs,ERd        | 1                           |                           |                    |                     |                     | 19                    |



| Instruction | Mnemonic        | Instruction<br>Fetch | Branch<br>Address<br>Read | Stack<br>Operation | Byte Data<br>Access | Word Data<br>Access | Internal<br>Operation |
|-------------|-----------------|----------------------|---------------------------|--------------------|---------------------|---------------------|-----------------------|
|             |                 | I                    | J                         | K                  | L                   | M                   | N                     |
| NEG         | NEG.B Rd        | 1                    |                           |                    |                     |                     |                       |
|             | NEG.W Rd        | 1                    |                           |                    |                     |                     |                       |
|             | NEG.L ERd       | 1                    |                           |                    |                     |                     |                       |
| NOP         | NOP             | 1                    |                           |                    |                     |                     |                       |
| NOT         | NOT.B Rd        | 1                    |                           |                    |                     |                     |                       |
|             | NOT.W Rd        | 1                    |                           |                    |                     |                     |                       |
|             | NOT.L ERd       | 1                    |                           |                    |                     |                     |                       |
| OR          | OR.B #xx:8,Rd   | 1                    |                           |                    |                     |                     |                       |
|             | OR.B Rs,Rd      | 1                    |                           |                    |                     |                     |                       |
|             | OR.W #xx:16,Rd  | 2                    |                           |                    |                     |                     |                       |
|             | OR.W Rs,Rd      | 1                    |                           |                    |                     |                     |                       |
|             | OR.L #xx:32,ERd | 3                    |                           |                    |                     |                     |                       |
|             | OR.L ERs,ERd    | 2                    |                           |                    |                     |                     |                       |
| ORC         | ORC #xx:8,CCR   | 1                    |                           |                    |                     |                     |                       |
|             | ORC #xx:8,EXR   | 2                    |                           |                    |                     |                     |                       |
| POP         | POP.W Rn        | 1                    |                           |                    |                     | 1                   | 1                     |
|             | POP.L ERn       | 2                    |                           |                    |                     | 2                   | 1                     |
| PUSH        | PUSH.W Rn       | 1                    |                           |                    |                     | 1                   | 1                     |
|             | PUSH.L ERn      | 2                    |                           |                    |                     | 2                   | 1                     |
| ROTL        | ROTL.B Rd       | 1                    |                           |                    |                     |                     |                       |
|             | ROTL.B #2,Rd    | 1                    |                           |                    |                     |                     |                       |
|             | ROTL.W Rd       | 1                    |                           |                    |                     |                     |                       |
|             | ROTL.W #2,Rd    | 1                    |                           |                    |                     |                     |                       |
|             | ROTL.L ERd      | 1                    |                           |                    |                     |                     |                       |
|             | ROTL.L #2,ERd   | 1                    |                           |                    |                     |                     |                       |
| ROTR        | ROTR.B Rd       | 1                    |                           |                    |                     |                     |                       |
|             | ROTR.B #2,Rd    | 1                    |                           |                    |                     |                     |                       |
|             | ROTR.W Rd       | 1                    |                           |                    |                     |                     |                       |
|             | ROTR.W #2,Rd    | 1                    |                           |                    |                     |                     |                       |
|             | ROTR.L ERd      | 1                    |                           |                    |                     |                     |                       |
|             | ROTR.L #2,ERd   | 1                    |                           |                    |                     |                     |                       |
| ROTXL       | ROTXL.B Rd      | 1                    |                           |                    |                     |                     |                       |
|             | ROTXL.B #2,Rd   | 1                    |                           |                    |                     |                     |                       |
|             | ROTXL.W Rd      | 1                    |                           |                    |                     |                     |                       |
|             | ROTXL.W #2,Rd   | 1                    |                           |                    |                     |                     |                       |
|             | ROTXL.L ERd     | 1                    |                           |                    |                     |                     |                       |
|             | ROTXL.L #2,ERd  | 1                    |                           |                    |                     |                     |                       |
| ROTXR       | ROTXR.B Rd      | 1                    |                           |                    |                     |                     |                       |
|             | RPTXR.B #2,Rd   | 1                    |                           |                    |                     |                     |                       |
|             | ROTXR.W Rd      | 1                    |                           |                    |                     |                     |                       |
|             | ROTXR.W #2,Rd   | 1                    |                           |                    |                     |                     |                       |
|             | ROTXR.L ERd     | 1                    |                           |                    |                     |                     |                       |
|             | ROTXR.L #2,ERd  | 1                    |                           |                    |                     |                     |                       |
| RTE         | RTE             | 2                    |                           | 2/3* <sup>1</sup>  |                     |                     | 1                     |
| RTS         | RTS             | 2                    |                           | 2                  |                     |                     | 1                     |

| Instruction       | Mnemonic                         | Instruction                 | Branch  | Stack | Byte Data | Word Data | Internal |
|-------------------|----------------------------------|-----------------------------|---------|-------|-----------|-----------|----------|
|                   |                                  | Fetch                       | Address |       |           |           |          |
|                   |                                  | I                           | J       | K     | L         | M         | N        |
| SHAL              | SHAL.B Rd                        | 1                           |         |       |           |           |          |
|                   | SHAL.B #2,Rd                     | 1                           |         |       |           |           |          |
|                   | SHAL.W Rd                        | 1                           |         |       |           |           |          |
|                   | SHAL.W #2,Rd                     | 1                           |         |       |           |           |          |
|                   | SHAL.L ERd                       | 1                           |         |       |           |           |          |
|                   | SHAL.L #2,ERd                    | 1                           |         |       |           |           |          |
| SHAR              | SHAR.B Rd                        | 1                           |         |       |           |           |          |
|                   | SHAR.B #2,Rd                     | 1                           |         |       |           |           |          |
|                   | SHAR.W Rd                        | 1                           |         |       |           |           |          |
|                   | SHAR.W #2,Rd                     | 1                           |         |       |           |           |          |
|                   | SHAR.L ERd                       | 1                           |         |       |           |           |          |
|                   | SHAR.L #2,ERd                    | 1                           |         |       |           |           |          |
| SHLL              | SHLL.B Rd                        | 1                           |         |       |           |           |          |
|                   | SHLL.B #2,Rd                     | 1                           |         |       |           |           |          |
|                   | SHLL.W Rd                        | 1                           |         |       |           |           |          |
|                   | SHLL.W #2,Rd                     | 1                           |         |       |           |           |          |
|                   | SHLL.L ERd                       | 1                           |         |       |           |           |          |
|                   | SHLL.L #2,ERd                    | 1                           |         |       |           |           |          |
| SHLR              | SHLR.B Rd                        | 1                           |         |       |           |           |          |
|                   | SHLR.B #2,Rd                     | 1                           |         |       |           |           |          |
|                   | SHLR.W Rd                        | 1                           |         |       |           |           |          |
|                   | SHLR.W #2,Rd                     | 1                           |         |       |           |           |          |
|                   | SHLR.L ERd                       | 1                           |         |       |           |           |          |
|                   | SHLR.L #2,ERd                    | 1                           |         |       |           |           |          |
| SLEEP             | SLEEP                            | 1                           |         |       |           |           | 1        |
| STC               | STC.B CCR,Rd                     | 1                           |         |       |           |           |          |
|                   | STC.B EXR,Rd                     | 1                           |         |       |           |           |          |
|                   | STC.W CCR,@ERd                   | 2                           |         |       |           | 1         |          |
|                   | STC.W EXR,@ERd                   | 2                           |         |       |           | 1         |          |
|                   | STC.W CCR,@(d:16,ERd)            | 3                           |         |       |           | 1         |          |
|                   | STC.W EXR,@(d:16,ERd)            | 3                           |         |       |           | 1         |          |
|                   | STC.W CCR,@(d:32,ERd)            | 5                           |         |       |           | 1         |          |
|                   | STC.W EXR,@(d:32,ERd)            | 5                           |         |       |           | 1         |          |
|                   | STC.W CCR,@-ERd                  | 2                           |         |       |           | 1         | 1        |
|                   | STC.W EXR,@-ERd                  | 2                           |         |       |           | 1         | 1        |
|                   | STC.W CCR,@aa:16                 | 3                           |         |       |           | 1         |          |
|                   | STC.W EXR,@aa:16                 | 3                           |         |       |           | 1         |          |
|                   | STC.W CCR,@aa:32                 | 4                           |         |       |           | 1         |          |
|                   | STC.W EXR,@aa:32                 | 4                           |         |       |           | 1         |          |
| STM* <sup>4</sup> | STM.L (ERn-ERn+1),<br>@-Sp       | 2                           |         | 4     |           |           | 1        |
|                   | STM.L (ERn-ERn+2),<br>@-Sp       | 2                           |         | 6     |           |           | 1        |
|                   | STM.L (ERn-ERn+3),<br>@-Sp       | 2                           |         | 8     |           |           | 1        |
|                   |                                  |                             |         |       |           |           |          |
| STMAC             | STMAC MACH,ERd<br>STMAC MACL,ERd | Cannot be used in this LSI. |         |       |           |           |          |
| SUB               | SUB.B Rs,Rd                      | 1                           |         |       |           |           |          |
|                   | SUB.W #xx:16,Rd                  | 2                           |         |       |           |           |          |
|                   | SUB.W Rs,Rd                      | 1                           |         |       |           |           |          |
|                   | SUB.L #xx:32,ERd                 | 3                           |         |       |           |           |          |
|                   | SUB.L ERs,ERd                    | 1                           |         |       |           |           |          |
| SUBS              | SUBS #1/2/4,ERd                  | 1                           |         |       |           |           |          |


| Instruction | Mnemonic               | Instruction<br>Fetch | Branch<br>Address<br>Read | Stack<br>Operation | Byte Data<br>Access | Word Data<br>Access | Internal<br>Operation |
|-------------|------------------------|----------------------|---------------------------|--------------------|---------------------|---------------------|-----------------------|
|             |                        | I                    | J                         | K                  | L                   | M                   | N                     |
| SUBX        | SUBX #xx:8,Rd          | 1                    |                           |                    |                     |                     |                       |
|             | SUBX Rs,Rd             | 1                    |                           |                    |                     |                     |                       |
| TAS         | TAS @ERd* <sup>3</sup> | 2                    |                           |                    | 2                   |                     |                       |
| TRAPA       | TRAPA #x:2             | 2                    | 2                         | 2/3* <sup>1</sup>  |                     |                     | 2                     |
| XOR         | XOR.B #xx:8,Rd         | 1                    |                           |                    |                     |                     |                       |
|             | XOR.B Rs,Rd            | 1                    |                           |                    |                     |                     |                       |
|             | XOR.W #xx:16,Rd        | 2                    |                           |                    |                     |                     |                       |
|             | XOR.W Rs,Rd            | 1                    |                           |                    |                     |                     |                       |
|             | XOR.L #xx:32,ERd       | 3                    |                           |                    |                     |                     |                       |
|             | XOR.L ERs,ERd          | 2                    |                           |                    |                     |                     |                       |
| XORC        | XORC #xx:8,CCR         | 1                    |                           |                    |                     |                     |                       |
|             | XORC #xx:8,EXR         | 2                    |                           |                    |                     |                     |                       |

- Notes:
1. 3 applies when EXR is valid, and 2 applies when invalid.
  2. Applies when the transfer data is n bytes.
  3. Only register ER0, ER1, ER4, or ER5 should be used when using the TAS instruction.
  4. Only registers ER0 to ER6 should be used when using the STM/LDM instruction.

# A.5 Bus Status during Instruction Execution

Table A.13 indicates execution status of each instruction available in this LSI. For the number of states required for each execution status, see table A.11, Number of States Required for Each Execution Status (Cycle).

## Interpreting the Table

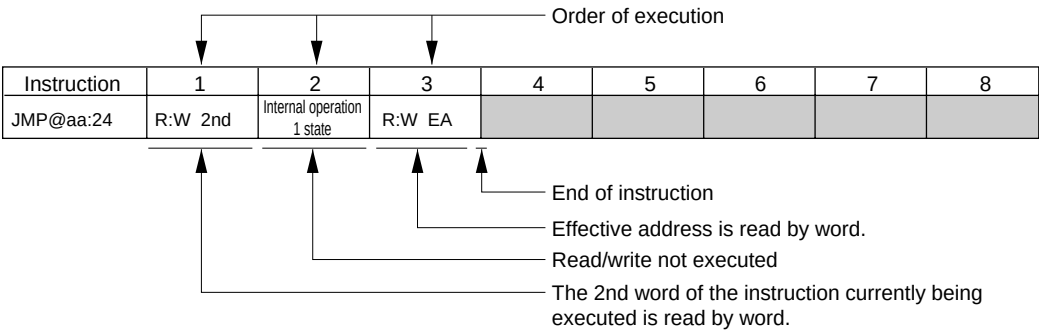

|       |                                                                                                |
|-------|------------------------------------------------------------------------------------------------|
| R : B | Read by byte                                                                                   |
| R : W | Read by word                                                                                   |
| W : B | Write by byte                                                                                  |
| W : W | Write by word                                                                                  |
| : M   | Bus not transferred immediately after this cycle                                               |
| 2nd   | Address of the 2nd word (3rd and 4th bytes)                                                    |
| 3rd   | Address of the 3rd word (5th and 6th bytes)                                                    |
| 4th   | Address of the 4th word (7th and 8th bytes)                                                    |
| 5th   | Address of the 5th word (9th and 10th bytes)                                                   |
| NEXT  | The head address of the instruction immediately after the instruction currently being executed |
| EA    | Execution address                                                                              |
| VEC   | Vector address                                                                                 |

**Table A.13 Instruction Execution Status**

| Instruction          | 1        | 2        | 3             | 4             | 5             | 6 | 7 | 8 | 9 |
|----------------------|----------|----------|---------------|---------------|---------------|---|---|---|---|
| ADD.B #xx:8,Rd       | R:W NEXT |          |               |               |               |   |   |   |   |
| ADD.B Rs,Rd          | R:W NEXT |          |               |               |               |   |   |   |   |
| ADD.W #xx:16,Rd      | R:W 2nd  | R:W NEXT |               |               |               |   |   |   |   |
| ADD.W Rs,Rd          | R:W NEXT |          |               |               |               |   |   |   |   |
| ADD.L #xx:32,ERd     | R:W 2nd  | R:W 3rd  | R:W NEXT      |               |               |   |   |   |   |
| ADD.L ERs,ERd        | R:W NEXT |          |               |               |               |   |   |   |   |
| ADDS #1/2/4,ERd      | R:W NEXT |          |               |               |               |   |   |   |   |
| ADDX #xx:8,Rd        | R:W NEXT |          |               |               |               |   |   |   |   |
| ADDX Rs,Rd           | R:W NEXT |          |               |               |               |   |   |   |   |
| AND.B #xx:8,Rd       | R:W NEXT |          |               |               |               |   |   |   |   |
| AND.B Rs,Rd          | R:W NEXT |          |               |               |               |   |   |   |   |
| AND.W #xx:16,Rd      | R:W 2nd  | R:W NEXT |               |               |               |   |   |   |   |
| AND.W Rs,Rd          | R:W NEXT |          |               |               |               |   |   |   |   |
| AND.L #xx:32,ERd     | R:W 2nd  | R:W 3rd  | R:W NEXT      |               |               |   |   |   |   |
| AND.L ERs,ERd        | R:W 2nd  | R:W NEXT |               |               |               |   |   |   |   |
| ANDC #xx:8,CCR       | R:W NEXT |          |               |               |               |   |   |   |   |
| ANDC #xx:8,EXR       | R:W 2nd  | R:W NEXT |               |               |               |   |   |   |   |
| BAND #xx:3,Rd        | R:W NEXT |          |               |               |               |   |   |   |   |
| BAND #xx:3,@ERd      | R:W 2nd  | R:B EA   | R:W:M<br>NEXT |               |               |   |   |   |   |
| BAND #xx:3,@aa:8     | R:W 2nd  | R:B EA   | R:W:M<br>NEXT |               |               |   |   |   |   |
| BAND<br>#xx:3,@aa:16 | R:W 2nd  | R:W 3rd  | R:B EA        | R:W:M<br>NEXT |               |   |   |   |   |
| BAND<br>#xx:3,@aa:32 | R:W 2nd  | R:W 3rd  | R:W 4th       | R:B EA        | R:W:M<br>NEXT |   |   |   |   |
| BRA d:8 (BT d:8)     | R:W NEXT | R:W EA   |               |               |               |   |   |   |   |
| BRN d:8 (BF d:8)     | R:W NEXT | R:W EA   |               |               |               |   |   |   |   |
| BHI d:8              | R:W NEXT | R:W EA   |               |               |               |   |   |   |   |
| BLS d:8              | R:W NEXT | R:W EA   |               |               |               |   |   |   |   |
| BCC d:8 (BHS d:8)    | R:W NEXT | R:W EA   |               |               |               |   |   |   |   |
| BCS d:8 (BLO d:8)    | R:W NEXT | R:W EA   |               |               |               |   |   |   |   |
| BNE d:8              | R:W NEXT | R:W EA   |               |               |               |   |   |   |   |
| BEQ d:8              | R:W NEXT | R:W EA   |               |               |               |   |   |   |   |
| BVC d:8              | R:W NEXT | R:W EA   |               |               |               |   |   |   |   |
| BVS d:8              | R:W NEXT | R:W EA   |               |               |               |   |   |   |   |
| BPL d:8              | R:W NEXT | R:W EA   |               |               |               |   |   |   |   |
| BMI d:8              | R:W NEXT | R:W EA   |               |               |               |   |   |   |   |
| BGE d:8              | R:W NEXT | R:W EA   |               |               |               |   |   |   |   |

| Instruction         | 1        | 2                          | 3      | 4 | 5 | 6 | 7 | 8 | 9 |
|---------------------|----------|----------------------------|--------|---|---|---|---|---|---|
| BLT d:8             | R:W NEXT | R:W EA                     |        |   |   |   |   |   |   |
| BGT d:8             | R:W NEXT | R:W EA                     |        |   |   |   |   |   |   |
| BLE d:8             | R:W NEXT | R:W EA                     |        |   |   |   |   |   |   |
| BRA d:16 (BT d:16)  | R:W 2nd  | Internal operation 1 state | R:W EA |   |   |   |   |   |   |
| BRN d:16 (BF d:16)  | R:W 2nd  | Internal operation 1 state | R:W EA |   |   |   |   |   |   |
| BHI d:16            | R:W 2nd  | Internal operation 1 state | R:W EA |   |   |   |   |   |   |
| BLS d:16            | R:W 2nd  | Internal operation 1 state | R:W EA |   |   |   |   |   |   |
| BCC d:16 (BHS d:16) | R:W 2nd  | Internal operation 1 state | R:W EA |   |   |   |   |   |   |
| BCS d:16 (BLO d:16) | R:W 2nd  | Internal operation 1 state | R:W EA |   |   |   |   |   |   |
| BNE d:16            | R:W 2nd  | Internal operation 1 state | R:W EA |   |   |   |   |   |   |
| BEQ d:16            | R:W 2nd  | Internal operation 1 state | R:W EA |   |   |   |   |   |   |
| BVC d:16            | R:W 2nd  | Internal operation 1 state | R:W EA |   |   |   |   |   |   |
| BVS d:16            | R:W 2nd  | Internal operation 1 state | R:W EA |   |   |   |   |   |   |
| BPL d:16            | R:W 2nd  | Internal operation 1 state | R:W EA |   |   |   |   |   |   |
| BMI d:16            | R:W 2nd  | Internal operation 1 state | R:W EA |   |   |   |   |   |   |
| BGE d:16            | R:W 2nd  | Internal operation 1 state | R:W EA |   |   |   |   |   |   |
| BLT d:16            | R:W 2nd  | Internal operation 1 state | R:W EA |   |   |   |   |   |   |
| BGT d:16            | R:W 2nd  | Internal operation 1 state | R:W EA |   |   |   |   |   |   |

| Instruction        | 1        | 2                             | 3             | 4             | 5             | 6      | 7 | 8 | 9 |
|--------------------|----------|-------------------------------|---------------|---------------|---------------|--------|---|---|---|
| BLE d:16           | R:W 2nd  | Internal operation<br>1 state | R:W EA        |               |               |        |   |   |   |
| BCLR #xx:3,Rd      | R:W NEXT |                               |               |               |               |        |   |   |   |
| BCLR #xx:3,@ERd    | R:W 2nd  | R:B:M EA                      | R:W:M<br>NEXT | W:B EA        |               |        |   |   |   |
| BCLR #xx:3,@aa:8   | R:W 2nd  | R:B:M EA                      | R:W:M<br>NEXT | W:B EA        |               |        |   |   |   |
| BCLR #xx:3,@aa:16  | R:W 2nd  | R:W 3rd                       | R:B:M EA      | R:W:M<br>NEXT | W:B EA        |        |   |   |   |
| BCLR #xx:3,@aa:32  | R:W 2nd  | R:W 3rd                       | R:W 4th       | R:B:M EA      | R:W:M<br>NEXT | W:B EA |   |   |   |
| BCLR Rn,Rd         | R:W NEXT |                               |               |               |               |        |   |   |   |
| BCLR Rn,@ERd       | R:W 2nd  | R:B:M EA                      | R:W:M<br>NEXT | W:B EA        |               |        |   |   |   |
| BCLR Rn,@aa:8      | R:W 2nd  | R:B:M EA                      | R:W:M<br>NEXT | W:B EA        |               |        |   |   |   |
| BCLR Rn,@aa:16     | R:W 2nd  | R:W 3rd                       | R:B:M EA      | R:W:M<br>NEXT | W:B EA        |        |   |   |   |
| BCLR Rn,@aa:32     | R:W 2nd  | R:W 3rd                       | R:W 4th       | R:B:M EA      | R:W:M<br>NEXT | W:B EA |   |   |   |
| BIAND #xx:3,Rd     | R:W NEXT |                               |               |               |               |        |   |   |   |
| BIAND #xx:3,ERd    | R:W 2nd  | R:B EA                        | R:W:M<br>NEXT |               |               |        |   |   |   |
| BIAND #xx:3,@aa:8  | R:W 2nd  | R:B EA                        | R:W:M<br>NEXT |               |               |        |   |   |   |
| BIAND #xx:3,@aa:16 | R:W 2nd  | R:W 3rd                       | R:B EA        | R:W:M<br>NEXT |               |        |   |   |   |
| BIAND #xx:3,@aa:32 | R:W 2nd  | R:W 3rd                       | R:W 4th       | R:B EA        | R:W:M<br>NEXT |        |   |   |   |
| BILD #xx:3,Rd      | R:W NEXT |                               |               |               |               |        |   |   |   |
| BILD #xx:3,@ERd    | R:W 2nd  | R:B EA                        | R:W:M<br>NEXT |               |               |        |   |   |   |
| BILD #xx:3,@aa:8   | R:W 2nd  | R:B EA                        | R:W:M<br>NEXT |               |               |        |   |   |   |
| BILD #xx:3,@aa:16  | R:W 2nd  | R:W 3rd                       | R:B EA        | R:W:M<br>NEXT |               |        |   |   |   |
| BILD #xx:3,@aa:32  | R:W 2nd  | R:W 3rd                       | R:W 4th       | R:B EA        | R:W:M<br>NEXT |        |   |   |   |
| BIOR #xx:3,Rd      | R:W NEXT |                               |               |               |               |        |   |   |   |
| BIOR #xx:3,@ERd    | R:W 2nd  | R:B EA                        | R:W:M<br>NEXT |               |               |        |   |   |   |
| BOIR #xx:3,@aa:8   | R:W 2nd  | R:B EA                        | R:W:M<br>NEXT |               |               |        |   |   |   |

| Instruction        | 1        | 2        | 3             | 4             | 5             | 6      | 7 | 8 | 9 |
|--------------------|----------|----------|---------------|---------------|---------------|--------|---|---|---|
| BOIR #xx:3,@aa:16  | R:W 2nd  | R:W 3rd  | R:B EA        | R:W:M<br>NEXT |               |        |   |   |   |
| BOIR #xx:3,@aa:32  | R:W 2nd  | R:W 3rd  | R:W 4th       | R:B EA        | R:W:M<br>NEXT |        |   |   |   |
| BIST #xx:3,Rd      | R:W NEXT |          |               |               |               |        |   |   |   |
| BIST #xx:3,@ERd    | R:W 2nd  | R:B:M EA | R:W:M<br>NEXT | W:B EA        |               |        |   |   |   |
| BIST #xx:3,@aa:8   | R:W 2nd  | R:B:M EA | R:W:M<br>NEXT | W:B EA        |               |        |   |   |   |
| BIST #xx:3,@aa:16  | R:W 2nd  | R:W 3rd  | R:B:M EA      | R:W:M<br>NEXT | W:B EA        |        |   |   |   |
| BIST #xx:3,@aa:32  | R:W 2nd  | R:W 3rd  | R:W 4th       | R:B:M EA      | R:W:M<br>NEXT | W:B EA |   |   |   |
| BIXOR #xx:3,Rd     | R:W NEXT |          |               |               |               |        |   |   |   |
| BIXOR #xx:3,@ERd   | R:W 2nd  | R:B EA   | R:W:M<br>NEXT |               |               |        |   |   |   |
| BIXOR #xx:3,@aa:8  | R:W 2nd  | R:B EA   | R:W:M<br>NEXT |               |               |        |   |   |   |
| BIXOR #xx:3,@aa:16 | R:W 2nd  | R:W 3rd  | R:B EA        | R:W:M<br>NEXT |               |        |   |   |   |
| BIXOR #xx:3,@aa:32 | R:W 2nd  | R:W 3rd  | R:W 4th       | R:B EA        | R:W:M<br>NEXT |        |   |   |   |
| BLD #xx:3,Rd       | R:W NEXT |          |               |               |               |        |   |   |   |
| BLD #xx:3,@ERd     | R:W 2nd  | R:B EA   | R:W:M<br>NEXT |               |               |        |   |   |   |
| BLD #xx:3,@aa:8    | R:W 2nd  | R:B EA   | R:W:M<br>NEXT |               |               |        |   |   |   |
| BLD #xx:3,@aa:16   | R:W 2nd  | R:W 3rd  | R:B EA        | R:W:M<br>NEXT |               |        |   |   |   |
| BLD #xx:3,@aa:32   | R:W 2nd  | R:W 3rd  | R:W 4th       | R:B EA        | R:W:M<br>NEXT |        |   |   |   |
| BNOT #xx:3,Rd      | R:W NEXT |          |               |               |               |        |   |   |   |
| BNOT #xx:3,ERd     | R:W 2nd  | R:B:M EA | R:W:M<br>NEXT | W:B EA        |               |        |   |   |   |
| BNOT #xx:3,@aa:8   | R:W 2nd  | R:B:M EA | R:W:M<br>NEXT | W:B EA        |               |        |   |   |   |
| BNOT #xx:3,@aa:16  | R:W 2nd  | R:W 3rd  | R:B:M EA      | R:W:M<br>NEXT | W:B EA        |        |   |   |   |
| BNOT #xx:3,@aa:32  | R:W 2nd  | R:W 3rd  | R:W 4th       | R:B:M EA      | R:W:M<br>NEXT | W:B EA |   |   |   |
| BNOT Rn,Rd         | R:W NEXT |          |               |               |               |        |   |   |   |
| BNOT Rn,@ERd       | R:W 2nd  | R:B:M EA | R:W:M<br>NEXT | W:B EA        |               |        |   |   |   |
| BNOT Rn @aa:8      | R:W 2nd  | R:B:M EA | R:W:M<br>NEXT | W:B EA        |               |        |   |   |   |



| Instruction       | 1        | 2                                | 3                 | 4                 | 5               | 6      | 7 | 8 | 9 |
|-------------------|----------|----------------------------------|-------------------|-------------------|-----------------|--------|---|---|---|
| BNOT Rn @aa:16    | R:W 2nd  | R:W 3rd                          | R:B:W EA          | R:W:M<br>NEXT     | W:B EA          |        |   |   |   |
| BNOT Rn @aa:32    | R:W 2nd  | R:W 3rd                          | R:W 4th           | R:B:M EA          | R:W:M<br>NEXT   | W:B EA |   |   |   |
| BOR #xx:3,Rd      | R:W NEXT |                                  |                   |                   |                 |        |   |   |   |
| BOR #xx:3,ERd     | R:W 2nd  | R:B EA                           | R:W:M<br>NEXT     |                   |                 |        |   |   |   |
| BOR #xx:3,@aa:8   | R:W 2nd  | R:B EA                           | R:W:M<br>NEXT     |                   |                 |        |   |   |   |
| BOR #xx:3,@aa:16  | R:W 2nd  | R:W 3rd                          | R:B EA            | R:W:M<br>NEXT     |                 |        |   |   |   |
| BOR #xx:3,@aa:32  | R:W 2nd  | R:W 3rd                          | R:W 4th           | R:B EA            | R:W NEXT        |        |   |   |   |
| BSET #xx:3,Rd     | R:W NEXT |                                  |                   |                   |                 |        |   |   |   |
| BSET #xx:3,@ERd   | R:W 2nd  | R:B:M EA                         | R:W:M<br>NEXT     | W:B EA            |                 |        |   |   |   |
| BSET #xx:3,@aa:8  | R:W 2nd  | R:B:M EA                         | R:W:M<br>NEXT     | W:B EA            |                 |        |   |   |   |
| BSET #xx:3,@aa:16 | R:W 2nd  | R:W 3rd                          | R:B:M EA          | R:W:M<br>NEXT     | W:B EA          |        |   |   |   |
| BSET #xx:3,@aa:32 | R:W 2nd  | R:W 3rd                          | R:W 4th           | R:B:M EA          | R:W:M<br>NEXT   | W:B EA |   |   |   |
| BSET Rn,Rd        | R:W NEXT |                                  |                   |                   |                 |        |   |   |   |
| BSET Rn,@ERd      | R:W 2nd  | R:B:M EA                         | R:W:M<br>NEXT     | W:B EA            |                 |        |   |   |   |
| BSET Rn,@aa:8     | R:W 2nd  | R:B:M EA                         | R:W:M<br>NEXT     | W:B EA            |                 |        |   |   |   |
| BSET Rn,@aa:16    | R:W 2nd  | R:W 3rd                          | R:B:M EA          | R:W:M<br>NEXT     | W:B EA          |        |   |   |   |
| BSET Rn,@aa:32    | R:W 2nd  | R:W 3rd                          | R:W 4th           | R:B:M EA          | R:W:M<br>NEXT   | W:B EA |   |   |   |
| BSR d:8           | R:W NEXT | R:W EA                           | W:W:M<br>stack(H) | W:W<br>stack(L)   |                 |        |   |   |   |
| BSR d:16          | R:W 2nd  | Internal<br>operation<br>1 state | R:W EA            | W:W:M<br>stack(H) | W:W<br>stack(L) |        |   |   |   |
| BST #xx:3,Rd      | R:W NEXT |                                  |                   |                   |                 |        |   |   |   |
| BST #xx:3,@ERd    | R:W 2nd  | R:B:M EA                         | R:W:M<br>NEXT     | W:B EA            |                 |        |   |   |   |
| BST #xx:3,@aa:8   | R:W 2nd  | R:B:M EA                         | R:W:M<br>NEXT     | W:B EA            |                 |        |   |   |   |
| BST #xx:3,@aa:16  | R:W 2nd  | R:W 3rd                          | R:B:M EA          | R:W:M<br>NEXT     | W:B EA          |        |   |   |   |
| BST #xx:3,@aa:32  | R:W 2nd  | R:W 3rd                          | R:W 4th           | R:B:M EA          | R:W:M<br>NEXT   | W:B EA |   |   |   |
| BTST #xx:3,Rd     | R:W NEXT |                                  |                   |                   |                 |        |   |   |   |

| Instruction       | 1                           | 2        | 3                           | 4             | 5             | 6 | 7 | 8 | 9 |
|-------------------|-----------------------------|----------|-----------------------------|---------------|---------------|---|---|---|---|
| BTST #xx:3,@ERd   | R:W 2nd                     | R:B EA   | R:W:M<br>NEXT               |               |               |   |   |   |   |
| BTST #xx:3,@aa:8  | R:W 2nd                     | R:B EA   | R:W:M<br>NEXT               |               |               |   |   |   |   |
| BTST #xx:3,@aa:16 | R:W 2nd                     | R:W 3rd  | R:B EA                      | R:W:M<br>NEXT |               |   |   |   |   |
| BTST #xx:3,@aa:32 | R:W 2nd                     | R:W 3rd  | R:W 4th                     | R:B EA        | R:W:M<br>NEXT |   |   |   |   |
| BTST Rn,Rd        | R:W NEXT                    |          |                             |               |               |   |   |   |   |
| BTST Rn,@ERd      | R:W 2nd                     | R:B EA   | R:W:M<br>NEXT               |               |               |   |   |   |   |
| BTST Rn,@aa:8     | R:W 2nd                     | R:B EA   | R:W:M<br>NEXT               |               |               |   |   |   |   |
| BTST Rn,@aa:16    | R:W 2nd                     | R:W 3rd  | R:B EA                      | R:W:M<br>NEXT |               |   |   |   |   |
| BTST Rn,@aa:32    | R:W 2nd                     | R:W 3rd  | R:W 4th                     | R:B EA        | R:W:M<br>NEXT |   |   |   |   |
| BOXR #xx:3,Rd     | R:W NEXT                    |          |                             |               |               |   |   |   |   |
| BOXR #xx:3,@ERd   | R:W 2nd                     | R:B EA   | R:W:M<br>NEXT               |               |               |   |   |   |   |
| BOXR #xx:3,@aa:8  | R:W 2nd                     | R:B EA   | R:W:M<br>NEXT               |               |               |   |   |   |   |
| BOXR #xx:3,@aa:16 | R:W 2nd                     | R:W 3rd  | R:B EA                      | R:W:M<br>NEXT |               |   |   |   |   |
| BOXR #xx:3,@aa:32 | R:W 2nd                     | R:W 3rd  | R:W 4th                     | R:B EA        | R:W:M<br>NEXT |   |   |   |   |
| CLRMAC            | Cannot be used in this LSI. |          |                             |               |               |   |   |   |   |
| CMP.B #xx:8,Rd    | R:W NEXT                    |          |                             |               |               |   |   |   |   |
| CMP.B Rs,Rd       | R:W NEXT                    |          |                             |               |               |   |   |   |   |
| CMP.W #xx:16,Rd   | R:W 2nd                     | R:W NEXT |                             |               |               |   |   |   |   |
| CMP.W Rs,Rd       | R:W NEXT                    |          |                             |               |               |   |   |   |   |
| CMP.L #xx:32,ERd  | R:W 2nd                     | R:W 3rd  | R:W NEXT                    |               |               |   |   |   |   |
| CMP.L ERs,ERd     | R:W NEXT                    |          |                             |               |               |   |   |   |   |
| DAA Rd            | R:W NEXT                    |          |                             |               |               |   |   |   |   |
| DAS Rd            | R:W NEXT                    |          |                             |               |               |   |   |   |   |
| DEC.B Rd          | R:W NEXT                    |          |                             |               |               |   |   |   |   |
| DEC.W #1/2,Rd     | R:W NEXT                    |          |                             |               |               |   |   |   |   |
| DEC.W #1/2,ERd    | R:W NEXT                    |          |                             |               |               |   |   |   |   |
| DIVXS.B Rs,Rd     | R:W 2nd                     | R:W NEXT | Internal operation 11 state |               |               |   |   |   |   |
| DIVXS.W Rs,ERd    | R:W 2nd                     | R:W NEXT | Internal operation 19 state |               |               |   |   |   |   |

| Instruction         | 1        | 2                           | 3                          | 4                                | 5                     | 6        | 7 | 8 | 9 |
|---------------------|----------|-----------------------------|----------------------------|----------------------------------|-----------------------|----------|---|---|---|
| DIVXU.B Rs,Rd       | R:W NEXT | Internal operation 11 state |                            |                                  |                       |          |   |   |   |
| DIVXU.W Rs,ERd      | R:W NEXT | Internal operation 19 state |                            |                                  |                       |          |   |   |   |
| EEPMOV.B            | R:W 2nd  | R:B EAs* <sup>1</sup>       | R:B EAd* <sup>1</sup>      | R:B EAs* <sup>2</sup>            | W:B EAd* <sup>2</sup> | R:W NEXT |   |   |   |
| EEPMOV.W            | R:W 2nd  | R:B EAs* <sup>1</sup>       | R:B EAd* <sup>1</sup>      | R:B EAs* <sup>2</sup>            | W:B EAd* <sup>2</sup> | R:W NEXT |   |   |   |
| EXTS.W Rd           | R:W NEXT |                             |                            | ← Repeat n times* <sup>2</sup> → |                       |          |   |   |   |
| EXTS.L ERd          | R:W NEXT |                             |                            |                                  |                       |          |   |   |   |
| EXTU.W Rd           | R:W NEXT |                             |                            |                                  |                       |          |   |   |   |
| EXTU.L ERd          | R:W NEXT |                             |                            |                                  |                       |          |   |   |   |
| INC.B Rd            | R:W NEXT |                             |                            |                                  |                       |          |   |   |   |
| INC.W #1/2,Rd       | R:W NEXT |                             |                            |                                  |                       |          |   |   |   |
| INC.L #1/2,ERd      | R:W NEXT |                             |                            |                                  |                       |          |   |   |   |
| JMP @ERn            | R:W NEXT | R:W EA                      |                            |                                  |                       |          |   |   |   |
| JMP @aa:24          | R:W 2nd  | Internal operation 1 state  | R:W EA                     |                                  |                       |          |   |   |   |
| JMP @@aa:8          | R:W NEXT | R:W:M aa:8                  | R:W:M aa:8                 | Internal operation 1 state       | R:W EA                |          |   |   |   |
| JSR @ERn            | R:W NEXT | R:W EA                      | W:W:M stack(H)             | W:W stack (L)                    |                       |          |   |   |   |
| JSR @aa:24          | R:W 2nd  | Internal operation 1 state  | R:W EA                     | W:W:M stack(H)                   | W:W stack (L)         |          |   |   |   |
| JSR @@aa:8          | R:W NEXT | R:W:M aa:8                  | R:W aa:8                   | W:W:M stack(H)                   | W:W stack (L)         | R:W EA   |   |   |   |
| LDC #xx.8,CCR       | R:W NEXT |                             |                            |                                  |                       |          |   |   |   |
| LDC #xx.8,EXR       | R:W 2nd  | R:W NEXT                    |                            |                                  |                       |          |   |   |   |
| LDC Rs,CCR          | R:W NEXT |                             |                            |                                  |                       |          |   |   |   |
| LDC Rs,EXR          | R:W NEXT |                             |                            |                                  |                       |          |   |   |   |
| LDC @ERs,CCR        | R:W 2nd  | R:W NEXT                    | R:W EA                     |                                  |                       |          |   |   |   |
| LDC @ERs,EXR        | R:W 2nd  | R:W NEXT                    | R:W EA                     |                                  |                       |          |   |   |   |
| LDC @(d:16,ERs),CCR | R:W 2nd  | R:W 3rd                     | R:W NEXT                   | R:W EA                           |                       |          |   |   |   |
| LDC @(d:16,ERs),EXR | R:W 2nd  | R:W 3rd                     | R:W NEXT                   | R:W EA                           |                       |          |   |   |   |
| LDC @(d:32,ERs),CCR | R:W 2nd  | R:W 3rd                     | R:W 4th                    | R:W 5th                          | R:W NEXT              | R:W EA   |   |   |   |
| LDC @(d:32,ERs),EXR | R:W 2nd  | R:W 3rd                     | R:W 4th                    | R:W 5th                          | R:W NEXT              | R:W EA   |   |   |   |
| LDC @ERs+,CCR       | R:W 2nd  | R:W NEXT                    | Internal operation 1 state | R:W EA                           |                       |          |   |   |   |

| Instruction                                | 1        | 2                             | 3                             | 4                               | 5                             | 6 | 7 | 8 | 9 |
|--------------------------------------------|----------|-------------------------------|-------------------------------|---------------------------------|-------------------------------|---|---|---|---|
| LDC @ERs+,EXR                              | R:W 2nd  | R:W NEXT                      | Internal operation<br>1 state | R:W EA                          |                               |   |   |   |   |
| LDC @aa:16,CCR                             | R:W 2nd  | R:W 3rd                       | R:W NEXT                      | R:W EA                          |                               |   |   |   |   |
| LDC @aa:16,EXR                             | R:W 2nd  | R:W 3rd                       | R:W NEXT                      | R:W EA                          |                               |   |   |   |   |
| LDC @aa:32,CCR                             | R:W 2nd  | R:W 3rd                       | R:W 4th                       | R:W NEXT                        | R:W EA                        |   |   |   |   |
| LDC @aa:32,EXR                             | R:W 2nd  | R:W 3rd                       | R:W 4th                       | R:W NEXT                        | R:W EA                        |   |   |   |   |
| LDM.L @SP+,<br>(ERn-ERn+1)* <sup>9</sup>   | R:W 2nd  | R:W:M<br>NEXT                 | Internal operation<br>1 state | R:W:M<br>stack(H)* <sup>3</sup> | R:W<br>stack(L)* <sup>3</sup> |   |   |   |   |
| LDM.L @SP+,<br>(ERn-ERn+2)* <sup>9</sup>   | R:W 2nd  | R:W:M<br>NEXT                 | Internal operation<br>1 state | R:W:M<br>stack(H)* <sup>3</sup> | R:W<br>stack(L)* <sup>3</sup> |   |   |   |   |
| LDM.L @SP+,<br>(ERn-ERn+3)* <sup>9</sup>   | R:W 2nd  | R:W:M<br>NEXT                 | Internal operation<br>1 state | R:W:M<br>stack(H)* <sup>3</sup> | R:W<br>stack(L)* <sup>3</sup> |   |   |   |   |
| LDMAC ERs,MACH Cannot be used in this LSI. |          |                               |                               |                                 |                               |   |   |   |   |
| LDMAC ERs,MACL                             |          |                               |                               |                                 |                               |   |   |   |   |
| MAC                                        |          |                               |                               |                                 |                               |   |   |   |   |
| @ERn+,@ERm+                                |          |                               |                               |                                 |                               |   |   |   |   |
| MOV.B #xx:8,Rd                             | R:W NEXT |                               |                               |                                 |                               |   |   |   |   |
| MOV.B Rs,Rd                                | R:W NEXT |                               |                               |                                 |                               |   |   |   |   |
| MOV.B @ERs,Rd                              | R:W NEXT | R:B EA                        |                               |                                 |                               |   |   |   |   |
| MOV.B<br>@(d:16,ERs),Rd                    | R:W 2nd  | R:W NEXT                      | R:B EA                        |                                 |                               |   |   |   |   |
| MOV.B<br>@(d:32,ERs),Rd                    | R:W 2nd  | R:W 3rd                       | R:W 4th                       | R:W NEXT                        | R:B EA                        |   |   |   |   |
| MOV.B @ERs+,Rd                             | R:W NEXT | Internal operation<br>1 state | R:B EA                        |                                 |                               |   |   |   |   |
| MOV.B @aa:8,Rd                             | R:W NEXT | R:B EA                        |                               |                                 |                               |   |   |   |   |
| MOV.B @aa:16,Rd                            | R:W 2nd  | R:W NEXT                      | R:B EA                        |                                 |                               |   |   |   |   |
| MOV.B @aa:32,Rd                            | R:W 2nd  | R:W 3rd                       | R:W NEXT                      | R:B EA                          |                               |   |   |   |   |
| MOV.B Rs,@ERd                              | R:W NEXT | W:B EA                        |                               |                                 |                               |   |   |   |   |
| MOV.B<br>Rs,@(d:16,ERd)                    | R:W 2nd  | R:W NEXT                      | W:B EA                        |                                 |                               |   |   |   |   |
| MOV.B<br>Rs,@(d:32,ERd)                    | R:W 2nd  | R:W 3rd                       | R:W 4th                       | R:W NEXT                        | W:B EA                        |   |   |   |   |
| MOV.B Rs,@-ERd                             | R:W NEXT | Internal operation<br>1 state | W:B EA                        |                                 |                               |   |   |   |   |
| MOV.B Rs,@aa:8                             | R:W NEXT | W:B EA                        |                               |                                 |                               |   |   |   |   |
| MOV.B Rs,@aa:16                            | R:W 2nd  | R:W NEXT                      | W:B EA                        |                                 |                               |   |   |   |   |
| MOV.B Rs,@aa:32                            | R:W 2nd  | R:W 3rd                       | R:W NEXT                      | W:B EA                          |                               |   |   |   |   |
| MOV.W #xx:16,Rd                            | R:W 2nd  | R:W NEXT                      |                               |                                 |                               |   |   |   |   |

| Instruction              | 1        | 2                                | 3                                | 4        | 5        | 6        | 7        | 8 | 9 |
|--------------------------|----------|----------------------------------|----------------------------------|----------|----------|----------|----------|---|---|
| MOV.W Rs,Rd              | R:W NEXT |                                  |                                  |          |          |          |          |   |   |
| MOV.W @ERs,Rd            | R:W NEXT | R:W EA                           |                                  |          |          |          |          |   |   |
| MOV.W<br>@(d:16,ERs),Rd  | R:W 2nd  | R:W NEXT                         | R:W EA                           |          |          |          |          |   |   |
| MOV.W<br>@(d:32,ERs),Rd  | R:W 2nd  | R:W 3rd                          | R:W 4th                          | R:W NEXT | R:W EA   |          |          |   |   |
| MOV.W @ERs+,Rd           | R:W NEXT | Internal<br>operation<br>1 state | R:W EA                           |          |          |          |          |   |   |
| MOV.W @aa:16,Rd          | R:W 2nd  | R:W NEXT                         | R:W EA                           |          |          |          |          |   |   |
| MOV.W @aa:32,Rd          | R:W 2nd  | R:W 3rd                          | R:W NEXT                         | R:B EA   |          |          |          |   |   |
| MOV.W Rs,@ERd            | R:W NEXT | W:W EA                           |                                  |          |          |          |          |   |   |
| MOV.W<br>Rs,@(d:16,ERd)  | R:W 2nd  | R:W NEXT                         | W:W EA                           |          |          |          |          |   |   |
| MOV.W<br>Rs,@(d:32,ERd)  | R:W 2nd  | R:W 3rd                          | R:W 4th                          | R:W NEXT | W:W EA   |          |          |   |   |
| MOV.W Rs,@-ERd           | R:W NEXT | Internal<br>operation<br>1 state | W:W EA                           |          |          |          |          |   |   |
| MOV.W Rs,@aa:16          | R:W 2nd  | R:W NEXT                         | W:W EA                           |          |          |          |          |   |   |
| MOV.W Rs,@aa:32          | R:W 2nd  | R:W 3rd                          | R:W NEXT                         | W:W EA   |          |          |          |   |   |
| MOV.L #xx:32,ERd         | R:W 2nd  | R:W 3rd                          | R:W NEXT                         |          |          |          |          |   |   |
| MOV.L ERs,ERd            | R:W NEXT |                                  |                                  |          |          |          |          |   |   |
| MOV.L @ERs,ERd           | R:W 2nd  | R:W:M<br>NEXT                    | R:W:M EA                         | R:W EA+2 |          |          |          |   |   |
| MOV.L<br>@(d:16,ERs),ERd | R:W 2nd  | R:W:M 3rd                        | R:W NEXT                         | R:W:M EA | R:W EA+2 |          |          |   |   |
| MOV.L<br>@(d:32,ERs),ERd | R:W 2nd  | R:W:M 3rd                        | R:W:M 4th                        | R:W 5th  | R:W NEXT | R:W:M EA | R:W EA+2 |   |   |
| MOV.L @ERs+,ERd          | R:W 2nd  | R:W:M<br>NEXT                    | Internal<br>operation<br>1 state | R:W:M EA | R:W EA+2 |          |          |   |   |
| MOV.L @aa:16,ERd         | R:W 2nd  | R:W:M 3rd                        | R:W NEXT                         | R:W:M EA | R:W EA+2 |          |          |   |   |
| MOV.L @aa:32,ERd         | R:W 2nd  | R:W:M 3rd                        | R:W 4th                          | R:W NEXT | R:W:M EA | R:W EA+2 |          |   |   |
| MOV.L ERs,@ERd           | R:W 2nd  | R:W:M<br>NEXT                    | W:W:M EA                         | W:W EA+2 |          |          |          |   |   |
| MOV.L<br>ERs,@(d:16,ERd) | R:W 2nd  | R:W:M 3rd                        | R:W NEXT                         | W:W:M EA | W:W EA+2 |          |          |   |   |
| MOV.L<br>ERs,@(d:32,ERd) | R:W 2nd  | R:W:M 3rd                        | R:W:M 4th                        | R:W 5th  | R:W NEXT | W:W:M EA | W:W EA+2 |   |   |
| MOV.L ERs,@-ERd          | R:W 2nd  | R:W:M<br>NEXT                    | Internal<br>operation<br>1 state | W:W:M EA | W:W EA+2 |          |          |   |   |

| Instruction              | 1                           | 2                           | 3                           | 4        | 5        | 6        | 7 | 8 | 9 |
|--------------------------|-----------------------------|-----------------------------|-----------------------------|----------|----------|----------|---|---|---|
| MOV.L ERs,@aa:16 R:W 2nd | R:W 2nd                     | R:W:M 3rd                   | R:W NEXT                    | W:W:M EA | W:W EA+2 |          |   |   |   |
| MOV.L ERs,@aa:32 R:W 2nd | R:W 2nd                     | R:W:M 3rd                   | R:W 4th                     | R:W NEXT | W:W:M EA | W:W EA+2 |   |   |   |
| MOVFPPE<br>@aa:16,Rd     | Cannot be used in this LSI. |                             |                             |          |          |          |   |   |   |
| MOVTPPE<br>Rs,@aa:16     |                             |                             |                             |          |          |          |   |   |   |
| MULXS.B Rs,Rd            | R:W 2nd                     | R:W NEXT                    | Internal operation 11 state |          |          |          |   |   |   |
| MULXS.W Rs,Rd            | R:W 2nd                     | R:W NEXT                    | Internal operation 19 state |          |          |          |   |   |   |
| MULXU.B Rs,Rd            | R:W NEXT                    | Internal operation 11 state |                             |          |          |          |   |   |   |
| MULXU.W Rs,Rd            | R:W NEXT                    | Internal operation 19 state |                             |          |          |          |   |   |   |
| NEG.B Rd                 | R:W NEXT                    |                             |                             |          |          |          |   |   |   |
| NEG.W Rd                 | R:W NEXT                    |                             |                             |          |          |          |   |   |   |
| NEG.L ERd                | R:W NEXT                    |                             |                             |          |          |          |   |   |   |
| NOP                      | R:W NEXT                    |                             |                             |          |          |          |   |   |   |
| NOT.B Rd                 | R:W NEXT                    |                             |                             |          |          |          |   |   |   |
| NOT.W Rd                 | R:W NEXT                    |                             |                             |          |          |          |   |   |   |
| NOT.L ERd                | R:W NEXT                    |                             |                             |          |          |          |   |   |   |
| OR.B #xx:8,Rd            | R:W NEXT                    |                             |                             |          |          |          |   |   |   |
| OR.B Rs,Rd               | R:W NEXT                    |                             |                             |          |          |          |   |   |   |
| OR.W #xx:16,Rd           | R:W 2nd                     | R:W NEXT                    |                             |          |          |          |   |   |   |
| OR.W Rs,Rd               | R:W NEXT                    |                             |                             |          |          |          |   |   |   |
| OR.L #xx:32,ERd          | R:W 2nd                     | R:W 3rd                     | R:W NEXT                    |          |          |          |   |   |   |
| OR.L ERs,ERd             | R:W 2nd                     | R:W NEXT                    |                             |          |          |          |   |   |   |
| ORC #xx:8,CCR            | R:W NEXT                    |                             |                             |          |          |          |   |   |   |
| ORC #xx:8,EXR            | R:W 2nd                     | R:W NEXT                    |                             |          |          |          |   |   |   |
| POP.W Rn                 | R:W NEXT                    | Internal operation 1 state  | R:W EA                      |          |          |          |   |   |   |
| POP.L ERn                | R:W 2nd                     | R:W:M NEXT                  | Internal operation 1 state  | R:W:M EA | R:W EA+2 |          |   |   |   |
| PUSH.W Rn                | R:W NEXT                    | Internal operation 1 state  | W:W EA                      |          |          |          |   |   |   |
| PUSH.L ERn               | R:W 2nd                     | R:W:M NEXT                  | Internal operation 1 state  | W:W:M EA | W:W EA+2 |          |   |   |   |
| ROTL.B Rd                | R:W NEXT                    |                             |                             |          |          |          |   |   |   |
| ROTL.B #2,Rd             | R:W NEXT                    |                             |                             |          |          |          |   |   |   |
| ROTL.W Rd                | R:W NEXT                    |                             |                             |          |          |          |   |   |   |
| ROTL.W #2,Rd             | R:W NEXT                    |                             |                             |          |          |          |   |   |   |
| ROTL.L ERd               | R:W NEXT                    |                             |                             |          |          |          |   |   |   |
| ROTL.L #2, ERd           | R:W NEXT                    |                             |                             |          |          |          |   |   |   |

| Instruction    | 1        | 2                  | 3               | 4                                | 5                                | 6              | 7              | 8 | 9 |
|----------------|----------|--------------------|-----------------|----------------------------------|----------------------------------|----------------|----------------|---|---|
| ROTR.B Rd      | R:W NEXT |                    |                 |                                  |                                  |                |                |   |   |
| ROTR.B #2,Rd   | R:W NEXT |                    |                 |                                  |                                  |                |                |   |   |
| ROTR.W Rd      | R:W NEXT |                    |                 |                                  |                                  |                |                |   |   |
| ROTR.W #2,Rd   | R:W NEXT |                    |                 |                                  |                                  |                |                |   |   |
| ROTR.L ERd     | R:W NEXT |                    |                 |                                  |                                  |                |                |   |   |
| ROTR.L #2,ERd  | R:W NEXT |                    |                 |                                  |                                  |                |                |   |   |
| ROTXL.B Rd     | R:W NEXT |                    |                 |                                  |                                  |                |                |   |   |
| ROTXL.B #2,Rd  | R:W NEXT |                    |                 |                                  |                                  |                |                |   |   |
| ROTXL.W Rd     | R:W NEXT |                    |                 |                                  |                                  |                |                |   |   |
| ROTXL.W #2,Rd  | R:W NEXT |                    |                 |                                  |                                  |                |                |   |   |
| ROTXL.L ERd    | R:W NEXT |                    |                 |                                  |                                  |                |                |   |   |
| ROTXL.L #2,ERd | R:W NEXT |                    |                 |                                  |                                  |                |                |   |   |
| ROTXR.B Rd     | R:W NEXT |                    |                 |                                  |                                  |                |                |   |   |
| ROTXR.B #2,Rd  | R:W NEXT |                    |                 |                                  |                                  |                |                |   |   |
| ROTXR.W Rd     | R:W NEXT |                    |                 |                                  |                                  |                |                |   |   |
| ROTXR.W #2,Rd  | R:W NEXT |                    |                 |                                  |                                  |                |                |   |   |
| ROTXR.L ERd    | R:W NEXT |                    |                 |                                  |                                  |                |                |   |   |
| ROTXR.L #2,ERd | R:W NEXT |                    |                 |                                  |                                  |                |                |   |   |
| RTE            | R:W NEXT | R:W stack<br>(EXR) | R:W<br>stack(H) | R:W<br>stack(L)                  | Internal<br>operation<br>1 state | R:W            | * <sup>4</sup> |   |   |
| RTS            | R:W NEXT | R:W:M<br>stack(H)  | R:W<br>stack(L) | Internal<br>operation<br>1 state | R:W                              | * <sup>4</sup> |                |   |   |
| SHAL.B Rd      | R:W NEXT |                    |                 |                                  |                                  |                |                |   |   |
| SHAL B #2,Rd   | R:W NEXT |                    |                 |                                  |                                  |                |                |   |   |
| SHAL.W Rd      | R:W NEXT |                    |                 |                                  |                                  |                |                |   |   |
| SHAL.W #2,Rd   | R:W NEXT |                    |                 |                                  |                                  |                |                |   |   |
| SHAL.L ERd     | R:W NEXT |                    |                 |                                  |                                  |                |                |   |   |
| SHAL.L #2,ERd  | R:W NEXT |                    |                 |                                  |                                  |                |                |   |   |
| SHAR.B Rd      | R:W NEXT |                    |                 |                                  |                                  |                |                |   |   |
| SHAR.B #2,Rd   | R:W NEXT |                    |                 |                                  |                                  |                |                |   |   |
| SHAR.W Rd      | R:W NEXT |                    |                 |                                  |                                  |                |                |   |   |
| SHAR.W #2,Rd   | R:W NEXT |                    |                 |                                  |                                  |                |                |   |   |
| SHAR.L ERd     | R:W NEXT |                    |                 |                                  |                                  |                |                |   |   |
| SHAR.L #2,ERd  | R:W NEXT |                    |                 |                                  |                                  |                |                |   |   |
| SHLL.B Rd      | R:W NEXT |                    |                 |                                  |                                  |                |                |   |   |
| SHLL.B #2,Rd   | R:W NEXT |                    |                 |                                  |                                  |                |                |   |   |
| SHLL.W Rd      | R:W NEXT |                    |                 |                                  |                                  |                |                |   |   |
| SHLL.W #2,Rd   | R:W NEXT |                    |                 |                                  |                                  |                |                |   |   |
| SHLL.L ERd     | R:W NEXT |                    |                 |                                  |                                  |                |                |   |   |

| Instruction                          | 1        | 2                     | 3                          | 4                             | 5                           | 6      | 7 | 8 | 9 |
|--------------------------------------|----------|-----------------------|----------------------------|-------------------------------|-----------------------------|--------|---|---|---|
| SHLL.L #2,ERd                        | R:W NEXT |                       |                            |                               |                             |        |   |   |   |
| SHLR.B Rd                            | R:W NEXT |                       |                            |                               |                             |        |   |   |   |
| SHLR.B #2,Rd                         | R:W NEXT |                       |                            |                               |                             |        |   |   |   |
| SHLR.W Rd                            | R:W NEXT |                       |                            |                               |                             |        |   |   |   |
| SHLR.W #2,Rd                         | R:W NEXT |                       |                            |                               |                             |        |   |   |   |
| SHLR.L ERd                           | R:W NEXT |                       |                            |                               |                             |        |   |   |   |
| SHLR.L #2,ERd                        | R:W NEXT |                       |                            |                               |                             |        |   |   |   |
| SLEEP                                | R:W NEXT | Internal operation: M |                            |                               |                             |        |   |   |   |
| STC.B CCR,Rd                         | R:W NEXT |                       |                            |                               |                             |        |   |   |   |
| STC.B EXR,Rd                         | R:W NEXT |                       |                            |                               |                             |        |   |   |   |
| STC.W CCR,@ERd                       | R:W 2nd  | R:W NEXT              | W:W EA                     |                               |                             |        |   |   |   |
| STC.W EXR,@ERd                       | R:W 2nd  | R:W NEXT              | W:W EA                     |                               |                             |        |   |   |   |
| STC.W CCR,@(d:16,ERd)                | R:W 2nd  | R:W 3rd               | R:W NEXT                   | W:W EA                        |                             |        |   |   |   |
| STC.W EXR,@(d:16,ERd)                | R:W 2nd  | R:W 3rd               | R:W NEXT                   | W:W EA                        |                             |        |   |   |   |
| STC.W CCR,@(d:32,ERd)                | R:W 2nd  | R:W 3rd               | R:W 4th                    | R:W 5th                       | R:W NEXT                    | W:W EA |   |   |   |
| STC.W EXR,@(d:32,ERd)                | R:W 2nd  | R:W 3rd               | R:W 4th                    | R:W 5th                       | R:W NEXT                    | W:W EA |   |   |   |
| STC.W CCR,@-ERd                      | R:W 2nd  | R:W NEXT              | Internal operation 1 state | W:W EA                        |                             |        |   |   |   |
| STC.W EXR,@-ERd                      | R:W 2nd  | R:W NEXT              | Internal operation 1 state | W:W EA                        |                             |        |   |   |   |
| STC.W CCR,@aa:16                     | R:W 2nd  | R:W 3rd               | R:W NEXT                   | W:W EA                        |                             |        |   |   |   |
| STC.W EXR,@aa:16                     | R:W 2nd  | R:W 3rd               | R:W NEXT                   | W:W EA                        |                             |        |   |   |   |
| STC.W CCR,@aa:32                     | R:W 2nd  | R:W 3rd               | R:W 4th                    | R:W NEXT                      | W:W EA                      |        |   |   |   |
| STC.W EXR,@aa:32                     | R:W 2nd  | R:W 3rd               | R:W 4th                    | R:W NEXT                      | W:W EA                      |        |   |   |   |
| STM.L (ERn-ERn+1),@-SP* <sup>9</sup> | R:W 2nd  | R:W:M NEXT            | Internal operation 1 state | W:W:M stack (H)* <sup>3</sup> | W:W stack (L)* <sup>3</sup> |        |   |   |   |
| STM.L (ERn-ERn+2),@-SP* <sup>9</sup> | R:W 2nd  | R:W:M NEXT            | Internal operation 1 state | W:W:M stack (H)* <sup>3</sup> | W:W stack (L)* <sup>3</sup> |        |   |   |   |
| STM.L (ERn-ERn+3),@-SP* <sup>9</sup> | R:W 2nd  | R:W:M NEXT            | Internal operation 1 state | W:W:M stack (H)* <sup>3</sup> | W:W stack (L)* <sup>3</sup> |        |   |   |   |



| Instruction                  | 1                           | 2                             | 3                             | 4                  | 5                 | 6            | 7            | 8                             | 9                  |
|------------------------------|-----------------------------|-------------------------------|-------------------------------|--------------------|-------------------|--------------|--------------|-------------------------------|--------------------|
| STMAC MACH,ERd               | Cannot be used in this LSI. |                               |                               |                    |                   |              |              |                               |                    |
| STMAC MACL,ERd               |                             |                               |                               |                    |                   |              |              |                               |                    |
| SUB.B Rs,Rd                  | R:W NEXT                    |                               |                               |                    |                   |              |              |                               |                    |
| SUB.W #xx:16,Rd              | R:W 2nd                     | R:W NEXT                      |                               |                    |                   |              |              |                               |                    |
| SUB.W Rs,Rd                  | R:W NEXT                    |                               |                               |                    |                   |              |              |                               |                    |
| SUB.L #xx:32,ERd             | R:W 2nd                     | R:W 3rd                       | R:W NEXT                      |                    |                   |              |              |                               |                    |
| SUB.L ERs,ERd                | R:W NEXT                    |                               |                               |                    |                   |              |              |                               |                    |
| SUB #1/2/4,ERd               | R:W NEXT                    |                               |                               |                    |                   |              |              |                               |                    |
| SUBX #xx:8,Rd                | R:W NEXT                    |                               |                               |                    |                   |              |              |                               |                    |
| SUBX Rs,Rd                   | R:W NEXT                    |                               |                               |                    |                   |              |              |                               |                    |
| TAS @ERd* <sup>5</sup>       | R:W 2nd                     | R:W NEXT                      | R:B:M EA                      | W:B EA             |                   |              |              |                               |                    |
| TRAPA #x:2                   | R:W NEXT                    | Internal operation<br>1 state | W:W<br>stack(L)               | W:W<br>stack(H)    | W:W<br>stack(EXR) | R:W:M<br>VEC | R:W<br>VEC+2 | Internal operation<br>1 state | R:W * <sup>6</sup> |
| XOR.B #xx:8,Rd               | R:W NEXT                    |                               |                               |                    |                   |              |              |                               |                    |
| XOR.B Rs,Rd                  | R:W NEXT                    |                               |                               |                    |                   |              |              |                               |                    |
| XOR.W #xx:16,Rd              | R:W 2nd                     | R:W NEXT                      |                               |                    |                   |              |              |                               |                    |
| XOR.W Rs,Rd                  | R:W NEXT                    |                               |                               |                    |                   |              |              |                               |                    |
| XOR.L #xx:32,ERd             | R:W 2nd                     | R:W 3rd                       | R:W NEXT                      |                    |                   |              |              |                               |                    |
| XOR.L ERs,ERd                | R:W 2nd                     | R:W NEXT                      |                               |                    |                   |              |              |                               |                    |
| XORC #xx:8,CCR               | R:W NEXT                    |                               |                               |                    |                   |              |              |                               |                    |
| XORC #xx:8,EXR               | R:W 2nd                     | R:W NEXT                      |                               |                    |                   |              |              |                               |                    |
| Reset exception handling     | R:W:M<br>VEC                | R:W<br>VEC+2                  | Internal operation<br>1 state | R:W * <sup>6</sup> |                   |              |              |                               |                    |
| Interrupt exception handling | R:W * <sup>7</sup>          | Internal operation<br>1 state | W:W<br>stack(L)               | W:W<br>stack(H)    | W:W<br>stack(EXR) | R:W:M<br>VEC | R:W<br>VEC+2 | Internal operation<br>1 state | R:W * <sup>8</sup> |

- Notes:
1. EAs is the contents of ER5, and EAd is the contents of ER6.
  2. 1 is added to EAs and EAd after execution. n is the initial value of R4L or R4. When 0 is set to n, R4L or R4 is not executed.
  3. Repeated twice for 2-unit retract/return, three times for 3-unit retract/return, and four times for 4-retract/return.
  4. Head address after return.
  5. Only register ER0, ER1, ER4, or ER5 should be used when using the TAS instruction.
  6. Start address of the program.
  7. Pre-fetch address obtained by adding 2 to the PC to be retracted.  
When returning from sleep mode, standby mode or watch mode, internal operation is executed instead of read operation.
  8. Head address of the interrupt process routine.
  9. Only registers ER0 to ER6 should be used when using the STM/LDM instruction.

## A.6 Change of Condition Codes

This section explains change of condition codes after instruction execution of the CPU. Legend of the following tables is as follows.

|         |                                       |
|---------|---------------------------------------|
| m = 31: | Longword size                         |
| m = 15: | Word size                             |
| m = 7:  | Byte size                             |
| Si:     | Bit i of source operand               |
| Di:     | Bit i of destination operand          |
| Ri:     | Bit i of result                       |
| Dn:     | Specified bit of destination operand  |
| —:      | No affection                          |
| ↑:      | Changes depending on execution result |
| 0:      | Always cleared to 0                   |
| 1:      | Always set to 1                       |
| *:      | Value undetermined                    |
| Z':     | Z flag before execution               |
| C':     | C flag before execution               |

**Table A.14 Change of Condition Code**

| Instruction | H                           | N | Z | V | C | Definition                                                                                                                                                                                                                                                                                                                                                     |
|-------------|-----------------------------|---|---|---|---|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| ADD         | ↕                           | ↕ | ↕ | ↕ | ↕ | $H = S_{m-4} \cdot D_{m-4} + D_{m-4} \cdot \overline{R_{m-4}} + S_{m-4} \cdot \overline{R_{m-4}}$<br>$N = R_m$<br>$Z = \overline{R_m} \cdot \overline{R_{m-1}} \cdot \dots \cdot \overline{R_0}$<br>$V = S_m \cdot D_m \cdot \overline{R_m} + S_m \cdot \overline{D_m} \cdot R_m$<br>$C = S_m \cdot D_m + D_m \cdot \overline{R_m} + S_m \cdot \overline{R_m}$ |
| ADDS        | —                           | — | — | — | — |                                                                                                                                                                                                                                                                                                                                                                |
| ADDX        | ↕                           | ↕ | ↕ | ↕ | ↕ | $H = S_{m-4} \cdot D_{m-4} + D_{m-4} \cdot \overline{R_{m-4}} + S_{m-4} \cdot \overline{R_{m-4}}$<br>$N = R_m$<br>$Z = Z' \cdot \overline{R_m} \cdot \dots \cdot \overline{R_0}$<br>$V = S_m \cdot D_m \cdot \overline{R_m} + S_m \cdot \overline{D_m} \cdot R_m$<br>$C = S_m \cdot D_m + D_m \cdot \overline{R_m} + S_m \cdot \overline{R_m}$                 |
| AND         | —                           | ↕ | ↕ | 0 | — | $N = R_m$<br>$Z = \overline{R_m} \cdot \overline{R_{m-1}} \cdot \dots \cdot \overline{R_0}$                                                                                                                                                                                                                                                                    |
| ANDC        | ↕                           | ↕ | ↕ | ↕ | ↕ | Value in the bit corresponding to execution result is stored.<br>No flag change when EXR.                                                                                                                                                                                                                                                                      |
| BAND        | —                           | — | — | — | ↕ | $C = C' \cdot D_n$                                                                                                                                                                                                                                                                                                                                             |
| Bcc         | —                           | — | — | — | — |                                                                                                                                                                                                                                                                                                                                                                |
| BCLR        | —                           | — | — | — | — |                                                                                                                                                                                                                                                                                                                                                                |
| BIAND       | —                           | — | — | — | ↕ | $C = C' \cdot \overline{D_n}$                                                                                                                                                                                                                                                                                                                                  |
| BILD        | —                           | — | — | — | ↕ | $C = \overline{D_n}$                                                                                                                                                                                                                                                                                                                                           |
| BIOR        | —                           | — | — | — | ↕ | $C = C' + \overline{D_n}$                                                                                                                                                                                                                                                                                                                                      |
| BIST        | —                           | — | — | — | — |                                                                                                                                                                                                                                                                                                                                                                |
| BIXOR       | —                           | — | — | — | ↕ | $C = C' \cdot D_n + \overline{C'} \cdot \overline{D_n}$                                                                                                                                                                                                                                                                                                        |
| BLD         | —                           | — | — | — | ↕ | $C = D_n$                                                                                                                                                                                                                                                                                                                                                      |
| BNOT        | —                           | — | — | — | — |                                                                                                                                                                                                                                                                                                                                                                |
| BOR         | —                           | — | — | — | ↕ | $C = C' + D_n$                                                                                                                                                                                                                                                                                                                                                 |
| BSET        | —                           | — | — | — | — |                                                                                                                                                                                                                                                                                                                                                                |
| BSR         | —                           | — | — | — | — |                                                                                                                                                                                                                                                                                                                                                                |
| BST         | —                           | — | — | — | — |                                                                                                                                                                                                                                                                                                                                                                |
| BTST        | —                           | — | ↕ | — | — | $Z = \overline{D_n}$                                                                                                                                                                                                                                                                                                                                           |
| BXOR        | —                           | — | — | — | ↕ | $C = C' \cdot \overline{D_n} + \overline{C'} \cdot D_n$                                                                                                                                                                                                                                                                                                        |
| CLRMAC      | Cannot be used in this LSI. |   |   |   |   |                                                                                                                                                                                                                                                                                                                                                                |

| Instruc-<br>tion | H                           | N | Z | V | C | Definition                                                                                                                                                                                                                                                                                                                                                                                        |
|------------------|-----------------------------|---|---|---|---|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| CMP              | ↑                           | ↑ | ↑ | ↑ | ↑ | $H = S_m \cdot 4 \cdot \overline{D_m} \cdot 4 + \overline{D_m} \cdot 4 \cdot R_m \cdot 4 + S_m \cdot 4 \cdot R_m \cdot 4$<br>$N = R_m$<br>$Z = \overline{R_m} \cdot \overline{R_m - 1} \cdot \dots \cdot \overline{R_0}$<br>$V = \overline{S_m} \cdot \overline{D_m} \cdot R_m + S_m \cdot \overline{D_m} \cdot R_m$<br>$C = S_m \cdot \overline{D_m} + \overline{D_m} \cdot R_m + S_m \cdot R_m$ |
| DAA              | *                           | ↑ | ↑ | * | ↑ | $N = R_m$<br>$Z = \overline{R_m} \cdot \overline{R_m - 1} \cdot \dots \cdot \overline{R_0}$<br>C: Decimal addition carry                                                                                                                                                                                                                                                                          |
| DAS              | *                           | ↑ | ↑ | * | ↑ | $N = R_m$<br>$Z = \overline{R_m} \cdot \overline{R_m - 1} \cdot \dots \cdot \overline{R_0}$<br>C: Decimal subtraction borrow                                                                                                                                                                                                                                                                      |
| DEC              | —                           | ↑ | ↑ | ↑ | — | $N = R_m$<br>$Z = \overline{R_m} \cdot \overline{R_m - 1} \cdot \dots \cdot \overline{R_0}$<br>$V = D_m \cdot \overline{R_m}$                                                                                                                                                                                                                                                                     |
| DIVXS            | —                           | ↑ | ↑ | — | — | $N = S_m \cdot \overline{D_m} + \overline{S_m} \cdot D_m$<br>$Z = \overline{S_m} \cdot \overline{S_m - 1} \cdot \dots \cdot \overline{S_0}$                                                                                                                                                                                                                                                       |
| DIVXU            | —                           | ↑ | ↑ | — | — | $N = S_m$<br>$Z = \overline{S_m} \cdot \overline{S_m - 1} \cdot \dots \cdot \overline{S_0}$                                                                                                                                                                                                                                                                                                       |
| EEPMOV           | —                           | — | — | — | — |                                                                                                                                                                                                                                                                                                                                                                                                   |
| EXTS             | —                           | ↑ | ↑ | 0 | — | $N = R_m$<br>$Z = \overline{R_m} \cdot \overline{R_m - 1} \cdot \dots \cdot \overline{R_0}$                                                                                                                                                                                                                                                                                                       |
| EXTU             | —                           | 0 | ↑ | 0 | — | $Z = \overline{R_m} \cdot \overline{R_m - 1} \cdot \dots \cdot \overline{R_0}$                                                                                                                                                                                                                                                                                                                    |
| INC              | —                           | ↑ | ↑ | ↑ | — | $N = R_m$<br>$Z = \overline{R_m} \cdot \overline{R_m - 1} \cdot \dots \cdot \overline{R_0}$<br>$V = \overline{D_m} \cdot \overline{R_m}$                                                                                                                                                                                                                                                          |
| JMP              | —                           | — | — | — | — |                                                                                                                                                                                                                                                                                                                                                                                                   |
| JSR              | —                           | — | — | — | — |                                                                                                                                                                                                                                                                                                                                                                                                   |
| LDC              | ↑                           | ↑ | ↑ | ↑ | ↑ | Value in the bit corresponding to execution<br>result is stored.<br>No flag change when EXR.                                                                                                                                                                                                                                                                                                      |
| LDM              | —                           | — | — | — | — |                                                                                                                                                                                                                                                                                                                                                                                                   |
| LDMAC            | Cannot be used in this LSI. |   |   |   |   |                                                                                                                                                                                                                                                                                                                                                                                                   |
| MAC              |                             |   |   |   |   |                                                                                                                                                                                                                                                                                                                                                                                                   |
| MOV              | —                           | ↑ | ↑ | 0 | — | $N = R_m$<br>$Z = \overline{R_m} \cdot \overline{R_m - 1} \cdot \dots \cdot \overline{R_0}$                                                                                                                                                                                                                                                                                                       |

| Instruction | H                           | N | Z | V | C | Definition                                                                                                                            |
|-------------|-----------------------------|---|---|---|---|---------------------------------------------------------------------------------------------------------------------------------------|
| MOVFPPE     | Cannot be used in this LSI. |   |   |   |   |                                                                                                                                       |
| MOVTPPE     |                             |   |   |   |   |                                                                                                                                       |
| MULXS       | —                           | ↑ | ↑ | — | — | N=R2m<br>Z= $\overline{R2m} \cdot \overline{R2m-1} \cdot \dots \cdot \overline{R0}$                                                   |
| MULXU       | —                           | — | — | — | — |                                                                                                                                       |
| NEG         | ↑                           | ↑ | ↑ | ↑ | ↑ | H=Dm-4+Rm-4<br>N=Rm<br>Z= $\overline{Rm} \cdot \overline{Rm-1} \cdot \dots \cdot \overline{R0}$<br>V=Dm·Rm<br>C=Dm+Rm                 |
| NOP         | —                           | — | — | — | — |                                                                                                                                       |
| NOT         | —                           | ↑ | ↑ | 0 | — | N=Rm<br>Z= $\overline{Rm} \cdot \overline{Rm-1} \cdot \dots \cdot \overline{R0}$                                                      |
| OR          | —                           | ↑ | ↑ | 0 | — | N=Rm<br>Z= $\overline{Rm} \cdot \overline{Rm-1} \cdot \dots \cdot \overline{R0}$                                                      |
| ORC         | ↑                           | ↑ | ↑ | ↑ | ↑ | Value in the bit corresponding to execution result is stored. No flag change when EXR.                                                |
| POP         | —                           | ↑ | ↑ | 0 | — | N=Rm<br>Z= $\overline{Rm} \cdot \overline{Rm-1} \cdot \dots \cdot \overline{R0}$                                                      |
| PUSH        | —                           | ↑ | ↑ | 0 | — | N=Rm<br>Z= $\overline{Rm} \cdot \overline{Rm-1} \cdot \dots \cdot \overline{R0}$                                                      |
| ROTL        | —                           | ↑ | ↑ | 0 | ↑ | N=Rm<br>Z= $\overline{Rm} \cdot \overline{Rm-1} \cdot \dots \cdot \overline{R0}$<br>C=Dm(In case of 1 bit), C=Dm-1(In case of 2 bits) |
| ROTR        | —                           | ↑ | ↑ | 0 | ↑ | N=Rm<br>Z= $\overline{Rm} \cdot \overline{Rm-1} \cdot \dots \cdot \overline{R0}$<br>C=D0(In case of 1 bit), C=D-1(In case of 2 bits)  |
| ROTXL       | —                           | ↑ | ↑ | 0 | ↑ | N=Rm<br>Z= $\overline{Rm} \cdot \overline{Rm-1} \cdot \dots \cdot \overline{R0}$<br>C=Dm(In case of 1 bit), C=Dm-1(In case of 2 bits) |
| ROTXR       | —                           | ↑ | ↑ | 0 | ↑ | N=Rm<br>Z= $\overline{Rm} \cdot \overline{Rm-1} \cdot \dots \cdot \overline{R0}$<br>C=D0(In case of 1 bit), C=D1(In case of 2 bits)   |
| RTE         | ↑                           | ↑ | ↑ | ↑ | ↑ | Value in the bit corresponding to execution result is stored.                                                                         |
| RTS         | —                           | — | — | — | — |                                                                                                                                       |

| Instruc-<br>tion | H                           | N | Z | V | C | Definition                                                                                                                                                                                                                                                                                                                                                                     |
|------------------|-----------------------------|---|---|---|---|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| SHAL             | —                           | ↑ | ↑ | ↑ | ↑ | $N=R_m$<br>$Z=\overline{R_m} \cdot \overline{R_m-1} \cdot \dots \cdot \overline{R_0}$<br>$V=D_m \cdot D_{m-1} + \overline{D_m} \cdot \overline{D_{m-1}}$ (In case of 1 bit)<br>$V=D_m \cdot D_{m-1} \cdot D_{m-2} \cdot \overline{D_m} \cdot \overline{D_{m-1}} \cdot \overline{D_{m-2}}$<br>(In case of 2bits)<br>$C=D_m$ (In case of 1 bit), $C=D_{m-1}$ (In case of 2 bits) |
| SHAR             | —                           | ↑ | ↑ | 0 | ↑ | $N=R_m$<br>$Z=\overline{R_m} \cdot \overline{R_m-1} \cdot \dots \cdot \overline{R_0}$<br>$C=D_0$ (In case of 1 bit), $C=D_1$ (In case of 2 bits)                                                                                                                                                                                                                               |
| SHLL             | —                           | ↑ | ↑ | 0 | ↑ | $N=R_m$<br>$Z=\overline{R_m} \cdot \overline{R_m-1} \cdot \dots \cdot \overline{R_0}$<br>$C=D_m$ (In case of 1 bit), $C=D_{m-1}$ (In case of 2 bits)                                                                                                                                                                                                                           |
| SHLR             | —                           | 0 | ↑ | 0 | ↑ | $N=R_m$<br>$Z=\overline{R_m} \cdot \overline{R_m-1} \cdot \dots \cdot \overline{R_0}$<br>$C=D_0$ (In case of 1 bit), $C=D_1$ (In case of 2 bits)                                                                                                                                                                                                                               |
| SLEEP            | —                           | — | — | — | — |                                                                                                                                                                                                                                                                                                                                                                                |
| STC              | —                           | — | — | — | — |                                                                                                                                                                                                                                                                                                                                                                                |
| STM              | —                           | — | — | — | — |                                                                                                                                                                                                                                                                                                                                                                                |
| STMAC            | Cannot be used in this LSI. |   |   |   |   |                                                                                                                                                                                                                                                                                                                                                                                |
| SUB              | ↑                           | ↑ | ↑ | ↑ | ↑ | $H=S_{m-4} \cdot \overline{D_{m-4}} + \overline{D_{m-4}} \cdot R_{m-4} + S_{m-4} \cdot R_{m-4}$<br>$N=R_m$<br>$Z=\overline{R_m} \cdot \overline{R_m-1} \cdot \dots \cdot \overline{R_0}$<br>$V=\overline{S_m} \cdot \overline{D_m} \cdot \overline{R_m} + S_m \cdot \overline{D_m} \cdot R_m$<br>$C=S_m \cdot \overline{D_m} + \overline{D_m} \cdot R_m + S_m \cdot R_m$       |
| SUBS             | —                           | — | — | — | — |                                                                                                                                                                                                                                                                                                                                                                                |
| SUBX             | ↑                           | ↑ | ↑ | ↑ | ↑ | $H=S_{m-4} \cdot \overline{D_{m-4}} + \overline{D_{m-4}} \cdot R_{m-4} + S_{m-4} \cdot R_{m-4}$<br>$N=R_m$<br>$Z=\overline{Z'} \cdot \overline{R_m} \cdot \dots \cdot \overline{R_0}$<br>$V=\overline{S_m} \cdot \overline{D_m} \cdot \overline{R_m} + S_m \cdot \overline{D_m} \cdot R_m$<br>$C=S_m \cdot \overline{D_m} + \overline{D_m} \cdot R_m + S_m \cdot R_m$          |
| TAS*             | —                           | ↑ | ↑ | 0 | — | $N=D_m$<br>$Z=\overline{D_m} \cdot \overline{D_{m-1}} \cdot \dots \cdot \overline{D_0}$                                                                                                                                                                                                                                                                                        |
| TRAPA            | —                           | — | — | — | — |                                                                                                                                                                                                                                                                                                                                                                                |
| XOR              | —                           | ↑ | ↑ | 0 | — | $N=R_m$<br>$Z=\overline{R_m} \cdot \overline{R_m-1} \cdot \dots \cdot \overline{R_0}$                                                                                                                                                                                                                                                                                          |
| XORC             | ↑                           | ↑ | ↑ | ↑ | ↑ | Value in the bit corresponding to execution result is stored. No flag change when EXR.                                                                                                                                                                                                                                                                                         |

Note: \*This instruction should be used with the ER0, ER1, ER4, or ER5 general register only.

# Appendix B Internal I/O Registers

## B.1 Addresses

| Address <sup>1</sup> | Register Name | R/W | Access | Bus Width | 7      | 6      | 5      | 4      | 3      | 2      | 1     | 0     | Module Name            |
|----------------------|---------------|-----|--------|-----------|--------|--------|--------|--------|--------|--------|-------|-------|------------------------|
| H'0000 to H'FFFF     |               |     |        |           |        |        |        |        |        |        |       |       |                        |
| H'D000               | DGKp          | W   | 16     | 16        | DGKp15 | DGKp14 | DGKp13 | DGKp12 | DGKp11 | DGKp10 | DGKp9 | DGKp8 | Drum digital filter    |
| H'D001               |               |     |        |           | DGKp7  | DGKp6  | DGKp5  | DGKp4  | DGKp3  | DGKp2  | DGKp1 | DGKp0 |                        |
| H'D002               | DGKs          | W   | 16     | 16        | DGKs15 | DGKs14 | DGKs13 | DGKs12 | DGKs11 | DGKs10 | DGKs9 | DGKs8 |                        |
| H'D003               |               |     |        |           | DGKs7  | DGKs6  | DGKs5  | DGKs4  | DGKs3  | DGKs2  | DGKs1 | DGKs0 |                        |
| H'D004               | DAp           | W   | 16     | 16        | DAp15  | DAp14  | DAp13  | DAp12  | DAp11  | DAp10  | DAp9  | DAp8  |                        |
| H'D005               |               |     |        |           | DAp7   | DAp6   | DAp5   | DAp4   | DAp3   | DAp2   | DAp1  | DAp0  |                        |
| H'D006               | DBp           | W   | 16     | 16        | DBp15  | DBp14  | DBp13  | DBp12  | DBp11  | DBp10  | DBp9  | DBp8  |                        |
| H'D007               |               |     |        |           | DBp7   | DBp6   | DBp5   | DBp4   | DBp3   | DBp2   | DBp1  | DBp0  |                        |
| H'D008               | DAs           | W   | 16     | 16        | DAs15  | DAs14  | DAs13  | DAs12  | DAs11  | DAs10  | DAs9  | DAs8  |                        |
| H'D009               |               |     |        |           | DAs7   | DAs6   | DAs5   | DAs4   | DAs3   | DAs2   | DAs1  | DAs0  |                        |
| H'D00A               | DBs           | W   | 16     | 16        | DBs15  | DBs14  | DBs13  | DBs12  | DBs11  | DBs10  | DBs9  | DBs8  |                        |
| H'D00B               |               |     |        |           | DBs7   | DBs6   | DBs5   | DBs4   | DBs3   | DBs2   | DBs1  | DBs0  |                        |
| H'D00C               | DOfp          | W   | 16     | 16        | DOfp15 | DOfp14 | DOfp13 | DOfp12 | DOfp11 | DOfp10 | DOfp9 | DOfp8 |                        |
| H'D00D               |               |     |        |           | DOfp7  | DOfp6  | DOfp5  | DOfp4  | DOfp3  | DOfp2  | DOfp1 | DOfp0 |                        |
| H'D00E               | DOfs          | W   | 16     | 16        | DOfs15 | DOfs14 | DOfs13 | DOfs12 | DOfs11 | DOfs10 | DOfs9 | DOfs8 |                        |
| H'D00F               |               |     |        |           | DOfs7  | DOfs6  | DOfs5  | DOfs4  | DOfs3  | DOfs2  | DOfs1 | DOfs0 |                        |
| H'D010               | CGKp          | W   | 16     | 16        | CGKp15 | CGKp14 | CGKp13 | CGKp12 | CGKp11 | CGKp10 | CGKp9 | CGKp8 | Capstan digital filter |
| H'D011               |               |     |        |           | CGKp7  | CGKp6  | CGKp5  | CGKp4  | CGKp3  | CGKp2  | CGKp1 | CGKp0 |                        |
| H'D012               | CGKs          | W   | 16     | 16        | CGKs15 | CGKs14 | CGKs13 | CGKs12 | CGKs11 | CGKs10 | CGKs9 | CGKs8 |                        |
| H'D013               |               |     |        |           | CGKs7  | CGKs6  | CGKs5  | CGKs4  | CGKs3  | CGKs2  | CGKs1 | CGKs0 |                        |
| H'D014               | CAp           | W   | 16     | 16        | CAp15  | CAp14  | CAp13  | CAp12  | CAp11  | CAp10  | CAp9  | CAp8  |                        |
| H'D015               |               |     |        |           | CAp7   | CAp6   | CAp5   | CAp4   | CAp3   | CAp2   | CAp1  | CAp0  |                        |
| H'D016               | CBp           | W   | 16     | 16        | CBp15  | CBp14  | CBp13  | CBp12  | CBp11  | CBp10  | CBp9  | CBp8  |                        |
| H'D017               |               |     |        |           | CBp7   | CBp6   | CBp5   | CBp4   | CBp3   | CBp2   | CBp1  | CBp0  |                        |
| H'D018               | CAs           | W   | 16     | 16        | CAs15  | CAs14  | CAs13  | CAs12  | CAs11  | CAs10  | CAs9  | CAs8  |                        |
| H'D019               |               |     |        |           | CAs7   | CAs6   | CAs5   | CAs4   | CAs3   | CAs2   | CAs1  | CAs0  |                        |
| H'D01A               | CBs           | W   | 16     | 16        | CBs15  | CBs14  | CBs13  | CBs12  | CBs11  | CBs10  | CBs9  | CBs8  |                        |
| H'D01B               |               |     |        |           | CBs7   | CBs6   | CBs5   | CBs4   | CBs3   | CBs2   | CBs1  | CBs0  |                        |
| H'D01C               | COfp          | W   | 16     | 16        | COfp15 | COfp14 | COfp13 | COfp12 | COfp11 | COfp10 | COfp9 | COfp8 |                        |
| H'D01D               |               |     |        |           | COfp7  | COfp6  | COfp5  | COfp4  | COfp3  | COfp2  | COfp1 | COfp0 |                        |
| H'D01E               | COfs          | W   | 16     | 16        | COfs15 | COfs14 | COfs13 | COfs12 | COfs11 | COfs10 | COfs9 | COfs8 |                        |
| H'D01F               |               |     |        |           | COfs7  | COfs6  | COfs5  | COfs4  | COfs3  | COfs2  | COfs1 | COfs0 |                        |
| H'D020               | DZs           | W   | 16     | 16        | —      | —      | —      | —      | DZs11  | DZs10  | DZs9  | DZs8  | Digital filter         |
| H'D021               |               |     |        |           | DZs7   | DZs6   | DZs5   | DZs4   | DZs3   | DZs2   | DZs1  | DZs0  |                        |
| H'D022               | DZp           | W   | 16     | 16        | —      | —      | —      | —      | DZp11  | DZp10  | DZp9  | DZp8  |                        |
| H'D023               |               |     |        |           | DZp7   | DZp6   | DZp5   | DZp4   | DZp3   | DZp2   | DZp1  | DZp0  |                        |
| H'D024               | CZs           | W   | 16     | 16        | —      | —      | —      | —      | CZs11  | CZs10  | CZs9  | CZs8  |                        |
| H'D025               |               |     |        |           | CZs7   | CZs6   | CZs5   | CZs4   | CZs3   | CZs2   | CZs1  | CZs0  |                        |
| H'D026               | CZp           | W   | 16     | 16        | —      | —      | —      | —      | CZp11  | CZp10  | CZp9  | CZp8  |                        |
| H'D027               |               |     |        |           | CZp7   | CZp6   | CZp5   | CZp4   | CZp3   | CZp2   | CZp1  | CZp0  |                        |

| Address*1      | Register Name       | R/W | Access | Bus Width | 7        | 6        | 5        | 4                   | 3        | 2        | 1       | 0       | Module Name            |
|----------------|---------------------|-----|--------|-----------|----------|----------|----------|---------------------|----------|----------|---------|---------|------------------------|
| HD028          | DFIC                | R/W | 8      | 16        | —        | DROV     | DPHA     | DZPON               | DZSON    | DSG2     | DSG1    | DSG0    | Digital filter         |
| HD029          | CFIC                | R/W | 8      |           | —        | CROV     | CPHA     | CZPON               | CZSON    | CSG2     | CSG1    | CSG0    |                        |
| HD02A          | DFUCR               | R/W | 8      | 16        | —        | —        | PTON     | CP/D $\overline{P}$ | CFEPS    | DFEPS    | CFESS   | DFESS   |                        |
| HD030          | DFPR                | W   | 16     | 16        | DFPR15   | DFPR14   | DFPR13   | DFPR12              | DFPR11   | DFPR10   | DFPR9   | DFPR8   | Drum error detector    |
| HD031          |                     |     |        |           | DFPR7    | DFPR6    | DFPR5    | DFPR4               | DFPR3    | DFPR2    | DFPR1   | DFPR0   |                        |
| HD032          | DFER                | R/W | 16     | 16        | DFER15   | DFER14   | DFER13   | DFER12              | DFER11   | DFER10   | DFER9   | DFER8   |                        |
| HD033          |                     |     |        |           | DFER7    | DFER6    | DFER5    | DFER4               | DFER3    | DFER2    | DFER1   | DFER0   |                        |
| HD034          | DFRUDR              | W   | 16     | 16        | DFRUDR15 | DFRUDR14 | DFRUDR13 | DFRUDR12            | DFRUDR11 | DFRUDR10 | DFRUDR9 | DFRUDR8 |                        |
| HD035          |                     |     |        |           | DFRUDR7  | DFRUDR6  | DFRUDR5  | DFRUDR4             | DFRUDR3  | DFRUDR2  | DFRUDR1 | DFRUDR0 |                        |
| HD036          | DFRLDR              | W   | 16     | 16        | DFRLDR15 | DFRLDR14 | DFRLDR13 | DFRLDR12            | DFRLDR11 | DFRLDR10 | DFRLDR9 | DFRLDR8 |                        |
| HD037          |                     |     |        |           | DFRLDR7  | DFRLDR6  | DFRLDR5  | DFRLDR4             | DFRLDR3  | DFRLDR2  | DFRLDR1 | DFRLDR0 |                        |
| HD038          | DFVCR               | R/W | 8      | 16        | DFCS1    | DFCS0    | DFOVF    | DFRFON              | DF-R/UNR | DPCNT    | DFRCS1  | DFRCS0  |                        |
| HD039          | DPGCR               | R/W | 8      | 16        | DPCS1    | DPCS0    | DPOVF    | N/V                 | HSWES    | —        | —       | —       |                        |
| HD03A          | DPPR2               | W   | 16     | 16        | DPPR15   | DPPR14   | DPPR13   | DPPR12              | DPPR11   | DPPR10   | DPPR9   | DPPR8   |                        |
| HD03B          |                     |     |        |           | DPPR7    | DPPR6    | DPPR5    | DPPR4               | DPPR3    | DPPR2    | DPPR1   | DPPR0   |                        |
| HD03C          | DPPR1               | W   | 8      | 16        | —        | —        | —        | —                   | DPPR19   | DPPR18   | DPPR17  | DPPR16  |                        |
| HD03D          | DPER1               | R/W | 8      | 16        | —        | —        | —        | —                   | DPER19   | DPER18   | DPER17  | DPER16  |                        |
| HD03E          | DPER2               | R/W | 16     | 16        | DPER15   | DPER14   | DPER13   | DPER12              | DPER11   | DPER10   | DPER9   | DPER8   |                        |
| HD03F          |                     |     |        |           | DPER7    | DPER6    | DPER5    | DPER4               | DPER3    | DPER2    | DPER1   | DPER0   |                        |
| HD040 to HD04F |                     |     |        |           |          |          |          |                     |          |          |         |         |                        |
| HD050          | CFPR                | W   | 16     | 16        | CFPR15   | CFPR14   | CFPR13   | CFPR12              | CFPR11   | CFPR10   | CFPR9   | CFPR8   | Capstan error detector |
| HD051          |                     |     |        |           | CFPR7    | CFPR6    | CFPR5    | CFPR4               | CFPR3    | CFPR2    | CFPR1   | CFPR0   |                        |
| HD052          | CFER                | R/W | 16     | 16        | CFER15   | CFER14   | CFER13   | CFER12              | CFER11   | CFER10   | CFER9   | CFER8   |                        |
| HD053          |                     |     |        |           | CFER7    | CFER6    | CFER5    | CFER4               | CFER3    | CFER2    | CFER1   | CFER0   |                        |
| HD054          | CFRUDR              | W   | 16     | 16        | CFRUDR15 | CFRUDR14 | CFRUDR13 | CFRUDR12            | CFRUDR11 | CFRUDR10 | CFRUDR9 | CFRUDR8 |                        |
| HD055          |                     |     |        |           | CFRUDR7  | CFRUDR6  | CFRUDR5  | CFRUDR4             | CFRUDR3  | CFRUDR2  | CFRUDR1 | CFRUDR0 |                        |
| HD056          | CFRLDR              | W   | 16     | 16        | CFRLDR15 | CFRLDR14 | CFRLDR13 | CFRLDR12            | CFRLDR11 | CFRLDR10 | CFRLDR9 | CFRLDR8 |                        |
| HD057          |                     |     |        |           | CFRLDR7  | CFRLDR6  | CFRLDR5  | CFRLDR4             | CFRLDR3  | CFRLDR2  | CFRLDR1 | CFRLDR0 |                        |
| HD058          | CFVCR               | R/W | 8      |           | CFCS1    | CFCS0    | CFOVF    | CFRFON              | CF-R/UNR | CPCNT    | CFRCS1  | CFRCS0  |                        |
| HD059          | CPGCR               | R/W | 8      | 16        | CPCS1    | CPCS0    | CPOVF    | CR/RF               | SELFCG2  | —        | —       | —       |                        |
| HD05A          | CPPR2               | W   | 16     | 16        | CPH15    | CPH14    | CPH13    | CPH12               | CPH11    | CPH10    | CPH9    | CPH8    |                        |
| HD05B          |                     |     |        |           | CPH7     | CPH6     | CPH5     | CPH4                | CPH3     | CPH2     | CPH1    | CPH0    |                        |
| HD05C          | CPPR1               | W   | 8      | 16        | —        | —        | —        | —                   | CPH19    | CPH18    | CPH17   | CPH16   |                        |
| HD05D          | CPER1               | R/W | 8      | 16        | —        | —        | —        | —                   | CPER19   | CPER18   | CPER17  | CPER16  |                        |
| HD05E          | CPER2               | R/W | 16     | 16        | CPER15   | CPER14   | CPER13   | CPER12              | CPER11   | CPER10   | CPER9   | CPER8   |                        |
| HD05F          |                     |     |        |           | CPER7    | CPER6    | CPER5    | CPER4               | CPER3    | CPER2    | CPER1   | CPER0   |                        |
| HD060          | HSM1                | R/W | 8      | 16        | FLB      | FLA      | EMPB     | EMPA                | OVWB     | OVWA     | CLRB    | CLRA    | HSW timing generator   |
| HD061          | HSM2                | R/W | 8      |           | FRT      | FGR2OFF  | LOP      | EDG                 | ISEL1    | SOFG     | OFG     | VFF/NFF |                        |
| HD062          | HSLP                | R/W | 8      | 16        | LOB3     | LOB2     | LOB1     | LOB0                | LOA3     | LOA2     | LOA1    | LOA0    |                        |
| HD063          |                     |     |        |           |          |          |          |                     |          |          |         |         |                        |
| HD064          | FPDRA               | W   | 16     | 16        | —        | ADTRGA   | STRIGA   | NarrowFFA           | VFFA     | AFFA     | VpulseA | MlevelA |                        |
| HD065          |                     |     |        |           | PPGA7    | PPGA6    | PPGA5    | PPGA4               | PPGA3    | PPGA2    | PPGA1   | PPGA0   |                        |
| HD066          | FTPRA* <sup>2</sup> | W   | 16     | 16        | FTPRA15  | FTPRA14  | FTPRA13  | FTPRA12             | FTPRA11  | FTPRA10  | FTPRA9  | FTPRA8  |                        |
| HD066          | FTCTR* <sup>2</sup> | R   | 16     |           | FTCTR15  | FTCTR14  | FTCTR13  | FTCTR12             | FTCTR11  | FTCTR10  | FTCTR9  | FTCTR8  |                        |
| HD067          | FTPRA* <sup>2</sup> | W   | 16     | 16        | FTPRA7   | FTPRA6   | FTPRA5   | FTPRA4              | FTPRA3   | FTPRA2   | FTPRA1  | FTPRA0  |                        |
| HD067          | FTCTR* <sup>2</sup> | R   | 16     |           | FTCTR7   | FTCTR6   | FTCTR5   | FTCTR4              | FTCTR3   | FTCTR2   | FTCTR1  | FTCTR0  |                        |
| HD068          | FPDRB               | W   | 16     | 16        | —        | ADTRGB   | STRIGB   | NarrowFFB           | VFFB     | AFFB     | VpulseB | MlevelB |                        |
| HD069          |                     |     |        |           | PPGB7    | PPGB6    | PPGB5    | PPGB4               | PPGB3    | PPGB2    | PPGB1   | PPGB0   |                        |
| HD06A          | FTPRB               | W   | 16     | 16        | FTPRB15  | FTPRB14  | FTPRB13  | FTPRB12             | FTPRB11  | FTPRB10  | FTPRB9  | FTPRB8  |                        |
| HD06B          |                     |     |        |           | FTPRB7   | FTPRB6   | FTPRB5   | FTPRB4              | FTPRB3   | FTPRB2   | FTPRB1  | FTPRB0  |                        |



| Address*1      | Register Name | R/W | Access | Bus Width | 7      | 6      | 5      | 4      | 3       | 2       | 1      | 0      | Module Name                     |
|----------------|---------------|-----|--------|-----------|--------|--------|--------|--------|---------|---------|--------|--------|---------------------------------|
| HD06C          | DFCRA*2       | W   | 8      | 16        | ISEL2  | CCLR   | CKSL   | DFCRA4 | DFCRA3  | DFCRA2  | DFCRA1 | DFCRA0 | HSW timing generator            |
| HD06C          | DFCTR*2       | R   | 8      |           | —      | —      | —      | DFCTR4 | DFCTR3  | DFCTR2  | DFCTR1 | DFCTR0 |                                 |
| HD06D          | DFCRB         | W   | 8      | 16        | —      | —      | —      | DFCRB4 | DFCRB3  | DFCRB2  | DFCRB1 | DFCRB0 |                                 |
| HD06E          | CHCR          | W   | 8      | 16        | V/N    | HSWPOL | CRH    | HAH    | SIG3    | SIG2    | SIG1   | SIG0   | 4 head special-effects playback |
| HD06F          | ADDVR         | R/W | 8      |           | —      | —      | —      | HMSK   | HIZ     | CUT     | VPON   | POL    | Additional V                    |
| HD070          | XDR           | W   | 16     | 16        | —      | —      | —      | —      | XD11    | XD10    | XD9    | XD8    | X-value, TRK-value              |
| HD071          |               |     |        |           | XD7    | XD6    | XD5    | XD4    | XD3     | XD2     | XD1    | XD0    |                                 |
| HD072          | TRDR          | W   | 16     | 16        | —      | —      | —      | —      | TRD11   | TRD10   | TRD9   | TRD8   |                                 |
| HD073          |               |     |        |           | TRD7   | TRD6   | TRD5   | TRD4   | TRD3    | TRD2    | TRD1   | TRD0   |                                 |
| HD074          | XTCR          | R/W | 8      | 16        | —      | CAPRF  | AT/MÜ  | TRK/X  | EXC/REF | XCS     | DVREF1 | DVREF0 |                                 |
| HD075 to HD077 |               |     |        |           |        |        |        |        |         |         |        |        |                                 |
| HD078          | DPWDR         | R/W | 16     | 16        | —      | —      | —      | —      | DPWDR11 | DPWDR10 | DPWDR9 | DPWDR8 | Drum 12-bit PWM                 |
| HD079          |               |     |        |           | DPWDR7 | DPWDR6 | DPWDR5 | DPWDR4 | DPWDR3  | DPWDR2  | DPWDR1 | DPWDR0 |                                 |
| HD07A          | DPWCR         | W   | 8      | 16        | DPOL   | DDC    | DHIZ   | DH/L   | DSF/DF  | DCK2    | DCK1   | DCK0   |                                 |
| HD07B          | CPWCR         | W   | 8      |           | CPOL   | CDC    | CHIZ   | CH/L   | CSF/DF  | CCK2    | CCK1   | CCK0   | Capstan 12-bit PWM              |
| HD07C          | CPWDR         | R/W | 16     | 16        | —      | —      | —      | —      | CPWDR11 | CPWDR10 | CPWDR9 | CPWDR8 |                                 |
| HD07D          |               |     |        |           | CPWDR7 | CPWDR6 | CPWDR5 | CPWDR4 | CPWDR3  | CPWDR2  | CPWDR1 | CPWDR0 |                                 |
| HD07E to HD07F |               |     |        |           |        |        |        |        |         |         |        |        |                                 |
| HD080          | CTCR          | W   | 8      | 16        | NT/PL  | FSLC   | FSLB   | FSLA   | CCS     | LCTL    | UNCTL  | SLWM   | CTL circuit                     |
| HD081          | CTLM          | R/W | 8      |           | ASM    | REC/PB | FW/RV  | MD4    | MD3     | MD2     | MD1    | MD0    |                                 |
| HD082          | RCDR1         | W   | 16     | 16        | —      | —      | —      | —      | CMT1B   | CMT1A   | CMT19  | CMT18  |                                 |
| HD083          |               |     |        |           | CMT17  | CMT16  | CMT15  | CMT14  | CMT13   | CMT12   | CMT11  | CMT10  |                                 |
| HD084          | RCDR2         | W   | 16     | 16        | —      | —      | —      | —      | CMT2B   | CMT2A   | CMT29  | CMT28  |                                 |
| HD085          |               |     |        |           | CMT27  | CMT26  | CMT25  | CMT24  | CMT23   | CMT22   | CMT21  | CMT20  |                                 |
| HD086          | RCDR3         | W   | 16     | 16        | —      | —      | —      | —      | CMT3B   | CMT3A   | CMT39  | CMT38  |                                 |
| HD087          |               |     |        |           | CMT37  | CMT36  | CMT35  | CMT34  | CMT33   | CMT32   | CMT31  | CMT30  |                                 |
| HD088          | RCDR4         | W   | 16     | 16        | —      | —      | —      | —      | CMT4B   | CMT4A   | CMT49  | CMT48  |                                 |
| HD089          |               |     |        |           | CMT47  | CMT46  | CMT45  | CMT44  | CMT43   | CMT42   | CMT41  | CMT40  |                                 |
| HD08A          | RCDR5         | W   | 16     | 16        | —      | —      | —      | —      | CMT5B   | CMT5A   | CMT59  | CMT58  |                                 |
| HD08B          |               |     |        |           | CMT57  | CMT56  | CMT55  | CMT54  | CMT53   | CMT52   | CMT51  | CMT50  |                                 |
| HD08C          | DI/O          | R/W | 8      | 16        | VCTR2  | VCTR1  | VCTR0  | —      | BPON    | BPS     | BPF    | DI/O   |                                 |
| HD08D          | BTPR          | R/W | 8      |           | LSP7   | LSP6   | LSP5   | LSP4   | LSP3    | LSP2    | LSP1   | LSP0   |                                 |
| HD08E to HD08F |               |     |        |           |        |        |        |        |         |         |        |        |                                 |
| HD090          | RFD           | W   | 16     | 16        | REF15  | REF14  | REF13  | REF12  | REF11   | REF10   | REF9   | REF8   | Reference signal generator      |
| HD091          |               |     |        |           | REF7   | REF6   | REF5   | REF4   | REF3    | REF2    | REF1   | REF0   |                                 |
| HD092          | CRF           | W   | 16     | 16        | CRF15  | CRF14  | CRF13  | CRF12  | CRF11   | CRF10   | CRF9   | CRF8   |                                 |
| HD093          |               |     |        |           | CRF7   | CRF6   | CRF5   | CRF4   | CRF3    | CRF2    | CRF1   | CRF0   |                                 |
| HD094          | RFC           | R/W | 16     | 16        | RFC15  | RFC14  | RFC13  | RFC12  | RFC11   | RFC10   | RFC9   | RFC8   |                                 |
| HD095          |               |     |        |           | RFC7   | RFC6   | RFC5   | RFC4   | RFC3    | RFC2    | RFC1   | RFC0   |                                 |
| HD096          | RFM           | R/W | 8      | 16        | RCS    | VNA    | CVS    | REX    | CRD     | OD/EV   | VST    | VEG    |                                 |
| HD097          | RFM2          | R/W | 8      |           | —      | —      | —      | —      | —       | —       | —      | FDS    |                                 |

| Address*1        | Register Name | R/W | Access | Bus Width | 7       | 6       | 5       | 4       | 3       | 2       | 1       | 0       | Module Name                |
|------------------|---------------|-----|--------|-----------|---------|---------|---------|---------|---------|---------|---------|---------|----------------------------|
| H'D098           | CTVC          | R/W | 8      | 16        | CEX     | CEG     | —       | —       | —       | CFG     | HSW     | CTL     | Frequency divider          |
| H'D099           | CTLR          | W   | 8      |           | CTL7    | CTL6    | CTL5    | CTL4    | CTL3    | CTL2    | CTL1    | CTL0    |                            |
| H'D09A           | CDVC          | R/W | 8      | 16        | MCGin   | —       | CMK     | CMN     | DVTRG   | CRF     | CPS1    | CPS0    |                            |
| H'D09B           | CDIVR1        | W   | 8      |           | —       | CDV16   | CDV15   | CDV14   | CDV13   | CDV12   | CDV11   | CDV10   |                            |
| H'D09C           | CDIVR2        | W   | 8      | 16        | —       | CDV26   | CDV25   | CDV24   | CDV23   | CDV22   | CDV21   | CDV20   |                            |
| H'D09D           | CTMR          | W   | 8      |           | —       | —       | CPM5    | CPM4    | CPM3    | CPM2    | CPM1    | CPM0    |                            |
| H'D09E           | FGCR          | W   | 8      | 16        | —       | —       | —       | —       | —       | —       | —       | DRF     |                            |
| H'D09F           |               |     |        |           |         |         |         |         |         |         |         |         |                            |
| H'D0A0           | SPMR          | R/W | 8      | 8         | CTLSTOP | —       | CFGCOMP | —       | —       | —       | —       | —       | Servo port control         |
| H'D0A1 to H'D0A2 |               |     |        |           |         |         |         |         |         |         |         |         |                            |
| H'D0A3           | SVMCR         | R/W | 8      | 8         | —       | —       | SVMCR5  | SVMCR4  | SVMCR3  | SVMCR2  | SVMCR1  | SVMCR0  |                            |
| H'D0A4           | CTLGR         | R/W | 8      | 8         | —       | —       | CTLE/Ā  | CTLFB   | CTLGR3  | CTLGR2  | CTLGR1  | CTLGR0  |                            |
| H'D0A5 to H'D0AF |               |     |        |           |         |         |         |         |         |         |         |         |                            |
| H'D0B0           | VTR           | W   | 8      | 16        | —       | —       | VTR5    | VTR4    | VTR3    | VTR2    | VTR1    | VTR0    | Sync detector (servo)      |
| H'D0B1           | HTR           | W   | 8      | 16        | —       | —       | —       | —       | HTR3    | HTR2    | HTR1    | HTR0    |                            |
| H'D0B2           | HRTR          | W   | 8      | 16        | HRTR7   | HRTR6   | HRTR5   | HRTR4   | HRTR3   | HRTR2   | HRTR1   | HRTR0   |                            |
| H'D0B3           | HPWR          | W   | 8      | 16        | —       | —       | —       | —       | HPWR3   | HPWR2   | HPWR1   | HPWR0   |                            |
| H'D0B4           | NWR           | W   | 8      | 16        | —       | —       | NWR5    | NWR4    | NWR3    | NWR2    | NWR1    | NWR0    |                            |
| H'D0B5           | NDR           | W   | 8      | 16        | NDR7    | NDR6    | NDR5    | NDR4    | NDR3    | NDR2    | NDR1    | NDR0    |                            |
| H'D0B6           | SYNCR         | R/W | 8      | 16        | —       | —       | —       | —       | NISVD   | NOIS    | FLD     | SYCT    |                            |
| H'D0B7           |               |     |        |           |         |         |         |         |         |         |         |         |                            |
| H'D0B8           | SIENR1        | R/W | 8      | 16        | IEDRM3  | IEDRM2  | IEDRM1  | IECAP3  | IECAP2  | IECAP1  | IEHSW2  | IEHSW1  | Servo interrupt control    |
| H'D0B9           | SIENR2        | R/W | 8      | 16        | —       | —       | —       | —       | —       | —       | IESNC   | IECTL   |                            |
| H'D0BA           | SIRQR1        | R/W | 8      | 16        | IRRDRM3 | IRRDRM2 | IRRDRM1 | IRRCAP3 | IRRCAP2 | IRRCAP1 | IRRHWS2 | IRRHWS1 |                            |
| H'D0BB           | SIRQR2        | R/W | 8      | 16        | —       | —       | —       | —       | —       | —       | IRRSNC  | IRRCTL  |                            |
| H'D0BC to H'D0E4 |               |     |        |           |         |         |         |         |         |         |         |         |                            |
| H'D0E5           | DDCSWR        | R/W | 8      | 8         | SWE     | SW      | IE      | IF      | —       | —       | —       | —       | I <sup>2</sup> C interface |
| H'D0E8           | ICCR0         | R/W | 8      | 8         | ICE     | IEIC    | MST     | TRS     | ACKE    | BBSY    | IRIC    | SCP     |                            |
| H'D0E9           | ICSR0         | R/W | 8      | 8         | ESTP    | STOP    | IRTR    | AASX    | AL      | AAS     | ADZ     | ACKB    |                            |
| H'D0EE           | ICDR0*3       | R/W | 8      | 8         | ICDR7   | ICDR6   | ICDR5   | ICDR4   | ICDR3   | ICDR2   | ICDR1   | ICDR0   |                            |
| H'D0EE           | SARX0*3       |     |        |           | SVAX6   | SVAX5   | SVAX4   | SVAX3   | SVAX2   | SVAX1   | SVAX0   | FSX     |                            |
| H'D0EF           | ICMR0*3       |     |        |           | MLS     | WAIT    | CKS2    | CKS1    | CKS0    | BC2     | BC1     | BC0     |                            |
| H'D0EF           | SAR0*3        |     |        |           | SVA6    | SVA5    | SVA4    | SVA3    | SVA2    | SVA1    | SVA0    | FS      |                            |
| H'D0F0 to H'D0FF |               |     |        |           |         |         |         |         |         |         |         |         |                            |
| H'D100           | TIER          | R/W | 8      | 16        | ICIAE   | ICIBE   | ICICE   | ICIDE   | OCIAE   | OCIBE   | OVIE    | ICSA    | Timer X1                   |
| H'D101           | TCSRX         | R/W | 8      | 16        | ICFA    | ICFB    | ICFC    | ICFD    | OCFA    | OCFB    | OVF     | CCLRA   |                            |
| H'D102           | FRCH          | R/W | 8/16   | 16        |         |         |         |         |         |         |         |         |                            |
| H'D103           | FRCL          |     |        |           |         |         |         |         |         |         |         |         |                            |
| H'D104           | OCRAH*4       | R/W | 8/16   | 16        |         |         |         |         |         |         |         |         |                            |
| H'D105           | OCRAL*4       |     |        |           |         |         |         |         |         |         |         |         |                            |
| H'D104           | OCRBH*4       | R/W | 8/16   | 16        |         |         |         |         |         |         |         |         |                            |
| H'D105           | OCRBL*4       |     |        |           |         |         |         |         |         |         |         |         |                            |
| H'D106           | TCRX          | R/W | 8      | 16        | IEDGA   | IEDGB   | IEDGC   | IEDGD   | BUFEA   | BUFEB   | CKS1    | CKS0    |                            |
| H'D107           | TOCR          | R/W | 8      | 16        | ICSB    | ICSC    | ICSD    | OCRS    | OEA     | OEB     | OLVLA   | OLVLB   |                            |
| H'D108           | ICRAH         | R   | 8/16   | 16        |         |         |         |         |         |         |         |         |                            |
| H'D109           | ICRAL         |     |        |           |         |         |         |         |         |         |         |         |                            |

| Address*1      | Register Name | R/W | Access | Bus Width | 7      | 6      | 5      | 4        | 3      | 2      | 1       | 0      | Module Name |
|----------------|---------------|-----|--------|-----------|--------|--------|--------|----------|--------|--------|---------|--------|-------------|
| HD10A          | ICRBH         | R   | 8/16   | 16        |        |        |        |          |        |        |         |        | Timer X1    |
| HD10B          | ICRBL         |     |        |           |        |        |        |          |        |        |         |        |             |
| HD10C          | ICRCH         | R   | 8/16   | 16        |        |        |        |          |        |        |         |        |             |
| HD10D          | ICRCL         |     |        |           |        |        |        |          |        |        |         |        |             |
| HD10E          | ICRDH         | R   | 8/16   | 16        |        |        |        |          |        |        |         |        | Timer B     |
| HD10F          | ICRDL         |     |        |           |        |        |        |          |        |        |         |        |             |
| HD110          | TMB           | R/W | 8      | 8         | TMB17  | TMB1F  | TMB1E  | —        | —      | TMB12  | TMB11   | TMB10  |             |
| HD111          | TCB           | R   | 8      | 8         | TCB17  | TCB16  | TCB15  | TCB14    | TCB13  | TCB12  | TCB11   | TCB10  |             |
| HD111          | TLB           | W   | 8      | 8         | TLB17  | TLB16  | TLB15  | TLB14    | TLB13  | TLB12  | TLB11   | TLB10  | Timer L     |
| HD112          | LMR           | R/W | 8      | 8         | LM1F   | LM1E   | —      | —        | LMR3   | LMR2   | LMR1    | LMR0   |             |
| HD113          | LTC           | R   | 8      | 8         | LTC7   | LTC6   | LTC5   | LTC4     | LTC3   | LTC2   | LTC1    | LTC0   |             |
| HD113          | RCR           | W   | 8      | 8         | RCR7   | RCR6   | RCR5   | RCR4     | RCR3   | RCR2   | RCR1    | RCR0   |             |
| HD114 to HD117 |               |     |        |           |        |        |        |          |        |        |         |        | Timer R     |
| HD118          | TMRM1         | R/W | 8      | 8         | CLR2   | AC/BR  | RLD    | RLCK     | PS21   | PS20   | RLD/CAP | CPS    |             |
| HD119          | TMRM2         | R/W | 8      | 8         | LAT    | PS11   | PS10   | PS31     | PS30   | CP/SLM | CAPF    | SLW    |             |
| HD11A          | TMRCP1        | R   | 8      | 8         | TMRC17 | TMRC16 | TMRC15 | TMRC14   | TMRC13 | TMRC12 | TMRC11  | TMRC10 |             |
| HD11B          | TMRCP2        | R   | 8      | 8         | TMRC27 | TMRC26 | TMRC25 | TMRC24   | TMRC23 | TMRC22 | TMRC21  | TMRC20 | 14-bit PWM  |
| HD11C          | TMLR1         | W   | 8      | 8         | TMR17  | TMR16  | TMR15  | TMR14    | TMR13  | TMR12  | TMR11   | TMR10  |             |
| HD11D          | TMLR2         | W   | 8      | 8         | TMR27  | TMR26  | TMR25  | TMR24    | TMR23  | TMR22  | TMR21   | TMR20  |             |
| HD11E          | TMLR3         | W   | 8      | 8         | TMR37  | TMR36  | TMR35  | TMR34    | TMR33  | TMR32  | TMR31   | TMR30  |             |
| HD11F          | TMRC3         | R/W | 8      | 8         | TMRI3E | TMRI2E | TMRI1E | TMRI3    | TMRI2  | TMRI1  | —       | —      | 8-bit PWM   |
| HD120          | PWDR1         | W   | 8      | 8         | PWDR17 | PWDR16 | PWDR15 | PWDR14   | PWDR13 | PWDR12 | PWDR11  | PWDR10 |             |
| HD121          | PWDRU         | W   | 8      | 8         | —      | —      | PWDRU5 | PWDRU4   | PWDRU3 | PWDRU2 | PWDRU1  | PWDRU0 |             |
| HD122          | PWCR          | R/W | 8      | 8         | —      | —      | —      | —        | —      | —      | —       | PWMCRO |             |
| HD123 to HD125 |               |     |        |           |        |        |        |          |        |        |         |        | PSU         |
| HD126          | PWR0          | W   | 8      | 8         | PW 07  | PW06   | PW05   | PW04     | PW03   | PW02   | PW01    | PW00   |             |
| HD127          | PWR1          | W   | 8      | 8         | PW17   | PW16   | PW15   | PW14     | PW13   | PW12   | PW11    | PW10   |             |
| HD128          | PWR2          | W   | 8      | 8         | PW 27  | PW26   | PW25   | PW24     | PW23   | PW22   | PW21    | PW20   |             |
| HD129          | PWR3          | W   | 8      | 8         | PW 37  | PW36   | PW35   | PW34     | PW33   | PW32   | PW31    | PW30   | A/D         |
| HD12A          | PW8CR         | R/W | 8      | 8         | —      | —      | —      | —        | PWC3   | PWC2   | PWC1    | PWC0   |             |
| HD12B          |               |     |        |           |        |        |        |          |        |        |         |        |             |
| HD12C          | ICR1          | R   | 8      | 8         | ICR17  | ICR16  | ICR15  | ICR14    | ICR13  | ICR12  | ICR11   | ICR10  |             |
| HD12D          | PCSR          | R/W | 8      | 8         | IC1F   | IC1E   | ICEG   | NCon/off | —      | DCS2   | DCS1    | DCS0   | Timer J     |
| HD12E to HD12F |               |     |        |           |        |        |        |          |        |        |         |        |             |
| HD130          | ADRH          | R   | 16     | 8         | ADR9   | ADR8   | ADR7   | ADR6     | ADR5   | ADR4   | ADR3    | ADR2   |             |
| HD131          | ADRL          |     |        |           | ADR1   | ADR0   | —      | —        | —      | —      | —       | —      |             |
| HD132          | AHRH          | R   | 16     |           | AHR9   | AHR8   | AHR7   | AHR6     | AHR5   | AHR4   | AHR3    | AHR2   |             |
| HD133          | AHRL          |     |        |           | AHR1   | AHR0   | —      | —        | —      | —      | —       | —      |             |
| HD134          | ADCR          | R/W | 8      |           | CK     | —      | HCH1   | HCH0     | SCH3   | SCH2   | SCH1    | SCH0   | Timer J     |
| HD135          | ADCSR         | R/W | 8      |           | SEND   | HEND   | ADIE   | SST      | HST    | BUSY   | SCNL    | —      |             |
| HD136          | ADTSR         | R/W | 8      |           | —      | —      | —      | —        | —      | —      | TRGS1   | TRGS0  |             |
| HD137          |               |     |        |           |        |        |        |          |        |        |         |        |             |
| HD138          | TLK           | W   | 8/16   | 16        | TLR27  | TLR26  | TLR25  | TLR24    | TLR23  | TLR22  | TLR21   | TLR20  | Timer J     |
| HD138          | TCK           | R   | 8/16   |           | TDR27  | TDR26  | TDR25  | TDR24    | TDR23  | TDR22  | TDR21   | TDR20  |             |
| HD139          | TLJ           | W   | 8/16   |           | TLR17  | TLR16  | TLR15  | TLR14    | TLR13  | TLR12  | TLR11   | TLR10  |             |
| HD139          | TCJ           | R   | 8/16   |           | TDR17  | TDR16  | TDR15  | TDR14    | TDR13  | TDR12  | TDR11   | TDR10  |             |
| HD13A          | TMJ           | R/W | 8/16   |           | PS11   | PS10   | ST     | 8/16     | PS21   | PS20   | TGL     | T/R    |             |

| Address*1      | Register Name | R/W | Access | Bus Width | 7      | 6      | 5      | 4       | 3       | 2       | 1       | 0       | Module Name                        |
|----------------|---------------|-----|--------|-----------|--------|--------|--------|---------|---------|---------|---------|---------|------------------------------------|
| HD13B          | TMJC          | R/W | 8/16   | 16        | BUZZ1  | BUZZ0  | MON1   | MON0    | EXN     | TMJ2IE  | TMJ1IE  | PS22    | Timer J                            |
| HD13C          | TMJS          | R/W | 8/16   |           | TMJ2I  | TMJ1I  | —      | —       | —       | —       | —       | —       |                                    |
| HD13D to HD147 |               |     |        |           |        |        |        |         |         |         |         |         |                                    |
| HD148          | SMR1          | R/W | 8      | 8         | C/Ā    | CHR    | PE     | O/Ē     | STOP    | MP      | CKS1    | CKS0    | Clock synchronous/asynchronous SCI |
| HD149          | BRR1          | R/W | 8      |           |        |        |        |         |         |         |         |         |                                    |
| HD14A          | SCR1          | R/W | 8      |           | TIE    | RIE    | TE     | RE      | MPIE    | TEIE    | CKE1    | CKE0    |                                    |
| HD14B          | TDR1          | R/W | 8      |           |        |        |        |         |         |         |         |         |                                    |
| HD14C          | SSR1          | R/W | 8      |           | TDRE   | RDRF   | ORER   | FER     | PER     | TEND    | MPB     | MPBT    |                                    |
| HD14D          | RDR1          | R   | 8      |           |        |        |        |         |         |         |         |         |                                    |
| HD14E          | SCMR1         | R/W | 8      |           | —      | —      | —      | —       | SDIR    | SINV    | —       | SMIF    |                                    |
| HD14F to HD157 |               |     |        |           |        |        |        |         |         |         |         |         |                                    |
| HD158          | ICCR1         | R/W | 8      | 8         | ICE    | IEIC   | MST    | TRS     | ACKE    | BBSY    | IRIC    | SCP     | I <sup>2</sup> C interface         |
| HD159          | ICSR1         | R/W | 8      |           | ESTP   | STOP   | IRTR   | AASX    | AL      | AAS     | ADZ     | ACKB    |                                    |
| HD15A to HD15D |               |     |        |           |        |        |        |         |         |         |         |         |                                    |
| HD15E          | ICDR1*3       | R/W | 8      | 8         | ICDR7  | ICDR6  | ICDR5  | ICDR4   | ICDR3   | ICDR2   | ICDR1   | ICDR0   |                                    |
| HD15E          | SARX1*3       | R/W | 8      |           | SVAX6  | SVAX5  | SVAX4  | SVAX3   | SVAX2   | SVAX1   | SVAX0   | FSX     |                                    |
| HD15F          | ICMR1*3       | R/W | 8      |           | MLS    | WAIT   | CKS2   | CKS1    | CKS0    | BC2     | BC1     | BC0     |                                    |
| HD15F          | SAR1*3        | R/W | 8      |           | SVA6   | SVA5   | SVA4   | SVA3    | SVA2    | SVA1    | SVA0    | FS      |                                    |
| HD160 to HD1FF |               |     |        |           |        |        |        |         |         |         |         |         |                                    |
| HD200          | CLINE1        | R/W | 8/16   | 16        | BPTN1  | SZ1    | CLU11  | CLU12   | KR1     | KG1     | KB1     | KLU1    | OSD                                |
| HD201          | CLINE2        | R/W | 8/16   | 16        | BPTN2  | SZ2    | CLU21  | CLU22   | KR2     | KG2     | KB2     | KLU2    |                                    |
| HD202          | CLINE3        | R/W | 8/16   | 16        | BPTN3  | SZ3    | CLU31  | CLU32   | KR3     | KG3     | KB3     | KLU3    |                                    |
| HD203          | CLINE4        | R/W | 8/16   | 16        | BPTN4  | SZ4    | CLU41  | CLU42   | KR4     | KG4     | KB4     | KLU4    |                                    |
| HD204          | CLINE5        | R/W | 8/16   | 16        | BPTN5  | SZ5    | CLU51  | CLU52   | KR5     | KG5     | KB5     | KLU5    |                                    |
| HD205          | CLINE6        | R/W | 8/16   | 16        | BPTN6  | SZ6    | CLU61  | CLU62   | KR6     | KG6     | KB6     | KLU6    |                                    |
| HD206          | CLINE7        | R/W | 8/16   | 16        | BPTN7  | SZ7    | CLU71  | CLU72   | KR7     | KG7     | KB7     | KLU7    |                                    |
| HD207          | CLINE8        | R/W | 8/16   | 16        | BPTN8  | SZ8    | CLU81  | CLU82   | KR8     | KG8     | KB8     | KLU8    |                                    |
| HD208          | CLINE9        | R/W | 8/16   | 16        | BPTN9  | SZ9    | CLU91  | CLU92   | KR9     | KG9     | KB9     | KLU9    |                                    |
| HD209          | CLINE10       | R/W | 8/16   | 16        | BPTN10 | SZ10   | CLU101 | CLU102  | KR10    | KG10    | KB10    | KLU10   |                                    |
| HD20A          | CLINE11       | R/W | 8/16   | 16        | BPTN11 | SZ11   | CLU111 | CLU112  | KR11    | KG11    | KB11    | KLU11   |                                    |
| HD20B          | CLINE12       | R/W | 8/16   | 16        | BPTN12 | SZ12   | CLU121 | CLU122  | KR12    | KG12    | KB12    | KLU12   |                                    |
| HD20C          | VPOSH         | R/W | 8/16   | 16        | —      | —      | —      | —       | VSPC2   | VSPC1   | VSPC0   | VP8     |                                    |
| HD20D          | VPOSL         | R/W | 8/16   | 16        | VP7    | VP6    | VP5    | VP4     | VP3     | VP2     | VP1     | VP0     |                                    |
| HD20E          | HPOS          | R/W | 8/16   | 16        | HP7    | HP6    | HP5    | HP4     | HP3     | HP2     | HP1     | HP0     |                                    |
| HD20F          | DOUT          | R/W | 8/16   | 16        | —      | RGBC   | YCOC   | DOBC    | DSEL    | CRSEL   | —       | —       |                                    |
| HD210          | DCNTLH        | R/W | 8/16   | 16        | VDSPON | DISPM  | LACEM  | BLKS    | OSDON   | —       | EDGE    | EDGC    |                                    |
| HD211          | DCNTLL        | R/W | 8/16   | 16        | BR     | BG     | BB     | BLU1    | BLU0    | CAMP    | KAMP    | BAMP    |                                    |
| HD212          | DFORMH        | R/W | 8/16   | 16        | TVM2   | TVM1   | TVM0   | FSCIN   | FSCEXT  | —       | OSDVE   | OSDVF   |                                    |
| HD213          | DFORML        | R/W | 8/16   | 16        | —      | —      | —      | —       | —       | DTMV    | LDREQ   | VACS    |                                    |
| HD214 to HD21F |               |     |        |           |        |        |        |         |         |         |         |         |                                    |
| HD220          | SEVFD         | R/W | 8/16   | 16        | EVNIE  | EVNIF  | —      | STBE4   | STBE3   | STBE2   | STBE1   | STBE0   | Data slicer                        |
| HD221          |               |     |        |           | SLVLE2 | SLVLE1 | SLVLE0 | DLYE4   | DLYE3   | DLYE2   | DLYE1   | DLYE0   |                                    |
| HD222          | SODFD         | R/W | 8/16   |           | ODDIE  | ODDIF  | —      | STB04   | STB03   | STB02   | STB01   | STB00   |                                    |
| HD223          |               |     |        |           | SLVL02 | SLVL01 | SLVL00 | DLYO4   | DLYO3   | DLYO2   | DLYO1   | DLYO0   |                                    |
| HD224          | SLINE1        | R/W | 8/16   |           | SENB1  | SFLD1  | —      | SLINE14 | SLINE13 | SLINE12 | SLINE11 | SLINE10 |                                    |

| Address*1      | Register Name | R/W | Access | Bus Width | 7       | 6      | 5      | 4       | 3       | 2       | 1       | 0       | Module Name        |
|----------------|---------------|-----|--------|-----------|---------|--------|--------|---------|---------|---------|---------|---------|--------------------|
| HD225          | SLINE2        | R/W | 8/16   | 16        | SENB L2 | SFLD2  | —      | SLINE24 | SLINE23 | SLINE22 | SLINE21 | SLINE20 | Data slicer        |
| HD226          | SLINE3        | R/W | 8/16   |           | SENB L3 | SFLD3  | —      | SLINE34 | SLINE33 | SLINE32 | SLINE31 | SLINE30 |                    |
| HD227          | SLINE4        | R/W | 8/16   |           | SENB L4 | SFLD4  | —      | SLINE44 | SLINE43 | SLINE42 | SLINE41 | SLINE40 |                    |
| HD228          | SDTCT1        | R   | 8/16   |           | CRDF1   | SBD F1 | END F1 | —       | CRIC13  | CRIC12  | CRIC11  | CRIC10  |                    |
| HD229          | SDTCT2        | R   | 8/16   |           | CRDF2   | SBD F2 | END F2 | —       | CRIC23  | CRIC22  | CRIC21  | CRIC20  |                    |
| HD22A          | SDTCT3        | R   | 8/16   |           | CRDF3   | SBD F3 | END F3 | —       | CRIC33  | CRIC32  | CRIC31  | CRIC30  |                    |
| HD22B          | SDTCT4        | R   | 8/16   |           | CRDF4   | SBD F4 | END F4 | —       | CRIC43  | CRIC42  | CRIC41  | CRIC40  |                    |
| HD22C          | SDATA1        | R   | 8/16   |           |         |        |        |         |         |         |         |         |                    |
| HD22D          |               |     |        |           |         |        |        |         |         |         |         |         |                    |
| HD22E          | SDATA2        | R   | 8/16   |           |         |        |        |         |         |         |         |         |                    |
| HD22F          |               |     |        |           |         |        |        |         |         |         |         |         |                    |
| HD230          | SDATA3        | R   | 8/16   |           |         |        |        |         |         |         |         |         |                    |
| HD231          |               |     |        |           |         |        |        |         |         |         |         |         |                    |
| HD232          | SDATA4        | R   | 8/16   |           |         |        |        |         |         |         |         |         |                    |
| HD233          |               |     |        |           |         |        |        |         |         |         |         |         |                    |
| HD234 to HD23F |               |     |        |           |         |        |        |         |         |         |         |         |                    |
| HD240          | SEPIMR        | R/W | 8      | 16        | CCMPV1  | CCMPV0 | CCMPSL | SYNCT   | VSEL    | DLPFON  | —       | FRQSEL  | Sync separator     |
| HD241          | SEPCR         | R/W | 8      |           | AFCVIE  | AFCVIF | VCKSL  | VCMPON  | HCKSEL  | HHKON   | HHKON2  | FLD     |                    |
| HD242          | SEPA CR       | R/W | 8      |           | NDETIE  | NDETIF | HSEL   | —       | —       | ARST    | DOTCKSL | DSL32B  |                    |
| HD243          | HVTHR         | W   | 8      |           | —       | —      | —      | HVTH4   | HVTH3   | HVTH2   | HVTH1   | HVTH0   |                    |
| HD244          | VVTHR         | W   | 8      |           | VVTH7   | VVTH6  | VVTH5  | VVTH4   | VVTH3   | VVTH2   | VVTH1   | VVTH0   |                    |
| HD245          | FWIDR         | W   | 8      |           | —       | —      | —      | —       | FWID3   | FWID2   | FWID1   | FWID0   |                    |
| HD246          | HCM MR        | W   | 16     |           | HC8     | HC7    | HC6    | HC5     | HC4     | HC3     | HC2     | HC1     |                    |
| HD247          |               |     |        |           | HC0     | HM6    | HM5    | HM4     | HM3     | HM2     | HM1     | HM0     |                    |
| HD248          | NDETC         | R   | 8      |           | NC7     | NC6    | NC5    | NC4     | NC3     | NC2     | NC1     | NC0     |                    |
|                | NDETR         | W   | 8      |           | NR7     | NR6    | NR5    | NR4     | NR3     | NR2     | NR1     | NR0     |                    |
| HD249          | DDE TWR       | W   | 8      |           | SRWDE1  | SRWDE0 | SRWDS1 | SRWDS0  | CRWDE1  | CRWDE0  | CRWDS1  | CRWDS0  |                    |
| HD24A          | INFRQR        | W   | 8      |           | VFS2    | VFS1   | HFS    | —       | —       | —       | DOTCKSL | DSL32B  |                    |
| HD24B to HFFAF |               |     |        |           |         |        |        |         |         |         |         |         |                    |
| HFFB0          | TAR0          | R/W | 8      | 8         | A23     | A22    | A21    | A20     | A19     | A18     | A17     | A16     | ATC                |
| HFFB1          |               |     |        |           | A15     | A14    | A13    | A12     | A11     | A10     | A9      | A8      |                    |
| HFFB2          |               |     |        |           | A7      | A6     | A5     | A4      | A3      | A2      | A1      | —       |                    |
| HFFB3          | TAR1          | R/W | 8      |           | A23     | A22    | A21    | A20     | A19     | A18     | A17     | A16     |                    |
| HFFB4          |               |     |        |           | A15     | A14    | A13    | A12     | A11     | A10     | A9      | A8      |                    |
| HFFB5          |               |     |        |           | A7      | A6     | A5     | A4      | A3      | A2      | A1      | —       |                    |
| HFFB6          | TAR2          | R/W | 8      |           | A23     | A22    | A21    | A20     | A19     | A18     | A17     | A16     |                    |
| HFFB7          |               |     |        |           | A15     | A14    | A13    | A12     | A11     | A10     | A9      | A8      |                    |
| HFFB8          |               |     |        |           | A7      | A6     | A5     | A4      | A3      | A2      | A1      | —       |                    |
| HFFB9          | ATCR          | R/W | 8      |           | —       | —      | —      | —       | —       | TRC2    | TRC1    | TRC0    |                    |
| HFFBA          | TMA           | R/W | 8      |           | TMAOV   | TMAIE  | —      | —       | TMA3    | TMA2    | TMA1    | TMA0    | Timer A            |
| HFFBB          | TCA           | R   | 8      |           | TCA7    | TCA6   | TCA5   | TCA4    | TCA3    | TCA2    | TCA1    | TCA0    |                    |
| HFFBC          | WTCSR         | R/W | 8/16   | 16        | OVF     | WT/IT  | TME    | —       | RST/NMI | CKS2    | CKS1    | CKS0    | WDT                |
| HFFBD          | WTCNT*5       | R/W | 8/16   |           |         |        |        |         |         |         |         |         |                    |
| HFFBE to HFFBF |               |     |        |           |         |        |        |         |         |         |         |         |                    |
| HFFC0          | PDR0          | R   | 8      | 8         | PDR07   | PDR06  | PDR05  | PDR04   | PDR03   | PDR02   | PDR01   | PDR00   | Port data register |
| HFFC1          | PDR1          | R/W | 8      |           | PDR17   | PDR16  | PDR15  | PDR14   | PDR13   | PDR12   | PDR11   | PDR10   |                    |
| HFFC2          | PDR2          | R/W | 8      |           | PDR27   | PDR26  | PDR25  | PDR24   | PDR23   | PDR22   | PDR21   | PDR20   |                    |

| Address*1      | Register Name | R/W | Access | Bus Width | 7       | 6       | 5       | 4       | 3       | 2       | 1       | 0       | Module Name                  |
|----------------|---------------|-----|--------|-----------|---------|---------|---------|---------|---------|---------|---------|---------|------------------------------|
| HFFC3          | PDR3          | R/W | 8      | 8         | PDR37   | PDR36   | PDR35   | PDR34   | PDR33   | PDR32   | PDR31   | PDR30   | Port data register           |
| HFFC4          | PDR4          | R/W | 8      |           | PDR47   | PDR46   | PDR45   | PDR44   | PDR43   | PDR42   | PDR41   | PDR40   |                              |
| HFFC5          |               |     |        |           |         |         |         |         |         |         |         |         |                              |
| HFFC6          | PDR6          | R/W | 8      | 8         | PDR67   | PDR66   | PDR65   | PDR64   | PDR63   | PDR62   | PDR61   | PDR60   |                              |
| HFFC7          | PDR7          | R/W | 8      |           | PDR77   | PDR76   | PDR75   | PDR74   | PDR73   | PDR72   | PDR71   | PDR70   |                              |
| HFFC8          | PDR8          | R/W | 8      |           | PDR87   | PDR86   | PDR85   | PDR84   | PDR83   | PDR82   | PDR81   | PDR80   |                              |
| HFFC9 to HFFCC |               |     |        |           |         |         |         |         |         |         |         |         |                              |
| HFFCD          | PMR0          | R/W | 8      | 8         | PMR07   | PMR06   | PMR05   | PMR04   | PMR03   | PMR02   | PMR01   | PMR00   | Port mode register           |
| HFFCE          | PMR1          | R/W | 8      |           | PMR17   | PMR16   | PMR15   | PMR14   | PMR13   | PMR12   | PMR11   | PMR10   |                              |
| HFFCF          |               |     |        |           |         |         |         |         |         |         |         |         |                              |
| HFFD0          | PMR3          | R/W | 8      | 8         | PMR37   | PMR36   | PMR35   | PMR34   | PMR33   | PMR32   | PMR31   | PMR30   | Port control register        |
| HFFD1          | PCR1          | W   | 8      |           | PCR17   | PCR16   | PCR15   | PCR14   | PCR13   | PCR12   | PCR11   | PCR10   |                              |
| HFFD2          | PCR2          | W   | 8      |           | PCR27   | PCR26   | PCR25   | PCR24   | PCR23   | PCR22   | PCR21   | PCR20   |                              |
| HFFD3          | PCR3          | W   | 8      | 8         | PCR37   | PCR36   | PCR35   | PCR34   | PCR33   | PCR32   | PCR31   | PCR30   |                              |
| HFFD4          | PCR4          | W   | 8      |           | PCR47   | PCR46   | PCR45   | PCR44   | PCR43   | PCR42   | PCR41   | PCR40   |                              |
| HFFD5          |               |     |        |           |         |         |         |         |         |         |         |         |                              |
| HFFD6          | PCR6          | W   | 8      | 8         | PCR67   | PCR66   | PCR65   | PCR64   | PCR63   | PCR62   | PCR61   | PCR60   |                              |
| HFFD7          | PCR7          | W   | 8      |           | PCR77   | PCR76   | PCR75   | PCR74   | PCR73   | PCR72   | PCR71   | PCR70   |                              |
| HFFD8          | PCR8          | W   | 8      |           | PCR87   | PCR86   | PCR85   | PCR84   | PCR83   | PCR82   | PCR81   | PCR80   |                              |
| HFFD9          | PMRA          | R/W | 8      | 8         | PMRA7   | PMRA6   | —       | —       | —       | —       | —       | —       | Port mode register           |
| HFFDA          | PMRB          | R/W | 8      |           | PMRB7   | PMRB6   | PMRB5   | PMRB4   | —       | —       | —       | —       |                              |
| HFFDB          | PMR4          | R/W | 8      |           | PMR47   | —       | —       | —       | —       | —       | —       | PMR40   |                              |
| HFFDC          |               |     |        |           |         |         |         |         |         |         |         |         |                              |
| HFFDD          | PMR6          | R/W | 8      | 8         | PMR67   | PMR66   | PMR65   | PMR64   | PMR63   | PMR62   | PMR61   | PMR60   |                              |
| HFFDE          | PMR7          | R/W | 8      |           | PMR77   | PMR76   | PMR75   | PMR74   | PMR73   | PMR72   | PMR71   | PMR70   |                              |
| HFFDF          | PMR8          | R/W | 8      |           | PMR87   | PMR86   | PMR85   | PMR84   | PMR83   | PMR82   | PMR81   | PMR80   |                              |
| HFFE0          | PMRC          | R/W | 8      | 8         | —       | —       | PMRC5   | PMRC4   | PMRC3   | —       | PMRC1   | —       | Port pull-up select register |
| HFFE1          | PUR1          | R/W | 8      |           | PUR17   | PUR16   | PUR15   | PUR14   | PUR13   | PUR12   | PUR11   | PUR10   |                              |
| HFFE2          | PUR2          | R/W | 8      |           | PUR27   | PUR26   | PUR25   | PUR24   | PUR23   | PUR22   | PUR21   | PUR20   |                              |
| HFFE3          | PUR3          | R/W | 8      | 8         | PUR37   | PUR36   | PUR35   | PUR34   | PUR33   | PUR32   | PUR31   | PUR30   | Realtime port                |
| HFFE4          | RTPEGR        | R/W | 8      |           | —       | —       | —       | —       | —       | —       | RTPEGR1 | RTPEGR0 |                              |
| HFFE5          | RTPSR1        | R/W | 8      |           | RTPSR17 | RTPSR16 | RTPSR15 | RTPSR14 | RTPSR13 | RTPSR12 | RTPSR11 | RTPSR10 |                              |
| HFFE6          | RTPSR2        | R/W | 8      | 8         | RTPSR27 | RTPSR26 | RTPSR25 | RTPSR24 | —       | —       | —       | —       | System control register      |
| HFFE7          |               |     |        |           | —       | —       | INTM1   | INTM0   | XRST    | —       | —       | —       |                              |
| HFFE8          | SYSCR         | R/W | 8      |           | —       | —       | —       | —       | —       | —       | —       | MDS0    |                              |
| HFFE9          | MDCR          | R   | 8      | 8         | —       | —       | —       | —       | —       | —       | —       | —       |                              |
| HFFEA          | SBYCR         | R/W | 8      |           | SSBY    | STS2    | STS1    | STS0    | —       | —       | SCK1    | SCK0    |                              |
| HFFEB          | LPWRCR        | R/W | 8      |           | DTON    | LSON    | NESEL   | —       | —       | —       | SA1     | SA0     |                              |
| HFFEC          | MSTPCRH       | R/W | 8      | 8         | MSTP15  | MSTP14  | MSTP13  | MSTP12  | MSTP11  | MSTP10  | MSTP9   | MSTP8   |                              |
| HFFED          | MSTPCRL       | R/W | 8      |           | MSTP7   | MSTP6   | MSTP5   | MSTP4   | MSTP3   | MSTP2   | MSTP1   | MSTP0   |                              |
| HFFEE          | STCR          | R/W | 8      |           | —       | IICX1   | IICX0   | —       | FLSHE   | OSROME  | —       | —       |                              |
| HFFEF          |               |     |        |           |         |         |         |         |         |         |         |         |                              |
| HFFF0          | IEGR          | R/W | 8      | 8         | —       | IRQ5EG  | IRQ4EG  | IRQ3EG  | IRQ2EG  | IRQ1EG  | IRQ0EG1 | IRQ0EG0 | IRQ edge                     |
| HFFF1          | IENR          | R/W | 8      |           | —       | —       | IRQ5E   | IRQ4E   | IRQ3E   | IRQ2E   | IRQ1E   | IRQ0E   | IRQ enable                   |
| HFFF2          | IRQR          | R/W | 8      |           | —       | —       | IRQ5F   | IRQ4F   | IRQ3F   | IRQ2F   | IRQ1F   | IRQ0F   | IRQ status                   |
| HFFF3          | ICRA          | R/W | 8      | 8         | ICRA7   | ICRA6   | ICRA5   | ICRA4   | ICRA3   | ICRA2   | ICRA1   | ICRA0   | IRQ priority control         |
| HFFF4          | ICRB          | R/W | 8      |           | ICRB7   | ICRB6   | ICRB5   | ICRB4   | ICRB3   | ICRB2   | ICRB1   | ICRB0   |                              |
| HFFF5          | ICRC          | R/W | 8      |           | ICRC7   | ICRC6   | ICRC5   | ICRC4   | ICRC3   | ICRC2   | ICRC1   | ICRC0   |                              |
| HFFF6          | ICRD          | R/W | 8      | 8         | ICRD7   | ICRD6   | ICRD5   | ICRD4   | ICRD3   | ICRD2   | ICRD1   | ICRD0   |                              |
| HFFF7          | —             | —   | —      |           | —       | —       | —       | —       | —       | —       | —       | —       |                              |

| Address*1 | Register Name | R/W | Access | Bus Width | 7    | 6    | 5    | 4    | 3    | 2    | 1   | 0   | Module Name  |
|-----------|---------------|-----|--------|-----------|------|------|------|------|------|------|-----|-----|--------------|
| H'FFF8    | FLMCR1        | R/W | 8      | 8         | FWE  | SWE1 | ESU1 | PSU1 | EV1  | PV1  | E1  | P1  | Flash memory |
| H'FFF9    | FLMCR2        | R/W | 8      | 8         | FLER | SWE2 | ESU2 | PSU2 | EV2  | PV2  | E2  | P2  |              |
| H'FFFA    | EBR1          | R/W | 8      | 8         | EB7  | EB6  | EB5  | EB4  | EB3  | EB2  | EB1 | EB0 |              |
| H'FFFB    | EBR2          | R/W | 8      | 8         | EB15 | EB14 | EB13 | EB12 | EB11 | EB10 | EB9 | EB8 |              |
| H'FFFC    | —             | —   | —      | —         | —    | —    | —    | —    | —    | —    | —   | —   |              |
| H'FFFD    | —             | —   | —      | —         | —    | —    | —    | —    | —    | —    | —   | —   |              |
| H'FFFE    | —             | —   | —      | —         | —    | —    | —    | —    | —    | —    | —   | —   |              |
| H'FFFF    | —             | —   | —      | —         | —    | —    | —    | —    | —    | —    | —   | —   |              |

- Notes:
1. Lower 16bits of the address.
  2. Assigned to the same address.
  3. Access varies depending on the ICE bit.
  4. OCRA and OCRB address are the same, which can be switched by the OCSR bit in TOCR.
  5. The address is H'FFBC when written to. WTCNT and WTC SR are assigned to the same address. Refer to section 17.2.4, Notes on Register Access.

## B.2 Function List

### H'D000 to H'D001: Drum Phase Gain Constant DGKp: Drum Digital Filter

|               |   |        |        |        |        |        |        |       |       |       |       |       |       |       |       |       |       |
|---------------|---|--------|--------|--------|--------|--------|--------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| Bit           | : | 15     | 14     | 13     | 12     | 11     | 10     | 9     | 8     | 7     | 6     | 5     | 4     | 3     | 2     | 1     | 0     |
|               |   | DGKp15 | DGKp14 | DGKp13 | DGKp12 | DGKp11 | DGKp10 | DGKp9 | DGKp8 | DGKp7 | DGKp6 | DGKp5 | DGKp4 | DGKp3 | DGKp2 | DGKp1 | DGKp0 |
| Initial value | : | *      | *      | *      | *      | *      | *      | *     | *     | *     | *     | *     | *     | *     | *     | *     | *     |
| R/W           | : | W      | W      | W      | W      | W      | W      | W     | W     | W     | W     | W     | W     | W     | W     | W     | W     |

### H'D002 to H'D003: Drum Speed Gain Constant DGKs: Drum Digital Filter

|               |   |        |        |        |        |        |        |       |       |       |       |       |       |       |       |       |       |
|---------------|---|--------|--------|--------|--------|--------|--------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| Bit           | : | 15     | 14     | 13     | 12     | 11     | 10     | 9     | 8     | 7     | 6     | 5     | 4     | 3     | 2     | 1     | 0     |
|               |   | DGKs15 | DGKs14 | DGKs13 | DGKs12 | DGKs11 | DGKs10 | DGKs9 | DGKs8 | DGKs7 | DGKs6 | DGKs5 | DGKs4 | DGKs3 | DGKs2 | DGKs1 | DGKs0 |
| Initial value | : | *      | *      | *      | *      | *      | *      | *     | *     | *     | *     | *     | *     | *     | *     | *     | *     |
| R/W           | : | W      | W      | W      | W      | W      | W      | W     | W     | W     | W     | W     | W     | W     | W     | W     | W     |

### H'D004 to H'D005: Drum Phase Coefficient A DAp: Drum Digital Filter

|               |   |       |       |       |       |       |       |      |      |      |      |      |      |      |      |      |      |
|---------------|---|-------|-------|-------|-------|-------|-------|------|------|------|------|------|------|------|------|------|------|
| Bit           | : | 15    | 14    | 13    | 12    | 11    | 10    | 9    | 8    | 7    | 6    | 5    | 4    | 3    | 2    | 1    | 0    |
|               |   | DAp15 | DAp14 | DAp13 | DAp12 | DAp11 | DAp10 | DAp9 | DAp8 | DAp7 | DAp6 | DAp5 | DAp4 | DAp3 | DAp2 | DAp1 | DAp0 |
| Initial value | : | *     | *     | *     | *     | *     | *     | *    | *    | *    | *    | *    | *    | *    | *    | *    | *    |
| R/W           | : | W     | W     | W     | W     | W     | W     | W    | W    | W    | W    | W    | W    | W    | W    | W    | W    |

### H'D006 to H'D007: Drum Phase Coefficient B DBp: Drum Digital Filter

|               |   |       |       |       |       |       |       |      |      |      |      |      |      |      |      |      |      |
|---------------|---|-------|-------|-------|-------|-------|-------|------|------|------|------|------|------|------|------|------|------|
| Bit           | : | 15    | 14    | 13    | 12    | 11    | 10    | 9    | 8    | 7    | 6    | 5    | 4    | 3    | 2    | 1    | 0    |
|               |   | DBp15 | DBp14 | DBp13 | DBp12 | DBp11 | DBp10 | DBp9 | DBp8 | DBp7 | DBp6 | DBp5 | DBp4 | DBp3 | DBp2 | DBp1 | DBp0 |
| Initial value | : | *     | *     | *     | *     | *     | *     | *    | *    | *    | *    | *    | *    | *    | *    | *    | *    |
| R/W           | : | W     | W     | W     | W     | W     | W     | W    | W    | W    | W    | W    | W    | W    | W    | W    | W    |

### H'D008 to H'D009: Drum Speed Coefficient A DAs: Drum Digital Filter

|               |   |       |       |       |       |       |       |      |      |      |      |      |      |      |      |      |      |
|---------------|---|-------|-------|-------|-------|-------|-------|------|------|------|------|------|------|------|------|------|------|
| Bit           | : | 15    | 14    | 13    | 12    | 11    | 10    | 9    | 8    | 7    | 6    | 5    | 4    | 3    | 2    | 1    | 0    |
|               |   | DAs15 | DAs14 | DAs13 | DAs12 | DAs11 | DAs10 | DAs9 | DAs8 | DAs7 | DAs6 | DAs5 | DAs4 | DAs3 | DAs2 | DAs1 | DAs0 |
| Initial value | : | *     | *     | *     | *     | *     | *     | *    | *    | *    | *    | *    | *    | *    | *    | *    | *    |
| R/W           | : | W     | W     | W     | W     | W     | W     | W    | W    | W    | W    | W    | W    | W    | W    | W    | W    |



## H'D00A to H'D00B: Drum Speed Coefficient B DBs: Drum Digital Filter

|               |   |       |       |       |       |       |       |      |      |      |      |      |      |      |      |      |      |
|---------------|---|-------|-------|-------|-------|-------|-------|------|------|------|------|------|------|------|------|------|------|
| Bit           | : | 15    | 14    | 13    | 12    | 11    | 10    | 9    | 8    | 7    | 6    | 5    | 4    | 3    | 2    | 1    | 0    |
|               |   | DBs15 | DBs14 | DBs13 | DBs12 | DBs11 | DBs10 | DBs9 | DBs8 | DBs7 | DBs6 | DBs5 | DBs4 | DBs3 | DBs2 | DBs1 | DBs0 |
| Initial value | : | *     | *     | *     | *     | *     | *     | *    | *    | *    | *    | *    | *    | *    | *    | *    | *    |
| R/W           | : | W     | W     | W     | W     | W     | W     | W    | W    | W    | W    | W    | W    | W    | W    | W    | W    |

## H'D00C to H'D00D: Drum Phase Offset DOfp: Drum Digital Filter

|               |   |        |        |        |        |        |        |       |       |       |       |       |       |       |       |       |       |
|---------------|---|--------|--------|--------|--------|--------|--------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| Bit           | : | 15     | 14     | 13     | 12     | 11     | 10     | 9     | 8     | 7     | 6     | 5     | 4     | 3     | 2     | 1     | 0     |
|               |   | DOfp15 | DOfp14 | DOfp13 | DOfp12 | DOfp11 | DOfp10 | DOfp9 | DOfp8 | DOfp7 | DOfp6 | DOfp5 | DOfp4 | DOfp3 | DOfp2 | DOfp1 | DOfp0 |
| Initial value | : | *      | *      | *      | *      | *      | *      | *     | *     | *     | *     | *     | *     | *     | *     | *     | *     |
| R/W           | : | W      | W      | W      | W      | W      | W      | W     | W     | W     | W     | W     | W     | W     | W     | W     | W     |

## H'D00E to H'D00F: Capstan Speed Offset DOfs: Drum Digital Filter

|               |   |        |        |        |        |        |        |       |       |       |       |       |       |       |       |       |       |
|---------------|---|--------|--------|--------|--------|--------|--------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| Bit           | : | 15     | 14     | 13     | 12     | 11     | 10     | 9     | 8     | 7     | 6     | 5     | 4     | 3     | 2     | 1     | 0     |
|               |   | DOfs15 | DOfs14 | DOfs13 | DOfs12 | DOfs11 | DOfs10 | DOfs9 | DOfs8 | DOfs7 | DOfs6 | DOfs5 | DOfs4 | DOfs3 | DOfs2 | DOfs1 | DOfs0 |
| Initial value | : | *      | *      | *      | *      | *      | *      | *     | *     | *     | *     | *     | *     | *     | *     | *     | *     |
| R/W           | : | W      | W      | W      | W      | W      | W      | W     | W     | W     | W     | W     | W     | W     | W     | W     | W     |

## H'D010 to H'D011: Capstan Phase Gain Constant CGKp: Capstan Digital Filter

|               |   |        |        |        |        |        |        |       |       |       |       |       |       |       |       |       |       |
|---------------|---|--------|--------|--------|--------|--------|--------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| Bit           | : | 15     | 14     | 13     | 12     | 11     | 10     | 9     | 8     | 7     | 6     | 5     | 4     | 3     | 2     | 1     | 0     |
|               |   | CGKp15 | CGKp14 | CGKp13 | CGKp12 | CGKp11 | CGKp10 | CGKp9 | CGKp8 | CGKp7 | CGKp6 | CGKp5 | CGKp4 | CGKp3 | CGKp2 | CGKp1 | CGKp0 |
| Initial value | : | *      | *      | *      | *      | *      | *      | *     | *     | *     | *     | *     | *     | *     | *     | *     | *     |
| R/W           | : | W      | W      | W      | W      | W      | W      | W     | W     | W     | W     | W     | W     | W     | W     | W     | W     |

## H'D012 to H'D013: Capstan Speed Gain Constant CGKs: Capstan Digital Filter

|               |   |        |        |        |        |        |        |       |       |       |       |       |       |       |       |       |       |
|---------------|---|--------|--------|--------|--------|--------|--------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| Bit           | : | 15     | 14     | 13     | 12     | 11     | 10     | 9     | 8     | 7     | 6     | 5     | 4     | 3     | 2     | 1     | 0     |
|               |   | CGKs15 | CGKs14 | CGKs13 | CGKs12 | CGKs11 | CGKs10 | CGKs9 | CGKs8 | CGKs7 | CGKs6 | CGKs5 | CGKs4 | CGKs3 | CGKs2 | CGKs1 | CGKs0 |
| Initial value | : | *      | *      | *      | *      | *      | *      | *     | *     | *     | *     | *     | *     | *     | *     | *     | *     |
| R/W           | : | W      | W      | W      | W      | W      | W      | W     | W     | W     | W     | W     | W     | W     | W     | W     | W     |

## H'D014 to H'D015: Capstan Phase Coefficient A CAp: Capstan Digital Filter

|               |   |       |       |       |       |       |       |      |      |      |      |      |      |      |      |      |      |
|---------------|---|-------|-------|-------|-------|-------|-------|------|------|------|------|------|------|------|------|------|------|
| Bit           | : | 15    | 14    | 13    | 12    | 11    | 10    | 9    | 8    | 7    | 6    | 5    | 4    | 3    | 2    | 1    | 0    |
|               |   | CAp15 | CAp14 | CAp13 | CAp12 | CAp11 | CAp10 | CAp9 | CAp8 | CAp7 | CAp6 | CAp5 | CAp4 | CAp3 | CAp2 | CAp1 | CAp0 |
| Initial value | : | *     | *     | *     | *     | *     | *     | *    | *    | *    | *    | *    | *    | *    | *    | *    | *    |
| R/W           | : | W     | W     | W     | W     | W     | W     | W    | W    | W    | W    | W    | W    | W    | W    | W    | W    |

## H'D016 to H'D017: Capstan Phase Coefficient B CBp: Capstan Digital Filter

|               |   |       |       |       |       |       |       |      |      |      |      |      |      |      |      |      |      |
|---------------|---|-------|-------|-------|-------|-------|-------|------|------|------|------|------|------|------|------|------|------|
| Bit           | : | 15    | 14    | 13    | 12    | 11    | 10    | 9    | 8    | 7    | 6    | 5    | 4    | 3    | 2    | 1    | 0    |
|               |   | CBp15 | CBp14 | CBp13 | CBp12 | CBp11 | CBp10 | CBp9 | CBp8 | CBp7 | CBp6 | CBp5 | CBp4 | CBp3 | CBp2 | CBp1 | CBp0 |
| Initial value | : | *     | *     | *     | *     | *     | *     | *    | *    | *    | *    | *    | *    | *    | *    | *    | *    |
| R/W           | : | W     | W     | W     | W     | W     | W     | W    | W    | W    | W    | W    | W    | W    | W    | W    | W    |

## H'D018 to H'D019: Capstan Speed Coefficient A CAs: Capstan Digital Filter

|               |   |       |       |       |       |       |       |      |      |      |      |      |      |      |      |      |      |
|---------------|---|-------|-------|-------|-------|-------|-------|------|------|------|------|------|------|------|------|------|------|
| Bit           | : | 15    | 14    | 13    | 12    | 11    | 10    | 9    | 8    | 7    | 6    | 5    | 4    | 3    | 2    | 1    | 0    |
|               |   | CAs15 | CAs14 | CAs13 | CAs12 | CAs11 | CAs10 | CAs9 | CAs8 | CAs7 | CAs6 | CAs5 | CAs4 | CAs3 | CAs2 | CAs1 | CAs0 |
| Initial value | : | *     | *     | *     | *     | *     | *     | *    | *    | *    | *    | *    | *    | *    | *    | *    | *    |
| R/W           | : | W     | W     | W     | W     | W     | W     | W    | W    | W    | W    | W    | W    | W    | W    | W    | W    |

## H'D01A to H'D01B: Capstan Speed Coefficient B CBs: Capstan Digital Filter

|               |   |       |       |       |       |       |       |      |      |      |      |      |      |      |      |      |      |
|---------------|---|-------|-------|-------|-------|-------|-------|------|------|------|------|------|------|------|------|------|------|
| Bit           | : | 15    | 14    | 13    | 12    | 11    | 10    | 9    | 8    | 7    | 6    | 5    | 4    | 3    | 2    | 1    | 0    |
|               |   | CBs15 | CBs14 | CBs13 | CBs12 | CBs11 | CBs10 | CBs9 | CBs8 | CBs7 | CBs6 | CBs5 | CBs4 | CBs3 | CBs2 | CBs1 | CBs0 |
| Initial value | : | *     | *     | *     | *     | *     | *     | *    | *    | *    | *    | *    | *    | *    | *    | *    | *    |
| R/W           | : | W     | W     | W     | W     | W     | W     | W    | W    | W    | W    | W    | W    | W    | W    | W    | W    |

## H'D01C to H'D01D: Capstan Phase Offset COfp: Capstan Digital Filter

|               |   |        |        |        |        |        |        |       |       |       |       |       |       |       |       |       |       |
|---------------|---|--------|--------|--------|--------|--------|--------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| Bit           | : | 15     | 14     | 13     | 12     | 11     | 10     | 9     | 8     | 7     | 6     | 5     | 4     | 3     | 2     | 1     | 0     |
|               |   | COfp15 | COfp14 | COfp13 | COfp12 | COfp11 | COfp10 | COfp9 | COfp8 | COfp7 | COfp6 | COfp5 | COfp4 | COfp3 | COfp2 | COfp1 | COfp0 |
| Initial value | : | *      | *      | *      | *      | *      | *      | *     | *     | *     | *     | *     | *     | *     | *     | *     | *     |
| R/W           | : | W      | W      | W      | W      | W      | W      | W     | W     | W     | W     | W     | W     | W     | W     | W     | W     |

## H'D01E to H'D01F: Capstan Speed Offset COfs: Capstan Digital Filter

|               |   |        |        |        |        |        |        |       |       |       |       |       |       |       |       |       |       |
|---------------|---|--------|--------|--------|--------|--------|--------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| Bit           | : | 15     | 14     | 13     | 12     | 11     | 10     | 9     | 8     | 7     | 6     | 5     | 4     | 3     | 2     | 1     | 0     |
|               |   | COfs15 | COfs14 | COfs13 | COfs12 | COfs11 | COfs10 | COfs9 | COfs8 | COfs7 | COfs6 | COfs5 | COfs4 | COfs3 | COfs2 | COfs1 | COfs0 |
| Initial value | : | *      | *      | *      | *      | *      | *      | *     | *     | *     | *     | *     | *     | *     | *     | *     | *     |
| R/W           | : | W      | W      | W      | W      | W      | W      | W     | W     | W     | W     | W     | W     | W     | W     | W     | W     |

## H'D020 to H'D021: Drum System Speed Delay Initialization Register DZs: Digital filter

|               |   |       |       |       |       |       |       |      |      |      |      |      |      |      |      |      |      |
|---------------|---|-------|-------|-------|-------|-------|-------|------|------|------|------|------|------|------|------|------|------|
| Bit           | : | 15    | 14    | 13    | 12    | 11    | 10    | 9    | 8    | 7    | 6    | 5    | 4    | 3    | 2    | 1    | 0    |
|               |   | DZs15 | DZs14 | DZs13 | DZs12 | DZs11 | DZs10 | DZs9 | DZs8 | DZs7 | DZs6 | DZs5 | DZs4 | DZs3 | DZs2 | DZs1 | DZs0 |
| Initial value | : | 1     | 1     | 1     | 1     | 0     | 0     | 0    | 0    | 0    | 0    | 0    | 0    | 0    | 0    | 0    | 0    |
| R/W           | : | —     | —     | —     | —     | W     | W     | W    | W    | W    | W    | W    | W    | W    | W    | W    | W    |

### H'D022 to H'D023: Drum System Phase Delay Initialization Register DZp: Digital filter

|               |   |       |       |       |       |       |       |      |      |      |      |      |      |      |      |      |      |
|---------------|---|-------|-------|-------|-------|-------|-------|------|------|------|------|------|------|------|------|------|------|
| Bit           | : | 15    | 14    | 13    | 12    | 11    | 10    | 9    | 8    | 7    | 6    | 5    | 4    | 3    | 2    | 1    | 0    |
|               |   | DZp15 | DZp14 | DZp13 | DZp12 | DZp11 | DZp10 | DZp9 | DZp8 | DZp7 | DZp6 | DZp5 | DZp4 | DZp3 | DZp2 | DZp1 | DZp0 |
| Initial value | : | 1     | 1     | 1     | 1     | 0     | 0     | 0    | 0    | 0    | 0    | 0    | 0    | 0    | 0    | 0    | 0    |
| R/W           | : | —     | —     | —     | —     | W     | W     | W    | W    | W    | W    | W    | W    | W    | W    | W    | W    |

### H'D024 to H'D025: Capstan System Speed Delay Initialization Register CZs: Digital filter

|               |   |       |       |       |       |       |       |      |      |      |      |      |      |      |      |      |      |
|---------------|---|-------|-------|-------|-------|-------|-------|------|------|------|------|------|------|------|------|------|------|
| Bit           | : | 15    | 14    | 13    | 12    | 11    | 10    | 9    | 8    | 7    | 6    | 5    | 4    | 3    | 2    | 1    | 0    |
|               |   | CZs15 | CZs14 | CZs13 | CZs12 | CZs11 | CZs10 | CZs9 | CZs8 | CZs7 | CZs6 | CZs5 | CZs4 | CZs3 | CZs2 | CZs1 | CZs0 |
| Initial value | : | 1     | 1     | 1     | 1     | 0     | 0     | 0    | 0    | 0    | 0    | 0    | 0    | 0    | 0    | 0    | 0    |
| R/W           | : | —     | —     | —     | —     | W     | W     | W    | W    | W    | W    | W    | W    | W    | W    | W    | W    |

### H'D026 to H'D027: Capstan System Phase Delay Initialization Register CZp: Digital filter

|               |   |       |       |       |       |       |       |      |      |      |      |      |      |      |      |      |      |
|---------------|---|-------|-------|-------|-------|-------|-------|------|------|------|------|------|------|------|------|------|------|
| Bit           | : | 15    | 14    | 13    | 12    | 11    | 10    | 9    | 8    | 7    | 6    | 5    | 4    | 3    | 2    | 1    | 0    |
|               |   | CZp15 | CZp14 | CZp13 | CZp12 | CZp11 | CZp10 | CZp9 | CZp8 | CZp7 | CZp6 | CZp5 | CZp4 | CZp3 | CZp2 | CZp1 | CZp0 |
| Initial value | : | 1     | 1     | 1     | 1     | 0     | 0     | 0    | 0    | 0    | 0    | 0    | 0    | 0    | 0    | 0    | 0    |
| R/W           | : | —     | —     | —     | —     | W     | W     | W    | W    | W    | W    | W    | W    | W    | W    | W    | W    |

## H'D028: Drum System Digital Filter Control Register DFIC: Digital Filter

|                 |   |                     |       |       |       |      |      |      |
|-----------------|---|---------------------|-------|-------|-------|------|------|------|
| Bit :           | 7 | 6                   | 5     | 4     | 3     | 2    | 1    | 0    |
|                 | — | DROV                | DPHA  | DZPON | DZSON | DSG2 | DSG1 | DSG0 |
| Initial value : | 1 | 0                   | 0     | 0     | 0     | 0    | 0    | 0    |
| R/W :           | — | R/(W)* <sup>1</sup> | R/(W) | R/W   | R/W   | R/W  | R/W  | R/W  |

| Drum system gain control bit |      |      |                      |
|------------------------------|------|------|----------------------|
| DSG2                         | DSG1 | DSG0 | Description          |
| 0                            | 0    | 0    | x 1 (Initial value)  |
|                              |      | 1    | x 2                  |
|                              | 1    | 0    | x 4                  |
|                              |      | 1    | x 8                  |
| 1                            | 0    | 0    | x 16                 |
|                              |      | 1    | (x 32)* <sup>2</sup> |
|                              | 1    | 0    | (x 64)* <sup>2</sup> |
|                              |      | 1    | Invalid (do not set) |

| Drum speed system Z <sup>-1</sup> initialization bit |                                                                          |
|------------------------------------------------------|--------------------------------------------------------------------------|
| 0                                                    | Speed system Z <sup>-1</sup> does not reflect DZs value. (Initial value) |
| 1                                                    | Speed system Z <sup>-1</sup> reflects DZs value.                         |

| Drum phase system Z <sup>-1</sup> initialization bit |                                                                          |
|------------------------------------------------------|--------------------------------------------------------------------------|
| 0                                                    | Phase system Z <sup>-1</sup> does not reflect DZp value. (Initial value) |
| 1                                                    | Phase system Z <sup>-1</sup> reflects DZp value                          |

| Drum phase system filter computation start bit |                                                                                                                  |
|------------------------------------------------|------------------------------------------------------------------------------------------------------------------|
| 0                                              | Phase system filter computation is OFF. (Initial value)<br>Phase system computation result Y is not added to Es. |
| 1                                              | Phase system filter computation is ON                                                                            |

| Drum system range over flag |                                                                    |
|-----------------------------|--------------------------------------------------------------------|
| 0                           | Filter computation result does not exceed 12 bits. (Initial value) |
| 1                           | Filter computation result exceeds 12 bits.                         |

- Notes: 1. Only 0 can be written.  
2. Optional

H'D029: Capstan System Digital Filter Control Register CFIC: Digital Filter

|                 |   |         |       |       |       |      |      |      |
|-----------------|---|---------|-------|-------|-------|------|------|------|
| Bit :           | 7 | 6       | 5     | 4     | 3     | 2    | 1    | 0    |
|                 | — | CROV    | CPHA  | CZPON | CZSON | CSG2 | CSG1 | CSG0 |
| Initial value : | 1 | 0       | 0     | 0     | 0     | 0    | 0    | 0    |
| R/W :           | — | R/(W)*1 | R/(W) | R/W   | R/W   | R/W  | R/W  | R/W  |

Capstan system gain control bit

| CSG2 | CSG1 | CSG0 | Description          |
|------|------|------|----------------------|
| 0    | 0    | 0    | x 1 (Initial value)  |
|      |      | 1    | x 2                  |
|      | 1    | 0    | x 4                  |
|      |      | 1    | x 8                  |
| 1    | 0    | 0    | x 16                 |
|      |      | 1    | (x 32)*2             |
|      | 1    | 0    | (x 64)*2             |
|      |      | 1    | Invalid (do not set) |

Capstan speed system Z<sup>-1</sup> initialization bit

|   |                                                                          |
|---|--------------------------------------------------------------------------|
| 0 | Speed system Z <sup>-1</sup> does not reflect CZs value. (Initial value) |
| 1 | Speed system Z <sup>-1</sup> reflects CZs value.                         |

Capstan phase system Z<sup>-1</sup> initialization bit

|   |                                                                          |
|---|--------------------------------------------------------------------------|
| 0 | Phase system Z <sup>-1</sup> does not reflect CZs value. (Initial value) |
| 1 | Phase system Z <sup>-1</sup> reflects CZs value.                         |

Capstan phase system filter computation start bit


|   |                                                                                                                  |
|---|------------------------------------------------------------------------------------------------------------------|
| 0 | Phase system filter computation is OFF. (Initial value)<br>Phase system computation result Y is not added to Es. |
| 1 | Phase system filter computation is ON.                                                                           |

Capstan system range over flag

|   |                                                                    |
|---|--------------------------------------------------------------------|
| 0 | Filter computation result does not exceed 12 bits. (Initial value) |
| 1 | Filter computation result exceeds 12 bits.                         |

Notes: 1. Only 0 can be written.  
2. Optional.

H'D02A: Digital Filter Control Register    DFUCR: Digital Filter

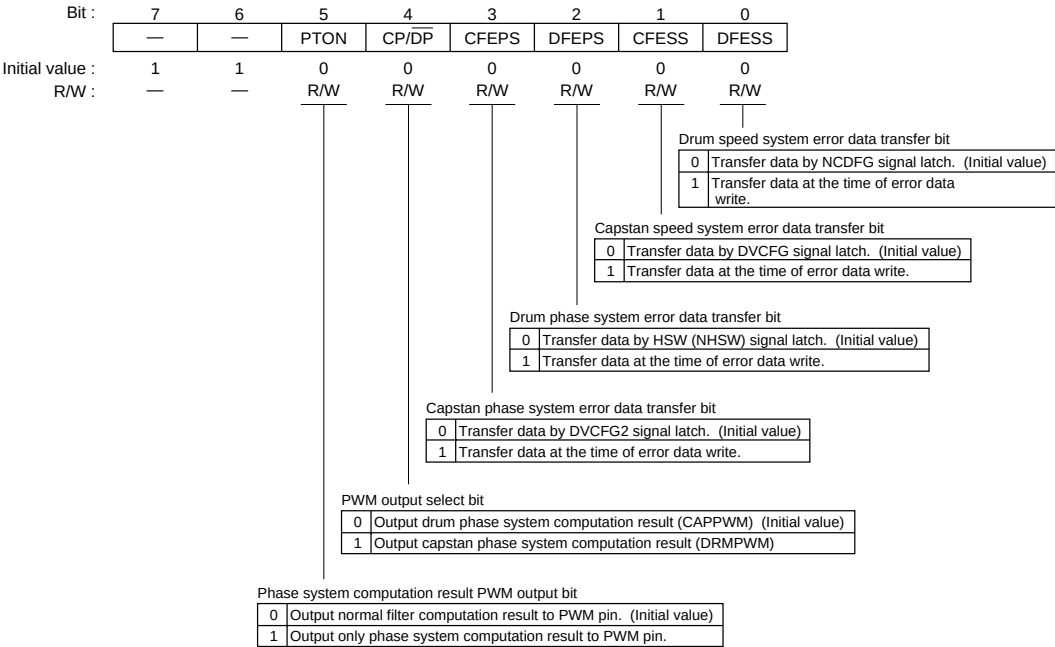

## H'D030 to H'D031: Specified DFG Speed Preset Data Register

**DFPR: Drum Speed Error Detector**

|               |   |        |        |        |        |        |        |       |       |       |       |       |       |       |       |       |       |
|---------------|---|--------|--------|--------|--------|--------|--------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| Bit           | : | 15     | 14     | 13     | 12     | 11     | 10     | 9     | 8     | 7     | 6     | 5     | 4     | 3     | 2     | 1     | 0     |
|               |   | DFPR15 | DFPR14 | DFPR13 | DFPR12 | DFPR11 | DFPR10 | DFPR9 | DFPR8 | DFPR7 | DFPR6 | DFPR5 | DFPR4 | DFPR3 | DFPR2 | DFPR1 | DFPR0 |
| Initial value | : | 0      | 0      | 0      | 0      | 0      | 0      | 0     | 0     | 0     | 0     | 0     | 0     | 0     | 0     | 0     | 0     |
| R/W           | : | W      | W      | W      | W      | W      | W      | W     | W     | W     | W     | W     | W     | W     | W     | W     | W     |

## H'D032 to H'D033: DFG Speed Error Data Register

**DFER: Drum Speed Error Detector**

|               |   |        |        |        |        |        |        |       |       |       |       |       |       |       |       |       |       |
|---------------|---|--------|--------|--------|--------|--------|--------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| Bit           | : | 15     | 14     | 13     | 12     | 11     | 10     | 9     | 8     | 7     | 6     | 5     | 4     | 3     | 2     | 1     | 0     |
|               |   | DFER15 | DFER14 | DFER13 | DFER12 | DFER11 | DFER10 | DFER9 | DFER8 | DFER7 | DFER6 | DFER5 | DFER4 | DFER3 | DFER2 | DFER1 | DFER0 |
| Initial value | : | 0      | 0      | 0      | 0      | 0      | 0      | 0     | 0     | 0     | 0     | 0     | 0     | 0     | 0     | 0     | 0     |
| R/W           | : | *R/W   | *R/W   | *R/W   | *R/W   | *R/W   | *R/W   | *R/W  | *R/W  | *R/W  | *R/W  | *R/W  | *R/W  | *R/W  | *R/W  | *R/W  | *R/W  |

Note: \*Only the detected error data can be read.

## H'D034 to H'D035: DFG Lock Upper Data Register

**DFRUDR: Drum Speed Error Detector**

|               |   |          |          |          |          |          |          |         |         |         |         |         |         |         |         |         |         |
|---------------|---|----------|----------|----------|----------|----------|----------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|
| Bit           | : | 15       | 14       | 13       | 12       | 11       | 10       | 9       | 8       | 7       | 6       | 5       | 4       | 3       | 2       | 1       | 0       |
|               |   | DFRUDR15 | DFRUDR14 | DFRUDR13 | DFRUDR12 | DFRUDR11 | DFRUDR10 | DFRUDR9 | DFRUDR8 | DFRUDR7 | DFRUDR6 | DFRUDR5 | DFRUDR4 | DFRUDR3 | DFRUDR2 | DFRUDR1 | DFRUDR0 |
| Initial value | : | 0        | 1        | 1        | 1        | 1        | 1        | 1       | 1       | 1       | 1       | 1       | 1       | 1       | 1       | 1       | 1       |
| R/W           | : | W        | W        | W        | W        | W        | W        | W       | W       | W       | W       | W       | W       | W       | W       | W       | W       |


## H'D036 to H'D037: DFG Lock Lower Data Register

**DFRLDR: Drum Speed Error Detector**

|               |   |          |          |          |          |          |          |         |         |         |         |         |         |         |         |         |         |
|---------------|---|----------|----------|----------|----------|----------|----------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|
| Bit           | : | 15       | 14       | 13       | 12       | 11       | 10       | 9       | 8       | 7       | 6       | 5       | 4       | 3       | 2       | 1       | 0       |
|               |   | DFRLDR15 | DFRLDR14 | DFRLDR13 | DFRLDR12 | DFRLDR11 | DFRLDR10 | DFRLDR9 | DFRLDR8 | DFRLDR7 | DFRLDR6 | DFRLDR5 | DFRLDR4 | DFRLDR3 | DFRLDR2 | DFRLDR1 | DFRLDR0 |
| Initial value | : | 1        | 0        | 0        | 0        | 0        | 0        | 0       | 0       | 0       | 0       | 0       | 0       | 0       | 0       | 0       | 0       |
| R/W           | : | W        | W        | W        | W        | W        | W        | W       | W       | W       | W       | W       | W       | W       | W       | W       | W       |

# H'D038: Drum Speed Error Detection Control Register

## DFVCR: Drum Speed Error Detector

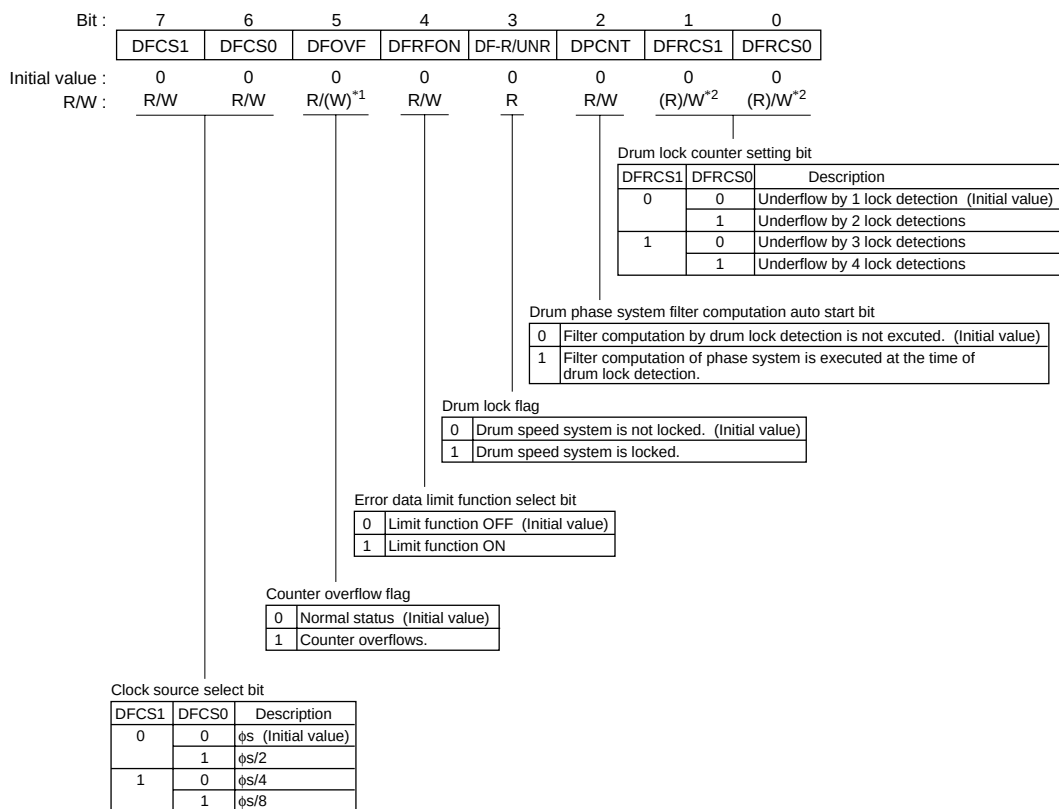

Notes: 1. Only 0 can be written.

2. When read, counter value is read.



## H'D039: Drum Phase Error Detection Control Register

### DPGCR: Drum Phase Error Detector

|                 |       |       |        |     |       |   |   |   |
|-----------------|-------|-------|--------|-----|-------|---|---|---|
| Bit :           | 7     | 6     | 5      | 4   | 3     | 2 | 1 | 0 |
|                 | DPCS1 | DPCS0 | DPOVF  | N/V | HSWES | — | — | — |
| Initial value : | 0     | 0     | 0      | 0   | 0     | 1 | 1 | 1 |
| R/W :           | R/W   | R/W   | R/(W)* | R/W | R/W   | — | — | — |

|                 |                                      |
|-----------------|--------------------------------------|
| Edge select bit |                                      |
| 0               | Latch at rising edge (Initial value) |
| 1               | Latch at falling edge                |

|                                    |                                      |
|------------------------------------|--------------------------------------|
| Error data latch signal select bit |                                      |
| 0                                  | HSW (VideoFF) signal (Initial value) |
| 1                                  | NHSW (NarrowFF) signal               |

|                       |                               |
|-----------------------|-------------------------------|
| Counter overflow flag |                               |
| 0                     | Normal status (Initial value) |
| 1                     | Counter overflows.            |

|                         |       |                          |
|-------------------------|-------|--------------------------|
| Clock source select bit |       |                          |
| DPCS1                   | DPCS0 | Description              |
| 0                       | 0     | $\phi S$ (Initial value) |
|                         | 1     | $\phi S/2$               |
| 1                       | 0     | $\phi S/4$               |
|                         | 1     | $\phi S/8$               |

Note: \* Only 0 can be written.

## H'D03A to H'D03B: Specified Drum Phase Preset Data Register 2

### DPPR2: Drum Phase Error Detector

|                 |   |        |        |        |        |        |        |       |       |       |       |       |       |       |       |       |       |
|-----------------|---|--------|--------|--------|--------|--------|--------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| Bit             | : | 15     | 14     | 13     | 12     | 11     | 10     | 9     | 8     | 7     | 6     | 5     | 4     | 3     | 2     | 1     | 0     |
|                 |   | DPPR15 | DPPR14 | DPPR13 | DPPR12 | DPPR11 | DPPR10 | DPPR9 | DPPR8 | DPPR7 | DPPR6 | DPPR5 | DPPR4 | DPPR3 | DPPR2 | DPPR1 | DPPR0 |
| Initial value : |   | 0      | 0      | 0      | 0      | 0      | 0      | 0     | 0     | 0     | 0     | 0     | 0     | 0     | 0     | 0     | 0     |
| R/W             | : | W      | W      | W      | W      | W      | W      | W     | W     | W     | W     | W     | W     | W     | W     | W     | W     |

## H'D03C: Specified Drum Phase Preset Data Register 1

### DPPR1: Drum Phase Error Detector

|                 |   |   |   |   |   |        |        |        |        |
|-----------------|---|---|---|---|---|--------|--------|--------|--------|
| Bit             | : | 7 | 6 | 5 | 4 | 3      | 2      | 1      | 0      |
|                 |   | — | — | — | — | DPPR19 | DPPR18 | DPPR17 | DPPR16 |
| Initial value : |   | 1 | 1 | 1 | 1 | 0      | 0      | 0      | 0      |
| R/W :           |   | — | — | — | — | W      | W      | W      | W      |

## H'D03D: Drum Phase Error Data Register 1 DPER1: Drum Phase Error Detector

|                 |   |   |   |   |   |        |        |        |        |
|-----------------|---|---|---|---|---|--------|--------|--------|--------|
| Bit             | : | 7 | 6 | 5 | 4 | 3      | 2      | 1      | 0      |
|                 |   | — | — | — | — | DPER19 | DPER18 | DPER17 | DPER16 |
| Initial value : |   | 1 | 1 | 1 | 1 | 0      | 0      | 0      | 0      |
| R/W :           |   | — | — | — | — | *R/W   | *R/W   | *R/W   | *R/W   |

Note: \*Only the detected error data can be read.

## H'D03E to H'D03F: Drum Phase Error Data Register 2

### DPER2: Drum Phase Error Detector

|                 |   |        |        |        |        |        |        |       |       |       |       |       |       |       |       |       |       |
|-----------------|---|--------|--------|--------|--------|--------|--------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| Bit             | : | 15     | 14     | 13     | 12     | 11     | 10     | 9     | 8     | 7     | 6     | 5     | 4     | 3     | 2     | 1     | 0     |
|                 |   | DPER15 | DPER14 | DPER13 | DPER12 | DPER11 | DPER10 | DPER9 | DPER8 | DPER7 | DPER6 | DPER5 | DPER4 | DPER3 | DPER2 | DPER1 | DPER0 |
| Initial value : |   | 0      | 0      | 0      | 0      | 0      | 0      | 0     | 0     | 0     | 0     | 0     | 0     | 0     | 0     | 0     | 0     |
| R/W             | : | *R/W   | *R/W   | *R/W   | *R/W   | *R/W   | *R/W   | *R/W  | *R/W  | *R/W  | *R/W  | *R/W  | *R/W  | *R/W  | *R/W  | *R/W  | *R/W  |

Note: \*Only the detected error data can be read.

## H'D050 to H'D051: Specified CFG Speed Preset Data Register

### CFPR: Capstan Speed Error Detector

|                 |   |        |        |        |        |        |        |       |       |       |       |       |       |       |       |       |       |
|-----------------|---|--------|--------|--------|--------|--------|--------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| Bit             | : | 15     | 14     | 13     | 12     | 11     | 10     | 9     | 8     | 7     | 6     | 5     | 4     | 3     | 2     | 1     | 0     |
|                 |   | CFPR15 | CFPR14 | CFPR13 | CFPR12 | CFPR11 | CFPR10 | CFPR9 | CFPR8 | CFPR7 | CFPR6 | CFPR5 | CFPR4 | CFPR3 | CFPR2 | CFPR1 | CFPR0 |
| Initial value : |   | 0      | 0      | 0      | 0      | 0      | 0      | 0     | 0     | 0     | 0     | 0     | 0     | 0     | 0     | 0     | 0     |
| R/W             | : | W      | W      | W      | W      | W      | W      | W     | W     | W     | W     | W     | W     | W     | W     | W     | W     |

## H'D052 to H'D053: CFG Speed Error Data Register

### CFER: Capstan Speed Error Detector

|               |   |        |        |        |        |        |        |       |       |       |       |       |       |       |       |       |       |
|---------------|---|--------|--------|--------|--------|--------|--------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| Bit           | : | 15     | 14     | 13     | 12     | 11     | 10     | 9     | 8     | 7     | 6     | 5     | 4     | 3     | 2     | 1     | 0     |
|               |   | CFER15 | CFER14 | CFER13 | CFER12 | CFER11 | CFER10 | CFER9 | CFER8 | CFER7 | CFER6 | CFER5 | CFER4 | CFER3 | CFER2 | CFER1 | CFER0 |
| Initial value | : | 0      | 0      | 0      | 0      | 0      | 0      | 0     | 0     | 0     | 0     | 0     | 0     | 0     | 0     | 0     | 0     |
| R/W           | : | *R/W   | *R/W   | *R/W   | *R/W   | *R/W   | *R/W   | *R/W  | *R/W  | *R/W  | *R/W  | *R/W  | *R/W  | *R/W  | *R/W  | *R/W  | *R/W  |

Note: \*Only the detected error data can be read.

## H'D054 to H'D055: CFG Lock Upper Data Register

### CFRUDR: Capstan Speed Error Detector

|               |   |          |          |          |          |          |          |         |         |         |         |         |         |         |         |         |         |
|---------------|---|----------|----------|----------|----------|----------|----------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|
| Bit           | : | 15       | 14       | 13       | 12       | 11       | 10       | 9       | 8       | 7       | 6       | 5       | 4       | 3       | 2       | 1       | 0       |
|               |   | CFRUDR15 | CFRUDR14 | CFRUDR13 | CFRUDR12 | CFRUDR11 | CFRUDR10 | CFRUDR9 | CFRUDR8 | CFRUDR7 | CFRUDR6 | CFRUDR5 | CFRUDR4 | CFRUDR3 | CFRUDR2 | CFRUDR1 | CFRUDR0 |
| Initial value | : | 0        | 1        | 1        | 1        | 1        | 1        | 1       | 1       | 1       | 1       | 1       | 1       | 1       | 1       | 1       | 1       |
| R/W           | : | W        | W        | W        | W        | W        | W        | W       | W       | W       | W       | W       | W       | W       | W       | W       | W       |


## H'D056 to H'D057: CFG Lock Lower Data Register

### CFRLDR: Capstan Speed Error Detector

|               |   |          |          |          |          |          |          |         |         |         |         |         |         |         |         |         |         |
|---------------|---|----------|----------|----------|----------|----------|----------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|
| Bit           | : | 15       | 14       | 13       | 12       | 11       | 10       | 9       | 8       | 7       | 6       | 5       | 4       | 3       | 2       | 1       | 0       |
|               |   | CFRLDR15 | CFRLDR14 | CFRLDR13 | CFRLDR12 | CFRLDR11 | CFRLDR10 | CFRLDR9 | CFRLDR8 | CFRLDR7 | CFRLDR6 | CFRLDR5 | CFRLDR4 | CFRLDR3 | CFRLDR2 | CFRLDR1 | CFRLDR0 |
| Initial value | : | 1        | 0        | 0        | 0        | 0        | 0        | 0       | 0       | 0       | 0       | 0       | 0       | 0       | 0       | 0       | 0       |
| R/W           | : | W        | W        | W        | W        | W        | W        | W       | W       | W       | W       | W       | W       | W       | W       | W       | W       |

# H'D058: Capstan Speed Error Detection Control Register

## CFVCR: Capstan Speed Error Detector

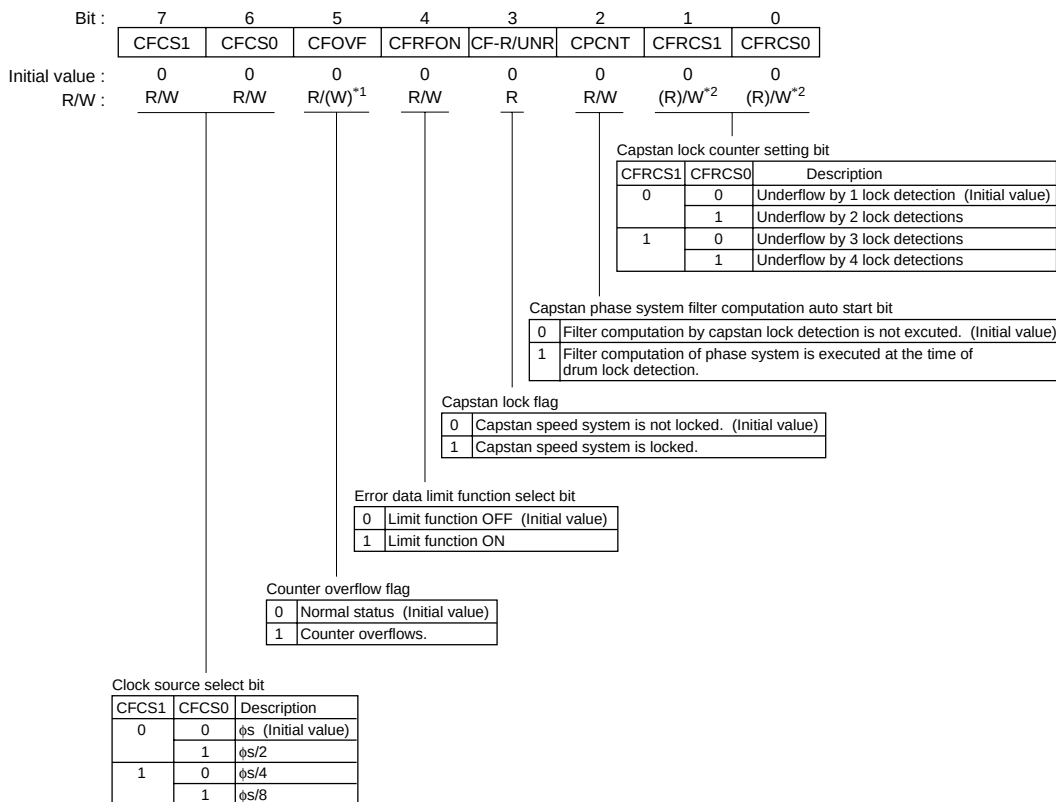


Notes: 1. Only 0 can be written.

2. When read, counter value is read.

H'D059: Capstan Phase Error Detection Control Register

CPGCR: Capstan Phase Error Detector

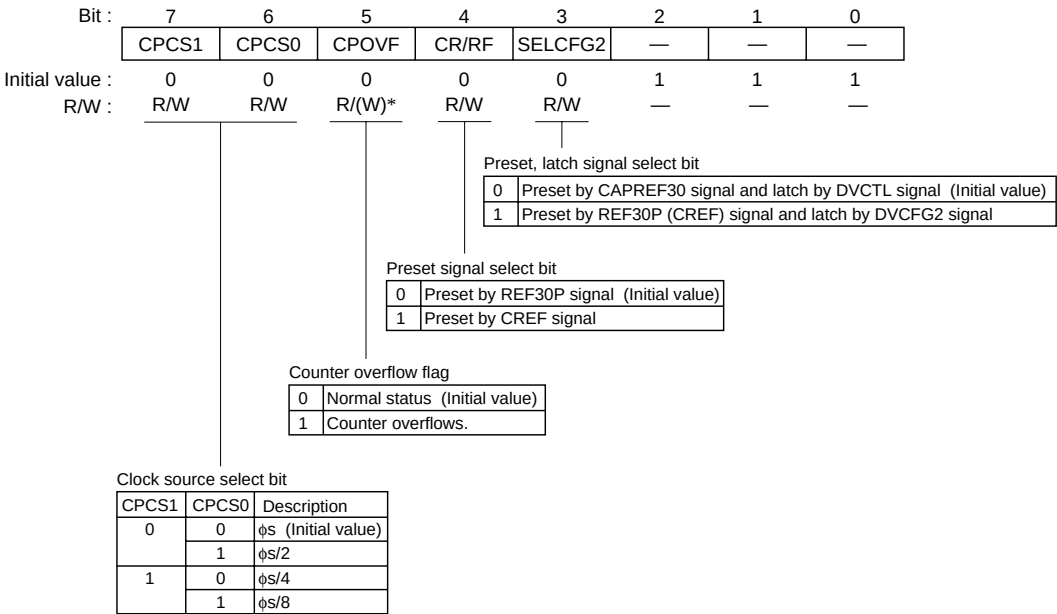

Note: \* Only 0 can be written.

## H'D05A to H'D05B: Specified Capstan Phase Preset Data Register 2

### CPPR2: Capstan Phase Error Detector

|               |   |        |        |        |        |        |        |       |       |       |       |       |       |       |       |       |       |
|---------------|---|--------|--------|--------|--------|--------|--------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| Bit           | : | 15     | 14     | 13     | 12     | 11     | 10     | 9     | 8     | 7     | 6     | 5     | 4     | 3     | 2     | 1     | 0     |
|               |   | CPPR15 | CPPR14 | CPPR13 | CPPR12 | CPPR11 | CPPR10 | CPPR9 | CPPR8 | CPPR7 | CPPR6 | CPPR5 | CPPR4 | CPPR3 | CPPR2 | CPPR1 | CPPR0 |
| Initial value | : | 0      | 0      | 0      | 0      | 0      | 0      | 0     | 0     | 0     | 0     | 0     | 0     | 0     | 0     | 0     | 0     |
| R/W           | : | W      | W      | W      | W      | W      | W      | W     | W     | W     | W     | W     | W     | W     | W     | W     | W     |

## H'D05C: Specified Capstan Phase Preset Data Register 1

### CPPR1: Capstan Phase Error Detector

|               |   |   |   |   |   |        |        |        |        |
|---------------|---|---|---|---|---|--------|--------|--------|--------|
| Bit           | : | 7 | 6 | 5 | 4 | 3      | 2      | 1      | 0      |
|               |   | — | — | — | — | CPPR19 | CPPR18 | CPPR17 | CPPR16 |
| Initial value | : | 1 | 1 | 1 | 1 | 0      | 0      | 0      | 0      |
| R/W           | : | — | — | — | — | W      | W      | W      | W      |

## H'D05D: Capstan Phase Error Data Register 1 CPER1: Capstan Phase Error Detector

|               |   |   |   |   |   |        |        |        |        |
|---------------|---|---|---|---|---|--------|--------|--------|--------|
| Bit           | : | 7 | 6 | 5 | 4 | 3      | 2      | 1      | 0      |
|               |   | — | — | — | — | CPER19 | CPER18 | CPER17 | CPER16 |
| Initial value | : | 1 | 1 | 1 | 1 | 0      | 0      | 0      | 0      |
| R/W           | : | — | — | — | — | *R/W   | *R/W   | *R/W   | *R/W   |

Note: \* Only the detected error data can be read.


## H'D05E to H'D05F: Capstan Phase Error Data Register 2

### CPER2: Capstan Phase Error Detector

|               |   |        |        |        |        |        |        |       |       |       |       |       |       |       |       |       |       |
|---------------|---|--------|--------|--------|--------|--------|--------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| Bit           | : | 15     | 14     | 13     | 12     | 11     | 10     | 9     | 8     | 7     | 6     | 5     | 4     | 3     | 2     | 1     | 0     |
|               |   | CPER15 | CPER14 | CPER13 | CPER12 | CPER11 | CPER10 | CPER9 | CPER8 | CPER7 | CPER6 | CPER5 | CPER4 | CPER3 | CPER2 | CPER1 | CPER0 |
| Initial value | : | 0      | 0      | 0      | 0      | 0      | 0      | 0     | 0     | 0     | 0     | 0     | 0     | 0     | 0     | 0     | 0     |
| R/W           | : | *R/W   | *R/W   | *R/W   | *R/W   | *R/W   | *R/W   | *R/W  | *R/W  | *R/W  | *R/W  | *R/W  | *R/W  | *R/W  | *R/W  | *R/W  | *R/W  |


Note: \* Only the detected error data can be read.

H'D060: HSW Mode Register 1 HSM1: HSW Timing Generator

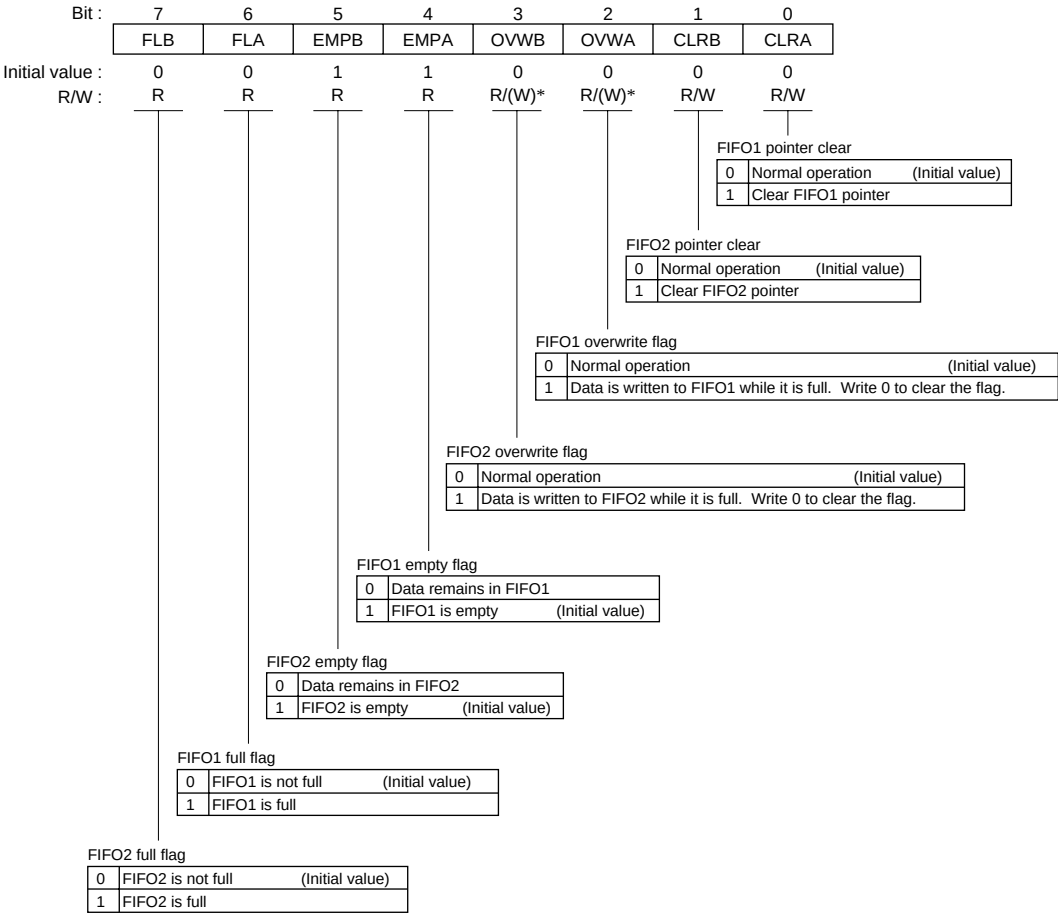

Note: \* Only 0 can be written.

## H'D061: HSW Mode Register 2 HSM2: HSW Timing Generator

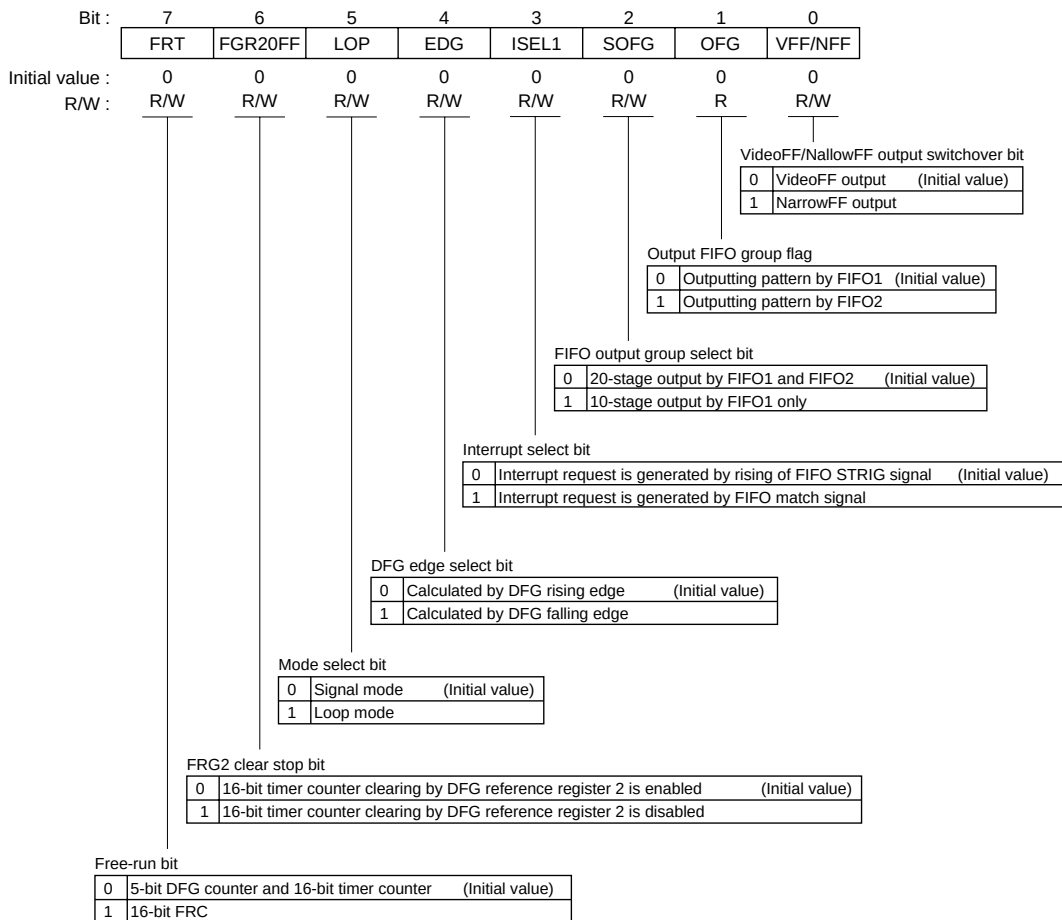



## H'D062: HSW Loop Stage Setting Register HSLP: HSW Timing Generator

|               |   |      |      |      |      |      |      |      |      |
|---------------|---|------|------|------|------|------|------|------|------|
| Bit           | : | 7    | 6    | 5    | 4    | 3    | 2    | 1    | 0    |
|               |   | LOB3 | LOB2 | LOB1 | LOB0 | LOA3 | LOA2 | LOA1 | LOA0 |
| Initial value | : | *    | *    | *    | *    | *    | *    | *    | *    |
| R/W           | : | R/W  | R/W  | R/W  | R/W  | R/W  | R/W  | R/W  | R/W  |

FIFO1 stage setting bit \_\_\_\_\_

| HSM2  | HSLP  |       |       |       |                               | Description |
|-------|-------|-------|-------|-------|-------------------------------|-------------|
| Bit 5 | Bit 3 | Bit 2 | Bit 1 | Bit 0 |                               |             |
| LOP   | LOA3  | LOA2  | LOA1  | LOA0  |                               |             |
| 0     | *     | *     | *     | *     | Single mode (Initial value)   |             |
| 1     | 0     | 0     | 0     | 0     | Output stage 0 of FIFO1       |             |
|       |       |       |       | 1     | Output stage 0 and 1 of FIFO1 |             |
|       |       |       | 1     | 0     | Output stage 0 to 2 of FIFO1  |             |
|       |       |       |       | 1     | Output stage 0 to 3 of FIFO1  |             |
|       |       | 1     | 0     | 0     | Output stage 0 to 4 of FIFO1  |             |
|       |       |       |       | 1     | Output stage 0 to 5 of FIFO1  |             |
|       | 1     | 0     | 0     | 0     | Output stage 0 to 6 of FIFO1  |             |
|       |       |       |       | 1     | Output stage 0 to 7 of FIFO1  |             |
|       |       |       | 0     | 0     | Output stage 0 to 8 of FIFO1  |             |
|       |       |       |       | 1     | Output stage 0 to 9 of FIFO1  |             |
|       |       | 1     | 1     | 0     | Setting disabled              |             |
|       |       |       |       | 1     |                               |             |
|       |       |       | 0     | 0     |                               |             |
|       |       |       |       | 1     |                               |             |
|       |       |       | 1     | 0     |                               |             |
|       | 1     |       |       |       |                               |             |



Note: \* Don't care.

FIFO2 stage setting bit \_\_\_\_\_

| HSM2  | HSLP  |       |       |       |                               | Description |
|-------|-------|-------|-------|-------|-------------------------------|-------------|
| Bit 5 | Bit 7 | Bit 6 | Bit 5 | Bit 4 |                               |             |
| LOP   | LOB3  | LOB2  | LOB1  | LOB0  |                               |             |
| 0     | *     | *     | *     | *     | Single mode (Initial value)   |             |
| 1     | 0     | 0     | 0     | 0     | Output stage 0 of FIFO2       |             |
|       |       |       |       | 1     | Output stage 0 and 1 of FIFO2 |             |
|       |       |       | 1     | 0     | Output stage 0 to 2 of FIFO2  |             |
|       |       |       |       | 1     | Output stage 0 to 3 of FIFO2  |             |
|       |       | 1     | 0     | 0     | Output stage 0 to 4 of FIFO2  |             |
|       |       |       |       | 1     | Output stage 0 to 5 of FIFO2  |             |
|       |       |       | 1     | 0     | Output stage 0 to 6 of FIFO2  |             |
|       |       |       |       | 1     | Output stage 0 to 7 of FIFO2  |             |
|       | 1     | 0     | 0     | 0     | Output stage 0 to 8 of FIFO2  |             |
|       |       |       |       | 1     | Output stage 0 to 9 of FIFO2  |             |
|       |       | 1     | 1     | 0     | Setting disabled              |             |
|       |       |       |       | 1     |                               |             |
|       |       |       | 0     | 0     |                               |             |
|       |       |       |       | 1     |                               |             |
|       |       |       | 1     | 0     |                               |             |
|       |       |       |       | 1     |                               |             |

Note: \* Don't care.

## H'D064 to H'D065: FIFO Output Pattern Register 1 FPDRA: HSW Timing Generator

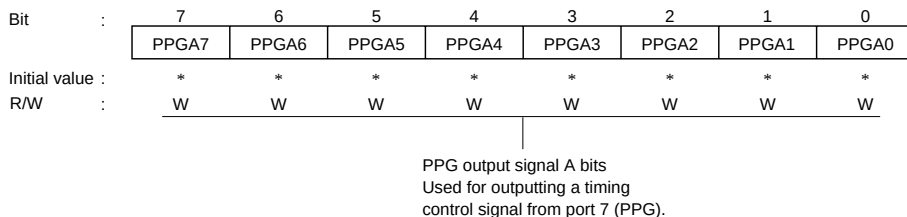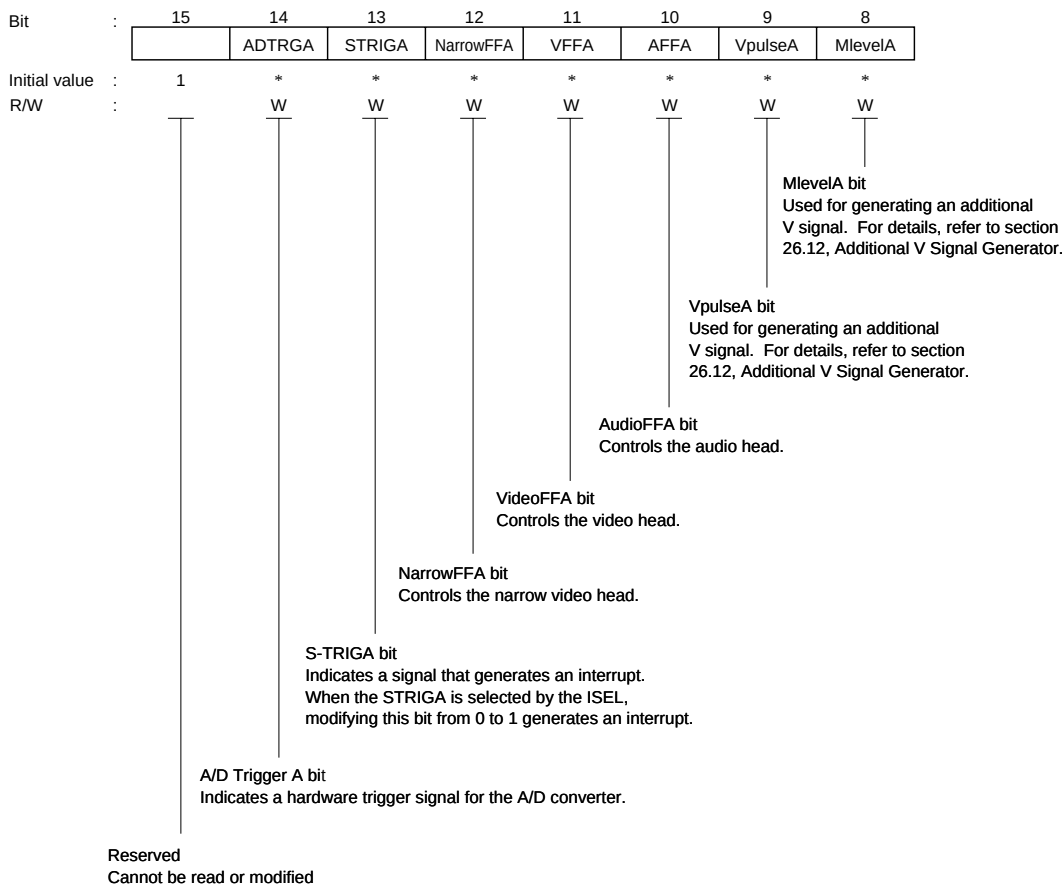

## H'D066 to H'D067: FIFO Timing Pattern Register 1 FTPRA: HSW Timing Generator

|               |   |         |         |         |         |         |         |        |        |
|---------------|---|---------|---------|---------|---------|---------|---------|--------|--------|
| Bit           | : | 15      | 14      | 13      | 12      | 11      | 10      | 9      | 8      |
|               |   | FTPRA15 | FTPRA14 | FTPRA13 | FTPRA12 | FTPRA11 | FTPRA10 | FTPRA9 | FTPRA8 |
| Initial value | : | *       | *       | *       | *       | *       | *       | *      | *      |
| R/W           | : | W       | W       | W       | W       | W       | W       | W      | W      |
| Bit           | : | 7       | 6       | 5       | 4       | 3       | 2       | 1      | 0      |
|               |   | FTPRA7  | FTPRA6  | FTPRA5  | FTPRA4  | FTPRA3  | FTPRA2  | FTPRA1 | FTPRA0 |
| Initial value | : | *       | *       | *       | *       | *       | *       | *      | *      |
| R/W           | : | W       | W       | W       | W       | W       | W       | W      | W      |

Note: FTPRA and FTCTR are assigned to the same address.

## H'D066 to H'D067: FIFO Timer Capture Register 1 FTCTR: HSW Timing Generator

|               |   |         |         |         |         |         |         |        |        |
|---------------|---|---------|---------|---------|---------|---------|---------|--------|--------|
| Bit           | : | 15      | 14      | 13      | 12      | 11      | 10      | 9      | 8      |
|               |   | FTCTR15 | FTCTR14 | FTCTR13 | FTCTR12 | FTCTR11 | FTCTR10 | FTCTR9 | FTCTR8 |
| Initial value | : | 0       | 0       | 0       | 0       | 0       | 0       | 0      | 0      |
| R/W           | : | R       | R       | R       | R       | R       | R       | R      | R      |
| Bit           | : | 7       | 6       | 5       | 4       | 3       | 2       | 1      | 0      |
|               |   | FTCTR7  | FTCTR6  | FTCTR5  | FTCTR4  | FTCTR3  | FTCTR2  | FTCTR1 | FTCTR0 |
| Initial value | : | 0       | 0       | 0       | 0       | 0       | 0       | 0      | 0      |
| R/W           | : | R       | R       | R       | R       | R       | R       | R      | R      |

Note: FTPRA and FTCTR are assigned to the same address.

H'D068 to H'D069: FIFO Output Pattern Register 2 FPDRB: HSW Timing Generator

|                |    |        |        |           |      |      |         |                                                                                                                                                                      |
|----------------|----|--------|--------|-----------|------|------|---------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Bit            | 15 | 14     | 13     | 12        | 11   | 10   | 9       | 8                                                                                                                                                                    |
|                | —  | ADTRGB | STRIGB | NarrowFFB | VFFB | AFFB | VpulseB | MlevelB                                                                                                                                                              |
| Initial value: | 1  | *      | *      | *         | *    | *    | *       | *                                                                                                                                                                    |
| R/W            | —  | W      | W      | W         | W    | W    | W       | W                                                                                                                                                                    |
|                |    |        |        |           |      |      |         | MlevelB bit<br>Used for generating an additional V signal. For details, refer to section 26.12, Additional V Signal Generator.                                       |
|                |    |        |        |           |      |      |         | VpulseB bit<br>Used for generating an additional V signal. For details, refer to section 26.12, Additional V Signal Generator.                                       |
|                |    |        |        |           |      |      |         | AudioFFB bit<br>Controls the audio head.                                                                                                                             |
|                |    |        |        |           |      |      |         | VideoFFB bit<br>Controls the video head.                                                                                                                             |
|                |    |        |        |           |      |      |         | NarrowFFB bit<br>Controls the narrow video head.                                                                                                                     |
|                |    |        |        |           |      |      |         | S-TRIGB bit<br>Indicates a signal that generates an interrupt.<br>When the STRIGA is selected by the ISEL,<br>modifying this bit from 0 to 1 generates an interrupt. |
|                |    |        |        |           |      |      |         | A/D Trigger B bit<br>Indicates a hardware trigger signal for the A/D converter.                                                                                      |
|                |    |        |        |           |      |      |         | Reserved<br>Cannot be read or modified                                                                                                                               |

|                |       |       |       |       |       |       |       |                                                                                            |
|----------------|-------|-------|-------|-------|-------|-------|-------|--------------------------------------------------------------------------------------------|
| Bit            | 7     | 6     | 5     | 4     | 3     | 2     | 1     | 0                                                                                          |
|                | PPGB7 | PPGB6 | PPGB5 | PPGB4 | PPGB3 | PPGB2 | PPGB1 | PPGB0                                                                                      |
| Initial value: | *     | *     | *     | *     | *     | *     | *     | *                                                                                          |
| R/W            | W     | W     | W     | W     | W     | W     | W     | W                                                                                          |
|                |       |       |       |       |       |       |       | PPG output signal B bits<br>Used for outputting a timing control signal from port 7 (PPG). |

## H'D06A to H'D06B: FIFO Timing Pattern Register 2 FTPRB: HSW Timing Generator

|               |   |         |         |         |         |         |         |        |        |
|---------------|---|---------|---------|---------|---------|---------|---------|--------|--------|
| Bit           | : | 15      | 14      | 13      | 12      | 11      | 10      | 9      | 8      |
|               |   | FTPRB15 | FTPRB14 | FTPRB13 | FTPRB12 | FTPRB11 | FTPRB10 | FTPRB9 | FTPRB8 |
| Initial value | : | *       | *       | *       | *       | *       | *       | *      | *      |
| R/W           | : | W       | W       | W       | W       | W       | W       | W      | W      |

|               |   |        |        |        |        |        |        |        |        |
|---------------|---|--------|--------|--------|--------|--------|--------|--------|--------|
| Bit           | : | 7      | 6      | 5      | 4      | 3      | 2      | 1      | 0      |
|               |   | FTPRB7 | FTPRB6 | FTPRB5 | FTPRB4 | FTPRB3 | FTPRB2 | FTPRB1 | FTPRB0 |
| Initial value | : | *      | *      | *      | *      | *      | *      | *      | *      |
| R/W           | : | W      | W      | W      | W      | W      | W      | W      | W      |

## H'D06C: DFG Reference Register 1 DFCRA\*: HSW Timing Generator

|               |   |       |      |      |        |        |        |        |        |
|---------------|---|-------|------|------|--------|--------|--------|--------|--------|
| Bit           | : | 7     | 6    | 5    | 4      | 3      | 2      | 1      | 0      |
|               |   | ISEL2 | CCLR | CKSL | DFCRA4 | DFCRA3 | DFCRA2 | DFCRA1 | DFCRA0 |
| Initial value | : | 0     | 0    | 0    | *      | *      | *      | *      | *      |
| R/W           | : | W     | W    | W    | W      | W      | W      | W      | W      |

16-bit counter clock source select bit

|   |            |                 |
|---|------------|-----------------|
| 0 | $\phi_s/4$ | (Initial value) |
| 1 | $\phi_s/8$ |                 |

DFG counter clear bit

|   |                              |                 |
|---|------------------------------|-----------------|
| 0 | Normal operation             | (Initial value) |
| 1 | 5-bit DFG counter is cleared |                 |

Interrupt select bit

|   |                                                                        |                 |
|---|------------------------------------------------------------------------|-----------------|
| 0 | Interrupt request is generated by clear signal of 16-bit timer counter | (Initial value) |
| 1 | Interrupt request is generated by VD signal in PB mode                 |                 |

FIFO1 output timing setting bits (DFCRA4 to DFCRA0)  
These bits determine the start point of FIFO1 timing.

Note: \* DFCRA and DFCTR are assigned to the same address.

## H'D06C: DFG Reference Count Register DFCTR\*: HSW Timing Generator

|                 |   |   |   |   |        |        |        |        |        |
|-----------------|---|---|---|---|--------|--------|--------|--------|--------|
| Bit             | : | 7 | 6 | 5 | 4      | 3      | 2      | 1      | 0      |
|                 |   | — | — | — | DFCTR4 | DFCTR3 | DFCTR2 | DFCTR1 | DFCTR0 |
| Initial value : |   | 1 | 1 | 1 | *      | *      | *      | *      | *      |
| R/W             | : | — | — | — | R      | R      | R      | R      | R      |

DFG pulse count bits (DFCTR4 to DFCTR0)  
These bits count DFG pulses.


Note: \* DFCRA and DFCTR are assigned to the same address.

## H'D06D: DFG Reference Register 2 DFCRB: HSW Timing Generator

|                 |   |   |   |   |        |        |        |        |        |
|-----------------|---|---|---|---|--------|--------|--------|--------|--------|
| Bit             | : | 7 | 6 | 5 | 4      | 3      | 2      | 1      | 0      |
|                 |   | — | — | — | DFCRB4 | DFCRB3 | DFCRB2 | DFCRB1 | DFCRB0 |
| Initial value : |   | 1 | 1 | 1 | *      | *      | *      | *      | *      |
| R/W             | : | — | — | — | W      | W      | W      | W      | W      |

FIFO2 output timing setting bits (DFCRB4 to DFCRB0)  
These bits determine the start point of FIFO2 timing.

H'D06E: Special Playback Control Register CHCR: 4-Head Special Playback Circuit

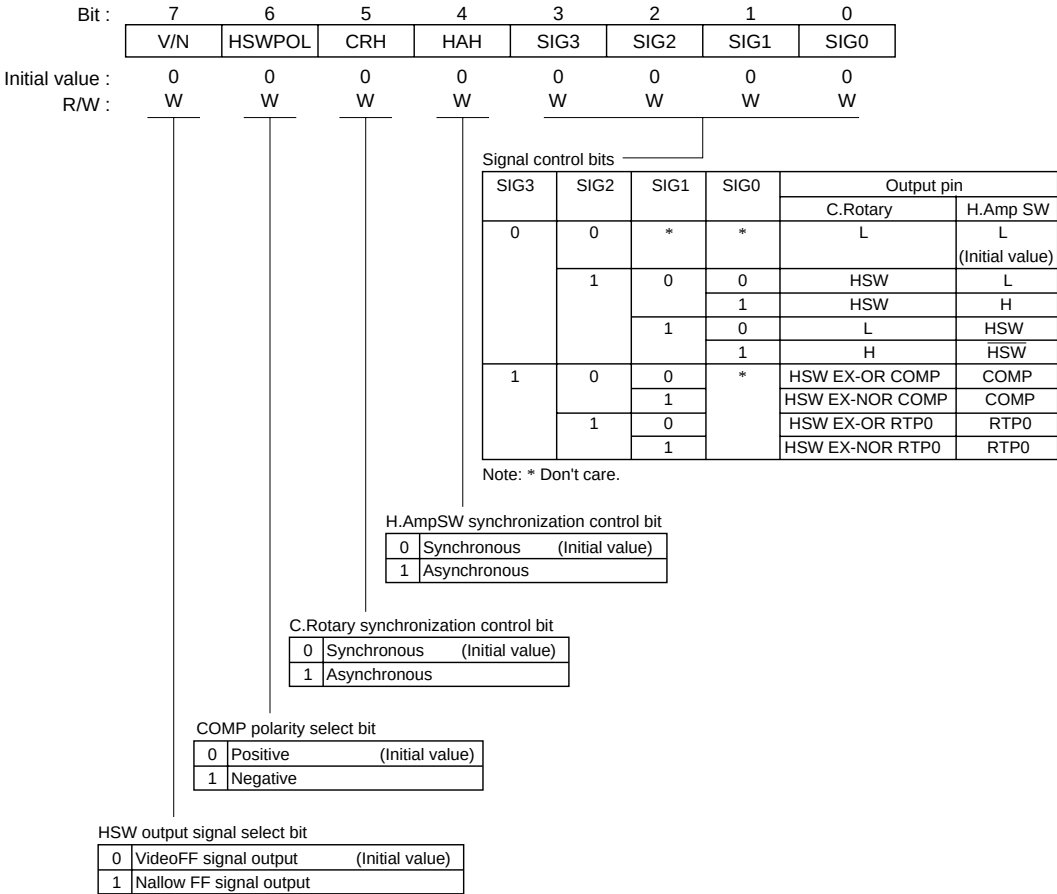

## H'D06F: Additional V Control Register ADDVR: Additional V Signal Generator

|               |   |   |   |   |      |     |     |      |     |
|---------------|---|---|---|---|------|-----|-----|------|-----|
| Bit           | : | 7 | 6 | 5 | 4    | 3   | 2   | 1    | 0   |
|               |   | — | — | — | HMSK | HiZ | CUT | VPOM | POL |
| Initial value | : | 1 | 1 | 1 | 0    | 0   | 0   | 0    | 0   |
| R/W           | : | — | — | — | R/W  | R/W | R/W | R/W  | R/W |

Additional V output control bits

| CUT | VPON | POL | Description                                          |
|-----|------|-----|------------------------------------------------------|
| 0   | 0    | *   | Low level (Initial value)                            |
|     | 1    | 0   | Negative polarity                                    |
|     |      | 1   | Positive polarity                                    |
| 1   | *    | 0   | Immediate level<br>(high-impedance when HiZ bit = 1) |
|     |      | 1   | High level                                           |

Note: \* Don't care.

High impedance bit

|   |                                                |
|---|------------------------------------------------|
| 0 | 3-level output from Vpulse pin (Initial value) |
| 1 | Vpulse pin is set as 3-state (H/L/HiZ) pin     |

OSCH mask bit

|   |                            |
|---|----------------------------|
| 0 | OSCH added (Initial value) |
| 1 | OSCH not added             |

## H'D070 to H'D071: X-Value Data Register

### XDR: X-Value, TRK-Value Adjustment Circuit

|               |   |    |    |    |    |      |      |     |     |     |     |     |     |     |     |     |     |
|---------------|---|----|----|----|----|------|------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| Bit           | : | 15 | 14 | 13 | 12 | 11   | 10   | 9   | 8   | 7   | 6   | 5   | 4   | 3   | 2   | 1   | 0   |
|               |   | —  | —  | —  | —  | XD11 | XD10 | XD9 | XD8 | XD7 | XD6 | XD5 | XD4 | XD3 | XD2 | XD1 | XD0 |
| Initial value | : | 1  | 1  | 1  | 1  | 0    | 0    | 0   | 0   | 0   | 0   | 0   | 0   | 0   | 0   | 0   | 0   |
| R/W           | : | —  | —  | —  | —  | W    | W    | W   | W   | W   | W   | W   | W   | W   | W   | W   | W   |

## H'D072 to H'D073: TRK-Value Data Register


### TRDR: X-Value, TRK-Value Adjustment Circuit

|               |   |    |    |    |    |       |       |      |      |      |      |      |      |      |      |      |      |
|---------------|---|----|----|----|----|-------|-------|------|------|------|------|------|------|------|------|------|------|
| Bit           | : | 15 | 14 | 13 | 12 | 11    | 10    | 9    | 8    | 7    | 6    | 5    | 4    | 3    | 2    | 1    | 0    |
|               |   | —  | —  | —  | —  | TRD11 | TRD10 | TRD9 | TRD8 | TRD7 | TRD6 | TRD5 | TRD4 | TRD3 | TRD2 | TRD1 | TRD0 |
| Initial value | : | 1  | 1  | 1  | 1  | 0     | 0     | 0    | 0    | 0    | 0    | 0    | 0    | 0    | 0    | 0    | 0    |
| R/W           | : | —  | —  | —  | —  | W     | W     | W    | W    | W    | W    | W    | W    | W    | W    | W    | W    |




H'D074: X-Value/TRK-Value Control Register

XTCR: X-Value, TRK-Value Adjustment Circuit

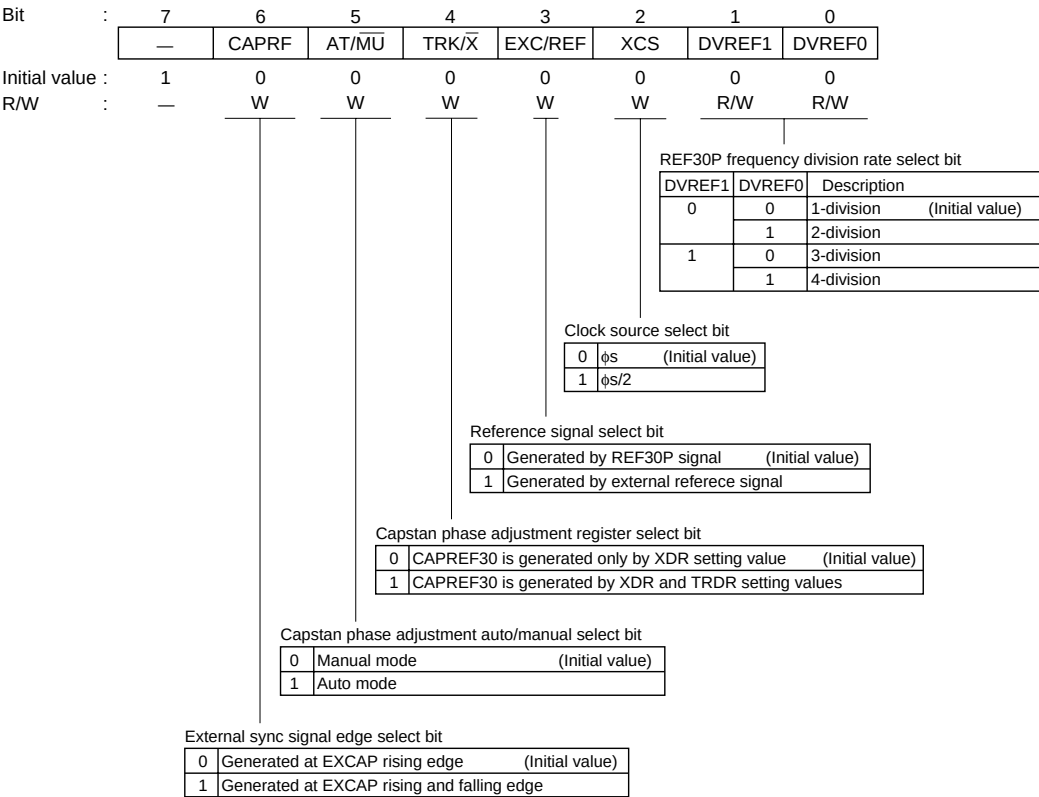

H'D078: Drum 12-Bit PWM Data Register DPWDR: Drum 12-Bit PWM

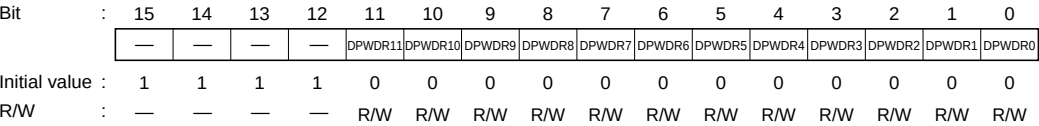

# H'D07A: Drum 12-Bit PWM Control Register DPWCR: Drum 12-Bit PWM

|               |   |      |     |      |      |        |      |      |      |
|---------------|---|------|-----|------|------|--------|------|------|------|
| Bit           | : | 7    | 6   | 5    | 4    | 3      | 2    | 1    | 0    |
|               |   | DPOL | DDC | DHiZ | DH/L | DSF/DF | DCK2 | DCK1 | DCK0 |
| Initial value | : | 0    | 1   | 0    | 0    | 0      | 0    | 1    | 0    |
| R/W           | : | W    | W   | W    | W    | W      | W    | W    | W    |

Carrier frequency select bits

| DCK2 | DCK1 | DCK0 | Description                                   |
|------|------|------|-----------------------------------------------|
| 0    | 0    | 0    | Carrier frequency is $\phi/2$                 |
|      |      | 1    | Carrier frequency is $\phi/4$                 |
|      | 1    | 0    | Carrier frequency is $\phi/8$ (Initial value) |
|      |      | 1    | Carrier frequency is $\phi/16$                |
| 1    | 0    | 0    | Carrier frequency is $\phi/32$                |
|      |      | 1    | Carrier frequency is $\phi/64$                |
|      | 1    | 0    | Carrier frequency is $\phi/128$               |
|      |      | 1    | (Do not set)                                  |

Output data select bit

|   |                                                                 |
|---|-----------------------------------------------------------------|
| 0 | Modulate error data from digital filter circuit (Initial value) |
| 1 | Modulate data written in data register                          |

Note: When PWMs output data from the digital filter circuit, the data consisting of the speed and phase filtering results are modulated by PWMs and output from the DRMPWM pin. However, it is possible to output only capstan phase filter result from DRMPWM pin, by DFUCR settings of the digital filter circuit. See the section explaining the digital filter computation circuit.

Fixed output bit, PWM pin output bit

| DDC | DHiZ | DH/L | Description                                   |
|-----|------|------|-----------------------------------------------|
| 1   | 0    | 0    | Low level output from PWM pin (Initial value) |
|     |      | 1    | High level output form PWM pin                |
|     | 1    | *    | High impedance from PWM pin                   |
| 0   | *    | *    | PWM modulated signal output                   |

Note: \* Don't care.

Polarity switchover bit

|   |                                          |
|---|------------------------------------------|
| 0 | Positive polarity output (Initial value) |
| 1 | Negative polarity output                 |

## H'D07B: Capstan 12-Bit PWM Control Register CPWCR: Capstan 12-Bit PWM

|               |   |      |     |      |      |        |      |      |      |
|---------------|---|------|-----|------|------|--------|------|------|------|
| Bit           | : | 7    | 6   | 5    | 4    | 3      | 2    | 1    | 0    |
|               |   | CPOL | CDC | CHiZ | CH/L | CSF/DF | CCK2 | CCK1 | CCK0 |
| Initial value | : | 0    | 1   | 0    | 0    | 0      | 0    | 1    | 0    |
| R/W           | : | W    | W   | W    | W    | W      | W    | W    | W    |

Carrier frequency select bits

| CCK2 | CCK1 | CCK0 | Description                                   |
|------|------|------|-----------------------------------------------|
| 0    | 0    | 0    | Carrier frequency is $\phi/2$                 |
|      |      | 1    | Carrier frequency is $\phi/4$                 |
|      | 1    | 0    | Carrier frequency is $\phi/8$ (Initial value) |
|      |      | 1    | Carrier frequency is $\phi/16$                |
| 1    | 0    | 0    | Carrier frequency is $\phi/32$                |
|      |      | 1    | Carrier frequency is $\phi/64$                |
|      | 1    | 0    | Carrier frequency is $\phi/128$               |
|      |      | 1    | (Do not set)                                  |

Output data select bit

|   |                                                                 |
|---|-----------------------------------------------------------------|
| 0 | Modulate error data from digital filter circuit (Initial value) |
| 1 | Modulate data written in data register                          |

Note: When PWMs output data from the digital filter circuit, the data consisting of the speed and phase filtering results are modulated by PWMs and output from the CAPPWM pin.

However, it is possible to output only drum phase filter results from CAPPWM pin, by DFUCR settings of the digital filter circuit.

See the section explaining the digital filter computation circuit.

Fixed output bit, PWM pin output bit

| CDC | CHiZ | CH/L | Description                                   |
|-----|------|------|-----------------------------------------------|
| 1   | 0    | 0    | Low level output from PWM pin (Initial value) |
|     |      | 1    | High level output form PWM pin                |
|     | 1    | *    | High impedance from PWM pin                   |
| 0   | *    | *    | PWM modulated signal output                   |

Note: \* Don't care.

Polarity switchover bit

|   |                                   |
|---|-----------------------------------|
| 0 | Positive polarity (Initial value) |
| 1 | Negative polarity output          |

**H'D07C: Capstan 12-Bit PWM Data Register CPWDR: Capstan 12-Bit PWM**

|               |   |    |    |    |    |         |         |        |        |        |        |        |        |        |        |        |        |
|---------------|---|----|----|----|----|---------|---------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|
| Bit           | : | 15 | 14 | 13 | 12 | 11      | 10      | 9      | 8      | 7      | 6      | 5      | 4      | 3      | 2      | 1      | 0      |
|               |   | —  | —  | —  | —  | CPWDR11 | CPWDR10 | CPWDR9 | CPWDR8 | CPWDR7 | CPWDR6 | CPWDR5 | CPWDR4 | CPWDR3 | CPWDR2 | CPWDR1 | CPWDR0 |
| Initial value | : | 1  | 1  | 1  | 1  | 0       | 0       | 0      | 0      | 0      | 0      | 0      | 0      | 0      | 0      | 0      | 0      |
| R/W           | : | —  | —  | —  | —  | R/W     | R/W     | R/W    | R/W    | R/W    | R/W    | R/W    | R/W    | R/W    | R/W    | R/W    | R/W    |

**H'D080: CTL Control Register CTCR: CTL Circuit**

|               |   |       |      |      |      |     |      |       |      |
|---------------|---|-------|------|------|------|-----|------|-------|------|
| Bit           | : | 7     | 6    | 5    | 4    | 3   | 2    | 1     | 0    |
|               |   | NT/PL | FSLC | FSLB | FSLA | CCS | LCTL | UNCTL | SLWM |
| Initial value | : | 0     | 0    | 1    | 1    | 0   | 0    | 0     | 0    |
| R/W           | : | W     | W    | W    | W    | W   | W    | R     | W    |

Mode select bit

|   |                             |
|---|-----------------------------|
| 0 | Normal mode (Initial value) |
| 1 | Slow mode                   |

CTL undetected bit

|   |                          |
|---|--------------------------|
| 0 | Detected (Initial value) |
| 1 | Undetected               |

Long CTL bit

|   |                                                                                         |
|---|-----------------------------------------------------------------------------------------|
| 0 | Clock source (CCS) operates at the setting value (Initial value)                        |
| 1 | Clock source (CCS) operates for further 8-division after operating at the setting value |

Clock source select bit

|   |                          |
|---|--------------------------|
| 0 | $\phi_s$ (Initial value) |
| 1 | $\phi_s/2$               |

Operating frequency select bits


| FSLC | FSLB | FSLA | Description                   |
|------|------|------|-------------------------------|
| 0    | 0    | 0    | Reserved (do not set)         |
|      |      | 1    | Reserved (do not set)         |
|      | 1    | 0    | fosc = 8 MHz                  |
|      |      | 1    | fosc = 10 MHz (Initial value) |
| 1    | *    | *    | Reserved (do not set)         |

Note: \* Don't care.

NTSC/PAL select bit

|   |                                               |
|---|-----------------------------------------------|
| 0 | NTSC mode (frame rate: 30 Hz) (Initial value) |
| 1 | PAL mode (frame rate: 25 Hz)                  |

H'D081: CTL Mode Register CTLM: CTL Circuit

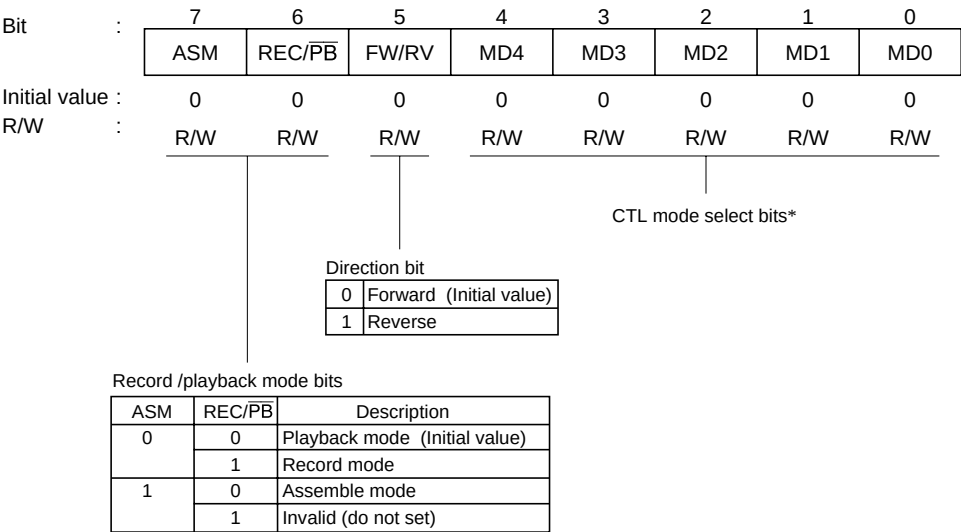

Note: \* Refer to the description of the CTL mode register in section 26.13.5, Register Description.

## H'D082 to H'D083: REC-CTL Duty Data Register 1 RCDR1: CTL Circuit

|                 |    |    |    |    |       |       |       |       |       |       |       |       |       |       |       |       |
|-----------------|----|----|----|----|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| Bit :           | 15 | 14 | 13 | 12 | 11    | 10    | 9     | 8     | 7     | 6     | 5     | 4     | 3     | 2     | 1     | 0     |
|                 | —  | —  | —  | —  | CMT1B | CMT1A | CMT19 | CMT18 | CMT17 | CMT16 | CMT15 | CMT14 | CMT13 | CMT12 | CMT11 | CMT10 |
| Initial value : | 1  | 1  | 1  | 1  | 0     | 0     | 0     | 0     | 0     | 0     | 0     | 0     | 0     | 0     | 0     | 0     |
| R/W :           | —  | —  | —  | —  | W     | W     | W     | W     | W     | W     | W     | W     | W     | W     | W     | W     |

## H'D084 to H'D085: REC-CTL Duty Data Register 2 RCDR2: CTL Circuit

|                 |    |    |    |    |       |       |       |       |       |       |       |       |       |       |       |       |
|-----------------|----|----|----|----|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| Bit :           | 15 | 14 | 13 | 12 | 11    | 10    | 9     | 8     | 7     | 6     | 5     | 4     | 3     | 2     | 1     | 0     |
|                 | —  | —  | —  | —  | CMT2B | CMT2A | CMT29 | CMT28 | CMT27 | CMT26 | CMT25 | CMT24 | CMT23 | CMT22 | CMT21 | CMT20 |
| Initial value : | 1  | 1  | 1  | 1  | 0     | 0     | 0     | 0     | 0     | 0     | 0     | 0     | 0     | 0     | 0     | 0     |
| R/W :           | —  | —  | —  | —  | W     | W     | W     | W     | W     | W     | W     | W     | W     | W     | W     | W     |

## H'D086 to H'D087: REC-CTL Duty Data Register 3 RCDR3: CTL Circuit

|                 |    |    |    |    |       |       |       |       |       |       |       |       |       |       |       |       |
|-----------------|----|----|----|----|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| Bit :           | 15 | 14 | 13 | 12 | 11    | 10    | 9     | 8     | 7     | 6     | 5     | 4     | 3     | 2     | 1     | 0     |
|                 | —  | —  | —  | —  | CMT3B | CMT3A | CMT39 | CMT38 | CMT37 | CMT36 | CMT35 | CMT34 | CMT33 | CMT32 | CMT31 | CMT30 |
| Initial value : | 1  | 1  | 1  | 1  | 0     | 0     | 0     | 0     | 0     | 0     | 0     | 0     | 0     | 0     | 0     | 0     |
| R/W :           | —  | —  | —  | —  | W     | W     | W     | W     | W     | W     | W     | W     | W     | W     | W     | W     |


## H'D088 to H'D089: REC-CTL Duty Data Register 4 RCDR4: CTL Circuit

|                 |    |    |    |    |       |       |       |       |       |       |       |       |       |       |       |       |
|-----------------|----|----|----|----|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| Bit :           | 15 | 14 | 13 | 12 | 11    | 10    | 9     | 8     | 7     | 6     | 5     | 4     | 3     | 2     | 1     | 0     |
|                 | —  | —  | —  | —  | CMT4B | CMT4A | CMT49 | CMT48 | CMT47 | CMT46 | CMT45 | CMT44 | CMT43 | CMT42 | CMT41 | CMT40 |
| Initial value : | 1  | 1  | 1  | 1  | 0     | 0     | 0     | 0     | 0     | 0     | 0     | 0     | 0     | 0     | 0     | 0     |
| R/W :           | —  | —  | —  | —  | W     | W     | W     | W     | W     | W     | W     | W     | W     | W     | W     | W     |

## H'D08A to H'D08B: REC-CTL Duty Data Register 5 RCDR5: CTL Circuit

|                 |    |    |    |    |       |       |       |       |       |       |       |       |       |       |       |       |
|-----------------|----|----|----|----|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| Bit :           | 15 | 14 | 13 | 12 | 11    | 10    | 9     | 8     | 7     | 6     | 5     | 4     | 3     | 2     | 1     | 0     |
|                 | —  | —  | —  | —  | CMT5B | CMT5A | CMT59 | CMT58 | CMT57 | CMT56 | CMT55 | CMT54 | CMT53 | CMT52 | CMT51 | CMT50 |
| Initial value : | 1  | 1  | 1  | 1  | 0     | 0     | 0     | 0     | 0     | 0     | 0     | 0     | 0     | 0     | 0     | 0     |
| R / W :         | —  | —  | —  | —  | W     | W     | W     | W     | W     | W     | W     | W     | W     | W     | W     | W     |

## H'D08C: Duty I/O Register DI/O: CTL Circuit

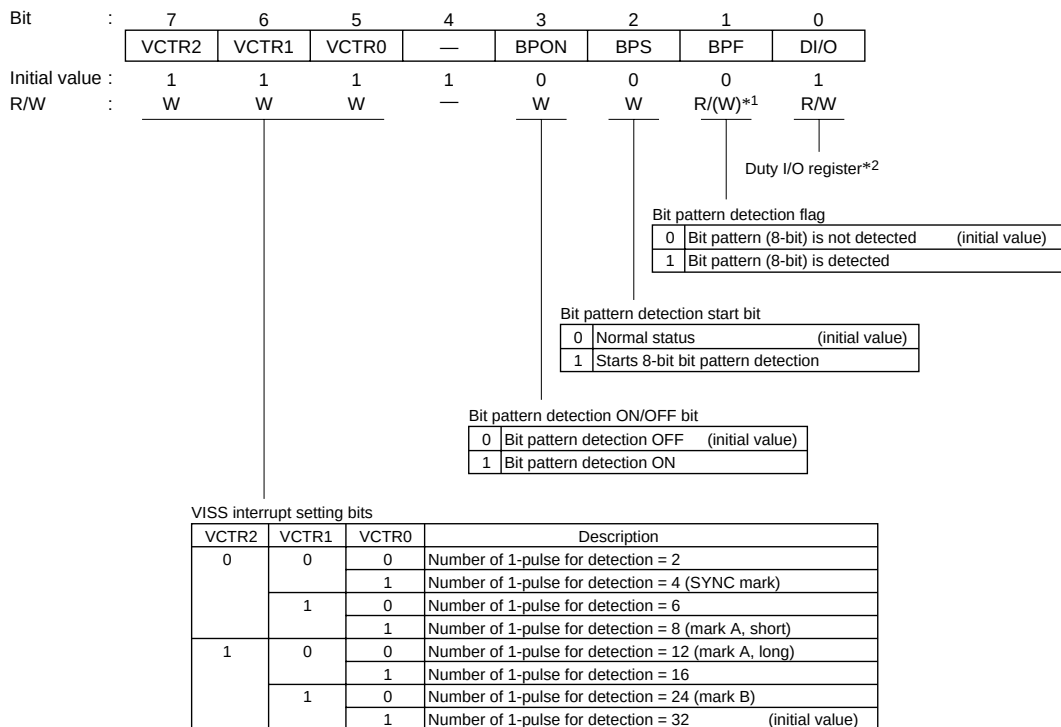

Notes: 1. Only 0 can be written.

2. Refer to the description of the duty I/O register in section 26.13.5, Register Description.

## H'D08D: Bit Pattern Register BTPR: CTL Circuit

|                 |      |      |      |      |      |      |      |      |
|-----------------|------|------|------|------|------|------|------|------|
| Bit             | 7    | 6    | 5    | 4    | 3    | 2    | 1    | 0    |
|                 | LSP7 | LSP6 | LSP5 | LSP4 | LSP3 | LSP2 | LSP1 | LSP0 |
| Initial value : | 1    | 1    | 1    | 1    | 1    | 1    | 1    | 1    |
| R/W             | R*/W | R*/W | R*/W | R*/W | R*/W | R*/W | R*/W | R*/W |

Note: \* Writes are disabled during bit pattern detection.

## H'D090 to H'D091: Reference Frequency Register 1 RFD: Reference Signal Generator

|                 |       |       |       |       |       |       |      |      |      |      |      |      |      |      |      |      |
|-----------------|-------|-------|-------|-------|-------|-------|------|------|------|------|------|------|------|------|------|------|
| Bit             | 15    | 14    | 13    | 12    | 11    | 10    | 9    | 8    | 7    | 6    | 5    | 4    | 3    | 2    | 1    | 0    |
|                 | REF15 | REF14 | REF13 | REF12 | REF11 | REF10 | REF9 | REF8 | REF7 | REF6 | REF5 | REF4 | REF3 | REF2 | REF1 | REF0 |
| Initial value : | 1     | 1     | 1     | 1     | 1     | 1     | 1    | 1    | 1    | 1    | 1    | 1    | 1    | 1    | 1    | 1    |
| R/W             | W     | W     | W     | W     | W     | W     | W    | W    | W    | W    | W    | W    | W    | W    | W    | W    |

## H'D092 to H'D093: Reference Frequency Register 2 CRF: Reference Signal Generator


|                 |       |       |       |       |       |       |      |      |      |      |      |      |      |      |      |      |
|-----------------|-------|-------|-------|-------|-------|-------|------|------|------|------|------|------|------|------|------|------|
| Bit             | 15    | 14    | 13    | 12    | 11    | 10    | 9    | 8    | 7    | 6    | 5    | 4    | 3    | 2    | 1    | 0    |
|                 | CRF15 | CRF14 | CRF13 | CRF12 | CRF11 | CRF10 | CRF9 | CRF8 | CRF7 | CRF6 | CRF5 | CRF4 | CRF3 | CRF2 | CRF1 | CRF0 |
| Initial value : | 1     | 1     | 1     | 1     | 1     | 1     | 1    | 1    | 1    | 1    | 1    | 1    | 1    | 1    | 1    | 1    |
| R/W             | W     | W     | W     | W     | W     | W     | W    | W    | W    | W    | W    | W    | W    | W    | W    | W    |

## H'D094 to H'D095: REF30 Counter Register RFC: Reference Signal Generator


|                 |       |       |       |       |       |       |      |      |      |      |      |      |      |      |      |      |
|-----------------|-------|-------|-------|-------|-------|-------|------|------|------|------|------|------|------|------|------|------|
| Bit             | 15    | 14    | 13    | 12    | 11    | 10    | 9    | 8    | 7    | 6    | 5    | 4    | 3    | 2    | 1    | 0    |
|                 | RFC15 | RFC14 | RFC13 | RFC12 | RFC11 | RFC10 | RFC9 | RFC8 | RFC7 | RFC6 | RFC5 | RFC4 | RFC3 | RFC2 | RFC1 | RFC0 |
| Initial value : | 0     | 0     | 0     | 0     | 0     | 0     | 0    | 0    | 0    | 0    | 0    | 0    | 0    | 0    | 0    | 0    |
| R/W             | R/W   | R/W   | R/W   | R/W   | R/W   | R/W   | R/W  | R/W  | R/W  | R/W  | R/W  | R/W  | R/W  | R/W  | R/W  | R/W  |



H'D096: Reference Frequency Mode Register RFM: Reference Signal Generator

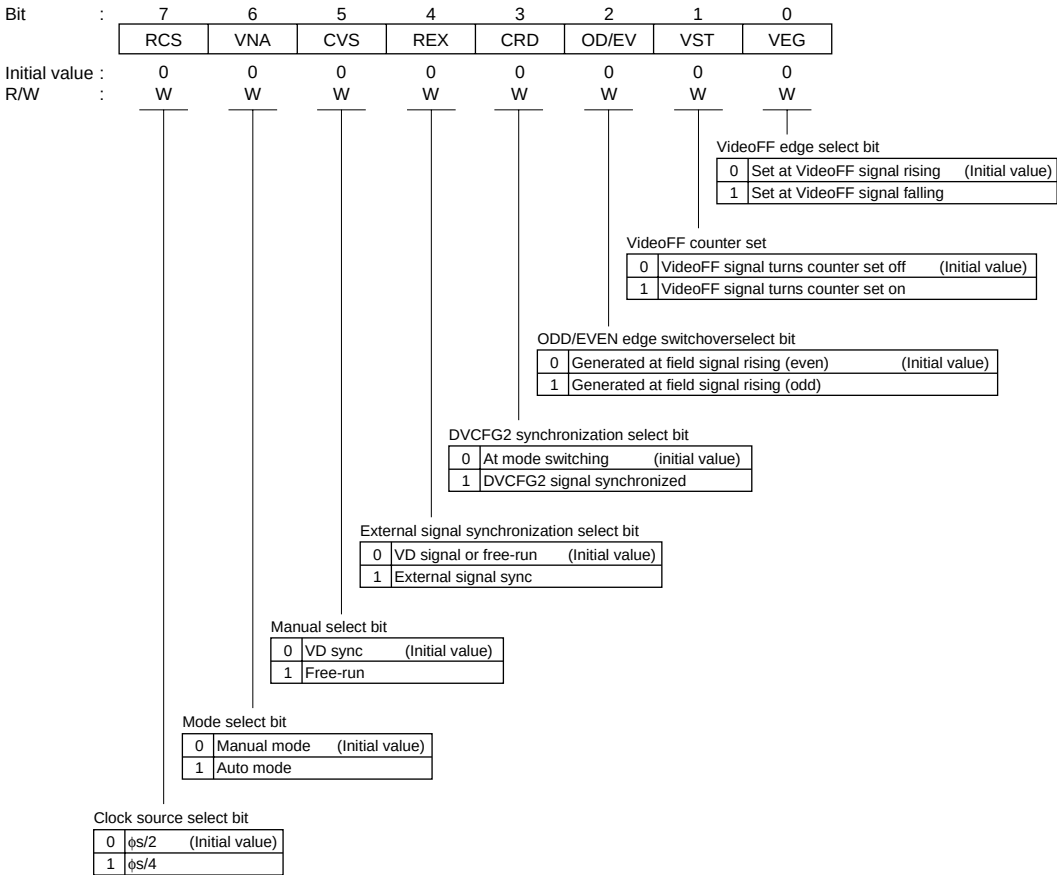

H'D097: Reference Frequency Mode Register 2 RFM2: Reference Signal Generator

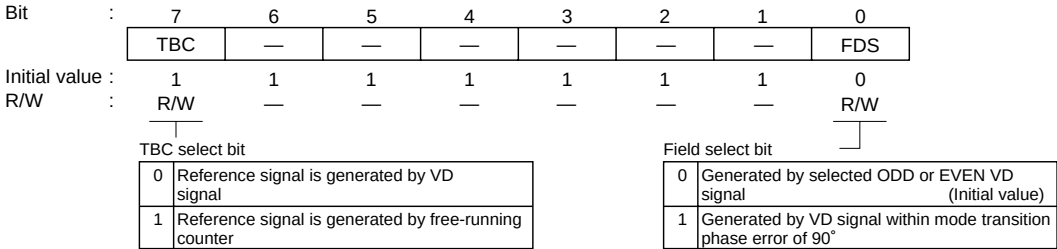

## H'D098: DVCTL Control Register CTVC: Frequency Divider

|               |   |     |     |   |   |   |     |     |     |
|---------------|---|-----|-----|---|---|---|-----|-----|-----|
| Bit           | : | 7   | 6   | 5 | 4 | 3 | 2   | 1   | 0   |
|               |   | CEX | CEG | — | — | — | CFG | HSW | CTL |
| Initial value | : | 0   | 0   | 1 | 1 | 1 | *   | *   | *   |
| R/W           | : | W   | W   | — | — | — | R   | R   | R   |

|   |                                            |
|---|--------------------------------------------|
| 0 | REC or PB-CTL level is low (Initial value) |
| 1 | REC or PB-CTL level is high                |

|   |                                  |
|---|----------------------------------|
| 0 | HSW level is low (Initial value) |
| 1 | HSW level is high                |

|   |                                  |
|---|----------------------------------|
| 0 | CFG level is low (Initial value) |
| 1 | CFG level is high                |

|   |                             |
|---|-----------------------------|
| 0 | Rising edge (Initial value) |
| 1 | Falling edge                |

|   |                                            |
|---|--------------------------------------------|
| 0 | Generated by PB-CTL signal (Initial value) |
| 1 | Generated by external input signal         |

## H'D099: CTL Frequency Division Register CTLR: Frequency Divider

|               |   |      |      |      |      |      |      |      |      |
|---------------|---|------|------|------|------|------|------|------|------|
| Bit           | : | 7    | 6    | 5    | 4    | 3    | 2    | 1    | 0    |
|               |   | CTL7 | CTL6 | CTL5 | CTL4 | CTL3 | CTL2 | CTL1 | CTL0 |
| Initial value | : | 0    | 0    | 0    | 0    | 0    | 0    | 0    | 0    |
| R/W           | : | W    | W    | W    | W    | W    | W    | W    | W    |

## H'D09A: DVCFG Control Register CDVC: Frequency Divider

|               |       |   |     |     |       |     |      |      |
|---------------|-------|---|-----|-----|-------|-----|------|------|
| Bit           | 7     | 6 | 5   | 4   | 3     | 2   | 1    | 0    |
|               | MCGin | — | CMK | CMN | DVTRG | CRF | CPS1 | CPS0 |
| Initial value | 0     | 1 | 1   | 0   | 0     | 0   | 0    | 0    |
| R/W           | R/W*  | — | R   | W   | W     | W   | W    | W    |

| CFG mask timer clock select bit |      |                               |
|---------------------------------|------|-------------------------------|
| CPS1                            | CPS0 | Description                   |
| 0                               | 0    | $\phi$ s/1024 (Initial value) |
|                                 | 1    | $\phi$ s/512                  |
| 1                               | 0    | $\phi$ s/256                  |
|                                 | 1    | $\phi$ s/128                  |

| CFG frequency division edge select bit |                                                                         |
|----------------------------------------|-------------------------------------------------------------------------|
| 0                                      | Execute frequency division operation at CFG rising edge (Initial value) |
| 1                                      | Execute frequency division operation at CFG rising                      |

| PB (ASM)-to-REC transition timing sync ON/OFF select bit |                                                           |
|----------------------------------------------------------|-----------------------------------------------------------|
| 0                                                        | PB (ASM)-to-REC transition timing sync ON (Initial value) |
| 1                                                        | PB (ASM)-to-REC transition timing sync OFF                |

| CFG mask select bit |                                                 |
|---------------------|-------------------------------------------------|
| 0                   | Capstan mask timing function ON (Initial value) |
| 1                   | Capstan mask timing function OFF                |

| CFG mask status bit |                                                   |
|---------------------|---------------------------------------------------|
| 0                   | Mask is released by capstan mask timer            |
| 1                   | Mask is set by capstan mask timer (Initial value) |

| Mask CFG flag |                                                      |
|---------------|------------------------------------------------------|
| 0             | CFG normal operation (Initial value)                 |
| 1             | DVCFG is detected while mask is set (race detection) |

Note: \* Only 0 can be written

## H'D09B: CFG Frequency Division Register 1 CDIVR1: Frequency Divider

|               |   |       |       |       |       |       |       |       |
|---------------|---|-------|-------|-------|-------|-------|-------|-------|
| Bit           | 7 | 6     | 5     | 4     | 3     | 2     | 1     | 0     |
|               | — | CDV16 | CDV15 | CDV14 | CDV13 | CDV12 | CDV11 | CDV10 |
| Initial value | 1 | 0     | 0     | 0     | 0     | 0     | 0     | 0     |
| R/W           | — | W     | W     | W     | W     | W     | W     | W     |

## H'D09C: CFG Frequency Division Register 2 CDIVR2: Frequency Divider

|               |   |       |       |       |       |       |       |       |
|---------------|---|-------|-------|-------|-------|-------|-------|-------|
| Bit           | 7 | 6     | 5     | 4     | 3     | 2     | 1     | 0     |
|               | — | CDV26 | CDV25 | CDV24 | CDV23 | CDV22 | CDV21 | CDV20 |
| Initial value | 1 | 0     | 0     | 0     | 0     | 0     | 0     | 0     |
| R/W           | — | W     | W     | W     | W     | W     | W     | W     |

### H'D09D: DVCFG Mask Interval Register CTMR: Frequency Divider

|                 |   |   |      |      |      |      |      |      |
|-----------------|---|---|------|------|------|------|------|------|
| Bit :           | 7 | 6 | 5    | 4    | 3    | 2    | 1    | 0    |
|                 | — | — | CPM5 | CPM4 | CPM3 | CPM2 | CPM1 | CPM0 |
| Initial value : | 1 | 1 | 1    | 1    | 1    | 1    | 1    | 1    |
| R/W :           | — | — | W    | W    | W    | W    | W    | W    |

### H'D09E: FG Control Register FGCR: Frequency Divider

|                 |   |   |   |   |   |   |   |     |
|-----------------|---|---|---|---|---|---|---|-----|
| Bit :           | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0   |
|                 | — | — | — | — | — | — | — | DRF |
| Initial value : | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 0   |
| R/W :           | — | — | — | — | — | — | — | W   |

DRF edge select bit

|   |                                                      |
|---|------------------------------------------------------|
| 0 | NCDFG signal rising edge is selected (Initial value) |
| 1 | NCDFG signal falling edge is selected                |

### H'D0A0: Servo Port Mode Register SPMR: Servo Port

|                 |         |   |         |   |   |   |   |   |
|-----------------|---------|---|---------|---|---|---|---|---|
| Bit :           | 7       | 6 | 5       | 4 | 3 | 2 | 1 | 0 |
|                 | CTLSTOP | — | CFGCOMP | — | — | — | — | — |
| Initial value : | 0       | 1 | 0       | 1 | 1 | 1 | 1 | 1 |
| R/W :           | R/W     | — | R/W     | — | — | — | — | — |


CFG input method switch bit

|   |                                                                        |
|---|------------------------------------------------------------------------|
| 0 | Zero cross type comparator method for CFG signal input (Initial value) |
| 1 | Digital signal input method for CFG signal input                       |

CTLSTOP bit

|   |                                      |
|---|--------------------------------------|
| 0 | CTL circuit operates (Initial value) |
| 1 | CTL circuit does not operate         |

H'D0A3: Servo Monitor Control Register SVMCR: Servo Port

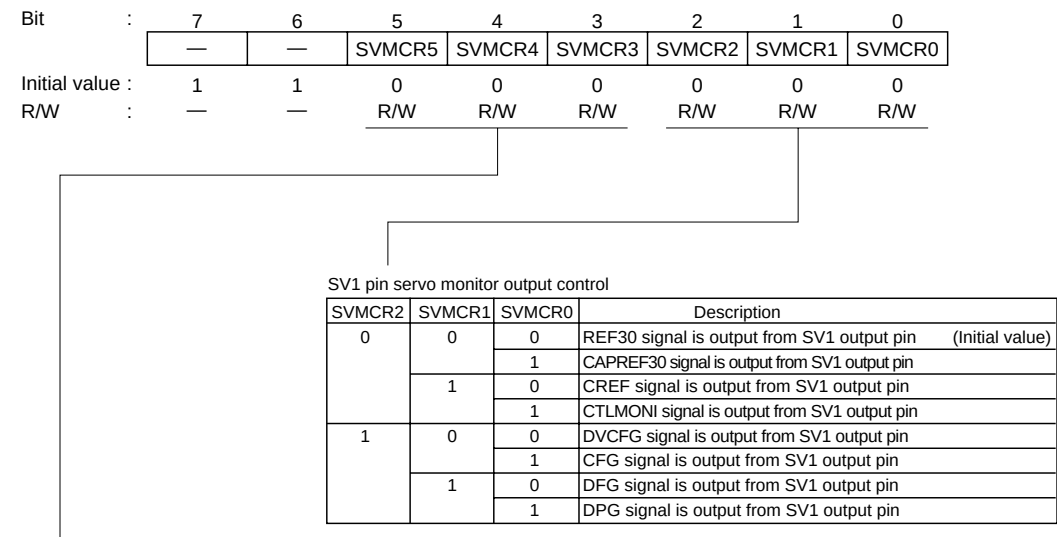

SV2 pin servo monitor output control

| SVMCR5 | SVMCR4 | SVMCR3 | Description                                                |
|--------|--------|--------|------------------------------------------------------------|
| 0      | 0      | 0      | REF30 signal is output from SV2 output pin (Initial value) |
|        |        | 1      | CAPREF30 signal is output from SV2 output pin              |
|        | 1      | 0      | CREF signal is output from SV2 output pin                  |
|        |        | 1      | CTLMONI signal is output from SV2 output pin               |
| 1      | 0      | 0      | DVCFG signal is output from SV2 output pin                 |
|        |        | 1      | CFG signal is output from SV2 output pin                   |
|        | 1      | 0      | DFG signal is output from SV2 output pin                   |
|        |        | 1      | DPG signal is output from SV2 output pin                   |

## H'D0A4: CTL Gain Control Register CTLGR: Servo Port

|               |   |   |   |                     |       |        |        |        |        |
|---------------|---|---|---|---------------------|-------|--------|--------|--------|--------|
| Bit           | : | 7 | 6 | 5                   | 4     | 3      | 2      | 1      | 0      |
|               |   | — | — | CTLE/A <sup>-</sup> | CTLFB | CTLGR3 | CTLGR2 | CTLGR1 | CTLGR0 |
| Initial value | : | 1 | 1 | 0                   | 0     | 0      | 0      | 0      | 0      |
| R/W           | : | — | — | R/W                 | R/W   | R/W    | R/W    | R/W    | R/W    |

CTL amp gain setting bit

| CTLGR3 | CTLGR2 | CTLGR1 | CTLGR0 | CTL output gain            |
|--------|--------|--------|--------|----------------------------|
| 0      | 0      | 0      | 0      | 35.0 dB<br>(Initial value) |
|        |        |        | 1      | 37.5 dB                    |
|        |        | 1      | 0      | 40.0 dB                    |
|        |        |        | 1      | 42.5 dB                    |
|        | 1      | 0      | 0      | 45.0 dB                    |
|        |        |        | 1      | 47.5 dB                    |
|        |        | 1      | 0      | 50.0 dB                    |
|        |        |        | 1      | 52.5 dB                    |
| 1      | 0      | 0      | 0      | 55.0 dB                    |
|        |        |        | 1      | 57.5 dB                    |
|        |        | 1      | 0      | 60.0 dB                    |
|        |        |        | 1      | 62.5 dB                    |
|        | 1      | 0      | 0      | 65.0 dB                    |
|        |        |        | 1      | 67.5 dB                    |
|        |        | 1      | 0      | 70.0 dB                    |
|        |        |        | 1      | 72.5 dB                    |

CTL amp feedback SW bit

|   |                 |
|---|-----------------|
| 0 | CTLFB SW is OFF |
| 1 | CTLFB SW is ON  |

CTL select bit

|   |            |
|---|------------|
| 0 | AMP output |
| 1 | EXCTL      |

## H'D0B0: Vertical Sync Signal Threshold Value Register VTR: Sync Detector (Servo)

|               |   |   |   |      |      |      |      |      |      |
|---------------|---|---|---|------|------|------|------|------|------|
| Bit           | : | 7 | 6 | 5    | 4    | 3    | 2    | 1    | 0    |
|               |   | — | — | VTR5 | VTR4 | VTR3 | VTR2 | VTR1 | VTR0 |
| Initial value | : | 1 | 1 | 0    | 0    | 0    | 0    | 0    | 0    |
| R/W           | : | — | — | W    | W    | W    | W    | W    | W    |

## H'D0B1: Horizontal Sync Signal Threshold Value Register HTR: Sync Detector (Servo)

|               |   |   |   |   |   |      |      |      |      |
|---------------|---|---|---|---|---|------|------|------|------|
| Bit           | : | 7 | 6 | 5 | 4 | 3    | 2    | 1    | 0    |
|               |   | — | — | — | — | HTR3 | HTR2 | HTR1 | HTR0 |
| Initial value | : | 1 | 1 | 1 | 1 | 0    | 0    | 0    | 0    |
| R/W           | : | — | — | — | — | W    | W    | W    | W    |

## H'D0B2: H Pulse Adjustment Start Time Setting Register HRTR: Sync Detector (Servo)

|                 |       |       |       |       |       |       |       |       |
|-----------------|-------|-------|-------|-------|-------|-------|-------|-------|
| Bit :           | 7     | 6     | 5     | 4     | 3     | 2     | 1     | 0     |
|                 | HRTR7 | HRTR6 | HRTR5 | HRTR4 | HRTR3 | HRTR2 | HRTR1 | HRTR0 |
| Initial value : | 0     | 0     | 0     | 0     | 0     | 0     | 0     | 0     |
| R/W :           | W     | W     | W     | W     | W     | W     | W     | W     |

## H'D0B3: H Pulse Width Setting Register HPWR: Sync Detector (Servo)

|                 |   |   |   |   |       |       |       |       |
|-----------------|---|---|---|---|-------|-------|-------|-------|
| Bit :           | 7 | 6 | 5 | 4 | 3     | 2     | 1     | 0     |
|                 | — | — | — | — | HPWR3 | HPWR2 | HPWR1 | HPWR0 |
| Initial value : | 1 | 1 | 1 | 1 | 0     | 0     | 0     | 0     |
| R/W :           | — | — | — | — | W     | W     | W     | W     |


## H'D0B4: Noise Detection Window Setting Register NWR: Sync Detector (Servo)

|                 |   |   |      |      |      |      |      |      |
|-----------------|---|---|------|------|------|------|------|------|
| Bit :           | 7 | 6 | 5    | 4    | 3    | 2    | 1    | 0    |
|                 | — | — | NWR5 | NWR4 | NWR3 | NWR2 | NWR1 | NWR0 |
| Initial value : | 1 | 1 | 0    | 0    | 0    | 0    | 0    | 0    |
| R/W :           | — | — | W    | W    | W    | W    | W    | W    |

## H'D0B5: Noise Detection Register NDR: Sync Detector (Servo)

|                 |      |      |      |      |      |      |      |      |
|-----------------|------|------|------|------|------|------|------|------|
| Bit :           | 7    | 6    | 5    | 4    | 3    | 2    | 1    | 0    |
|                 | NDR7 | NDR6 | NDR5 | NDR4 | NDR3 | NDR2 | NDR1 | NDR0 |
| Initial value : | 0    | 0    | 0    | 0    | 0    | 0    | 0    | 0    |
| R/W :           | W    | W    | W    | W    | W    | W    | W    | W    |


H'D0B6: Sync Signal Control Register SYNCR: Sync Detector (Servo)

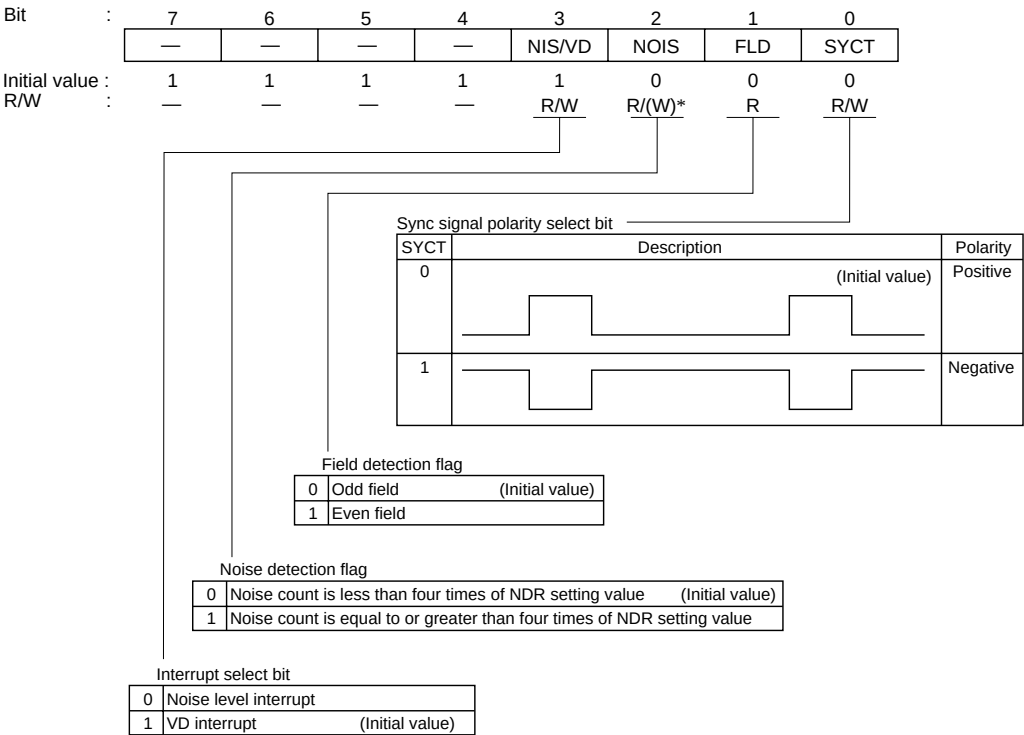

Note: \* Only 0 can be written.



H'D0B8: Servo Interrupt Enable Register 1 SIENR1: Servo Interrupt

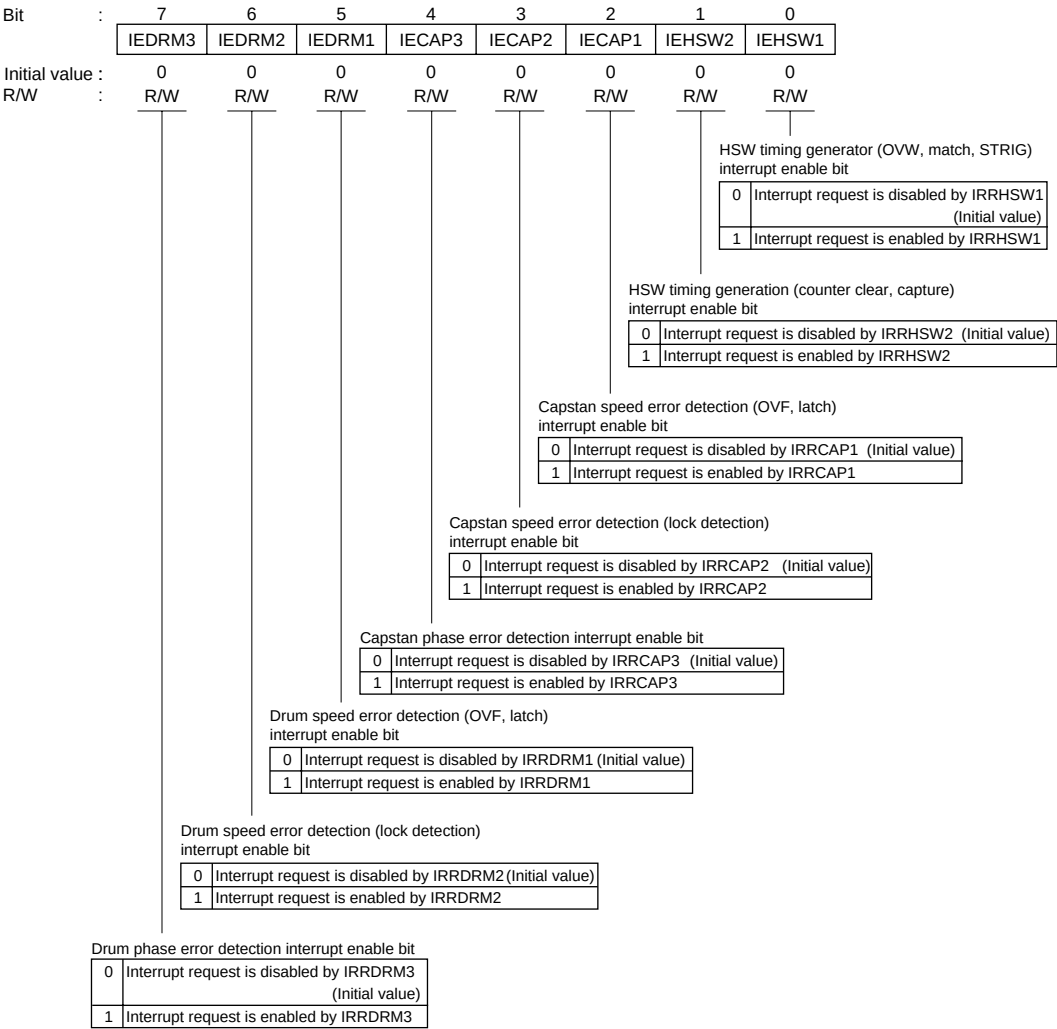

**H'D0B9: Servo Interrupt Enable Register 2 SIENR2: Servo Interrupt**

|               |   |   |   |   |   |   |   |       |       |
|---------------|---|---|---|---|---|---|---|-------|-------|
| Bit           | : | 7 | 6 | 5 | 4 | 3 | 2 | 1     | 0     |
|               |   | — | — | — | — | — | — | IESNC | IECTL |
| Initial value | : | 1 | 1 | 1 | 1 | 1 | 1 | 0     | 0     |
| R/W           | : | — | — | — | — | — | — | R/W   | R/W   |

Vertical sync signal interrupt enable bit

|   |                                                                                          |
|---|------------------------------------------------------------------------------------------|
| 0 | Interrupt (vertical sync signal interrupt) request is disabled by IRRSNC (Initial value) |
| 1 | Interrupt (vertical sync signal interrupt) request is enabled by IRRSNC                  |

CTL interrupt enable bit

|   |                                                         |
|---|---------------------------------------------------------|
| 0 | Interrupt request is disabled by IRRCTL (Initial value) |
| 1 | Interrupt request is enabled by IRRCTL                  |

## H'D0BA: Servo Interrupt Request Register 1 SIRQR1: Servo Interrupt

|               |   |        |        |        |         |         |         |        |        |
|---------------|---|--------|--------|--------|---------|---------|---------|--------|--------|
| Bit           | : | 7      | 6      | 5      | 4       | 3       | 2       | 1      | 0      |
|               |   | IRDRM3 | IRDRM2 | IRDRM1 | IRRCAP3 | IRRCAP2 | IRRCAP1 | IRHSW2 | IRHSW1 |
| Initial value | : | 0      | 0      | 0      | 0       | 0       | 0       | 0      | 0      |
| R/W           | : | R/(W)* | R/(W)* | R/(W)* | R/(W)*  | R/(W)*  | R/(W)*  | R/(W)* | R/(W)* |

HSW timing generator (OVW, match, STRIG) interrupt request bit

|   |                                                                                             |
|---|---------------------------------------------------------------------------------------------|
| 0 | HSW timing generator (OVM, match, STRIG) interrupt request is not generated (Initial value) |
| 1 | HSW timing generator (OVM, match, STRIG) interrupt request is generated                     |

HSW timing generator (counter clear, capture) interrupt request bit

|   |                                                                                                  |
|---|--------------------------------------------------------------------------------------------------|
| 0 | HSW timing generator (counter clear, capture) interrupt request is not generated (Initial value) |
| 0 | HSW timing generator (counter clear, capture) interrupt request is generated                     |

Capstan speed error detector (OVF, latch) interrupt request bit

|   |                                                                                              |
|---|----------------------------------------------------------------------------------------------|
| 0 | Capstan speed error detector (OVF, latch) interrupt request is not generated (Initial value) |
| 1 | Capstan speed error detector (OVF, latch) interrupt request is generated                     |

Capstan speed error detector (lock detection) interrupt request bit

|   |                                                                                                  |
|---|--------------------------------------------------------------------------------------------------|
| 0 | Capstan speed error detector (lock detection) interrupt request is not generated (Initial value) |
| 1 | Capstan speed error detector (lock detection) interrupt request is generated                     |

Capstan phase error detector interrupt request bit

|   |                                                                                 |
|---|---------------------------------------------------------------------------------|
| 0 | Capstan phase error detector interrupt request is not generated (Initial value) |
| 1 | Capstan phase error detector interrupt request is generated                     |

Drum speed error detector (OVF, latch) interrupt request bit

|   |                                                                                           |
|---|-------------------------------------------------------------------------------------------|
| 0 | Drum speed error detector (OVF, latch) interrupt request is not generated (Initial value) |
| 1 | Drum speed error detector (OVF, latch) interrupt request is generated                     |

Drum speed error detector (lock detection) interrupt request bit

|   |                                                                                               |
|---|-----------------------------------------------------------------------------------------------|
| 0 | Drum speed error detector (lock detection) interrupt request is not generated (Initial value) |
| 1 | Drum speed error detector (lock detection) interrupt request is generated                     |

Drum phase error detector interrupt request bit

|   |                                                                              |
|---|------------------------------------------------------------------------------|
| 0 | Drum phase error detector interrupt request is not generated (Initial value) |
| 1 | Drum phase error detector interrupt request is generated                     |

HSW timing generator (OVW, match, STRIG) interrupt request bit

|   |                                                                                             |
|---|---------------------------------------------------------------------------------------------|
| 0 | HSW timing generator (OVM, match, STRIG) interrupt request is not generated (Initial value) |
| 1 | HSW timing generator (OVM, match, STRIG) interrupt request is generated                     |

HSW timing generator (counter clear, capture) interrupt request bit

|   |                                                                                                  |
|---|--------------------------------------------------------------------------------------------------|
| 0 | HSW timing generator (counter clear, capture) interrupt request is not generated (Initial value) |
| 0 | HSW timing generator (counter clear, capture) interrupt request is generated                     |

Capstan speed error detector (OVF, latch) interrupt request bit

|   |                                                                                              |
|---|----------------------------------------------------------------------------------------------|
| 0 | Capstan speed error detector (OVF, latch) interrupt request is not generated (Initial value) |
| 1 | Capstan speed error detector (OVF, latch) interrupt request is generated                     |

Capstan speed error detector (lock detection) interrupt request bit

|   |                                                                                                  |
|---|--------------------------------------------------------------------------------------------------|
| 0 | Capstan speed error detector (lock detection) interrupt request is not generated (Initial value) |
| 1 | Capstan speed error detector (lock detection) interrupt request is generated                     |

Capstan phase error detector interrupt request bit

|   |                                                                                 |
|---|---------------------------------------------------------------------------------|
| 0 | Capstan phase error detector interrupt request is not generated (Initial value) |
| 1 | Capstan phase error detector interrupt request is generated                     |

Drum speed error detector (OVF, latch) interrupt request bit

|   |                                                                                           |
|---|-------------------------------------------------------------------------------------------|
| 0 | Drum speed error detector (OVF, latch) interrupt request is not generated (Initial value) |
| 1 | Drum speed error detector (OVF, latch) interrupt request is generated                     |

Drum speed error detector (lock detection) interrupt request bit

|   |                                                                                               |
|---|-----------------------------------------------------------------------------------------------|
| 0 | Drum speed error detector (lock detection) interrupt request is not generated (Initial value) |
| 1 | Drum speed error detector (lock detection) interrupt request is generated                     |

Drum phase error detector interrupt request bit

|   |                                                                              |
|---|------------------------------------------------------------------------------|
| 0 | Drum phase error detector interrupt request is not generated (Initial value) |
| 1 | Drum phase error detector interrupt request is generated                     |

Note: \* Only 0 can be written to clear the flag.

H'D0BB: Servo Interrupt Request Register 2 SIRQR2: Servo Interrupt

|               |   |   |   |   |   |   |   |        |        |
|---------------|---|---|---|---|---|---|---|--------|--------|
| Bit           | : | 7 | 6 | 5 | 4 | 3 | 2 | 1      | 0      |
|               |   | — | — | — | — | — | — | IRRSNC | IRRCTL |
| Initial value | : | 1 | 1 | 1 | 1 | 1 | 1 | 0      | 0      |
| R/W           | : | — | — | — | — | — | — | R/(W)* | R/(W)* |

CTL interrupt request bit


|   |                                                        |
|---|--------------------------------------------------------|
| 0 | CTL interrupt request is not generated (Initial value) |
| 1 | CTL interrupt request is generated                     |

Vertical sync signal interrupt request bit

|   |                                                                                     |
|---|-------------------------------------------------------------------------------------|
| 0 | Sync signal detector (VD, noise) interrupt request is not generated (Initial value) |
| 1 | Sync signal detector (VD, noise) interrupt request is generated                     |

Note: \* Only 0 can be written to clear the flag.

H'D0E5: DDC Switch Register    DDCSWR: I²C Bus Interface

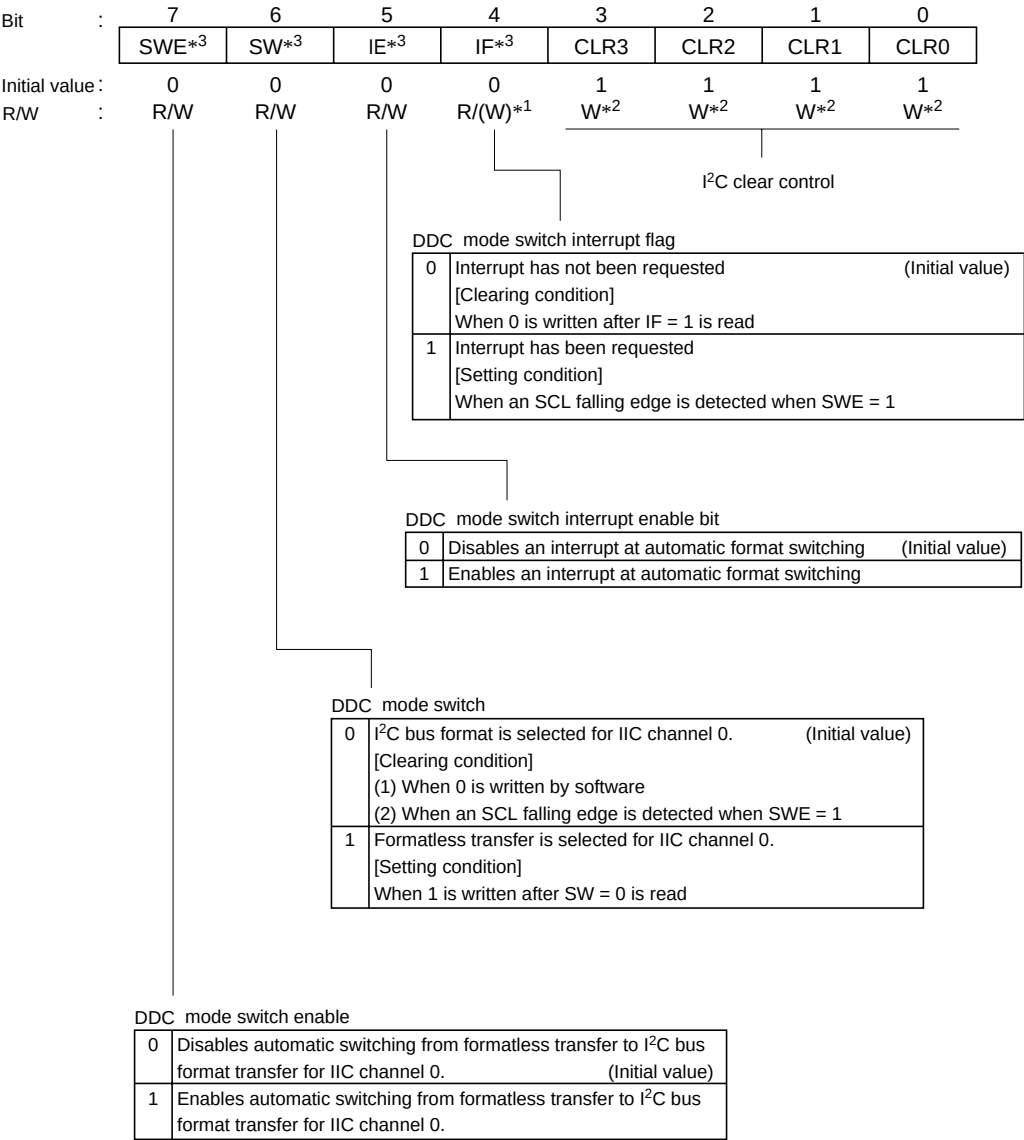

- Notes:
- 1. Only 0 can be written to clear the flag.
  - 2. Always read as 1.
  - 3. These bits are not provided for the H8S/2197S and H8S/2196S.

# H'D0E8: I<sup>2</sup>C Bus Control Register ICCR0: I<sup>2</sup>C Bus Interface

|                 |     |      |     |     |      |      |        |     |
|-----------------|-----|------|-----|-----|------|------|--------|-----|
| Bit :           | 7   | 6    | 5   | 4   | 3    | 2    | 1      | 0   |
|                 | ICE | IEIC | MST | TRS | ACKC | BBSY | IRIC   | SCP |
| Initial value : | 0   | 0    | 0   | 0   | 0    | 0    | 0      | 1   |
| R/W :           | R/W | R/W  | R/W | R/W | R/W  | R/W  | R/(W)* | W   |

|                                         |                                                                               |
|-----------------------------------------|-------------------------------------------------------------------------------|
| Start condition/stop condition prohibit |                                                                               |
| 0                                       | Writing 0 issues a start or stop condition, in combination with the BBSY flag |
| 1                                       | Reading always returns a value of 1 (Initial value)<br>Writing is ignored     |

|                                                       |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
|-------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| I <sup>2</sup> C bus interface interrupt request flag |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| 0                                                     | Waiting for transfer, or transfer in progress (Initial value)<br>[Clearing conditions]<br>When 0 is written in IRIC after reading IRIC = 1                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| (1)                                                   | Interrupt requested [Setting conditions] <ul style="list-style-type: none"> <li>I<sup>2</sup>C bus format master mode <ol style="list-style-type: none"> <li>When a start condition is detected in the bus line state after a start condition is issued (when the TDRE flag is set to 1 because of first frame transmission)</li> <li>When a wait is inserted between the data and acknowledge bit when WAIT = 1</li> <li>At the end of data transfer (at the rise of the 9th transmit clock pulse, or at the fall of the 8th transmit/receive clock pulse when using wait insertion)</li> <li>When a slave address is received after bus arbitration is lost (when the AL flag is set to 1)</li> <li>When 1 is received as the acknowledge bit when the ACKC bit is 1 (when the ACKB bit is set to 1)</li> </ol> </li> <li>I<sup>2</sup>C bus format slave mode <ol style="list-style-type: none"> <li>When the slave address (SVA, SVAX) matches (when the AAS and AASX flags are set to 1) and at the end of data transfer up to the subsequent retransmission start condition or stop condition detection (when the TDRE or RDRF flag is set to 1)</li> <li>When the general call address is detected (when FS=0 and the ADZ flag is set to 1) and at the end of data transfer up to the subsequent retransmission start condition or stop condition detection (when the TDRE or RDRF flag is set to 1)</li> <li>When 1 is received as the acknowledge bit when the ACKC bit is 1 (when the ACKB bit is set to 1)</li> <li>When a stop condition is detected (when the STOP or ESTP flag is set to 1)</li> </ol> </li> </ul> |
|                                                       | <ul style="list-style-type: none"> <li>Synchronous serial format and formatless <ol style="list-style-type: none"> <li>At the end of data transfer (when the TDRE or RDRF flag is set to 1)</li> <li>When a start condition is detected with serial format selected</li> </ol> </li> <li>When a condition, other than the above, that sets the TDRE or RDRF flag to 1 is detected</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |

|          |                                                                                        |
|----------|----------------------------------------------------------------------------------------|
| Bus busy |                                                                                        |
| 0        | Bus is free (Initial value)<br>[Clearing conditions] When a stop condition is detected |
| 1        | Bus is busy [Setting conditions] When a start condition is detected                    |

|                                    |                                                                                                   |
|------------------------------------|---------------------------------------------------------------------------------------------------|
| Acknowledge bit judgment selection |                                                                                                   |
| 0                                  | The value of the acknowledge bit is ignored, and continuous transfer is performed (Initial value) |
| 1                                  | If the acknowledge bit is 1, continuous transfer is interrupted                                   |

| Master/slave select     |     |                                    |
|-------------------------|-----|------------------------------------|
| Transmit/receive select |     |                                    |
| MST                     | TRS | Description                        |
| 0                       | 0   | Slave receive mode (Initial value) |
|                         | 1   | Slave transmit mode                |
| 1                       | 0   | Master receive mode                |
|                         | 1   | Master transmit mode               |

|                                                 |                                               |
|-------------------------------------------------|-----------------------------------------------|
| I <sup>2</sup> C bus interface interrupt enable |                                               |
| 0                                               | Interrupt request is disabled (Initial value) |
| 1                                               | Interrupt request is enabled                  |

|                                       |                                                                                                                                                                                                |
|---------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| I <sup>2</sup> C bus interface enable |                                                                                                                                                                                                |
| 0                                     | I <sup>2</sup> C bus interface module disabled, with SCL and SDA signal pins set to port function. The internal status of the IIC is initialized SAR and SARX can be accessed. (Initial value) |
| 1                                     | I <sup>2</sup> C bus interface module enabled for transfer operation (pins SCL and SCA are driving the bus). ICMR and ICDR can be accessed.                                                    |

Note: \* Only 0 can be written to clear the flag.

# H'D0E9: I<sup>2</sup>C Bus Status Register ICSR0: I<sup>2</sup>C Bus Interface

|               |        |        |        |        |        |        |        |      |
|---------------|--------|--------|--------|--------|--------|--------|--------|------|
| Bit           | 7      | 6      | 5      | 4      | 3      | 2      | 1      | 0    |
|               | ESTP   | STOP   | IRTR   | AASX   | AL     | AAS    | ADZ    | ACKB |
| Initial value | 0      | 0      | 0      | 0      | 0      | 0      | 0      | 0    |
| R/W           | R/(W)* | R/(W)* | R/(W)* | R/(W)* | R/(W)* | R/(W)* | R/(W)* | R/W  |

## Acknowledge bit

|   |                                                                                                                                                          |                 |
|---|----------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------|
| 0 | Receive mode: 0 is output at acknowledge output timing<br>Transmit mode: Indicates that the receiving device has acknowledged the data (signal is 0)     | (Initial value) |
| 1 | Receive mode: 1 is output at acknowledge output timing<br>Transmit mode: Indicates that the receiving device has not acknowledged the data (signal is 1) |                 |

## General call address recognition flag

|   |                                                                                                                                                                                                                  |                 |
|---|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------|
| 0 | General call address not recognized<br>[Clearing conditions]<br>(1) When ICDR data is written (transmit mode) or read (receive mode)<br>(2) When 0 is written in ADZ after reading ADZ = 1<br>(3) In master mode | (Initial value) |
| 1 | General call address recognized<br>[Setting conditions]<br>– When the general call address is detected when FSX = 0 or FS = 0 in slave receive mode                                                              |                 |

## Slave address recognition flag

|   |                                                                                                                                                                                                                                   |                 |
|---|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------|
| 0 | Slave address or general call address not recognized<br>[Clearing conditions]<br>(1) When ICDR data is written (transmit mode) or read (receive mode)<br>(2) When 0 is written in AAS after reading AAS = 1<br>(3) In master mode | (Initial value) |
| 1 | Slave address or general call address recognized<br>[Setting conditions]<br>– When the slave address or general call address is detected when FS = 0 in slave receive mode                                                        |                 |

## Arbitration lost flag

|   |                                                                                                                                                                                                                        |                 |
|---|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------|
| 0 | Bus arbitration won<br>[Clearing conditions]<br>(1) When ICDR data is written (transmit mode) or read (receive mode)<br>(2) When 0 is written in AL after reading AL = 1                                               | (Initial value) |
| 1 | Arbitration lost<br>[Setting conditions]<br>(1) If the internal SDA and SDA pin disagree at the rise of SCL in master transmit mode<br>(2) If the internal SCL line is high at the fall of SCL in master transmit mode |                 |

## Second slave address recognition flag

|   |                                                                                                                                                                                      |                 |
|---|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------|
| 0 | Second slave address not recognized<br>[Clearing conditions]<br>(1) When 0 is written in AASX after reading AASX = 1<br>(2) When a start condition is detected<br>(3) In master mode | (Initial value) |
| 1 | Second slave address recognized<br>[Setting conditions]<br>– When the second slave address is detected in slave receive mode while FSX = 0                                           |                 |

## I<sup>2</sup>C bus interface continuous transmission/reception interrupt request flag

|   |                                                                                                                                                                                                                              |                 |
|---|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------|
| 0 | Waiting for transfer, or transfer in progress<br>[Clearing conditions]<br>(1) When 0 is written in IRTR after reading IRTR = 1<br>(2) When the IRIC flag is cleared to 0                                                     | (Initial value) |
| 1 | Continuous transfer state<br>[Setting conditions]<br>• In I <sup>2</sup> C bus interface slave mode<br>– When the TDRE or RDRF flag is set to 1 when AASX = 1<br>• In other mode<br>– When the TDRE or RDRF flag is set to 1 |                 |

## Normal stop condition detection flag

|   |                                                                                                                                                                                                                  |                 |
|---|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------|
| 0 | No normal stop condition<br>[Clearing conditions]<br>(1) When 0 is written in STOP after reading STOP = 1<br>(2) When the IRIC flag is cleared to 0                                                              | (Initial value) |
| 1 | * In I <sup>2</sup> C bus format slave mode<br>Normal stop condition detected<br>[Setting conditions]<br>– When a stop condition is detected after completion of frame transfer<br>• In other mode<br>No meaning |                 |

## Error stop condition detection flag

|   |                                                                                                                                                                                                    |                 |
|---|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------|
| 0 | No error stop condition<br>[Clearing conditions]<br>(1) When 0 is written in ESTP after reading ESTP = 1<br>(2) When the IRIC flag is cleared to 0                                                 | (Initial value) |
| 1 | * In I <sup>2</sup> C bus format slave mode<br>Error stop condition detected<br>[Setting conditions]<br>– When a stop condition is detected during frame transfer<br>• In other mode<br>No meaning |                 |

Note: \* Only 0 can be written to clear the flag.

**H'D0EE: I<sup>2</sup>C Bus Data Register ICDR0: I<sup>2</sup>C Bus Interface**

|                 |   |       |       |       |       |       |       |       |       |
|-----------------|---|-------|-------|-------|-------|-------|-------|-------|-------|
| Bit             | : | 7     | 6     | 5     | 4     | 3     | 2     | 1     | 0     |
|                 |   | ICDR7 | ICDR6 | ICDR5 | ICDR4 | ICDR3 | ICDR2 | ICDR1 | ICDR0 |
| Initial value : |   | —     | —     | —     | —     | —     | —     | —     | —     |
| R/W             | : | R/W   | R/W   | R/W   | R/W   | R/W   | R/W   | R/W   | R/W   |

Note: Refer to section 23.2.1, I<sup>2</sup>C Bus Data Register (ICDR).

**H'D0EE: Second Slave Address Register SARX0: I<sup>2</sup>C Bus Interface**

|                 |   |       |       |       |       |       |       |       |     |
|-----------------|---|-------|-------|-------|-------|-------|-------|-------|-----|
| Bit             | : | 7     | 6     | 5     | 4     | 3     | 2     | 1     | 0   |
|                 |   | SVAX6 | SVAX5 | SVAX4 | SVAX3 | SVAX2 | SVAX1 | SVAX0 | FSX |
| Initial value : |   | 0     | 0     | 0     | 0     | 0     | 0     | 0     | 1   |
| R/W             | : | R/W   | R/W   | R/W   | R/W   | R/W   | R/W   | R/W   | R/W |

Format select  
Used combined FS bit in SAR.

Note: Refer to section 23.2.3, Second Slave Address Register (SARX), and section 23.2.2, Slave Address Register (SAR).



## H'D0EF: I<sup>2</sup>C Bus Mode Register ICMR0: I<sup>2</sup>C Bus Interface

|               |   |     |      |      |      |      |     |     |     |
|---------------|---|-----|------|------|------|------|-----|-----|-----|
| Bit           | : | 7   | 6    | 5    | 4    | 3    | 2   | 1   | 0   |
|               |   | MLS | WAIT | CKS2 | CKS1 | CKS0 | BC2 | BC1 | BC0 |
| Initial value | : | 0   | 0    | 0    | 0    | 0    | 0   | 0   | 0   |
| R/W           | : | R/W | R/W  | R/W  | R/W  | R/W  | R/W | R/W | R/W |

Bit counter

|     |     |     | Bit/frame                |                             |
|-----|-----|-----|--------------------------|-----------------------------|
| BC2 | BC1 | BC0 | Clock sync serial format | I <sup>2</sup> C bus format |
| 0   | 0   | 0   | 8                        | 9 (Initial value)           |
|     |     | 1   | 1                        | 2                           |
|     |     | 0   | 2                        | 3                           |
| 0   | 1   | 1   | 3                        | 4                           |
|     |     | 0   | 4                        | 5                           |
|     |     | 1   | 5                        | 6                           |
|     | 0   | 0   | 6                        | 7                           |
|     |     | 1   | 7                        | 8                           |
|     |     | 0   |                          |                             |

Transfer clock select bits

| IICX* | CKS2 | CKS1 | CKS0 | Clock      | Transfer rate |               |
|-------|------|------|------|------------|---------------|---------------|
|       |      |      |      |            | $\phi=8$ MHz  | $\phi=10$ MHz |
| 0     | 0    | 0    | 0    | $\phi/28$  | 286 kHz       | 357 kHz       |
|       |      |      | 1    | $\phi/40$  | 200 kHz       | 250 kHz       |
|       |      | 1    | 0    | $\phi/48$  | 167 kHz       | 208 kHz       |
|       |      |      | 1    | $\phi/64$  | 125 kHz       | 156 kHz       |
|       | 1    | 0    | 0    | $\phi/80$  | 100 kHz       | 125 kHz       |
|       |      |      | 1    | $\phi/100$ | 80.0 kHz      | 100 kHz       |
|       |      | 1    | 0    | $\phi/112$ | 71.4 kHz      | 89.3 kHz      |
|       |      |      | 1    | $\phi/128$ | 62.5 kHz      | 78.1 kHz      |
| 1     | 0    | 0    | 0    | $\phi/56$  | 143 kHz       | 179 kHz       |
|       |      |      | 1    | $\phi/80$  | 100 kHz       | 125 kHz       |
|       |      | 1    | 0    | $\phi/96$  | 83.3 kHz      | 104 kHz       |
|       |      |      | 1    | $\phi/128$ | 62.5 kHz      | 78.1 kHz      |
|       | 1    | 0    | 0    | $\phi/160$ | 50.0 kHz      | 62.5 kHz      |
|       |      |      | 1    | $\phi/200$ | 40.0 kHz      | 50.0 kHz      |
|       |      | 1    | 0    | $\phi/224$ | 35.7 kHz      | 44.6 kHz      |
|       |      |      | 1    | $\phi/256$ | 31.3 kHz      | 39.1 kHz      |

Wait insertion bit

|   |                                                                     |
|---|---------------------------------------------------------------------|
| 0 | Data and acknowledge bits transferred consecutively (Initial value) |
| 1 | Wait inserted between data and acknowledge bits                     |

MSB-first/LSB-first select

|   |                           |
|---|---------------------------|
| 0 | MSB-first (Initial value) |
| 1 | LSB-first                 |

Note: \* See bit 6 in the serial timer control register (STCR)

## H'D0EF: Slave Address Register SAR0: I<sup>2</sup>C Bus Interface

|               |   |      |      |      |      |      |      |      |     |
|---------------|---|------|------|------|------|------|------|------|-----|
| Bit           | : | 7    | 6    | 5    | 4    | 3    | 2    | 1    | 0   |
|               |   | SVA6 | SVA5 | SVA4 | SVA3 | SVA2 | SVA1 | SVA0 | FS  |
| Initial value | : | 0    | 0    | 0    | 0    | 0    | 0    | 0    | 0   |
| R/W           | : | R/W  | R/W  | R/W  | R/W  | R/W  | R/W  | R/W  | R/W |

Format select bit

| DDCSWR<br>Bit 6 | SAR<br>Bit 0 | SARX<br>Bit 0 | Format select                                                                                                 |
|-----------------|--------------|---------------|---------------------------------------------------------------------------------------------------------------|
| SW              | FS           | FX            |                                                                                                               |
| 0               | 0            | 0             | I <sup>2</sup> C bus format<br>• SAR and SARX slave addresses recognized                                      |
|                 |              | 1             | I <sup>2</sup> C bus format (Initial value)<br>• SAR slave address recognized<br>• SARX slave address ignored |
|                 | 1            | 0             | I <sup>2</sup> C bus format<br>• SAR slave address ignored<br>• SARX slave address recognized                 |
|                 |              | 1             | I <sup>2</sup> C bus format<br>• SAR and SARX slave addresses ignored                                         |
| 1               | 0            | 0             | Formatless transfer (start and stop conditions are not detected)                                              |
|                 |              | 1             | • With acknowledge bit                                                                                        |
|                 | 0            | 0             | Formatless transfer* (start and stop conditions are not detected)                                             |
|                 |              | 1             | • Without acknowledge bit                                                                                     |

Note: \* Do not use this setting when automatically switching the made from formatless transfer to I<sup>2</sup>C bus format by setting DDCSWR.

H'D100: Timer Interrupt Enable Register TIER: Timer X1

Bit :

|       |       |       |       |       |       |      |      |
|-------|-------|-------|-------|-------|-------|------|------|
| 7     | 6     | 5     | 4     | 3     | 2     | 1    | 0    |
| ICIAE | ICIBE | ICICE | ICIDE | OCIAE | OCIBE | OVIE | ICSA |

Initial value :

|   |   |   |   |   |   |   |   |
|---|---|---|---|---|---|---|---|
| 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
|---|---|---|---|---|---|---|---|

R/W :

|     |     |     |     |     |     |     |     |
|-----|-----|-----|-----|-----|-----|-----|-----|
| R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
|-----|-----|-----|-----|-----|-----|-----|-----|

Input capture input select A bit

|   |                                                                      |
|---|----------------------------------------------------------------------|
| 0 | FTIA pin input is selected for input capture A input (Initial value) |
| 1 | HSW is selected for input capture A input                            |

Timeout overflow interrupt enable bit

|   |                                                      |
|---|------------------------------------------------------|
| 0 | Interrupt request (FOVI) is disabled (Initial value) |
| 1 | Interrupt request (FOVI) is enabled                  |

Output compare interrupt B enable bit

|   |                                                           |
|---|-----------------------------------------------------------|
| 0 | OCFB interrupt request (OCIB) is disabled (Initial value) |
| 1 | OCFB interrupt request (OCIB) is enabled                  |

Output compare interrupt A enable bit

|   |                                                           |
|---|-----------------------------------------------------------|
| 0 | OCFA interrupt request (OCIA) is disabled (Initial value) |
| 1 | OCFA interrupt request (OCIA) is enabled                  |

Input capture D interrupt enable bit

|   |                                                           |
|---|-----------------------------------------------------------|
| 0 | ICFD interrupt request (ICID) is disabled (Initial value) |
| 1 | ICFD interrupt request (ICID) is enabled                  |

Input capture C interrupt enable bit

|   |                                                           |
|---|-----------------------------------------------------------|
| 0 | ICFC interrupt request (ICIC) is disabled (Initial value) |
| 1 | ICFC interrupt request (ICIC) is enabled                  |

Input capture B interrupt enable bit

|   |                                                           |
|---|-----------------------------------------------------------|
| 0 | ICFB interrupt request (ICIB) is disabled (Initial value) |
| 1 | ICFB interrupt request (ICIB) is enabled                  |

Input capture A interrupt enable bit

|   |                                                           |
|---|-----------------------------------------------------------|
| 0 | ICFA interrupt request (ICIA) is disabled (Initial value) |
| 1 | ICFA interrupt request (ICIA) is enabled                  |

Rev. 1.0, 02/01, page 1079 of 1184

RENESAS

# H'D101: Timer Control/Status Register X TCSR\_X: Timer X1

|               |   |        |        |        |        |        |        |        |      |
|---------------|---|--------|--------|--------|--------|--------|--------|--------|------|
| Bit           | : | 7      | 6      | 5      | 4      | 3      | 2      | 1      | 0    |
|               |   | ICFA   | ICFB   | ICFC   | ICFD   | OCFA   | OCFB   | OVF    | CCLR |
| Initial value | : | 0      | 0      | 0      | 0      | 0      | 0      | 0      | 0    |
| R/W           | : | R/(W)* | R/(W)* | R/(W)* | R/(W)* | R/(W)* | R/(W)* | R/(W)* | R/W  |

|               |                                             |
|---------------|---------------------------------------------|
| Counter clear |                                             |
| 0             | FRC clearing is disabled<br>(Initial value) |
| 1             | FRC clearing is enabled                     |

|                |                                                                                               |
|----------------|-----------------------------------------------------------------------------------------------|
| Timer overflow |                                                                                               |
| 0              | [Clearing conditions]<br>When 0 is written to OVF after reading<br>OVF = 1<br>(Initial value) |
| 1              | [Setting conditions]<br>When FRC changes from H'FFFF to H'0000                                |

|                       |                                                                                                 |
|-----------------------|-------------------------------------------------------------------------------------------------|
| Output compare flag B |                                                                                                 |
| 0                     | [Clearing conditions]<br>When 0 is written to OCFB after reading<br>OCFB = 1<br>(Initial value) |
| 1                     | [Setting conditions]<br>When FRC = OCRB                                                         |

|                       |                                                                                                 |
|-----------------------|-------------------------------------------------------------------------------------------------|
| Output compare flag A |                                                                                                 |
| 0                     | [Clearing conditions]<br>When 0 is written to OCFA after reading<br>OCFA = 1<br>(Initial value) |
| 1                     | [Setting conditions]<br>When FRC = OCRA                                                         |

|                      |                                                                                                 |
|----------------------|-------------------------------------------------------------------------------------------------|
| Input capture flag D |                                                                                                 |
| 0                    | [Clearing conditions]<br>When 0 is written to ICFD after reading<br>ICFD = 1<br>(Initial value) |
| 1                    | [Setting conditions]<br>When input capture signal is generated                                  |

|                      |                                                                                                 |
|----------------------|-------------------------------------------------------------------------------------------------|
| Input capture flag C |                                                                                                 |
| 0                    | [Clearing conditions]<br>When 0 is written to ICFC after reading<br>ICFC = 1<br>(Initial value) |
| 1                    | [Setting conditions]<br>When input capture signal is generated                                  |


|                      |                                                                                                 |
|----------------------|-------------------------------------------------------------------------------------------------|
| Input capture flag B |                                                                                                 |
| 0                    | [Clearing conditions]<br>When 0 is written to ICFB after reading<br>ICFB = 1<br>(Initial value) |
| 1                    | [Setting conditions]<br>When FRC value is transferred to ICRB by<br>input capture signal        |

|                      |                                                                                                 |
|----------------------|-------------------------------------------------------------------------------------------------|
| Input capture flag A |                                                                                                 |
| 0                    | [Clearing conditions]<br>When 0 is written to ICFA after reading<br>ICFA = 1<br>(Initial value) |
| 1                    | [Setting conditions]<br>When FRC value is transferred to ICRA by<br>input capture signal        |


Note: \* Only 0 can be written to bits 7 to 1 to clear the flags.

### H'D103: Free Running Counter L FRCL: Timer X1

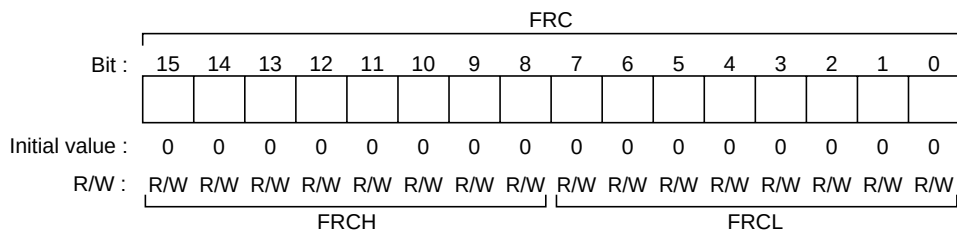

**H'D104: Output Compare Register AH, BH OCRAH, OCRBH: Timer X1**

### H'D105: Output Compare Register AL, BL OCRAL, OCRBL: Timer X1

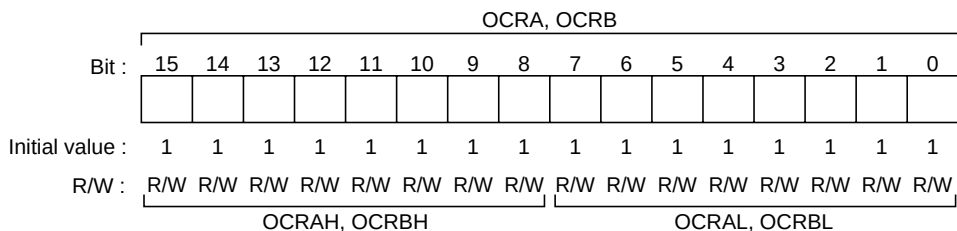

## H'D106: Timer Control Register X TCRX: Timer X1

|     |   |       |       |       |       |       |       |      |      |
|-----|---|-------|-------|-------|-------|-------|-------|------|------|
| Bit | : | 7     | 6     | 5     | 4     | 3     | 2     | 1    | 0    |
|     |   | IEDGA | IEDGB | IEDGC | IEDGD | BUFEA | BUFEB | CKS1 | CKS0 |

Initial value : 0 0 0 0 0 0 0 0

R/W : R/W R/W R/W R/W R/W R/W R/W R/W

Clock select bit

| CKS1 | CKS0 | Clock select                                                         |
|------|------|----------------------------------------------------------------------|
| 0    | 0    | Internal clock: count at $\phi/4$<br>(Initial value)                 |
| 0    | 1    | Internal clock: count at $\phi/16$                                   |
| 1    | 0    | Internal clock: count at $\phi/64$                                   |
| 1    | 1    | DVCFG: Edge detection pulse selected by CFG frequency division timer |

Buffer enable B

|   |                                                                 |
|---|-----------------------------------------------------------------|
| 0 | ICRC is not used as buffer register for ICRB<br>(Initial value) |
| 1 | ICRC is used as buffer register for ICRB                        |

Buffer enable A

|   |                                                              |
|---|--------------------------------------------------------------|
| 0 | ICRC is not used as buffer register for ICRA (Initial value) |
| 1 | ICRC is used as buffer register for ICRA                     |

Input capture edge select D

|   |                                                                  |
|---|------------------------------------------------------------------|
| 0 | Capture at falling edge of input capture input D (Initial value) |
| 1 | Capture at rising edge of input capture input D                  |

Input capture edge select C

|   |                                                                  |
|---|------------------------------------------------------------------|
| 0 | Capture at falling edge of input capture input C (Initial value) |
| 1 | Capture at rising edge of input capture input C                  |


Input capture edge select B

|   |                                                                  |
|---|------------------------------------------------------------------|
| 0 | Capture at falling edge of input capture input B (Initial value) |
| 1 | Capture at rising edge of input capture input B                  |

Input capture edge select A

|   |                                                                  |
|---|------------------------------------------------------------------|
| 0 | Capture at falling edge of input capture input A (Initial value) |
| 1 | Capture at rising edge of input capture input A                  |

H'D107: Timer Output Compare Control Register TOCR: Timer X1

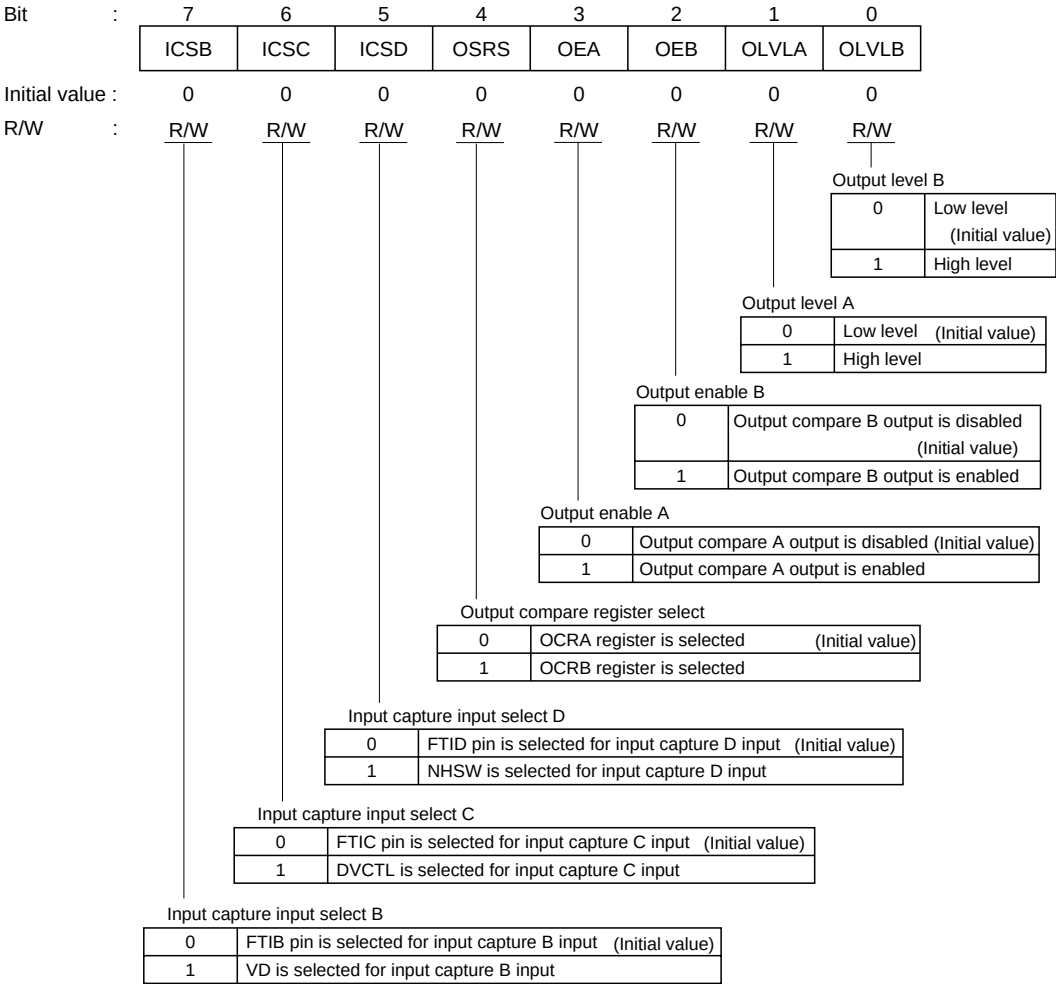

**H'D108: Input Capture Register AH ICRAH: Timer X1**

**H'D109: Input Capture Register AL ICRAL: Timer X1**

**H'D10A: Input Capture Register BH ICRBH: Timer X1**

**H'D10B: Input Capture Register BL ICRBL: Timer X1**

**H'D10C: Input Capture Register CH ICRCH: Timer X1**

**H'D10D: Input Capture Register CL ICRCL: Timer X1**

**H'D10E: Input Capture Register DH ICRDH: Timer X1**

**H'D10F: Input Capture Register DL ICRDL: Timer X1**

| ICRA, ICRB, ICRC, ICRD     |    |    |    |    |    |    |   |                            |   |   |   |   |   |   |   |   |
|----------------------------|----|----|----|----|----|----|---|----------------------------|---|---|---|---|---|---|---|---|
| Bit :                      | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8                          | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
|                            |    |    |    |    |    |    |   |                            |   |   |   |   |   |   |   |   |
| Initial value :            | 0  | 0  | 0  | 0  | 0  | 0  | 0 | 0                          | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| R/W :                      | R  | R  | R  | R  | R  | R  | R | R                          | R | R | R | R | R | R | R | R |
| ICRAH, ICRBH, ICRCH, ICRDH |    |    |    |    |    |    |   | ICRAL, ICRBL, ICRCL, ICRDL |   |   |   |   |   |   |   |   |



## H'D110: Timer Mode Register B TMB: Timer B

|               |       |        |       |   |   |       |       |       |
|---------------|-------|--------|-------|---|---|-------|-------|-------|
| Bit           | 7     | 6      | 5     | 4 | 3 | 2     | 1     | 0     |
|               | TMB17 | TMBIF  | TMBIE | — | — | TMB12 | TMB11 | TMB10 |
| Initial value | 0     | 0      | 0     | 1 | 1 | 0     | 0     | 0     |
| R/W           | R/W   | R/(W)* | R/W   | — | — | R/W   | R/W   | R/W   |

Clock select bit

| TMB12 | TMB11 | TMB10 | Clock select                                           |
|-------|-------|-------|--------------------------------------------------------|
| 0     | 0     | 0     | Internal clock: Count at $\phi/16384$ (Initial value)  |
| 0     | 0     | 1     | Internal clock: Count at $\phi/4096$                   |
| 0     | 1     | 0     | Internal clock: Count at $\phi/1024$                   |
| 0     | 1     | 1     | Internal clock: Count at $\phi/512$                    |
| 1     | 0     | 0     | Internal clock: Count at $\phi/128$                    |
| 1     | 0     | 1     | Internal clock: Count at $\phi/32$                     |
| 1     | 1     | 0     | Internal clock: Count at $\phi/8$                      |
| 1     | 1     | 1     | Count at rising/falling edge of external event (TMBI)* |

Note: \* External event edge selection is set at PMRA6 in port mode register A (PMRA).

See section 12.2.4, Port Register A (PMRA).

Timer B interrupt enable bit

|   |                                                       |
|---|-------------------------------------------------------|
| 0 | Timer B interrupt request is disabled (Initial value) |
| 1 | Timer B interrupt request is enabled                  |

Timer B interrupt request flag

|   |                                                                            |
|---|----------------------------------------------------------------------------|
| 0 | [Clearing conditions] (Initial value)<br>When 0 is written after reading 1 |
| 1 | [Setting conditions]<br>When TCB overflows                                 |

Auto reload function select bit

|   |                                               |
|---|-----------------------------------------------|
| 0 | Interval function is selected (Initial value) |
| 1 | Auto reload function is selected              |

Note: \* Only 0 can be written to clear the flag.

## H'D111: Timer Counter B TCB: Timer B

|               |       |       |       |       |       |       |       |       |
|---------------|-------|-------|-------|-------|-------|-------|-------|-------|
| Bit           | 7     | 6     | 5     | 4     | 3     | 2     | 1     | 0     |
|               | TCB17 | TCB16 | TCB15 | TCB14 | TCB13 | TCB12 | TCB11 | TCB10 |
| Initial value | 0     | 0     | 0     | 0     | 0     | 0     | 0     | 0     |
| R/W           | R     | R     | R     | R     | R     | R     | R     | R     |

## H'D111: Timer Load RegisterB TLB: TimerB

|                 |       |       |       |       |       |       |       |       |
|-----------------|-------|-------|-------|-------|-------|-------|-------|-------|
| Bit :           | 7     | 6     | 5     | 4     | 3     | 2     | 1     | 0     |
|                 | TLB17 | TLB16 | TLB15 | TLB14 | TLB13 | TLB12 | TLB11 | TLB10 |
| Initial value : | 0     | 0     | 0     | 0     | 0     | 0     | 0     | 0     |
| R/W :           | W     | W     | W     | W     | W     | W     | W     | W     |

## H'D112: Timer L Mode Register LMR: Timer L

|                 |        |      |   |   |      |      |      |      |
|-----------------|--------|------|---|---|------|------|------|------|
| Bit :           | 7      | 6    | 5 | 4 | 3    | 2    | 1    | 0    |
|                 | LMIF   | LMIE | — | — | LMR3 | LMR2 | LMR1 | LMR0 |
| Initial value : | 0      | 0    | 1 | 1 | 0    | 0    | 0    | 0    |
| R/W :           | R/(W)* | R/W  | — | — | R/W  | R/W  | R/W  | R/W  |

Clock select bit

| LMR2 | LMR1 | LMR0 | Clock select                                              |
|------|------|------|-----------------------------------------------------------|
| 0    | 0    | 0    | Count at rising edge of PB and REC-CTL<br>(Initial value) |
|      |      | 1    | Count at falling edge of PB and REC-CTL                   |
|      | 1    | *    | Count DVCFG2                                              |
| 1    | 0    | *    | Internal clock: Count at $\phi/128$                       |
|      | 1    | *    | Internal clock: Count at $\phi/64$                        |

Note: \* Don't care.

Up/down count control

|   |                                  |
|---|----------------------------------|
| 0 | Up count control (Initial value) |
| 1 | Down count control               |

Timer L interrupt enable bit

|   |                                                       |
|---|-------------------------------------------------------|
| 0 | Timer L interrupt request is disabled (Initial value) |
| 1 | Timer L interrupt request is enabled                  |

Timer L interrupt request flag

|   |                                                                                    |
|---|------------------------------------------------------------------------------------|
| 0 | [Clearing conditions]<br>When 0 is written after reading 1 (Initial value)         |
| 1 | [Setting conditions]<br>When LTC overflow, underflow or compare match clear occurs |

Note: \* Only 0 can be written to clear the flag.


**H'D113: Linear Time Counter LTC: Timer L**

|                 |      |      |      |      |      |      |      |      |
|-----------------|------|------|------|------|------|------|------|------|
| Bit :           | 7    | 6    | 5    | 4    | 3    | 2    | 1    | 0    |
|                 | LTC7 | LTC6 | LTC5 | LTC4 | LTC3 | LTC2 | LTC1 | LTC0 |
| Initial value : | 0    | 0    | 0    | 0    | 0    | 0    | 0    | 0    |
| R/W :           | R    | R    | R    | R    | R    | R    | R    | R    |


**H'D113: Reload/Compare Match Register RCR: Timer L**

|                 |      |      |      |      |      |      |      |      |
|-----------------|------|------|------|------|------|------|------|------|
| Bit :           | 7    | 6    | 5    | 4    | 3    | 2    | 1    | 0    |
|                 | RCR7 | RCR6 | RCR5 | RCR4 | RCR3 | RCR2 | RCR1 | RCR0 |
| Initial value : | 0    | 0    | 0    | 0    | 0    | 0    | 0    | 0    |
| R/W :           | W    | W    | W    | W    | W    | W    | W    | W    |

## H'D118: Timer R Mode Register 1 TMRM1: Timer R

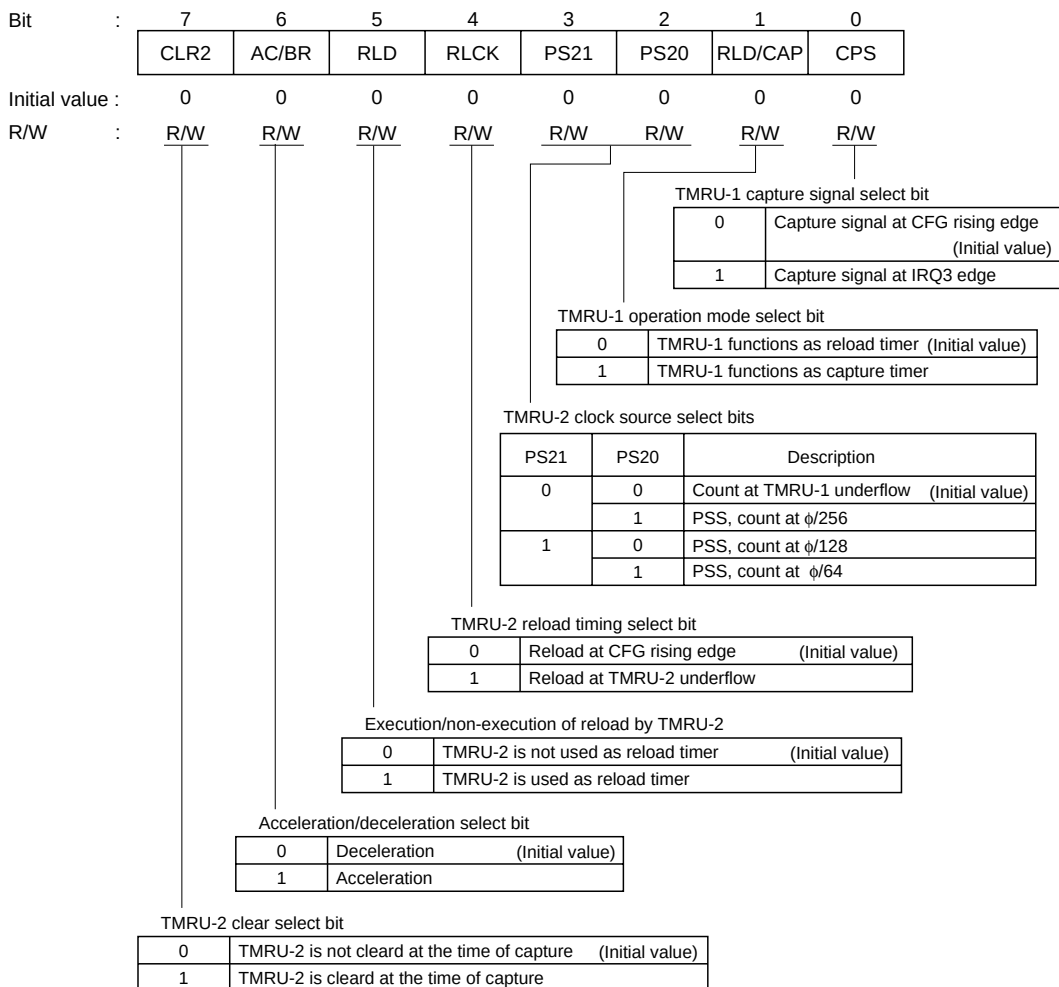

## H'D119: Timer R Mode Register 2 TMRM2: Timer R

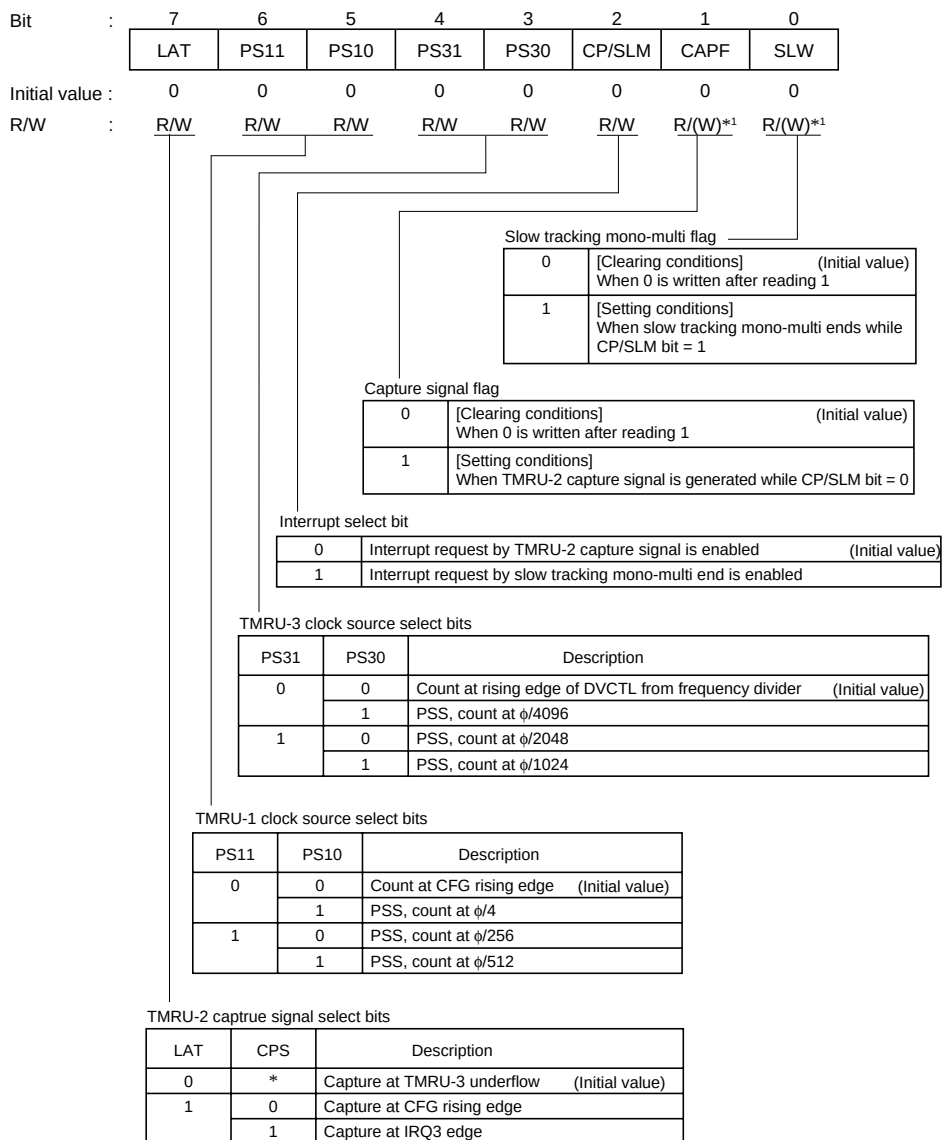

Note: \* Don't care.

Note: 1. The CAPF bit and the SLW bit, respectively, works to latch the interrupt causes and writing 0 only is valid. Consequently, when these bits are being set to 1, respective interrupt requests will not be issued. Therefore, it is necessary to check these bits during the course of the interrupt processing routine to have them cleared.

Also priority is given to the set and, when an interrupt cause occur while the a clearing command (BCLR, MOV, etc.) is being executed, the CAPF bit and the SLW bit will not be cleared respectively and it thus becomes necessary to pay attention to the clearing timing.

### H'D11A: Timer R Capture Register 1 TMRC1: Time R

|                 |        |        |        |        |        |        |        |        |
|-----------------|--------|--------|--------|--------|--------|--------|--------|--------|
| Bit :           | 7      | 6      | 5      | 4      | 3      | 2      | 1      | 0      |
|                 | TMRC17 | TMRC16 | TMRC15 | TMRC14 | TMRC13 | TMRC12 | TMRC11 | TMRC10 |
| Initial value : | 1      | 1      | 1      | 1      | 1      | 1      | 1      | 1      |
| R/W :           | R      | R      | R      | R      | R      | R      | R      | R      |

### H'D11B: Timer R Capture Register 2 TMRC2: Time R

|                 |        |        |        |        |        |        |        |        |
|-----------------|--------|--------|--------|--------|--------|--------|--------|--------|
| Bit :           | 7      | 6      | 5      | 4      | 3      | 2      | 1      | 0      |
|                 | TMRC27 | TMRC26 | TMRC25 | TMRC24 | TMRC23 | TMRC22 | TMRC21 | TMRC20 |
| Initial value : | 1      | 1      | 1      | 1      | 1      | 1      | 1      | 1      |
| R/W :           | R      | R      | R      | R      | R      | R      | R      | R      |

### H'D11C: Timer R Load Register 1 TMRL1: Timer R

|                 |       |       |       |       |       |       |       |       |
|-----------------|-------|-------|-------|-------|-------|-------|-------|-------|
| Bit :           | 7     | 6     | 5     | 4     | 3     | 2     | 1     | 0     |
|                 | TMR17 | TMR16 | TMR15 | TMR14 | TMR13 | TMR12 | TMR11 | TMR10 |
| Initial value : | 1     | 1     | 1     | 1     | 1     | 1     | 1     | 1     |
| R/W :           | W     | W     | W     | W     | W     | W     | W     | W     |

### H'D11D: Timer R Load Register 2 TMRL2: Timer R

|                 |       |       |       |       |       |       |       |       |
|-----------------|-------|-------|-------|-------|-------|-------|-------|-------|
| Bit :           | 7     | 6     | 5     | 4     | 3     | 2     | 1     | 0     |
|                 | TMR27 | TMR26 | TMR25 | TMR24 | TMR23 | TMR22 | TMR21 | TMR20 |
| Initial value : | 1     | 1     | 1     | 1     | 1     | 1     | 1     | 1     |
| R/W :           | W     | W     | W     | W     | W     | W     | W     | W     |

### H'D11E: Timer R Load Register 3 TMRL3: Timer R

|                 |       |       |       |       |       |       |       |       |
|-----------------|-------|-------|-------|-------|-------|-------|-------|-------|
| Bit :           | 7     | 6     | 5     | 4     | 3     | 2     | 1     | 0     |
|                 | TMR37 | TMR36 | TMR35 | TMR34 | TMR33 | TMR32 | TMR31 | TMR30 |
| Initial value : | 1     | 1     | 1     | 1     | 1     | 1     | 1     | 1     |
| R/W :           | W     | W     | W     | W     | W     | W     | W     | W     |

## H'D11F: Timer R Control/Status Register TMRCs: Timer R

|     |   |        |        |        |       |       |       |   |   |
|-----|---|--------|--------|--------|-------|-------|-------|---|---|
| Bit | : | 7      | 6      | 5      | 4     | 3     | 2     | 1 | 0 |
|     |   | TMRI3E | TMRI2E | TMRI1E | TMRI3 | TMRI2 | TMRI1 | — | — |

Initial value :      0          0          0          0          0          0          1          1

R/W :      R/W      R/W      R/W      R/(W)\*      R/(W)\*      R/(W)\*      —      —

TMRI1 interrupt request flag

|   |                                                            |                 |
|---|------------------------------------------------------------|-----------------|
| 0 | [Clearing conditions]<br>When 0 is written after reading 1 | (Initial value) |
| 1 | [Setting conditions]<br>When TMRU-1 underflows             |                 |

TMRI2 interrupt request flag

|   |                                                                                                                  |                 |
|---|------------------------------------------------------------------------------------------------------------------|-----------------|
| 0 | [Clearing conditions]<br>When 0 is written after reading 1                                                       | (Initial value) |
| 1 | [Setting conditions]<br>When TMRU-2 underflows or when capstan motor<br>acceleration/deceleration operation ends |                 |

TMRI3 interrupt request flag

|   |                                                                                               |                 |
|---|-----------------------------------------------------------------------------------------------|-----------------|
| 0 | [Clearing conditions]<br>When 0 is written after reading 1                                    | (Initial value) |
| 1 | [Setting conditions]<br>When interrupt source selected at CP/SLM bit in<br>TMRM2 is generated |                 |

TMRI1 interrupt enable bit

|   |                                     |                 |
|---|-------------------------------------|-----------------|
| 0 | TMRI1 interrupt request is disabled | (Initial value) |
| 1 | TMRI1 interrupt request is enabled  |                 |

TMRI2 interrupt enable bit

|   |                                     |                 |
|---|-------------------------------------|-----------------|
| 0 | TMRI2 interrupt request is disabled | (Initial value) |
| 1 | TMRI2 interrupt request is enabled  |                 |

TMRI3 interrupt enable bit

|   |                                     |                 |
|---|-------------------------------------|-----------------|
| 0 | TMRI3 interrupt request is disabled | (Initial value) |
| 1 | TMRI3 interrupt request is enabled  |                 |

Note: \* Only 0 can be written to clear the flag.

**H'D120: PWM Data Register L PWDRL: 14-Bit PWM**

|                 |        |        |        |        |        |        |        |        |
|-----------------|--------|--------|--------|--------|--------|--------|--------|--------|
| Bit :           | 7      | 6      | 5      | 4      | 3      | 2      | 1      | 0      |
|                 | PWDRL7 | PWDRL6 | PWDRL5 | PWDRL4 | PWDRL3 | PWDRL2 | PWDRL1 | PWDRL0 |
| Initial value : | 0      | 0      | 0      | 0      | 0      | 0      | 0      | 0      |
| R/W :           | W      | W      | W      | W      | W      | W      | W      | W      |

**H'D121: PWM Data Register U PWDRU: 14-Bit PWM**

|                 |   |   |        |        |        |        |        |        |
|-----------------|---|---|--------|--------|--------|--------|--------|--------|
| Bit :           | 7 | 6 | 5      | 4      | 3      | 2      | 1      | 0      |
|                 | — | — | PWDRU5 | PWDRU4 | PWDRU3 | PWDRU2 | PWDRU1 | PWDRU0 |
| Initial value : | 1 | 1 | 0      | 0      | 0      | 0      | 0      | 0      |
| R/W :           | — | — | W      | W      | W      | W      | W      | W      |

**H'D122: PWM Control Register PWCR: 14-Bit PWM**

|                 |   |   |   |   |   |   |   |       |
|-----------------|---|---|---|---|---|---|---|-------|
| Bit :           | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0     |
|                 | — | — | — | — | — | — | — | PWCR0 |
| Initial value : | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 0     |
| R/W :           | — | — | — | — | — | — | — | R/W   |

Clock select bit

|   |                                                                                                                                                                     |
|---|---------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 0 | Input clock is $\phi/2$ ( $t\phi = 2/\phi$ ) (Initial value)<br>Generate PWM waveform with conversion frequency of $16384/\phi$ and minimum pulse width of $1/\phi$ |
| 1 | Input clock is $\phi/4$ ( $t\phi = 4/\phi$ )<br>Generate PWM waveform with conversion frequency of $32768/\phi$ and minimum pulse width of $2/\phi$                 |

Note:  $t\phi$ : PWM input clock frequency**H'D126: 8-Bit PWM Data Register 0 PWR0: 8-Bit PWM**

|                 |      |      |      |      |      |      |      |      |
|-----------------|------|------|------|------|------|------|------|------|
| Bit :           | 7    | 6    | 5    | 4    | 3    | 2    | 1    | 0    |
|                 | PW07 | PW06 | PW05 | PW04 | PW03 | PW02 | PW01 | PW00 |
| Initial value : | 0    | 0    | 0    | 0    | 0    | 0    | 0    | 0    |
| R/W :           | W    | W    | W    | W    | W    | W    | W    | W    |



**H'D127: 8-Bit PWM Data Register 1 PWR1: 8-Bit PWM**

|                 |      |      |      |      |      |      |      |      |
|-----------------|------|------|------|------|------|------|------|------|
| Bit :           | 7    | 6    | 5    | 4    | 3    | 2    | 1    | 0    |
|                 | PW17 | PW16 | PW15 | PW14 | PW13 | PW12 | PW11 | PW10 |
| Initial value : | 0    | 0    | 0    | 0    | 0    | 0    | 0    | 0    |
| R/W :           | W    | W    | W    | W    | W    | W    | W    | W    |

**H'D128: 8-Bit PWM Data Register 2 PWR2: 8-Bit PWM**

|                 |      |      |      |      |      |      |      |      |
|-----------------|------|------|------|------|------|------|------|------|
| Bit :           | 7    | 6    | 5    | 4    | 3    | 2    | 1    | 0    |
|                 | PW27 | PW26 | PW25 | PW24 | PW23 | PW22 | PW21 | PW20 |
| Initial value : | 0    | 0    | 0    | 0    | 0    | 0    | 0    | 0    |
| R/W :           | W    | W    | W    | W    | W    | W    | W    | W    |

Note: The H8S/2197S and H8S/2196S do not have PWR2 and PWR3.

**H'D129: 8-Bit PWM Data Register 3 PWR3: 8-Bit PWM**

|                 |      |      |      |      |      |      |      |      |
|-----------------|------|------|------|------|------|------|------|------|
| Bit :           | 7    | 6    | 5    | 4    | 3    | 2    | 1    | 0    |
|                 | PW37 | PW36 | PW35 | PW34 | PW33 | PW32 | PW31 | PW30 |
| Initial value : | 0    | 0    | 0    | 0    | 0    | 0    | 0    | 0    |
| R/W :           | W    | W    | W    | W    | W    | W    | W    | W    |

Note: The H8S/2197S and H8S/2196S do not have PWR2 and PWR3.

**H'D12A: 8-Bit PWM Control Register PW8CR: 8-Bit PWM**

|                 |   |   |   |   |      |      |      |      |
|-----------------|---|---|---|---|------|------|------|------|
| Bit :           | 7 | 6 | 5 | 4 | 3    | 2    | 1    | 0    |
|                 | — | — | — | — | PWC3 | PWC2 | PWC1 | PWC0 |
| Initial value : | 1 | 1 | 1 | 1 | 0    | 0    | 0    | 0    |
| R/W :           | — | — | — | — | R/W  | R/W  | R/W  | R/W  |

Output polarity select bits

|   |                                   |
|---|-----------------------------------|
| 0 | Positive polarity (Initial value) |
| 1 | Negative polarity                 |

Note: n = 3 to 0 (H8S/2197S and H8S/2196S: n=1 and 0.)

**H'D12C: Input Capture Register 1 ICR1: PSU**

|                 |       |       |       |       |       |       |       |       |
|-----------------|-------|-------|-------|-------|-------|-------|-------|-------|
| Bit :           | 7     | 6     | 5     | 4     | 3     | 2     | 1     | 0     |
|                 | ICR17 | ICR16 | ICR15 | ICR14 | ICR13 | ICR12 | ICR11 | ICR10 |
| Initial value : | 0     | 0     | 0     | 0     | 0     | 0     | 0     | 0     |
| R/W :           | R     | R     | R     | R     | R     | R     | R     | R     |

H'D12D: Prescaler Unit Control/Status Register PCSR: PSU

|               |   |        |      |      |          |   |      |      |      |
|---------------|---|--------|------|------|----------|---|------|------|------|
| Bit           | : | 7      | 6    | 5    | 4        | 3 | 2    | 1    | 0    |
|               |   | ICIF   | ICIE | ICEG | NCon/off | — | DCS2 | DCS1 | DCS0 |
| Initial value | : | 0      | 0    | 0    | 0        | 1 | 0    | 0    | 0    |
| R/W           | : | R/(W)* | R/W  | R/W  | R/W      | — | R/W  | R/W  | R/W  |

Frequency division clock output select bits

| DCS2 | DCS1 | DCS0 | Description                              |
|------|------|------|------------------------------------------|
| 0    | 0    | 0    | PSS, output $\phi/32$<br>(Initial value) |
|      |      | 1    | PSS, output $\phi/16$                    |
|      |      | 0    | PSS, output $\phi/8$                     |
|      | 1    | 1    | PSS, output $\phi/4$                     |
| 1    | 0    | 0    | PSW, output $\phi W/32$                  |
|      |      | 1    | PSW, output $\phi W/16$                  |
|      |      | 0    | PSW, output $\phi W/8$                   |
|      | 1    | 1    | PSW, output $\phi W/4$                   |

Noise cancel ON/OFF bit

|   |                                                                          |
|---|--------------------------------------------------------------------------|
| 0 | Noise cancel function of $\overline{IC}$ pin is disabled (Initial value) |
| 1 | Noise cancel function of $\overline{IC}$ pin is enabled                  |

$\overline{IC}$  pin edge select bit

|   |                                                                       |
|---|-----------------------------------------------------------------------|
| 0 | Falling edge of $\overline{IC}$ pin input is detected (Initial value) |
| 1 | Rising edge of $\overline{IC}$ pin input is detected                  |

Input capture interrupt enable bit

|   |                                                                |
|---|----------------------------------------------------------------|
| 0 | Interrupt request by input capture is disabled (Initial value) |
| 1 | Interrupt request by input capture is enabled                  |

Input capture interrupt flag

|   |                                                                                    |
|---|------------------------------------------------------------------------------------|
| 0 | [Clearing conditions]<br>When 0 is written after reading 1 (Initial value)         |
| 1 | [Setting conditions]<br>When input capture is executed at $\overline{IC}$ pin edge |

Note: \* Only 0 can be written to clear the flag.

**H'D130: Software Trigger A/D Result Register H ADRH: A/D Converter****H'D131: Software Trigger A/D Result Register L ADRL: A/D Converter**

| ADRH            |      |      |      |      |      |      |      |      |      |      |   |   |   |   |   | ADRL |  |  |  |  |  |  |  |
|-----------------|------|------|------|------|------|------|------|------|------|------|---|---|---|---|---|------|--|--|--|--|--|--|--|
| Bit :           | 15   | 14   | 13   | 12   | 11   | 10   | 9    | 8    | 7    | 6    | 5 | 4 | 3 | 2 | 1 | 0    |  |  |  |  |  |  |  |
|                 | ADR9 | ADR8 | ADR7 | ADR6 | ADR5 | ADR4 | ADR3 | ADR2 | ADR1 | ADR0 | — | — | — | — | — | —    |  |  |  |  |  |  |  |
| Initial value : | 0    | 0    | 0    | 0    | 0    | 0    | 0    | 0    | 0    | 0    | 0 | 0 | 0 | 0 | 0 | 0    |  |  |  |  |  |  |  |
| R/W :           | R    | R    | R    | R    | R    | R    | R    | R    | R    | R    | — | — | — | — | — | —    |  |  |  |  |  |  |  |

**H'D132: Hardware Trigger A/D Result Register H AHRH: A/D Converter****H'D133: Hardware Trigger A/D Result Register L AHRL: A/D Converter**

| AHRH            |      |      |      |      |      |      |      | AHRL |      |      |   |   |   |   |   |   |
|-----------------|------|------|------|------|------|------|------|------|------|------|---|---|---|---|---|---|
| Bit :           | 15   | 14   | 13   | 12   | 11   | 10   | 9    | 8    | 7    | 6    | 5 | 4 | 3 | 2 | 1 | 0 |
|                 | AHR9 | AHR8 | AHR7 | AHR6 | AHR5 | AHR4 | AHR3 | AHR2 | AHR1 | AHR0 | — | — | — | — | — | — |
| Initial value : | 0    | 0    | 0    | 0    | 0    | 0    | 0    | 0    | 0    | 0    | 0 | 0 | 0 | 0 | 0 | 0 |
| R/W :           | R    | R    | R    | R    | R    | R    | R    | R    | R    | R    | — | — | — | — | — | — |

H'D134: A/D Control Register ADCR: A/D Converter

|               |   |     |   |      |      |      |      |      |      |
|---------------|---|-----|---|------|------|------|------|------|------|
| Bit           | : | 7   | 6 | 5    | 4    | 3    | 2    | 1    | 0    |
|               |   | CK  | — | HCH1 | HCH0 | SCH3 | SCH2 | SCH1 | SCH0 |
| Initial value | : | 0   | 1 | 0    | 0    | 0    | 0    | 0    | 0    |
| R/W           | : | R/W | — | R/W  | R/W  | R/W  | R/W  | R/W  | R/W  |

Software channel select bits

| SCH3 | SCH2 | SCH1 | SCH0 | Analog input channel                                  |
|------|------|------|------|-------------------------------------------------------|
| 0    | 0    | 0    | 0    | AN0 (Initial value)                                   |
|      |      |      | 1    | AN1                                                   |
|      |      | 1    | 0    | AN2                                                   |
|      |      |      | 1    | AN3                                                   |
|      | 1    | 0    | 0    | AN4                                                   |
|      |      |      | 1    | AN5                                                   |
|      |      | 1    | 0    | AN6                                                   |
| 1    | 0    | 0    | 0    | AN7                                                   |
|      |      |      | 1    | AN9                                                   |
|      |      | 1    | 0    | ANA                                                   |
|      |      |      | 1    | ANB                                                   |
|      | 1    | *    | *    | Software-triggered conversion channel is not selected |
|      |      |      |      |                                                       |

- Notes: 1. If conversion is started by software when SCH3 to SCH0 are set to 11xx, the conversion result is undetermined. Hardware- or external-triggered conversion, however, will be performed on the channel selected by HCH1 and HCH0.
2. \* Don't care.

Hardware channel select bits

| HCH1 | HCH2 | Analog input channel |
|------|------|----------------------|
| 0    | 0    | AN8 (Initial value)  |
|      | 1    | AN9                  |
| 1    | 0    | ANA                  |
|      | 1    | ANB                  |

Clock select

|   |                                                   |
|---|---------------------------------------------------|
| 0 | Conversion frequency = 266 states (Initial value) |
| 1 | Conversion frequency = 134 states                 |

## H'D135: A/D Control/Status Register ADCSR: A/D Converter

|               |        |        |      |     |     |      |      |   |
|---------------|--------|--------|------|-----|-----|------|------|---|
| Bit           | 7      | 6      | 5    | 4   | 3   | 2    | 1    | 0 |
|               | SEND   | HEND   | ADIE | SST | HST | BUSY | SCNL | — |
| Initial value | 0      | 0      | 0    | 0   | 0   | 0    | 0    | 1 |
| R/W           | R/(W)* | R/(W)* | R/W  | R/W | R   | R    | R    | — |

Vertical line from Bit 7 (SEND) to Software A/D end flag

Vertical line from Bit 6 (HEND) to Hardware A/D end flag

Vertical line from Bit 5 (ADIE) to A/D interrupt enable bit

Vertical line from Bit 4 (SST) to Software A/D start flag

Vertical line from Bit 3 (HST) to Hardware A/D status flag

Vertical line from Bit 2 (BUSY) to Busy flag

**Software-triggered A/D conversion cancel flag**

|   |                                                                                                                  |
|---|------------------------------------------------------------------------------------------------------------------|
| 0 | No contention for A/D conversion<br>(Initial value)                                                              |
| 1 | Indicates that software-triggered A/D conversion was canceled by the start of hardware-triggered A/D conversion. |

**Busy flag**

|   |                                                                                                                                         |
|---|-----------------------------------------------------------------------------------------------------------------------------------------|
| 0 | No contention for A/D conversion<br>(Initial value)                                                                                     |
| 1 | Indicates an attempt to execute software-triggered A/D conversion while hardware- or external-triggered A/D conversion was in progress. |

**Hardware A/D status flag**

|   |                                                                                                                                                                |
|---|----------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 0 | Read: Hardware- or external-triggered A/D conversion is not in progress<br>(Initial value)<br>Write: Hardware- or external-triggered A/D conversion is aborted |
| 1 | Hardware- or external-triggered A/D conversion is in progress.                                                                                                 |

**Software A/D start flag**

|   |                                                                                                                                                            |
|---|------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 0 | Read: Indicates that software-triggered A/D conversion has ended or been stopped<br>(Initial value)<br>Write: Software-triggered A/D conversion is aborted |
| 1 | Read: Indicates that software-triggered A/D conversion is in progress<br>Write: Starts software-triggered A/D conversion                                   |

**A/D interrupt enable bit**

|   |                                                                        |
|---|------------------------------------------------------------------------|
| 0 | Interrupt (ADI) upon A/D conversion end is disabled<br>(Initial value) |
| 1 | Interrupt (ADI) upon A/D conversion end is enabled                     |

**Hardware A/D end flag**

|   |                                                                                       |
|---|---------------------------------------------------------------------------------------|
| 0 | [Clearing conditions]<br>(Initial value)<br>When 0 is written after reading 1         |
| 1 | [Setting conditions]<br>When hardware- or external-triggered A/D conversion has ended |

**Software A/D end flag**

|   |                                                                               |
|---|-------------------------------------------------------------------------------|
| 0 | [Clearing conditions]<br>(Initial value)<br>When 0 is written after reading 1 |
| 1 | [Setting conditions]<br>When software-triggered A/D conversion has ended      |

Note: \* Only 0 can be written to clear the flag.

### H'D136: A/D Trigger Select Register ADTSR: A/D Converter

|               |   |   |   |   |   |   |   |       |       |
|---------------|---|---|---|---|---|---|---|-------|-------|
| Bit           | : | 7 | 6 | 5 | 4 | 3 | 2 | 1     | 0     |
|               |   | — | — | — | — | — | — | TRGS1 | TRGS0 |
| Initial value | : | 1 | 1 | 1 | 1 | 1 | 1 | 0     | 0     |
| R/W           | : | — | — | — | — | — | — | R/W   | R/W   |

Trigger select bits

| TRGS1 | TRGS0 |                                                                            |
|-------|-------|----------------------------------------------------------------------------|
| 0     | 0     | Hardware- or external-triggered A/D conversion is disabled (Initial value) |
|       | 1     | Hardware-triggered (ADTRG) A/D conversion is selected                      |
| 1     | 0     | Hardware-triggered (DFG) A/D conversion is selected                        |
|       | 1     | External-triggered (ADTRG) A/D conversion is selected                      |

### H'D138: Timer Load Register K TLK: Timer J

|               |   |       |       |       |       |       |       |       |       |
|---------------|---|-------|-------|-------|-------|-------|-------|-------|-------|
| Bit           | : | 7     | 6     | 5     | 4     | 3     | 2     | 1     | 0     |
|               |   | TLR27 | TLR26 | TLR25 | TLR24 | TLR23 | TLR22 | TLR21 | TLR20 |
| Initial value | : | 1     | 1     | 1     | 1     | 1     | 1     | 1     | 1     |
| R/W           | : | W     | W     | W     | W     | W     | W     | W     | W     |

### H'D138: Timer Counter K TCK: Timer J

|               |   |       |       |       |       |       |       |       |       |
|---------------|---|-------|-------|-------|-------|-------|-------|-------|-------|
| Bit           | : | 7     | 6     | 5     | 4     | 3     | 2     | 1     | 0     |
|               |   | TDR27 | TDR26 | TDR25 | TDR24 | TDR23 | TDR22 | TDR21 | TDR20 |
| Initial value | : | 1     | 1     | 1     | 1     | 1     | 1     | 1     | 1     |
| R/W           | : | R     | R     | R     | R     | R     | R     | R     | R     |

### H'D139: Timer Load Register J TLJ: Timer J

|               |   |       |       |       |       |       |       |       |       |
|---------------|---|-------|-------|-------|-------|-------|-------|-------|-------|
| Bit           | : | 7     | 6     | 5     | 4     | 3     | 2     | 1     | 0     |
|               |   | TLR17 | TLR16 | TLR15 | TLR14 | TLR13 | TLR12 | TLR11 | TLR10 |
| Initial value | : | 1     | 1     | 1     | 1     | 1     | 1     | 1     | 1     |
| R/W           | : | W     | W     | W     | W     | W     | W     | W     | W     |

## H'D139: Timer Counter J TCJ: Timer J

|                 |       |       |       |       |       |       |       |       |
|-----------------|-------|-------|-------|-------|-------|-------|-------|-------|
| Bit :           | 7     | 6     | 5     | 4     | 3     | 2     | 1     | 0     |
|                 | TDR17 | TDR16 | TDR15 | TDR14 | TDR13 | TDR12 | TDR11 | TDR10 |
| Initial value : | 1     | 1     | 1     | 1     | 1     | 1     | 1     | 1     |
| R/W :           | R     | R     | R     | R     | R     | R     | R     | R     |

## H'D13A: Timer Mode Register J TMJ: Timer J

|                 |      |      |     |      |      |      |     |     |
|-----------------|------|------|-----|------|------|------|-----|-----|
| Bit :           | 7    | 6    | 5   | 4    | 3    | 2    | 1   | 0   |
|                 | PS11 | PS10 | ST  | 8/16 | PS21 | PS20 | TGL | T/R |
| Initial value : | 0    | 0    | 0   | 0    | 0    | 0    | 0   | 0   |
| R/W :           | R/W  | R/W  | R/W | R/W  | R/W  | R/W  | R   | R/W |

|   |                                                               |
|---|---------------------------------------------------------------|
| 0 | TMJ-1 timer output (Initial value)                            |
| 1 | TMJ-1 toggle output (data transmitted from remote controller) |

|   |                                          |
|---|------------------------------------------|
| 0 | TMJ-2 toggle output is 0 (Initial value) |
| 1 | TMJ-2 toggle output is 1                 |

| PS21 | PS20 | Description                                            |
|------|------|--------------------------------------------------------|
| 0    | 0    | PSS, count at $\phi/16384$ (Initial value)             |
|      | 1    | PSS, count at $\phi/2048$                              |
| 1    | 0    | Count at TMJ-1 underflow                               |
|      | 1    | Count at rising/falling edge of external clock (IRQ2)* |

Note: \* External clock edge selection is set in the IRQ edge select register (IEGR). See section 6.2.4, IRQ Edge Select Register (IEGR).

|   |                                                    |
|---|----------------------------------------------------|
| 0 | TMJ-1 and TMJ-2 operate separately (Initial value) |
| 1 | TMJ-1 and TMJ-2 operate together as 16-bit         |

|   |                                                                |
|---|----------------------------------------------------------------|
| 0 | Stop TMJ-1 clock supply in remote control mode (Initial value) |
| 1 | Start TMJ-1 clock supply in remote control mode                |


  

| PS11 | PS10 | Description                                            |
|------|------|--------------------------------------------------------|
| 0    | 0    | PSS, count at $\phi/512$ (Initial value)               |
|      | 1    | PSS, count at $\phi/256$                               |
| 1    | 0    | PSS, count at $\phi/4$                                 |
|      | 1    | Count at rising/falling edge of external clock (IRQ1)* |

Note: \* External clock edge selection is set in the IRQ edge select register (IEGR). See section 6.2.4, IRQ Edge Select Register (IEGR).  
When using external clock in remote control mode, set opposite edges for IRQ1 and IRQ2 edges (eg. When falling edge is set for IRQ1, set rising edge for IRQ2. When rising edge is set for IRQ1, set falling edge for IRQ2).



H'D13B: Timer J Control Register TMJC: Timer J

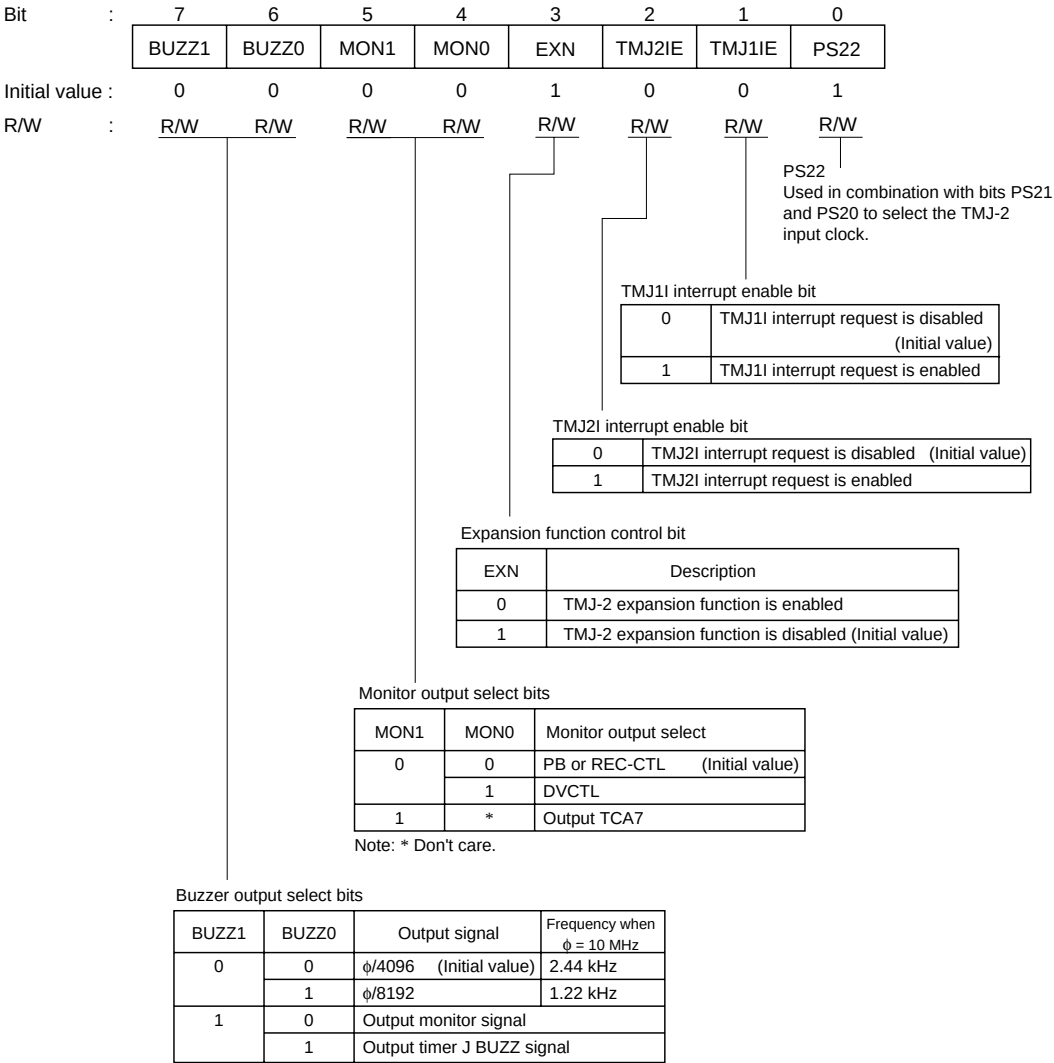

**H'D13C: Timer J Status Register TMJS: Timer J**

|               |   |        |        |   |   |   |   |   |   |
|---------------|---|--------|--------|---|---|---|---|---|---|
| Bit           | : | 7      | 6      | 5 | 4 | 3 | 2 | 1 | 0 |
|               |   | TMJ2I  | TMJ1I  | — | — | — | — | — | — |
| Initial value | : | 0      | 0      | 1 | 1 | 1 | 1 | 1 | 1 |
| R/W           | : | R/(W)* | R/(W)* | — | — | — | — | — | — |

TMJ1I interrupt request flag

|   |                                                                            |
|---|----------------------------------------------------------------------------|
| 0 | [Clearing conditions] (Initial value)<br>When 0 is written after reading 1 |
| 1 | [Setting conditions]<br>When TMJ-1 underflows                              |

TMJ2I interrupt request flag

|   |                                                                            |
|---|----------------------------------------------------------------------------|
| 0 | [Clearing conditions] (Initial value)<br>When 0 is written after reading 1 |
| 1 | [Setting conditions]<br>When TMJ-2 underflows                              |

Note: \* Only 0 can be written to clear the flag.

## H'D148: Serial Mode Register SMR1: SCI1

|               |   |              |     |     |              |      |     |      |      |
|---------------|---|--------------|-----|-----|--------------|------|-----|------|------|
| Bit           | : | 7            | 6   | 5   | 4            | 3    | 2   | 1    | 0    |
|               |   | C/ $\bar{A}$ | CHR | PE  | O/ $\bar{E}$ | STOP | MP  | CKS1 | CKS0 |
| Initial value | : | 0            | 0   | 0   | 0            | 0    | 0   | 0    | 0    |
| R/W           | : | R/W          | R/W | R/W | R/W          | R/W  | R/W | R/W  | R/W  |

### Clock select

| CKS1 | CKS0 | Clock select                 |
|------|------|------------------------------|
| 0    | 0    | $\phi$ clock (Initial value) |
|      | 1    | $\phi/4$ clock               |
| 1    | 0    | $\phi/16$ clock              |
|      | 1    | $\phi/64$ clock              |

### Multiprocessor mode

|   |                                                        |
|---|--------------------------------------------------------|
| 0 | Multiprocessor function is disabled<br>(Initial value) |
| 1 | Multiprocessor format is selected                      |

### Stop bit length

|   |                                           |
|---|-------------------------------------------|
| 0 | 1 stop bits* <sup>1</sup> (Initial value) |
| 1 | 2 stop bits* <sup>2</sup>                 |

- Notes: 1. In transmission, a single 1 bit (stop bit) is added to the end of a transmit character before it is sent.  
 2. In transmission, two 1 bits (stop bits) are added to the end of a transmit character before it is sent.

### Parity mode

|   |                                           |
|---|-------------------------------------------|
| 0 | Even parity* <sup>1</sup> (Initial value) |
| 1 | Odd parity* <sup>2</sup>                  |

- Notes: 1. When even parity is set, parity bit addition is performed in transmission so that the total number of 1 bits in the transmit character plus the parity bit is even. In reception, a check is performed to see if the total number of 1 bits in the receive character plus the parity bit is even.  
 2. When odd parity is set, parity bit addition is performed in transmission so that the total number of 1 bits in the transmit character plus the parity bit is odd. In reception, a check is performed to see if the total number of 1 bits in the receive character plus the parity bit is odd.

### Parity enable

|   |                                                           |
|---|-----------------------------------------------------------|
| 0 | Parity bit addition and checking disabled (Initial value) |
| 1 | Parity bit addition and checking enabled*                 |

Note: \* When the PE bit is set to 1, the parity (even or odd) specified by the O/ $\bar{E}$  bit is added to transmit data before transmission. In reception, the parity bit is checked for the parity (even or odd) specified by the O/ $\bar{E}$  bit.

### Character length

|   |                            |
|---|----------------------------|
| 0 | 8-bit data (Initial value) |
| 1 | 7-bit data*                |

Note: \* When 7-bit data is selected, the MSB (bit 7) of TDR is not transmitted, and LSB-first/MSB-first selection is not available.

### Communication mode

|   |                                   |
|---|-----------------------------------|
| 0 | Asynchronous mode (Initial value) |
| 1 | Clock synchronous mode            |

**H'D149: Bit Rate Register BRR1: SCI1**

|                 |     |     |     |     |     |     |     |     |
|-----------------|-----|-----|-----|-----|-----|-----|-----|-----|
| Bit :           | 7   | 6   | 5   | 4   | 3   | 2   | 1   | 0   |
|                 |     |     |     |     |     |     |     |     |
| Initial value : | 1   | 1   | 1   | 1   | 1   | 1   | 1   | 1   |
| R/W :           | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |

## H'D14A: Serial Control Register SCR1: SCI1

|                 |     |     |     |     |      |      |      |      |
|-----------------|-----|-----|-----|-----|------|------|------|------|
| Bit :           | 7   | 6   | 5   | 4   | 3    | 2    | 1    | 0    |
|                 | TIE | RIE | TE  | RE  | MPIE | TEIE | CKE1 | CKE0 |
| Initial value : | 0   | 0   | 0   | 0   | 0    | 0    | 0    | 0    |
| R/W :           | R/W | R/W | R/W | R/W | R/W  | R/W  | R/W  | R/W  |

Clock enable bits

| CKE1 | CKE0 | Clock select           |                                                                            |
|------|------|------------------------|----------------------------------------------------------------------------|
| 0    | 0    | Asynchronous mode      | Internal clock/SCK pin functions as I/O port <sup>1</sup> (Initial value)  |
|      |      | Clock synchronous mode | Internal clock/SCK pin functions as synchronous clock output <sup>*1</sup> |
|      | 1    | Asynchronous mode      | Internal clock/SCK pin functions as clock output <sup>*2</sup>             |
|      |      | Clock synchronous mode | Internal clock/SCK pin functions as synchronous clock output               |
| 1    | 0    | Asynchronous mode      | External clock/SCK pin functions as clock input <sup>*3</sup>              |
|      |      | Clock synchronous mode | External clock/SCK pin functions as synchronous clock input                |
|      | 1    | Asynchronous mode      | External clock/SCK pin functions as clock input <sup>*3</sup>              |
|      |      | Clock synchronous mode | External clock/SCK pin functions as synchronous clock input                |

- Notes: 1. Initial value  
2. Outputs a clock of the same frequency as the bit rate.  
3. Inputs a clock with a frequency 16 times the bit rate.

Transmit end interrupt enable bit

|   |                                                                   |
|---|-------------------------------------------------------------------|
| 0 | Transmit-end interrupt (TEI) request is disabled* (Initial value) |
| 1 | Transmit-end interrupt (TEI) request is enabled*                  |

Note: \* TEI cancellation can be performed by reading 1 from the TDRE flag in SSR, then clearing it to 0 and clearing the TEND flag to 0, or clearing the TEIE bit to 0.

Multiprocessor interrupt enable bit

|   |                                                                                                                                                                                                                                                   |
|---|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 0 | Multiprocessor interrupts are disabled (normal reception performed) (Initial value)<br>[Clearing conditions]<br>(1) When the MPIE bit is cleared to 0<br>(2) When data with MPB = 1 is received                                                   |
| 1 | Multiprocessor interrupt are enabled*<br>Receive interrupt (RXI) requests, receive-error interrupt (ERI) requests, and setting of the RDRF, FER, and ORER flags in SSR1 are disabled until data with the multiprocessor bit set to 1 is received. |

Note: \* When receive data including MPB = 0 is received, receive data transfer from RSR to RDR, receive error detection, and setting of the RDRF, FER, and ORER flags in SSR, is not performed. When receive data with MPB = 1 is received, the MPB bit in SSR is set to 1, the MPIE bit is cleared to 0 automatically, and generation of RXI and ERI interrupts (when the TIE and RIE bits in SCR are set to 1) and FER and ORER flag setting is enabled.

Receive enable bit

|   |                                                     |
|---|-----------------------------------------------------|
| 0 | Reception is disabled <sup>*1</sup> (Initial value) |
| 1 | Reception is enabled <sup>*2</sup>                  |

- Notes: 1. Clearing the RE bit to 0 does not affect the RDRF, FER, PER, and ORER flags, which retain their states.  
2. Serial reception is started in this state when a start bit is detected in asynchronous mode or serial clock input is detected in synchronous mode.  
SMR setting must be performed to decide the reception format before setting the RE bit to 1.

Transmit enable bit

|   |                                                        |
|---|--------------------------------------------------------|
| 0 | Transmission is disabled <sup>*1</sup> (Initial value) |
| 1 | Transmission is enabled <sup>*2</sup>                  |

- Notes: 1. The TDRE flag in SSR is fixed at 1.  
2. In this state, serial transmission is started when transmit data is written to TDR and TDRE flag in SSR is cleared to 0.  
SMR setting must be performed to decide the transmission format before setting the TE bit to 1.

Receive interrupt enable bit

|   |                                                                                                                  |
|---|------------------------------------------------------------------------------------------------------------------|
| 0 | Receive-data-full interrupt (RXI) request and receive-error interrupt (ERI) request is disabled* (Initial value) |
| 1 | Receive-data-full interrupt (RXI) request and receive-error interrupt (ERI) request is enabled                   |

Note: \* RXI and ERI interrupt request cancellation can be performed by reading 1 from the RDRF, FER, PER, or ORER flag, then clearing the flag to 0, or clearing the RIE bit to 0.

Transmit interrupt enable bit


|   |                                                                          |
|---|--------------------------------------------------------------------------|
| 0 | Transmit-data-empty interrupt (TXI) request is disabled* (Initial value) |
| 1 | Transmit-data-empty interrupt (TXI) request is enabled                   |

Note: \* TXI interrupt request cancellation can be performed by reading 1 from the TDRE flag, then clearing it to 0, or clearing the TIE bit to 0.

**H'D14B: Transmit Data Register TDR1: SCI1**

|                 |     |     |     |     |     |     |     |     |
|-----------------|-----|-----|-----|-----|-----|-----|-----|-----|
| Bit :           | 7   | 6   | 5   | 4   | 3   | 2   | 1   | 0   |
|                 |     |     |     |     |     |     |     |     |
| Initial value : | 1   | 1   | 1   | 1   | 1   | 1   | 1   | 1   |
| R/W :           | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |

## H'D14C: Serial Status Register SSR1: SCI1

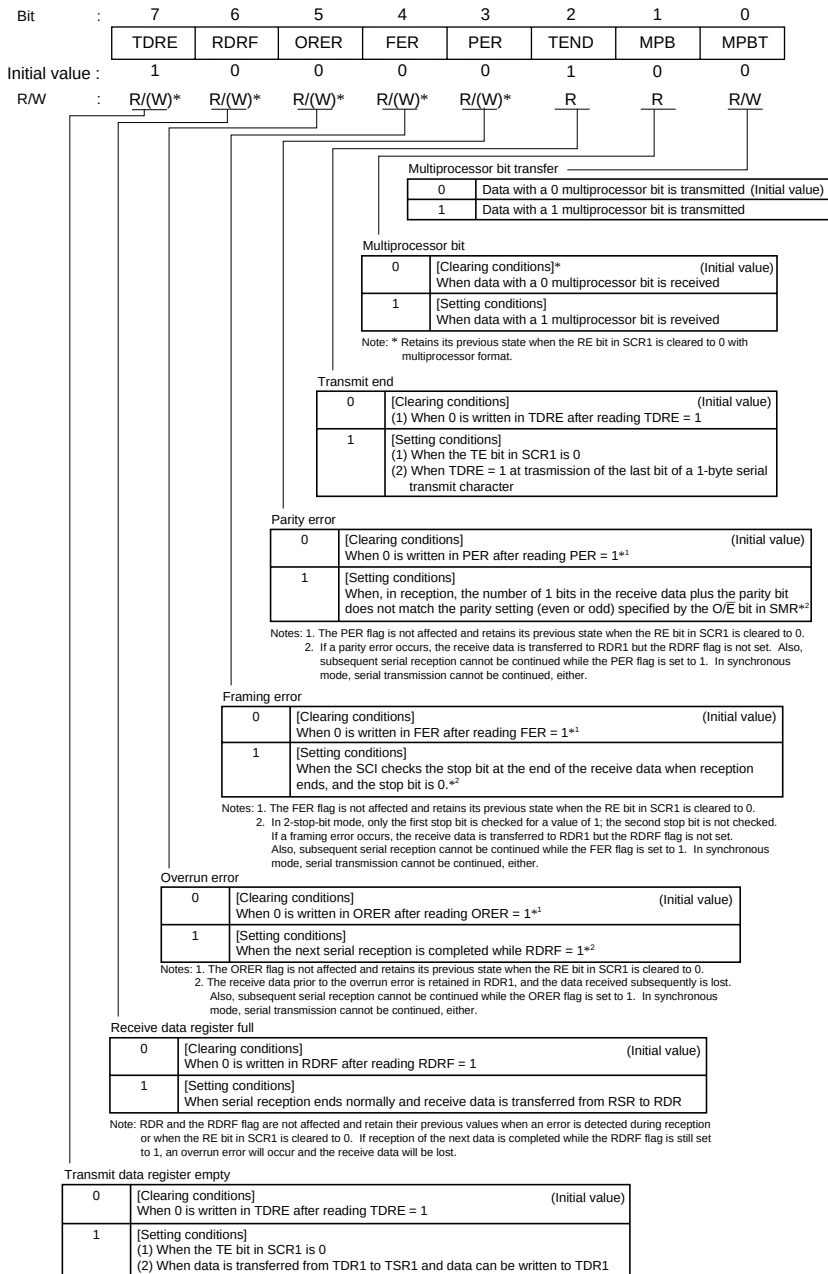

Note: \* Only 0 can be written to clear the flag.

**H'D14D: Receive Data Register RDR1: SCI1**

|                 |   |   |   |   |   |   |   |   |
|-----------------|---|---|---|---|---|---|---|---|
| Bit :           | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
|                 |   |   |   |   |   |   |   |   |
| Initial value : | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| R/W :           | R | R | R | R | R | R | R | R |

**H'D14E: Serial Interface Mode Register SCMR1: SCI1**

|                 |   |   |   |   |      |      |   |   |
|-----------------|---|---|---|---|------|------|---|---|
| Bit :           | 7 | 6 | 5 | 4 | 3    | 2    | 1 | 0 |
|                 | — | — | — | — | SDIR | SINV | — | — |
| Initial value : | 1 | 1 | 1 | 1 | 0    | 0    | 1 | 0 |
| R/W :           | — | — | — | — | R/W  | R/W  | — | — |

Data inversion


|   |                                                                                                        |
|---|--------------------------------------------------------------------------------------------------------|
| 0 | TDR contents are transmitted without modification. Receive data is stored in RDR without modification. |
| 1 | TDR contents are inverted before being transmitted. Receive data is stored in RDR1 in inverted form.   |

Data transfer direction

|   |                                                                                  |
|---|----------------------------------------------------------------------------------|
| 0 | TDR contents are transmitted LSB-first. Receive data is stored in RDR LSB-first. |
| 1 | TDR contents are transmitted MSB-first. Receive data is stored in RDR MSB-first. |



# H'D158: I<sup>2</sup>C Bus Control Register ICCR1: I<sup>2</sup>C Bus Interface

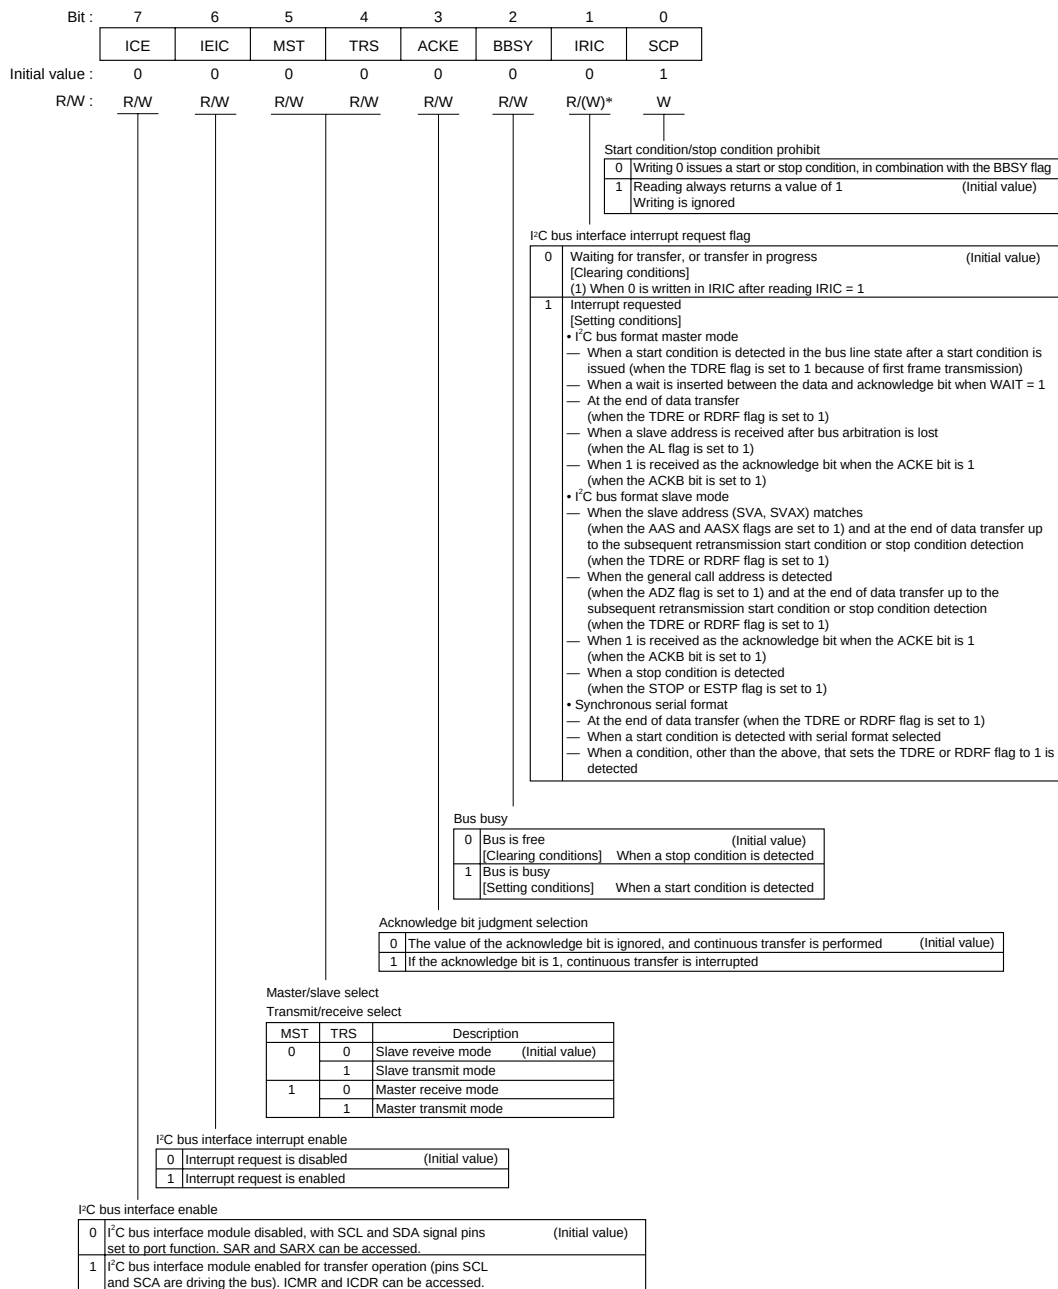

Note: \* Only 0 can be written to clear the flag.

# H'D159: I<sup>2</sup>C Bus Status Register ICSR1: I<sup>2</sup>C Bus Interface

|                 |        |        |        |        |        |        |        |      |
|-----------------|--------|--------|--------|--------|--------|--------|--------|------|
| Bit             | 7      | 6      | 5      | 4      | 3      | 2      | 1      | 0    |
|                 | ESTP   | STOP   | IRTR   | AASX   | AL     | AAS    | ADZ    | ACKB |
| Initial value : | 0      | 0      | 0      | 0      | 0      | 0      | 0      | 0    |
| R/W             | R/(W)* | R/(W)* | R/(W)* | R/(W)* | R/(W)* | R/(W)* | R/(W)* | R/W  |

## Acknowledge bit

|   |                                                                                                                                                          |                 |
|---|----------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------|
| 0 | Receive mode: 0 is output at acknowledge output timing<br>Transmit mode: Indicates that the receiving device has acknowledged the data (signal is 0)     | (Initial value) |
| 1 | Receive mode: 1 is output at acknowledge output timing<br>Transmit mode: Indicates that the receiving device has not acknowledged the data (signal is 1) |                 |

## General call address recognition flag

|   |                                                                                                                                                                                                                  |                 |
|---|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------|
| 0 | General call address not recognized<br>[Clearing conditions]<br>(1) When ICDR data is written (transmit mode) or read (receive mode)<br>(2) When 0 is written in ADZ after reading ADZ = 1<br>(3) In master mode | (Initial value) |
| 1 | General call address recognized<br>[Setting conditions]<br>When the general call address is detected when FSX = 0 or FS = 0 in slave receive mode                                                                |                 |

## Slave address recognition flag

|   |                                                                                                                                                                                                                                   |                 |
|---|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------|
| 0 | Slave address or general call address not recognized<br>[Clearing conditions]<br>(1) When ICDR data is written (transmit mode) or read (receive mode)<br>(2) When 0 is written in AAS after reading AAS = 1<br>(3) In master mode | (Initial value) |
| 1 | Slave address or general call address recognized<br>[Setting conditions]<br>When the slave address or general call address is detected when FS = 0 in slave receive mode                                                          |                 |

## Arbitration lost flag

|   |                                                                                                                                                                                                                        |                 |
|---|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------|
| 0 | Bus arbitration won<br>[Clearing conditions]<br>(1) When ICDR data is written (transmit mode) or read (receive mode)<br>(2) When 0 is written in AL after reading AL = 1                                               | (Initial value) |
| 1 | Arbitration lost<br>[Setting conditions]<br>(1) If the internal SDA and SDA pin disagree at the rise of SCL in master transmit mode<br>(2) If the internal SCL line is high at the fall of SCL in master transmit mode |                 |

## Second slave address recognition flag

|   |                                                                                                                                                                                      |                 |
|---|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------|
| 0 | Second slave address not recognized<br>[Clearing conditions]<br>(1) When 0 is written in AASX after reading AASX = 1<br>(2) When a start condition is detected<br>(3) In master mode | (Initial value) |
| 1 | Second slave address recognized<br>[Setting conditions]<br>When the second slave address is detected in slave receive mode                                                           |                 |

## I<sup>2</sup>C bus interface continuous transmission/reception interrupt request flag

|   |                                                                                                                                                                                                                              |                 |
|---|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------|
| 0 | Waiting for transfer, or transfer in progress<br>[Clearing conditions]<br>(1) When 0 is written in IRTR after reading IRTR = 1<br>(2) When the IRIC flag is cleared to 0                                                     | (Initial value) |
| 1 | Continuous transfer state<br>[Setting conditions]<br>• In I <sup>2</sup> C bus interface slave mode<br>– When the TDRE or RDRE flag is set to 1 when AASX = 1<br>• In other mode<br>– When the TDRE or RDRE flag is set to 1 |                 |

## Normal stop condition detection flag

|   |                                                                                                                                                                                                                  |                 |
|---|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------|
| 0 | No normal stop condition<br>[Clearing conditions]<br>(1) When 0 is written in STOP after reading STOP = 1<br>(2) When the IRIC flag is cleared to 0                                                              | (Initial value) |
| 1 | • In I <sup>2</sup> C bus format slave mode<br>Normal stop condition detected<br>[Setting conditions]<br>– When a stop condition is detected after completion of frame transfer<br>• In other mode<br>No meaning |                 |

## Error stop condition detection flag

|   |                                                                                                                                                                                                    |                 |
|---|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------|
| 0 | No error stop condition<br>[Clearing conditions]<br>(1) When 0 is written in ESTP after reading ESTP = 1<br>(2) When the IRIC flag is cleared to 0                                                 | (Initial value) |
| 1 | • In I <sup>2</sup> C bus format slave mode<br>Error stop condition detected<br>[Setting conditions]<br>– When a stop condition is detected during frame transfer<br>• In other mode<br>No meaning |                 |

Note: \* Only 0 can be written to clear the flag.

**H'D15E: I<sup>2</sup>C Bus Data Register ICDR1: I<sup>2</sup>C Bus Interface**

|               |   |       |       |       |       |       |       |       |       |
|---------------|---|-------|-------|-------|-------|-------|-------|-------|-------|
| Bit           | : | 7     | 6     | 5     | 4     | 3     | 2     | 1     | 0     |
|               |   | ICDR7 | ICDR6 | ICDR5 | ICDR4 | ICDR3 | ICDR2 | ICDR1 | ICDR0 |
| Initial value | : | —     | —     | —     | —     | —     | —     | —     | —     |
| R/W           | : | R/W   | R/W   | R/W   | R/W   | R/W   | R/W   | R/W   | R/W   |

Note: Refer to section 23.2.1, I<sup>2</sup>C Bus Data Register (ICDR).

**H'D15E: Second Slave Address Register SARX1: I<sup>2</sup>C Bus Interface**

|               |   |       |       |       |       |       |       |       |     |
|---------------|---|-------|-------|-------|-------|-------|-------|-------|-----|
| Bit           | : | 7     | 6     | 5     | 4     | 3     | 2     | 1     | 0   |
|               |   | SVAX6 | SVAX5 | SVAX4 | SVAX3 | SVAX2 | SVAX1 | SVAX0 | FSX |
| Initial value | : | 0     | 0     | 0     | 0     | 0     | 0     | 0     | 1   |
| R/W           | : | R/W   | R/W   | R/W   | R/W   | R/W   | R/W   | R/W   | R/W |

Note: Refer to section 23.2.3, Second Slave Address Register (SARX),  
and section 23.2.2, Slave Address Register (SAR)

Format select  
Used combined with FS bit in SAR.

H'D15F: I<sup>2</sup>C Bus Mode Register ICMR1: I<sup>2</sup>C Bus Interface

|                 |     |      |      |      |      |     |     |     |
|-----------------|-----|------|------|------|------|-----|-----|-----|
| Bit :           | 7   | 6    | 5    | 4    | 3    | 2   | 1   | 0   |
|                 | MLS | WAIT | CKS2 | CKS1 | CKS0 | BC2 | BC1 | BC0 |
| Initial value : | 0   | 0    | 0    | 0    | 0    | 0   | 0   | 0   |
| R/W :           | R/W | R/W  | R/W  | R/W  | R/W  | R/W | R/W | R/W |

| Bit counter |     |     | Bit/frame                |                             |
|-------------|-----|-----|--------------------------|-----------------------------|
| BC2         | BC1 | BC0 | Clock sync serial format | I <sup>2</sup> C bus format |
| 0           | 0   | 0   | 8                        | 9 (Initial value)           |
|             |     | 1   | 1                        | 2                           |
|             |     | 1   | 0                        | 3                           |
| 0           | 1   | 0   | 2                        | 4                           |
|             |     | 1   | 3                        | 5                           |
|             |     | 1   | 4                        | 6                           |
| 1           | 0   | 0   | 5                        | 7                           |
|             |     | 1   | 6                        | 8                           |
|             |     | 1   | 7                        | 9                           |

Transfer clock select bits

| IICX* | CKS2 | CKS1 | CKS0 | Clock       | Transfer rate |                |
|-------|------|------|------|-------------|---------------|----------------|
|       |      |      |      |             | $\phi$ =8 MHz | $\phi$ =10 MHz |
| 0     | 0    | 0    | 0    | $\phi$ /28  | 286 kHz       | 357 kHz        |
|       |      |      | 1    | $\phi$ /40  | 200 kHz       | 250 kHz        |
|       |      | 1    | 0    | $\phi$ /48  | 167 kHz       | 208 kHz        |
|       |      |      | 1    | $\phi$ /64  | 125 kHz       | 156 kHz        |
|       | 1    | 0    | 0    | $\phi$ /80  | 100 kHz       | 125 kHz        |
|       |      |      | 1    | $\phi$ /100 | 80.0 kHz      | 100 kHz        |
|       |      | 1    | 0    | $\phi$ /112 | 71.4 kHz      | 89.3 kHz       |
|       |      |      | 1    | $\phi$ /128 | 62.5 kHz      | 78.1 kHz       |
| 1     | 0    | 0    | 0    | $\phi$ /56  | 143 kHz       | 179 kHz        |
|       |      |      | 1    | $\phi$ /80  | 100 kHz       | 125 kHz        |
|       |      | 1    | 0    | $\phi$ /96  | 83.3 kHz      | 104 kHz        |
|       |      |      | 1    | $\phi$ /128 | 62.5 kHz      | 78.1 kHz       |
|       | 1    | 0    | 0    | $\phi$ /160 | 50.0 kHz      | 62.5 kHz       |
|       |      |      | 1    | $\phi$ /200 | 40.0 kHz      | 50.0 kHz       |
|       |      | 1    | 0    | $\phi$ /224 | 35.7 kHz      | 44.6 kHz       |
|       |      |      | 1    | $\phi$ /256 | 31.3 kHz      | 39.1 kHz       |

Note: \* See bit 6 in STCR.

Wait insertion bit

|   |                                                     |                 |
|---|-----------------------------------------------------|-----------------|
| 0 | Data and acknowledge bits transferred consecutively | (initial value) |
| 1 | Wait inserted between data and acknowledge bits     |                 |

MSB-first/LSB-first select

|   |           |                 |
|---|-----------|-----------------|
| 0 | MSB-first | (initial value) |
| 1 | LSB-first |                 |

H'D15F: Slave Address Register SAR1: I<sup>2</sup>C Bus Interface

|               |   |      |      |      |      |      |      |      |     |
|---------------|---|------|------|------|------|------|------|------|-----|
| Bit           | : | 7    | 6    | 5    | 4    | 3    | 2    | 1    | 0   |
|               |   | SVA6 | SVA5 | SVA4 | SVA3 | SVA2 | SVA1 | SVA0 | FS  |
| Initial value | : | 0    | 0    | 0    | 0    | 0    | 0    | 0    | 0   |
| R/W           | : | R/W  | R/W  | R/W  | R/W  | R/W  | R/W  | R/W  | R/W |

Format select bit

| DDCSWR<br>Bit 6 | SAR<br>Bit 0 | SARX<br>Bit 0 | Format select                                                                                                 |
|-----------------|--------------|---------------|---------------------------------------------------------------------------------------------------------------|
| SW              | FS           | FX            |                                                                                                               |
| 0               | 0            | 0             | I <sup>2</sup> C bus format<br>• SAR and SARX slave addresses recognized                                      |
|                 |              | 1             | I <sup>2</sup> C bus format (Initial value)<br>• SAR slave address recognized<br>• SARX slave address ignored |
|                 | 1            | 0             | I <sup>2</sup> C bus format<br>• SAR slave address ignored<br>• SARX slave address recognized                 |
|                 |              | 1             | I <sup>2</sup> C bus format<br>• SAR and SARX slave addresses ignored                                         |
| 1               | 0            | 0             | Formatless transfer (start and stop conditions are not detected)<br>• With acknowledge bit                    |
|                 |              | 1             |                                                                                                               |
|                 | 1            | 0             | Formatless transfer* (start and stop conditions are not detected)                                             |
|                 |              | 1             | • Without acknowledge bit                                                                                     |

Note: \* Do not use this setting when automatically switching the made from formatless transfer to I<sup>2</sup>C bus format by setting DDCSWR.

# H'D200 to H'D20B: Row Registers 1 to 12 CLINE1 to CLINE12: OSD

|               |      |     |       |       |     |     |     |      |
|---------------|------|-----|-------|-------|-----|-----|-----|------|
| Bit           | 7    | 6   | 5     | 4     | 3   | 2   | 1   | 0    |
|               | BPTn | SZn | CLUn1 | CLUn2 | KRn | KGn | KBn | KLUn |
| Initial value | 0    | 0   | 0     | 0     | 0   | 0   | 0   | 0    |
| R/W           | R/W  | R/W | R/W   | R/W   | R/W | R/W | R/W | R/W  |

Cursor brightness/half-tone level specification bit  
(Cursor Brightness in Text Display Mode)

| Bit 0<br>KLUn | Cursor Color         | Cursor Brightness Level |
|---------------|----------------------|-------------------------|
| 0             | Black                | 0 IRE (Initial value)   |
| 1             |                      | 25 IRE                  |
| 0             | Blue, green, cyan,   | 25 IRE (Initial value)  |
| 1             | red, yellow, magenta | 45 IRE                  |
| 0             | White                | 45 IRE (Initial value)  |
| 1             |                      | 55 IRE                  |

Note: All brightness levels are with reference to the pedestal level (5 IRE).  
Brightness levels are reference values.

(Half-tone Levels in Superimposed Mode)

| Bit 0<br>KLUn | Character Brightness Level    |
|---------------|-------------------------------|
| 0             | 50% half-tone (Initial value) |
| 1             | 30% half-tone                 |

Cursor color specification bits  
(Cursor Colors in Text Display Mode)

| Cursor Colors in Text Display mode |       |          |                               |                               |                       |
|------------------------------------|-------|----------|-------------------------------|-------------------------------|-----------------------|
| Bit 3                              | Bit 2 | Bit 1    | Character Brightness Level    |                               |                       |
| KRn                                | KGn   | KBn      | Cursor Color (C.Video Output) | Cursor Color (R, G, B Output) |                       |
|                                    |       |          | NTSC                          | PAL                           |                       |
| 0                                  | 0     | 0        | Black                         | Black                         | Black (Initial value) |
|                                    |       | 1        | $\pi$                         | $\pm\pi$                      | Blue                  |
|                                    | 1     | 0        | $7\pi/4$                      | $\pm 7\pi/4$                  | Green                 |
| 1                                  | 0     | 1        | $3\pi/2$                      | $\pm 3\pi/2$                  | Cyan                  |
|                                    |       | 0        | $\pi/2$                       | $\pm\pi/2$                    | Red                   |
|                                    | 1     | $3\pi/4$ | $\pm 3\pi/4$                  | Magenta                       |                       |
|                                    | 1     | 0        | Same phase                    | $\pm 0$                       | Yellow                |
|                                    |       | 1        | White                         | White                         | White                 |

(Cursor Colors in Superimposed Mode)

| Bit 3<br>KRn | Bit 2<br>KGn | Bit 1<br>KBn | Character Brightness Level                                           |                               |
|--------------|--------------|--------------|----------------------------------------------------------------------|-------------------------------|
|              |              |              | Cursor Color (C.Video Output)                                        | Cursor Color (R, G, B Output) |
| 0            | 0            | 0            | Specification invalid<br>(Half-tone display in<br>superimposed mode) | Black (Initial value)         |
|              |              | 1            |                                                                      | Blue                          |
|              | 1            | 0            |                                                                      | Green                         |
| 1            | 0            | 1            |                                                                      | Cyan                          |
|              |              | 0            |                                                                      | Red                           |
|              | 1            | 0            |                                                                      | Magenta                       |
|              | 1            | 0            |                                                                      | Yellow                        |
|              |              | 1            |                                                                      | White                         |

Character brightness specification bits

| Bit 5<br>CLUn1 | Bit 4<br>CLUn0 | Character Color            | Character Brightness Level |
|----------------|----------------|----------------------------|----------------------------|
| 0              | 0              | Black                      | 0 IRE (Initial value)      |
|                | 1              |                            | 10 IRE                     |
|                | 0              |                            | 20 IRE                     |
| 1              | 1              |                            | 30 IRE                     |
|                | 0              | Blue, green,<br>cyan, red, | 25 IRE (Initial value)     |
|                | 1              |                            | 45 IRE                     |
| 1              | 0              |                            | 55 IRE                     |
|                | 1              |                            | 65 IRE                     |
| 0              | 0              | White                      | 45 IRE (Initial value)     |
|                | 1              |                            | 70 IRE                     |
|                | 0              |                            | 80 IRE                     |
| 1              | 1              |                            | 90 IRE                     |

Note: All brightness levels are with reference to the pedestal level (5 IRE).  
Brightness levels are reference values.

(n = 1 to 12)

Character size specification bit

|   |                                                                      |
|---|----------------------------------------------------------------------|
| 0 | Character display size: single height × single width (Initial value) |
| 1 | Character display size: double height × double width                 |

Button pattern specification bit

|   |                                                                               |
|---|-------------------------------------------------------------------------------|
| 0 | Pattern causing buttons in the nth row to appear to be raised (Initial value) |
| 1 | Pattern causing buttons in the nth row to appear to be lowered                |

(n = 1 to 12)

**H'D20C: Vertical Display Position Register VPOS: OSD**

|               |   |    |    |    |    |       |       |       |     |
|---------------|---|----|----|----|----|-------|-------|-------|-----|
| Bit           | : | 15 | 14 | 13 | 12 | 11    | 10    | 9     | 8   |
|               |   | —  | —  | —  | —  | VSPC2 | VSPC1 | VSPC0 | VP8 |
| Initial value | : | 1  | 1  | 1  | 1  | 0     | 0     | 0     | 0   |
| R/W           | : | —  | —  | —  | —  | R/W   | R/W   | R/W   | R/W |

Vertical row interval specification bits

| VSPC2 | VSPC1 | VSPC0 | Description                        |
|-------|-------|-------|------------------------------------|
| 0     | 0     | 0     | No row interval                    |
|       |       | 1     | Row interval: One scanning line    |
|       | 1     | 0     | Row interval: Two scanning lines   |
|       |       | 1     | Row interval: Three scanning lines |
| 1     | 0     | 0     | Row interval: Four scanning lines  |
|       |       | 1     | Row interval: Five scanning lines  |
|       | 1     | 0     | Row interval: Six scanning lines   |
|       |       | 1     | Row interval: Seven scanning lines |

|               |   |     |     |     |     |     |     |     |     |
|---------------|---|-----|-----|-----|-----|-----|-----|-----|-----|
| Bit           | : | 7   | 6   | 5   | 4   | 3   | 2   | 1   | 0   |
|               |   | VP7 | VP6 | VP5 | VP4 | VP3 | VP2 | VP1 | VP0 |
| Initial value | : | 0   | 0   | 0   | 0   | 0   | 0   | 0   | 0   |
| R/W           | : | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |

Vertical display start position specification bits

**H'D20E: Horizontal Display Position Register HPOS: OSD**

|               |   |     |     |     |     |     |     |     |     |
|---------------|---|-----|-----|-----|-----|-----|-----|-----|-----|
| Bit           | : | 7   | 6   | 5   | 4   | 3   | 2   | 1   | 0   |
|               |   | HP7 | HP6 | HP5 | HP4 | HP3 | HP2 | HP1 | HP0 |
| Initial value | : | 0   | 0   | 0   | 0   | 0   | 0   | 0   | 0   |
| R/W           | : | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |

Horizontal display start position specification bits

## H'D20F: Digital Output Specification Register DOUT: OSD

|               |   |   |      |      |      |      |       |   |   |
|---------------|---|---|------|------|------|------|-------|---|---|
| Bit           | : | 7 | 6    | 5    | 4    | 3    | 2     | 1 | 0 |
|               |   | — | RGBC | YCOC | DOBC | DSEL | CRSEL | — | — |
| Initial value | : | 0 | 0    | 0    | 0    | 0    | 0     | 1 | 0 |
| R/W           | : | — | R/W  | R/W  | R/W  | R/W  | R/W   | — | — |

Monitor signal switching bit

|   |                                                                         |
|---|-------------------------------------------------------------------------|
| 0 | Clock run-in detection window signal output is selected (Initial value) |
| 1 | Start bit detection window signal output is selected                    |

R, G, B, YCO, YBO pin function select bit

|                                                                                                                                                                                                                                                                                                                                                                                                                               |                                                               |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------|
| 0                                                                                                                                                                                                                                                                                                                                                                                                                             | R, G, B, YCO, YBO output function is selected (Initial value) |
| 1                                                                                                                                                                                                                                                                                                                                                                                                                             | Data slicer monitor output function is selected               |
| <div style="border-left: 1px solid black; border-right: 1px solid black; padding: 0 10px;"> <p>R pin = Signal selected by bit 2 (CRSEL)</p> <p>G pin = Slice data signal analog-compared with Cvin2</p> <p>B pin = Sampling clock generated within data slicer</p> <p>YCO pin = External Hsync signal (AFCH) synchronized within the LSI</p> <p>YBO pin = External Vsync signal (AFCV) synchronized within the LSI</p> </div> |                                                               |

Digital output blink control bit

| RAM    | DOUT  | Description                    |
|--------|-------|--------------------------------|
| Bit 15 | Bit 4 |                                |
| BLNK   | DOBC  |                                |
| 0      | 0     | Does not blink (Initial value) |
|        | 1     | Does not blink                 |
| 1      | 0     | Does not blink                 |
|        | 1     | Blinks                         |

YCO digital output specification bit

|   |                                                   |
|---|---------------------------------------------------|
| 0 | Character output is specified (Initial value)     |
| 1 | Combined character and border output is specified |

R, G, B digital output specification bit

|   |                                                                                |
|---|--------------------------------------------------------------------------------|
| 0 | Character output is specified (Initial value)                                  |
| 1 | Combined character, border, cursor, background, and button output is specified |



H'D210: Screen Control Register DCNTL: OSD

|                 |   |        |       |       |      |       |    |      |      |
|-----------------|---|--------|-------|-------|------|-------|----|------|------|
| Bit             | : | 15     | 14    | 13    | 12   | 11    | 10 | 9    | 8    |
|                 |   | VDSPON | DISPM | LACEM | BLKS | OSDON | —  | EDGE | EDGC |
| Initial value : |   | 0      | 0     | 0     | 0    | 0     | 0  | 0    | 0    |
| R/W             | : | R/W    | R/W   | R/W   | R/W  | R/W   | —  | R/W  | R/W  |

Border color specification bit

|       |                                     |                             |
|-------|-------------------------------------|-----------------------------|
| Bit 8 | Border Color (in text display mode) |                             |
| EDGC  | Border Color (C.Video output)       | Border Color (R,G,B Output) |
| 0     | Black                               | Black (Initial value)       |
| 1     | White                               | White                       |

|       |                                     |                       |
|-------|-------------------------------------|-----------------------|
| Bit 8 | Border Color (in superimposed mode) |                       |
| EDGC  | C.Video output                      | R,G,B Output          |
| 0     | Specification invalid (Black)       | Black (Initial value) |
| 1     |                                     | White                 |

Border specification bit

|   |                     |                 |
|---|---------------------|-----------------|
| 0 | No character border | (Initial value) |
| 1 | Character border    |                 |

OSD display start bit

|        |       |                                                                                     |
|--------|-------|-------------------------------------------------------------------------------------|
| CDSPON | OSDON | Description                                                                         |
| 0/1    | 0     | OSD display is stopped (C.Video output and digital output both off) (Initial value) |
| 0      | 1     | OSD display is started (digital output only)                                        |
| 1      | 1     | OSD display is started (both C.Video output and digital output enabled)             |

Blinking period select bit

|      |      |                                                    |
|------|------|----------------------------------------------------|
| TVM2 | BLKS | Description                                        |
| 0    | 0    | Approx. 0.5 sec (32/fv = 0.53 sec) (Initial value) |
|      | 1    | Approx. 1.0 sec (64/fv = 1.07 sec)                 |
| 1    | 0    | Approx. 0.5 sec (32/fv = 0.64 sec)                 |
|      | 1    | Approx. 1.0 sec (64/fv = 1.28 sec)                 |

(TVM2 is bit15 in DFORM)

Interlaced/noninterlaced display select bit

|   |                                                     |
|---|-----------------------------------------------------|
| 0 | 0 Noninterlaced display is selected (Initial value) |
| 1 | Interlaced display is selected                      |

Superimposed/text display mode select bit


|   |                                               |
|---|-----------------------------------------------|
| 0 | Superimposed mode is selected (Initial value) |
| 1 | Text display mode is selected                 |

OSD C. video display enable bit

|   |                                            |
|---|--------------------------------------------|
| 0 | OSD C.Video display is off (Initial value) |
| 1 | OSD C.Video display is on                  |

# H'D211: Screen Control Register DCNTL: OSD

|                 |   |     |     |     |      |      |      |      |      |
|-----------------|---|-----|-----|-----|------|------|------|------|------|
| Bit             | : | 7   | 6   | 5   | 4    | 3    | 2    | 1    | 0    |
|                 |   | BR  | BG  | BB  | BLU1 | BLU0 | CAMP | KAMP | BAMP |
| Initial value : |   | 0   | 0   | 0   | 0    | 0    | 0    | 0    | 0    |
| R/W             | : | R/W | R/W | R/W | R/W  | R/W  | R/W  | R/W  | R/W  |

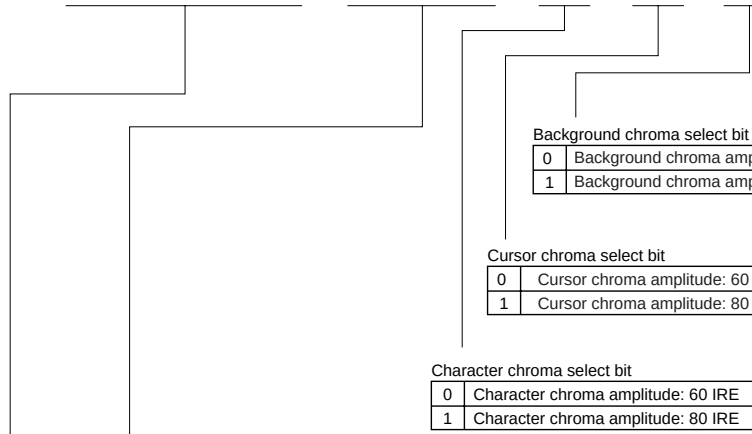

## Background chroma select bit

|   |                                                     |
|---|-----------------------------------------------------|
| 0 | Background chroma amplitude: 60 IRE (Initial value) |
| 1 | Background chroma amplitude: 80 IRE                 |

## Cursor chroma select bit

|   |                                                 |
|---|-------------------------------------------------|
| 0 | Cursor chroma amplitude: 60 IRE (Initial value) |
| 1 | Cursor chroma amplitude: 80 IRE                 |

## Character chroma select bit

|   |                                                    |
|---|----------------------------------------------------|
| 0 | Character chroma amplitude: 60 IRE (Initial value) |
| 1 | Character chroma amplitude: 80 IRE                 |

## Background brightness select bits

| BUL1 | BUL0 | Description                                  |
|------|------|----------------------------------------------|
| 0    | 0    | Background Brightness, 10IRE (Initial value) |
|      | 1    | Background Brightness, 30IRE                 |
| 1    | 0    | Background Brightness, 50IRE                 |
|      | 1    | Background Brightness, 70IRE                 |

## Background color specification


(Background Colors in Text Display Mode)

| Bit 7 | Bit 6 | Bit 5 | Description                       |              |                                    |
|-------|-------|-------|-----------------------------------|--------------|------------------------------------|
| BR    | BG    | BB    | Background color (C.Video Output) |              | Background color (R, G, B Outputs) |
| 0     | 0     | 0     | NTSC                              | PAL          | Black (Initial value)              |
|       |       | 1     | Black                             | Black        |                                    |
|       | 1     | 0     | $\pi$                             | $\pm\pi$     | Blue                               |
|       |       | 1     | $7\pi/4$                          | $\pm 7\pi/4$ | Green                              |
| 1     | 0     | 0     | $3\pi/2$                          | $\pm 3\pi/2$ | Cyan                               |
|       |       | 1     | $\pi/2$                           | $\pm\pi/2$   | Red                                |
|       | 1     | 0     | $3\pi/4$                          | $\pm 3\pi/4$ | Magenta                            |
|       |       | 1     | Same phase                        | $\pm 0$      | Yellow                             |
|       |       | 1     | White                             | White        | White                              |

(Background Colors in Superimposed Mode)

| Bit 7 | Bit 6 | Bit 5 | Description                       |  |                                    |
|-------|-------|-------|-----------------------------------|--|------------------------------------|
| BR    | BG    | BB    | Background color (C.Video Output) |  | Background color (R, G, B Outputs) |
| 0     | 0     | 0     | Specification invalid             |  | Black (Initial value)              |
|       |       | 1     |                                   |  | Blue                               |
|       | 1     | 0     |                                   |  | Green                              |
|       |       | 1     |                                   |  | Cyan                               |
| 1     | 0     | 0     |                                   |  | Red                                |
|       |       | 1     |                                   |  | Magenta                            |
|       | 1     | 0     |                                   |  | Yellow                             |
|       |       | 1     |                                   |  | White                              |

## H'D212: OSD Format Register DFORM: OSD

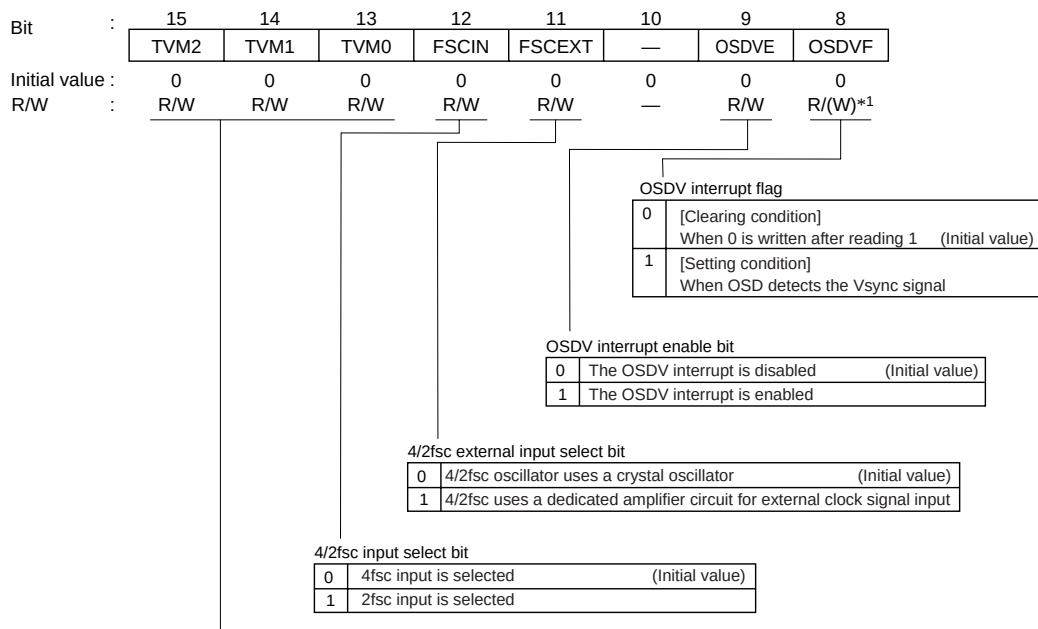

TV format select bits

| Bit 15 | Bit 14 | Bit 13 | Bit 12 | Description                              |                          |                        |
|--------|--------|--------|--------|------------------------------------------|--------------------------|------------------------|
| TVM2   | TVM1   | TVM0   | FSCIN  | TV Format                                | 4fsc (MHz)               | 2fsc (MHz)             |
| 0      | 0      | 0      | 0      | M/NTSC                                   | 14.31818                 | —                      |
|        |        |        | 1      |                                          | —                        | 7.15909                |
| 0      | 0      | 1      | 0      | 4.43-NTSC                                | 17.734475<br>(17.734470) | —                      |
|        |        |        | 1      |                                          | —                        | 8.867235<br>(8.867238) |
| 0      | 1      | 0      | 0      | M/PAL                                    | 14.302446<br>(14.302444) | —                      |
|        |        |        | 1      |                                          | —                        | 7.15122298             |
| 0      | 1      | 1      | 0/1    | Must not be specified                    |                          |                        |
| 1      | 0      | 0      | 0      | N/PAL                                    | 14.328225<br>(14.28244)  | —                      |
|        |        |        | 1      |                                          | —                        | 7.1641125              |
| 1      | 0      | 1      | 0/1    | Must not be specified                    |                          |                        |
| 1      | 1      | 0      | 0      | B,G,H/PAL<br>I/PAL<br>D,K/PAL            | 17.734475<br>(17.734476) | —                      |
|        |        |        | 1      |                                          | —                        | 8.867235<br>(8.867238) |
| 1      | 1      | 1      | 0      | B,G,H/SECAM*2<br>L/SECAM<br>D,K,K1/SECAM | 17.734475<br>(17.734470) | —                      |
|        |        |        | 1      |                                          | —                        | 8.867235<br>(8.867238) |

Notes: 1. Only 0 can be written to clear the flag.

2. The 4fsc and 2fsc frequencies for SECAM do not conform to the SECAM TV format specifications.

## H'D213: OSD Format Register DFORM: OSD

|               |   |   |   |   |   |      |       |        |
|---------------|---|---|---|---|---|------|-------|--------|
| Bit           | 7 | 6 | 5 | 4 | 3 | 2    | 1     | 0      |
|               | — | — | — | — | — | DTMV | LDREQ | VACS   |
| Initial value | 1 | 1 | 1 | 1 | 1 | 0    | 0     | 0      |
| R/W           | — | — | — | — | — | R/W  | R/W   | R/(W)* |

Master slave RAM transfer state bit

|   |                                                                     |
|---|---------------------------------------------------------------------|
| 0 | The CPU did not access OSDRAM during data transfer (Initial value)  |
| 1 | The CPU accessed OSDRAM during data transfer; the access is invalid |

Master slave RAM transfer state bit

Writing:

|   |                                                                                                                  |
|---|------------------------------------------------------------------------------------------------------------------|
| 0 | Requests abort of data transfer from master RAM to slave RAM                                                     |
| 1 | Requests transfer of data from master RAM to slave RAM.<br>After transfer is completed, this bit is cleared to 0 |

Reading:

|   |                                                                                                                                                  |
|---|--------------------------------------------------------------------------------------------------------------------------------------------------|
| 0 | Data is not being transferred from master RAM to slave RAM (Initial value)                                                                       |
| 1 | Data is being transferred from master RAM to slave RAM, or is being prepared for transfer. After transfer is completed, this bit is cleared to 0 |

OSD display update timing control bit

|   |                                                                                                                                                                                                                                                                                                         |
|---|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 0 | After the LDREQ bit is written to 1, data is transferred from master RAM to slave RAM regardless of the Vsync signal (OSDV). The OSD display is updated simultaneously with register* rewriting.<br>Note: * When transferring data using this setting, do not have the OSD display data (Initial value) |
| 1 | After the LDREQ bit is written to 1, data is transferred from master RAM to slave RAM synchronously with the Vsync signal (OSDV). After rewriting the register, the OSD display is updated synchronously with the Vsync signal (OSDV).                                                                  |

Note: \* The registers and register bits whose settings are reflected in the OSD display are the row registers (CLINE), vertical display position register (VPOS), horizontal display position register (HPOS), screen control register (DCNTL) except bit 13, and the RGBC, YCOC, and DOBC bits of the digital output specification register (DOUT).

# H'D800 to H'DAFF: Display Data RAM OSDRAM: OSD

|               |   |      |       |      |      |     |     |     |     |
|---------------|---|------|-------|------|------|-----|-----|-----|-----|
| Bit           | : | 15   | 14    | 13   | 12   | 11  | 10  | 9   | 8   |
|               |   | BLNK | HT/CR | BON1 | BON0 | CR  | CG  | CB  | C8  |
| Initial value | : | *    | *     | *    | *    | *   | *   | *   | *   |
| R/W           | : | R/W  | R/W   | R/W  | R/W  | R/W | R/W | R/W | R/W |

Character codes specification

Character color specification bits

| CR | CG | CB | Character Color (C.Video Output) |              | Character Color (R, G, B Output) |
|----|----|----|----------------------------------|--------------|----------------------------------|
|    |    |    | NTSC                             | PAL          |                                  |
| 0  | 0  | 0  | Black                            | Black        | Black                            |
|    |    | 1  | $\pi$                            | $\pm\pi$     | Blue                             |
|    | 1  | 0  | $7\pi/4$                         | $\pm 7\pi/4$ | Green                            |
|    |    | 1  | $3\pi/2$                         | $\pm 3\pi/2$ | Cyan                             |
| 1  | 0  | 0  | $\pi/2$                          | $\pm\pi/2$   | Red                              |
|    |    | 1  | $3\pi/4$                         | $\pm 3\pi/4$ | Magenta                          |
|    | 1  | 0  | Same phase                       | $\pm 0$      | Yellow                           |
|    |    | 1  | White                            | White        | White                            |

Button specification bits

| BPTNn | BON1 | BON0 | Description                         |
|-------|------|------|-------------------------------------|
| 0     | 0    | 0    | No button is displayed              |
|       |      | 1    | Button is displayed (start)         |
|       | 1    | 0    | Button is displayed (end)           |
|       |      | 1    | Button is displayed (one character) |
| 1     | 0    | 0    | No button is displayed              |
|       |      | 1    | Button is displayed (start)         |
|       | 1    | 0    | Button is displayed (end)           |
|       |      | 1    | Button is displayed (one character) |

Halftone/cursor display specification bit

| DISPM | HT/CR | C.Video Output        |
|-------|-------|-----------------------|
| 0     | 0     | Halftone is off       |
|       | 1     | Halftone is on        |
| 1     | 0     | Cursor display is off |
|       | 1     | Cursor display is on  |

(DISPM is bit 14 in DCNTL)

| RGBC | HT/CR | Digital Output (R, G, B)                                                                    |
|------|-------|---------------------------------------------------------------------------------------------|
| 0    | 0/1   | Character is output (halfitone/cursor specification invalid)                                |
| 1    | 0     | Character is output (halfitone/cursor display off)                                          |
|      | 1     | Cursor color data specified by the cursor color specification bit of row register is output |

(RGBC is bit 6 in DOUT)

Blinking specification bit

|   |                 |
|---|-----------------|
| 0 | Blinking is off |
| 1 | Blinking is on  |

| DOBC | BLNK | Digital Output (YCO, R, G, B) |
|------|------|-------------------------------|
| 0    | 0    | Blinking is off               |
|      | 1    | Blinking is off               |
| 1    | 0    | Blinking is off               |
|      | 1    | Blinking is on                |

(DOBC is bit 4 in DOUT)

|               |   |     |     |     |     |     |     |     |     |
|---------------|---|-----|-----|-----|-----|-----|-----|-----|-----|
| Bit           | : | 7   | 6   | 5   | 4   | 3   | 2   | 1   | 0   |
|               |   | C7  | C6  | C5  | C4  | C3  | C2  | C1  | C0  |
| Initial value | : | *   | *   | *   | *   | *   | *   | *   | *   |
| R/W           | : | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |

Character Codes

H'D220: Slice Even-Field Mode Register SEVFD: Data Slicer

|               |   |       |        |    |       |       |       |       |       |
|---------------|---|-------|--------|----|-------|-------|-------|-------|-------|
| Bit           | : | 15    | 14     | 13 | 12    | 11    | 10    | 9     | 8     |
|               |   | EVNIE | EVNIF  | —  | STBE4 | STBE3 | STBE2 | STBE1 | STBE0 |
| Initial value | : | 0     | 0      | 1  | 0     | 0     | 0     | 0     | 0     |
| R/W           | : | R/W   | R/(W)* | —  | R/W   | R/W   | R/W   | R/W   | R/W   |

Start bit detection starting position bits

Even field slice interrupt completion flag

|   |                                                                                             |
|---|---------------------------------------------------------------------------------------------|
| 0 | [Clearing condition]<br>When 0 is written after reading 1 (Initial value)                   |
| 1 | [Setting condition]<br>When data slicing is completed for all specified lines of even field |

Even field slice completion interrupt enable flag

|   |                                                                |
|---|----------------------------------------------------------------|
| 0 | Disables even-field slice completion interrupt (Initial value) |
| 1 | Enables even-field slice completion interrupt                  |

|               |   |        |        |        |       |       |       |       |       |
|---------------|---|--------|--------|--------|-------|-------|-------|-------|-------|
| Bit           | : | 7      | 6      | 5      | 4     | 3     | 2     | 1     | 0     |
|               |   | SLVLE2 | SLVLE1 | SLVLE0 | DLYE4 | DLYE3 | DLYE2 | DLYE1 | DLYE0 |
| Initial value | : | 0      | 0      | 0      | 0     | 0     | 0     | 0     | 0     |
| R/W           | : | R/W    | R/W    | R/W    | R/W   | R/W   | R/W   | R/W   | R/W   |

Even field data sampling clock delay time

Slice Level Setting Bits

| SLVLE2 | SLVLE1 | SLVLE0 | Description                          |
|--------|--------|--------|--------------------------------------|
| 0      | 0      | 0      | Slice level is 0 IRE (Initial value) |
|        |        | 1      | Slice level is 5 IRE                 |
|        | 1      | 0      | Slice level is 15 IRE                |
|        |        | 1      | Slice level is 20 IRE                |
| 1      | 0      | 0      | Slice level is 25 IRE                |
|        |        | 1      | Slice level is 35 IRE                |
|        | 1      | 0      | Slice level is 40 IRE                |
|        |        | 1      | Must not be specified                |

Note: All slice levels are with reference to the pedestal level (5 IRE).  
Slice level values are provided for reference.

Note: \* Only 0 can be written to clear the flag.

H'D222: Slice Odd-Field Mode Register SODFD: Data Slicer

|               |   |       |        |    |       |       |       |       |       |
|---------------|---|-------|--------|----|-------|-------|-------|-------|-------|
| Bit           | : | 15    | 14     | 13 | 12    | 11    | 10    | 9     | 8     |
|               |   | ODDIE | ODDIF  | —  | STBO4 | STBO3 | STBO2 | STBO1 | STBO0 |
| Initial value | : | 0     | 0      | 1  | 0     | 0     | 0     | 0     | 0     |
| R/W           | : | R/W   | R/(W)* | —  | R/W   | R/W   | R/W   | R/W   | R/W   |

Start bit detection starting position bits

Odd field slice interrupt completion flag

|   |                                                                                            |
|---|--------------------------------------------------------------------------------------------|
| 0 | [Clearing condition]<br>When 0 is written after reading 1 (Initial value)                  |
| 1 | [Setting condition]<br>When data slicing is completed for all specified lines of odd field |

Odd field slice completion interrupt enable flag

|   |                                                               |
|---|---------------------------------------------------------------|
| 0 | Disables odd field slice completion interrupt (Initial value) |
| 1 | Enables even-odd field slice completion interrupt             |

|               |   |        |        |        |       |       |       |       |       |
|---------------|---|--------|--------|--------|-------|-------|-------|-------|-------|
| Bit           | : | 7      | 6      | 5      | 4     | 3     | 2     | 1     | 0     |
|               |   | SLVLO2 | SLVLO1 | SLVLO0 | DLYO3 | DLYO3 | DLYO2 | DLYO1 | DLYO0 |
| Initial value | : | 0      | 0      | 0      | 0     | 0     | 0     | 0     | 0     |
| R/W           | : | R/W    | R/W    | R/W    | R/W   | R/W   | R/W   | R/W   | R/W   |

ODD field data sampling clock delay time

Slice level setting bits

| SLVLO2 | SLVLO1 | SLVLO0 | Description                          |
|--------|--------|--------|--------------------------------------|
| 0      | 0      | 0      | Slice level is 0 IRE (Initial value) |
|        |        | 1      | Slice level is 5 IRE                 |
|        | 1      | 0      | Slice level is 15 IRE                |
|        |        | 1      | Slice level is 20 IRE                |
| 1      | 0      | 0      | Slice level is 25 IRE                |
|        |        | 1      | Slice level is 35 IRE                |
|        | 1      | 0      | Slice level is 40 IRE                |
|        |        | 1      | Must not be specified                |

Note: All slice levels are with reference to the pedestal level (5 IRE).  
Slice level values are provided for reference.

Note: \* Only 0 can be written to clear the flag.

## H'D224 to H'D227: Slice Line Setting Registers 1 to 4 SLINE1 to SLINE4: Data Slicer

|                 |         |        |   |          |          |          |          |          |
|-----------------|---------|--------|---|----------|----------|----------|----------|----------|
| Bit             | 7       | 6      | 5 | 4        | 3        | 2        | 1        | 0        |
|                 | SENBLn* | SFLDn* | — | SLINEn4* | SLINEn3* | SLINEn2* | SLINEn1* | SLINEn0* |
| Initial value : | 0       | 0      | 1 | 0        | 0        | 0        | 0        | 0        |
| R/W             | R/W     | R/W    | — | R/W      | R/W      | R/W      | R/W      | R/W      |

Slice line setting bit

Field setting bit

|   |            |                 |
|---|------------|-----------------|
| 0 | Even field | (Initial value) |
| 1 | Odd field  |                 |


Slice enable bit

|   |                                                                                                                                                            |
|---|------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 0 | [When read] Disables data slice operation for the specified lines<br>[Clearing condition]<br>When the data slice operation for the line has been completed |
| 1 | Enables data slice operation for the specified lines                                                                                                       |

Note: n = 1 to 4 (H8S/2197S and H8S/2196S: n=1 and 0.)



**H'D228 to H'D22B: Slice Detection Registers 1 to 4 SDTCT1 to SDTCT4: Data Slicer**

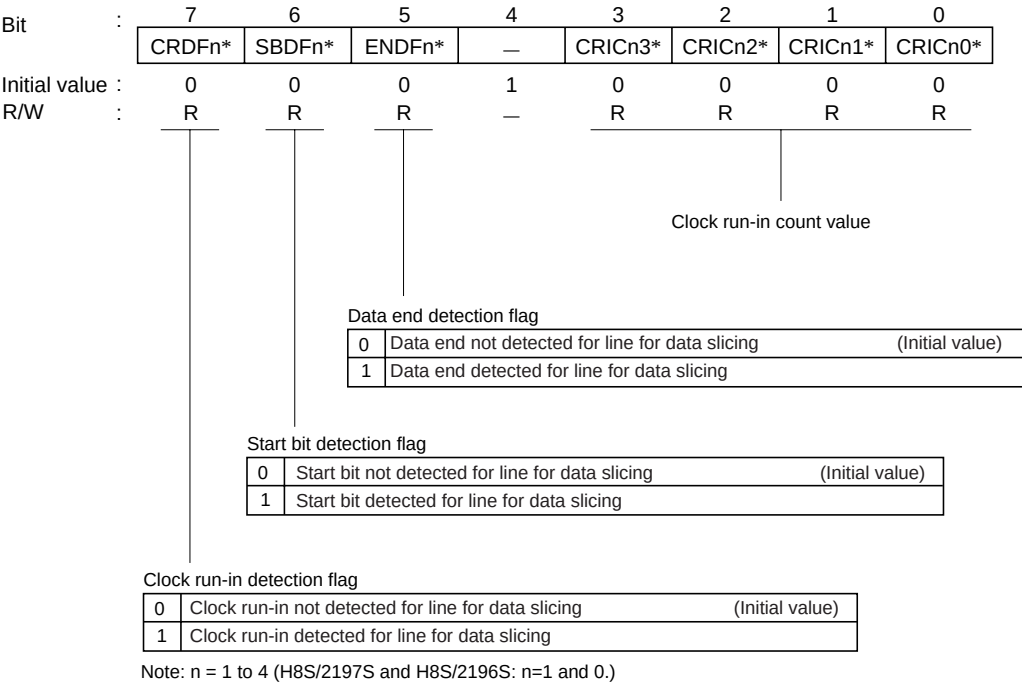

**H'D22C to H'D232: Slice Data Registers 1 to 4 SDATA1 to SDATA4: Data Slicer**

|               |   |    |    |    |    |    |    |   |   |   |   |   |   |   |   |   |   |
|---------------|---|----|----|----|----|----|----|---|---|---|---|---|---|---|---|---|---|
| Bit           | : | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
|               |   |    |    |    |    |    |    |   |   |   |   |   |   |   |   |   |   |
| Initial value | : | *  | *  | *  | *  | *  | *  | * | * | * | * | * | * | * | * | * | * |
| R/W           | : | R  | R  | R  | R  | R  | R  | R | R | R | R | R | R | R | R | R | R |

Note: \* Undetermined

## H'D240: Sync Separation Input Mode Register SEPIMR: Sync Separator

|                |        |        |        |       |      |        |     |        |
|----------------|--------|--------|--------|-------|------|--------|-----|--------|
| Bit            | 7      | 6      | 5      | 4     | 3    | 2      | 1   | 0      |
|                | CCMPV1 | CCMPV0 | CCMPSL | SYNCT | VSEL | DLPFON | —   | FRQSEL |
| Initial value: | 0      | 0      | 0      | 0     | 0    | 0      | 0   | 0      |
| R/W            | R/W    | R/W    | R/W    | R/W   | R/W  | R/W    | R/W | R/W    |

Reference clock frequency select

|   |                                                         |
|---|---------------------------------------------------------|
| 0 | 576 times the horizontal sync frequency (Initial value) |
| 1 | 448 times the horizontal sync frequency                 |


Digital LPF control

|   |                                                  |
|---|--------------------------------------------------|
| 0 | The digital LPF does not operate (Initial value) |
| 1 | The digital LPF operates                         |

Vsync input signal select

|   |                                     |
|---|-------------------------------------|
| 0 | Vsync Schmitt input (Initial value) |
| 1 | Csync Schmitt input                 |

Sync signal polarity select

|   |                                                                                                   |
|---|---------------------------------------------------------------------------------------------------|
| 0 |  (Initial value) |
| 1 |                  |

Csync separation comparator input select

|   |                                                                                                                              |
|---|------------------------------------------------------------------------------------------------------------------------------|
| 0 | The Csync separation comparator input is selected<br>The Csync/Hsync terminal operates as an output terminal (Initial value) |
| 1 | The Csync Schmitt input is selected<br>The Csync/Hsync terminal operates as an input terminal                                |

Note: \* When this bit is set to 1, it must be set to 1 by the instruction following the module stop release instruction in the interrupt-prohibited state.

ORC #B'10000000, CCR ← Interrupt prohibited

BCLR.B #1, @MSTPCRH ← Module stop release


BSET.B #5, @SEPIMR ← Sets CCMPSL bit to 1

ANDC #5'01111111, CCR ← Interrupt permitted

Csync separation comparator slicing voltage select


| CCMPV1 | CCMPV0 | Description                                       |
|--------|--------|---------------------------------------------------|
| 0      | 0      | The Csync slicing level is 10 IRE (Initial value) |
|        | 1      | The Csync slicing level is 5 IRE                  |
| 1      | 0      | The Csync slicing level is 15 IRE                 |
|        | 1      | The Csync slicing level is 20 IRE                 |

## H'D241: Sync Separation Control Register SEPCR: Sync Separator

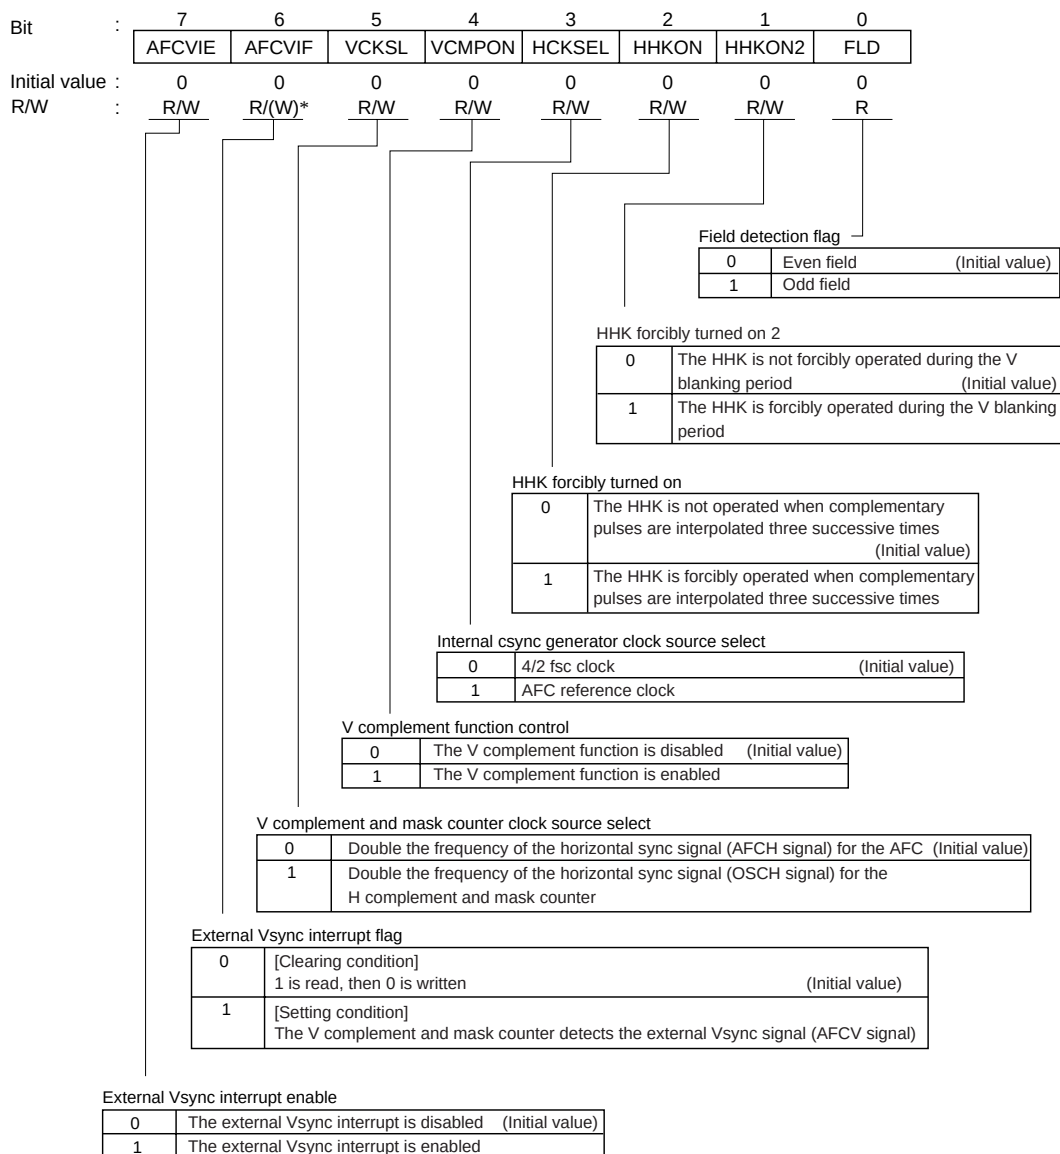


Note: \* Only 0 can be written to clear the flag

## H'D242: Sync Separation AFC Control Register SEPACR: Sync Separator

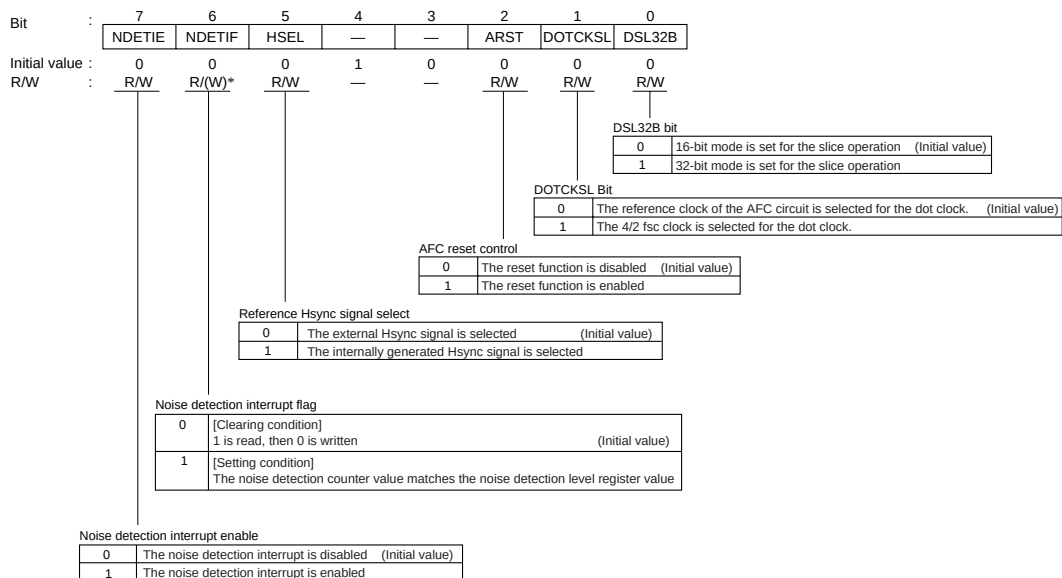


Note: \* Only 0 can be written to clear the flag

## H'D243: Horizontal Sync Signal Threshold Register HVTHR: Sync Separator

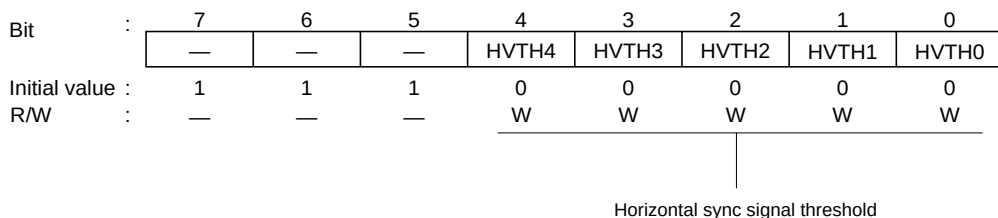

Note: Refer to section 27.2.4, Horizontal Sync Signal Threshold Register (HVTHR)

## H'D244: Vertical Sync Signal Threshold Register VVTHR: Sync Separator

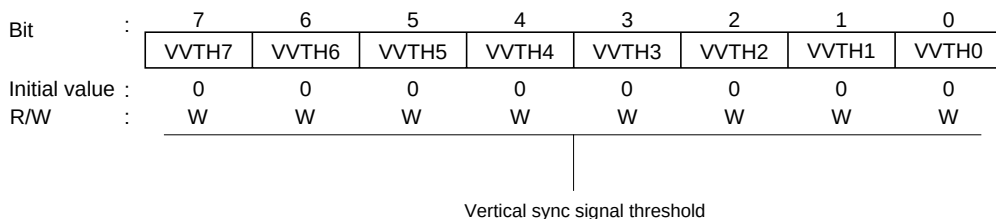

Note: Refer to section 27.2.5, Vertical Sync Signal Threshold Register (VVTHR)

## H'D245: Field Detection Window Register FWIDR: Sync Separator

|               |   |   |   |   |   |       |       |       |       |
|---------------|---|---|---|---|---|-------|-------|-------|-------|
| Bit           | : | 7 | 6 | 5 | 4 | 3     | 2     | 1     | 0     |
|               |   | — | — | — | — | FWID3 | FWID2 | FWID1 | FWID0 |
| Initial value | : | 1 | 1 | 1 | 1 | 0     | 0     | 0     | 0     |
| R/W           | : | — | — | — | — | W     | W     | W     | W     |

Field detection window timing

Note: Refer to section 27.2.6, Field Detection Window Register (FWIDR)

## H'D246: H Complement and Mask Timing Register HCMMR: Sync Separator

|               |   |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |
|---------------|---|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| Bit           | : | 15  | 14  | 13  | 12  | 11  | 10  | 9   | 8   | 7   | 6   | 5   | 4   | 3   | 2   | 1   | 0   |
|               |   | HC8 | HC7 | HC6 | HC5 | HC4 | HC3 | HC2 | HC1 | HC0 | HM6 | HM5 | HM4 | HM3 | HM2 | HM1 | HM0 |
| Initial value | : | 0   | 0   | 0   | 0   | 0   | 0   | 0   | 0   | 0   | 0   | 0   | 0   | 0   | 0   | 0   | 0   |
| R/W           | : | W   | W   | W   | W   | W   | W   | W   | W   | W   | W   | W   | W   | W   | W   | W   | W   |

Complementary pulse generation timing      HHK clearing timing

Note: Refer to section 27.2.7, H Complement and Mask Timing Register (HCMMR)

## H'D248: Noise Detection Counter NDETC: Sync Separator

|               |   |     |     |     |     |     |     |     |     |
|---------------|---|-----|-----|-----|-----|-----|-----|-----|-----|
| Bit           | : | 7   | 6   | 5   | 4   | 3   | 2   | 1   | 0   |
|               |   | NC7 | NC6 | NC5 | NC4 | NC3 | NC2 | NC1 | NC0 |
| Initial value | : | 0   | 0   | 0   | 0   | 0   | 0   | 0   | 0   |
| R/W           | : | R   | R   | R   | R   | R   | R   | R   | R   |

Note: Refer to section 27.2.8, Noise Detection Counter (NDETC)

## H'D248: Noise Detection Level Register NDETR: Sync Separator

|               |   |     |     |     |     |     |     |     |     |
|---------------|---|-----|-----|-----|-----|-----|-----|-----|-----|
| Bit           | : | 7   | 6   | 5   | 4   | 3   | 2   | 1   | 0   |
|               |   | NR7 | NR6 | NR5 | NR4 | NR3 | NR2 | NR1 | NR0 |
| Initial value | : | 0   | 0   | 0   | 0   | 0   | 0   | 0   | 0   |
| R/W           | : | W   | W   | W   | W   | W   | W   | W   | W   |

Noise detection level

Note: Refer to section 27.2.9, Noise Detection Level Register (NDETR)

## H'D249: Data Slicer Detection Window Register DDETW: Sync Separator

|               |   |        |        |        |        |        |        |        |        |
|---------------|---|--------|--------|--------|--------|--------|--------|--------|--------|
| Bit           | : | 7      | 6      | 5      | 4      | 3      | 2      | 1      | 0      |
|               |   | SRWDE1 | SRWDE0 | SRWDS1 | SRWDS0 | CRWDE1 | CRWDE0 | CRWDS1 | CRWDS0 |
| Initial value | : | 0      | 0      | 0      | 0      | 0      | 0      | 0      | 0      |
| R/W           | : | W      | W      | W      | W      | W      | W      | W      | W      |

Clock run-in detection window signal rising timing setting

| CRWDS1 | CRWDS0 | Description                                                                          |
|--------|--------|--------------------------------------------------------------------------------------|
| 0      | 0      | The detection starts about 10.5 $\mu$ s after the slicer start point (Initial value) |
|        | 1      | The detection starts about 10.0 $\mu$ s after the slicer start point                 |
| 1      | 0      | The detection starts about 11.0 $\mu$ s after the slicer start point                 |
|        | 1      | This setting must not be used                                                        |

Clock run-in detection window signal falling timing setting

| CRWDE1 | CRWDE0 | Description                                                                        |
|--------|--------|------------------------------------------------------------------------------------|
| 0      | 0      | The detection ends about 23.5 $\mu$ s after the slicer start point (Initial value) |
|        | 1      | The detection ends about 23.0 $\mu$ s after the slicer start point                 |
| 1      | 0      | The detection ends about 24.0 $\mu$ s after the slicer start point                 |
|        | 1      | This setting must not be used                                                      |

Start bit detection window signal rising timing setting

| SRWDS1 | SRWDS0 | Description                                                                          |
|--------|--------|--------------------------------------------------------------------------------------|
| 0      | 0      | The detection starts about 23.5 $\mu$ s after the slicer start point (Initial value) |
|        | 1      | The detection starts about 23.0 $\mu$ s after the slicer start point                 |
| 1      | 0      | The detection starts about 24.0 $\mu$ s after the slicer start point                 |
|        | 1      | This setting must not be used                                                        |

Start bit detection window signal falling timing setting

| SRWDE1 | SRWDE0 | Description                                                                        |
|--------|--------|------------------------------------------------------------------------------------|
| 0      | 0      | The detection ends about 29.5 $\mu$ s after the slicer start point (Initial value) |
|        | 1      | The detection ends about 29.0 $\mu$ s after the slicer start point                 |
| 1      | 0      | The detection ends about 30.0 $\mu$ s after the slicer start point                 |
|        | 1      | This setting must not be used                                                      |

H'D24A: Internal Sync Frequency Register    INFRQR: Sync Separator

|               |   |      |      |     |   |   |   |   |   |
|---------------|---|------|------|-----|---|---|---|---|---|
| Bit           | : | 7    | 6    | 5   | 4 | 3 | 2 | 1 | 0 |
|               |   | VFS2 | VFS1 | HFS | — | — | — | — | — |
| Initial value | : | 0    | 0    | 0   | 0 | 0 | 0 | 0 | 0 |
| R/W           | : | W    | W    | W   | — | — | — | — | — |

Hsync frequency selection bit

| Bit 5 | Description                |                            |                            |
|-------|----------------------------|----------------------------|----------------------------|
| HFS   | PAL                        | MPAL                       | NPAL                       |
| 0     | fsc/283.75 (Initial value) | fsc/227.25 (Initial value) | fsc/229.25 (Initial value) |
| 1     | fsc/283.5                  | fsc/227.5                  | fsc/229.5                  |

Vsync frequency selection bit

| Bit 7 | Bit 6 | Description            |                        |                        |
|-------|-------|------------------------|------------------------|------------------------|
| VFS2  | VFS1  | PAL                    | MPAL                   | NPAL                   |
| 0     | 0     | fh/313 (Initial value) | fh/263 (Initial value) | fh/313 (Initial value) |
|       | 1     | fh/314                 | fh/266                 | fh/314                 |
| 1     | 0     | fh/310                 | fh/262                 | fh/310                 |
|       | 1     | fh/312                 | fh/264                 | fh/312                 |

**H'FFB0 to H'FFB2: Trap Address Register 0 TAR0: ATC****H'FFB3 to H'FFB5: Trap Address Register 1 TAR1: ATC****H'FFB6 to H'FFB8: Trap Address Register 2 TAR2: ATC**

|                 |     |     |     |     |     |     |     |     |
|-----------------|-----|-----|-----|-----|-----|-----|-----|-----|
| Bit :           | 7   | 6   | 5   | 4   | 3   | 2   | 1   | 0   |
|                 | A23 | A22 | A21 | A20 | A19 | A18 | A17 | A16 |
| Initial value : | 0   | 0   | 0   | 0   | 0   | 0   | 0   | 0   |
| R/W :           | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |


|                 |     |     |     |     |     |     |     |     |
|-----------------|-----|-----|-----|-----|-----|-----|-----|-----|
| Bit :           | 7   | 6   | 5   | 4   | 3   | 2   | 1   | 0   |
|                 | A15 | A14 | A13 | A12 | A11 | A10 | A9  | A8  |
| Initial value : | 0   | 0   | 0   | 0   | 0   | 0   | 0   | 0   |
| R/W :           | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |

|                 |     |     |     |     |     |     |     |   |
|-----------------|-----|-----|-----|-----|-----|-----|-----|---|
| Bit :           | 7   | 6   | 5   | 4   | 3   | 2   | 1   | 0 |
|                 | A7  | A6  | A5  | A4  | A3  | A2  | A1  | — |
| Initial value : | 0   | 0   | 0   | 0   | 0   | 0   | 0   | 0 |
| R/W :           | R/W | R/W | R/W | R/W | R/W | R/W | R/W | — |



**H'FFB9: Address Trap Control Register ATCR: ATC**

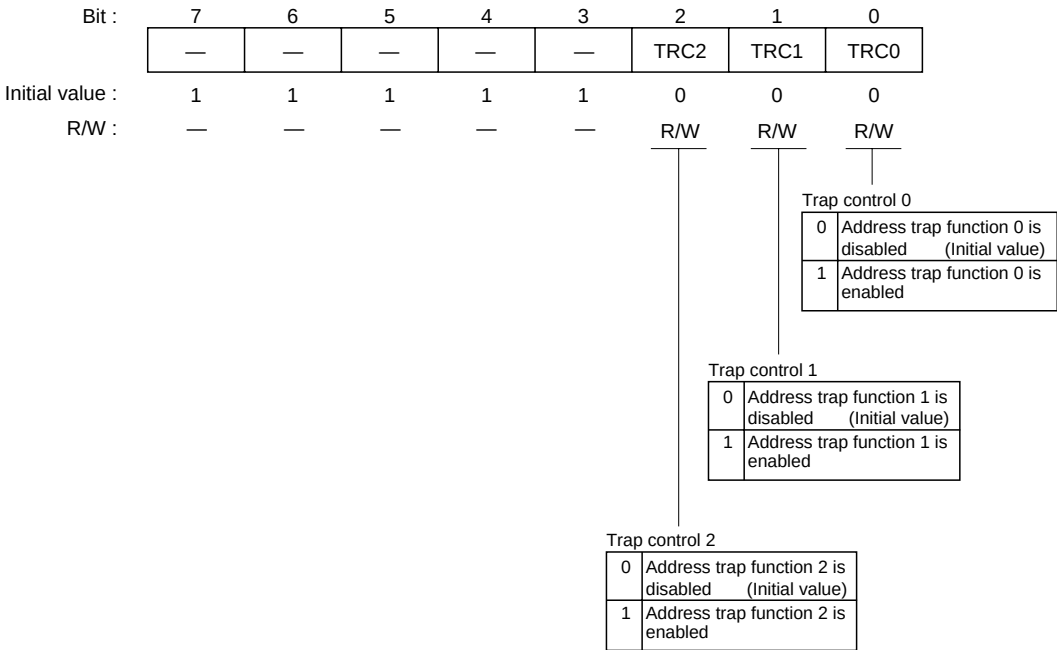

H'FFBA: Timer Mode Register A TMA: Timer A

|                 |        |       |   |   |      |      |      |      |
|-----------------|--------|-------|---|---|------|------|------|------|
| Bit :           | 7      | 6     | 5 | 4 | 3    | 2    | 1    | 0    |
|                 | TMAOV  | TMAIE | — | — | TMA3 | TMA2 | TMA1 | TMA0 |
| Initial value : | 0      | 0     | 1 | 1 | 0    | 0    | 0    | 0    |
| R/W :           | R/(W)* | R/W   | — | — | R/W  | R/W  | R/W  | R/W  |

| Clock select bits |      |      |      |                                                                                         |                         |
|-------------------|------|------|------|-----------------------------------------------------------------------------------------|-------------------------|
| TMA3              | TMA2 | TMA1 | TMA0 | Prescaler frequency division rate (interval timer)<br>or overflow frequency (time-base) | Operation mode          |
| 0                 | 0    | 0    | 0    | PSS, $\phi/16384$ (Initial value)                                                       | Interval timer<br>mode  |
|                   |      |      | 1    | PSS, $\phi/8192$                                                                        |                         |
|                   |      | 1    | 0    | PSS, $\phi/4096$                                                                        |                         |
|                   |      |      | 1    | PSS, $\phi/1024$                                                                        |                         |
|                   | 1    | 0    | 0    | PSS, $\phi/512$                                                                         |                         |
|                   |      |      | 1    | PSS, $\phi/256$                                                                         |                         |
|                   |      | 1    | 0    | PSS, $\phi/64$                                                                          |                         |
|                   |      |      | 1    | PSS, $\phi/16$                                                                          |                         |
| 1                 | 0    | 0    | 0    | 1 s                                                                                     | Clock time<br>base mode |
|                   |      |      | 1    | 0.5 s                                                                                   |                         |
|                   |      | 1    | 0    | 0.25 s                                                                                  |                         |
|                   |      |      | 1    | 0.03125 s                                                                               |                         |
|                   | 1    | 0    | 0    | Clear PSW and TCA to H'00                                                               |                         |
|                   |      |      | 1    |                                                                                         |                         |
|                   |      | 1    | 0    |                                                                                         |                         |
|                   |      |      | 1    |                                                                                         |                         |

Note:  $\phi = f_{osc}$

Clock source, prescaler select bit

|   |                                             |
|---|---------------------------------------------|
| 0 | Timer A clock source is PSS (Initial value) |
| 1 | Timer A clock source is PSW                 |

Timer A interrupt enable bit

|   |                                                                 |
|---|-----------------------------------------------------------------|
| 0 | Interrupt request by Timer A (TMAI) is disabled (Initial value) |
| 1 | Interrupt request by Timer A (TMAI) is enabled                  |

Timer A overflow flag

|   |                                                                                                |
|---|------------------------------------------------------------------------------------------------|
| 0 | [Clearing conditions] (Initial value)<br>When 0 is written to TMAOV after reading<br>TMAOV = 1 |
| 1 | [Setting conditions]<br>When TCA overflows                                                     |

Note: \* Only 0 can be written to clear the flag.

**H'FFBB: Timer Counter A TCA: TimerA**

|                 |      |      |      |      |      |      |      |      |
|-----------------|------|------|------|------|------|------|------|------|
| Bit :           | 7    | 6    | 5    | 4    | 3    | 2    | 1    | 0    |
|                 | TCA7 | TCA6 | TCA5 | TCA4 | TCA3 | TCA2 | TCA1 | TCA0 |
| Initial value : | 0    | 0    | 0    | 0    | 0    | 0    | 0    | 0    |
| R/W :           | R    | R    | R    | R    | R    | R    | R    | R    |

**H'FFBC: Watchdog Timer Control/Status Register WTCSR: WDT**

|                 |        |       |     |   |         |      |      |      |
|-----------------|--------|-------|-----|---|---------|------|------|------|
| Bit :           | 7      | 6     | 5   | 4 | 3       | 2    | 1    | 0    |
|                 | OVF    | WT/IT | TME | — | RST/NMI | CKS2 | CKS1 | CKS0 |
| Initial value : | 0      | 0     | 0   | 0 | 0       | 0    | 0    | 0    |
| R/W :           | R/(W)* | R/W   | R/W | — | R/W     | R/W  | R/W  | R/W  |

Reset or NMI

|   |                                                    |
|---|----------------------------------------------------|
| 0 | NMI interrupt request is generated (Initial value) |
| 1 | Internal reset request is generated                |

Timer enable bit

|   |                                                         |
|---|---------------------------------------------------------|
| 0 | WTCNT is initialized to H'00 and halted (Initial value) |
| 1 | WTCNT counts                                            |

Timer mode select bit

|   |                                                                                                                    |
|---|--------------------------------------------------------------------------------------------------------------------|
| 0 | Interval timer mode: Sends the CPU an interval timer interrupt request (WOVI) when WTCNT overflows (Initial value) |
| 1 | Watchdog timer mode: Sends the CPU a reset or NMI interrupt request when WTCNT overflows                           |

Overflow flag

|   |                                                                                                                                                                                                              |
|---|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 0 | [Clearing conditions]<br>(1) Write 0 in the TME bit (Initial value)<br>(2) Read WTCSR when OVF = 1*, then write 0 in OVF                                                                                     |
| 1 | [Setting conditions]<br>When WTCNT overflows (changes from H'FF to H'00)<br>(When internal reset request generation is selected in watchdog timer mode, OVF is cleared automatically by the internal reset.) |

Note: \* When OVF is polled and the interval timer interrupt is disabled, OVF=1 must be read at least twice.

Note: \* Only 0 can be written to clear the flag.

## H'FFBD: Watchdog Timer Counter WTCNT: WDT

|                 |     |     |     |     |     |     |     |     |
|-----------------|-----|-----|-----|-----|-----|-----|-----|-----|
| Bit :           | 7   | 6   | 5   | 4   | 3   | 2   | 1   | 0   |
|                 |     |     |     |     |     |     |     |     |
| Initial value : | 0   | 0   | 0   | 0   | 0   | 0   | 0   | 0   |
| R/W :           | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |

## H'FFC0: Port Data Register 0 PDR0: I/O Port

|                 |       |       |       |       |       |       |       |       |
|-----------------|-------|-------|-------|-------|-------|-------|-------|-------|
| Bit :           | 7     | 6     | 5     | 4     | 3     | 2     | 1     | 0     |
|                 | PDR07 | PDR06 | PDR05 | PDR04 | PDR03 | PDR02 | PDR01 | PDR00 |
| Initial value : | —     | —     | —     | —     | —     | —     | —     | —     |
| R/W :           | R     | R     | R     | R     | R     | R     | R     | R     |

## H'FFC1: Port Data Register 1 PDR1: I/O Port

|                 |       |       |       |       |       |       |       |       |
|-----------------|-------|-------|-------|-------|-------|-------|-------|-------|
| Bit :           | 7     | 6     | 5     | 4     | 3     | 2     | 1     | 0     |
|                 | PDR17 | PDR16 | PDR15 | PDR14 | PDR13 | PDR12 | PDR11 | PDR10 |
| Initial value : | 0     | 0     | 0     | 0     | 0     | 0     | 0     | 0     |
| R/W :           | R/W   | R/W   | R/W   | R/W   | R/W   | R/W   | R/W   | R/W   |

## H'FFC2: Port Data Register 2 PDR2: I/O Port

|                 |       |       |       |       |       |       |       |       |
|-----------------|-------|-------|-------|-------|-------|-------|-------|-------|
| Bit :           | 7     | 6     | 5     | 4     | 3     | 2     | 1     | 0     |
|                 | PDR37 | PDR36 | PDR35 | PDR34 | PDR33 | PDR32 | PDR31 | PDR30 |
| Initial value : | 0     | 0     | 0     | 0     | 0     | 0     | 0     | 0     |
| R/W :           | R/W   | R/W   | R/W   | R/W   | R/W   | R/W   | R/W   | R/W   |

## H'FFC3: Port Data Register 3 PDR3: I/O Port

|                 |       |       |       |       |       |       |       |       |
|-----------------|-------|-------|-------|-------|-------|-------|-------|-------|
| Bit :           | 7     | 6     | 5     | 4     | 3     | 2     | 1     | 0     |
|                 | PDR37 | PDR36 | PDR35 | PDR34 | PDR33 | PDR32 | PDR31 | PDR30 |
| Initial value : | 0     | 0     | 0     | 0     | 0     | 0     | 0     | 0     |
| R/W :           | R/W   | R/W   | R/W   | R/W   | R/W   | R/W   | R/W   | R/W   |

#### H'FFC4: Port Data Register 4 PDR4: I/O Port

|                 |       |       |       |       |       |       |       |       |
|-----------------|-------|-------|-------|-------|-------|-------|-------|-------|
| Bit :           | 7     | 6     | 5     | 4     | 3     | 2     | 1     | 0     |
|                 | PDR47 | PDR46 | PDR45 | PDR44 | PDR43 | PDR42 | PDR41 | PDR40 |
| Initial value : | 0     | 0     | 0     | 0     | 0     | 0     | 0     | 0     |
| R/W :           | R/W   | R/W   | R/W   | R/W   | R/W   | R/W   | R/W   | R/W   |

#### H'FFC6: Port Data Register 6 PDR6: I/O Port

|                 |       |       |       |       |       |       |       |       |
|-----------------|-------|-------|-------|-------|-------|-------|-------|-------|
| Bit :           | 7     | 6     | 5     | 4     | 3     | 2     | 1     | 0     |
|                 | PDR67 | PDR66 | PDR65 | PDR64 | PDR63 | PDR62 | PDR61 | PDR60 |
| Initial value : | 0     | 0     | 0     | 0     | 0     | 0     | 0     | 0     |
| R/W :           | R/W   | R/W   | R/W   | R/W   | R/W   | R/W   | R/W   | R/W   |

#### H'FFC7: Port Data Register 7 PDR7: I/O Port

|                 |       |       |       |       |       |       |       |       |
|-----------------|-------|-------|-------|-------|-------|-------|-------|-------|
| Bit :           | 7     | 6     | 5     | 4     | 3     | 2     | 1     | 0     |
|                 | PDR77 | PDR76 | PDR75 | PDR74 | PDR73 | PDR72 | PDR71 | PDR70 |
| Initial value : | 0     | 0     | 0     | 0     | 0     | 0     | 0     | 0     |
| R/W :           | R/W   | R/W   | R/W   | R/W   | R/W   | R/W   | R/W   | R/W   |

#### H'FFC8: Port Data Register 8 PDR8: I/O Port

|                 |       |       |       |       |       |       |       |       |
|-----------------|-------|-------|-------|-------|-------|-------|-------|-------|
| Bit :           | 7     | 6     | 5     | 4     | 3     | 2     | 1     | 0     |
|                 | PDR87 | PDR86 | PDR85 | PDR84 | PDR83 | PDR82 | PDR81 | PDR80 |
| Initial value : | 0     | 0     | 0     | 0     | 0     | 0     | 0     | 0     |
| R/W :           | R/W   | R/W   | R/W   | R/W   | R/W   | R/W   | R/W   | R/W   |

## H'FFCD: Port Mode Register 0 PMR0: I/O Port

|                 |       |       |       |       |       |       |       |       |
|-----------------|-------|-------|-------|-------|-------|-------|-------|-------|
| Bit :           | 7     | 6     | 5     | 4     | 3     | 2     | 1     | 0     |
|                 | PMR07 | PMR06 | PMR05 | PMR04 | PMR03 | PMR02 | PMR01 | PMR00 |
| Initial value : | 0     | 0     | 0     | 0     | 0     | 0     | 0     | 0     |
| R/W :           | R/W   | R/W   | R/W   | R/W   | R/W   | R/W   | R/W   | R/W   |

P07/AN7 to P00/IRQ0 pin function select bits

|   |                                                         |
|---|---------------------------------------------------------|
| 0 | P0n/ANn pin functions as P0n input port (initial value) |
| 1 | P0n/ANn pin functions as ANn input port                 |

(n = 7 to 0)

## H'FFCE: Port Mode Register 1 PMR1: I/O Port

|                 |       |       |       |       |       |       |       |       |
|-----------------|-------|-------|-------|-------|-------|-------|-------|-------|
| Bit :           | 7     | 6     | 5     | 4     | 3     | 2     | 1     | 0     |
|                 | PMR17 | PMR16 | PMR15 | PMR14 | PMR13 | PMR12 | PMR11 | PMR10 |
| Initial value : | 0     | 0     | 0     | 0     | 0     | 0     | 0     | 0     |
| R/W :           | R/W   | R/W   | R/W   | R/W   | R/W   | R/W   | R/W   | R/W   |

P15/ $\overline{\text{IRQ}}_5$  to P10/ $\overline{\text{IRQ}}_0$  pin function select bits

|   |                                                                                      |
|---|--------------------------------------------------------------------------------------|
| 0 | P1n/ $\overline{\text{IRQ}}_n$ pin functions as P1n I/O port (Initial value)         |
| 1 | P1n/ $\overline{\text{IRQ}}_n$ pin functions as $\overline{\text{IRQ}}_n$ input port |

(n = 5 to 0)


P16/ $\overline{\text{IC}}$  pin function select bit

|   |                                                                                |
|---|--------------------------------------------------------------------------------|
| 0 | P16/ $\overline{\text{IC}}$ pin functions as P16 I/O port (Initial value)      |
| 1 | P16/ $\overline{\text{IC}}$ pin functions as $\overline{\text{IC}}$ input port |


P17/TMOW pin function select bit

|   |                                                        |
|---|--------------------------------------------------------|
| 0 | P17/TMOW pin functions as P17 I/O port (initial value) |
| 1 | P17/TMOW pin functions as TMOW output port             |

## H'FFD0: Port Mode Register 3 PMR3: I/O Port

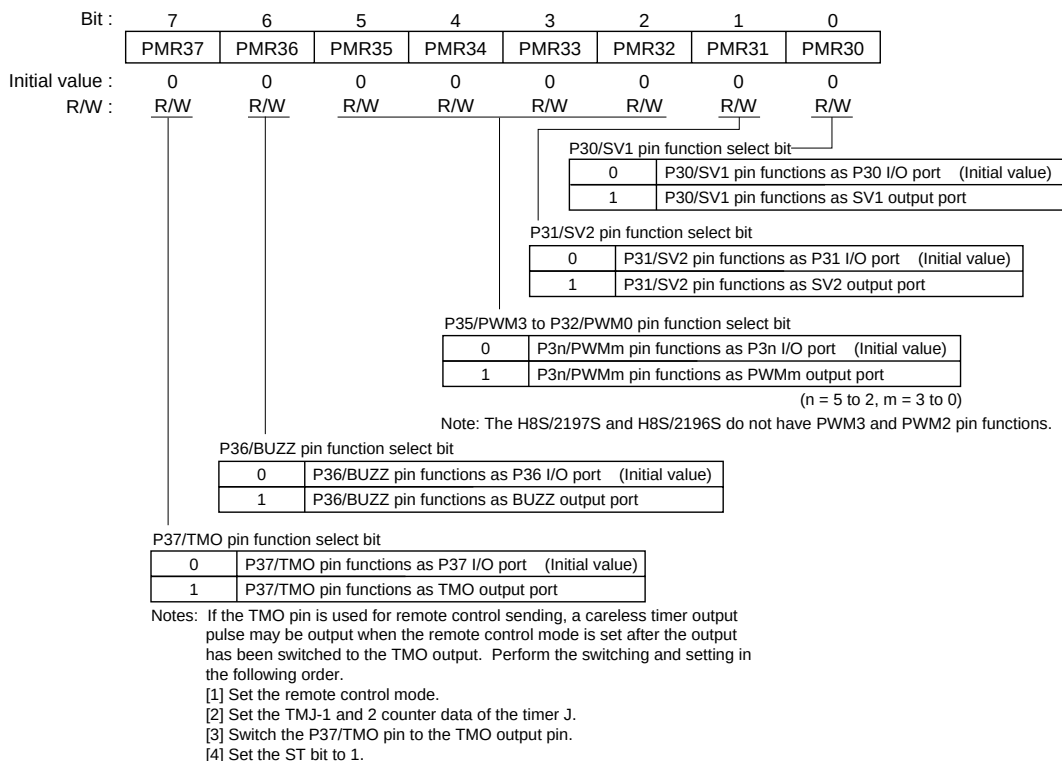

## H'FFD1: Port Control Register 1 PCR1: I/O Port

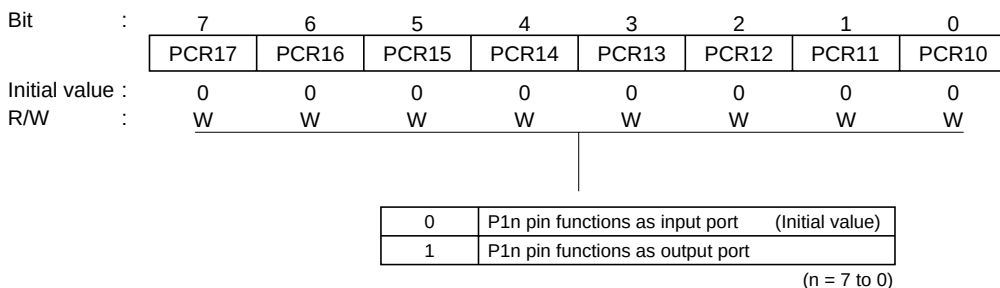

## H'FFD2: Port Control Register 2 PCR2: I/O Port

|                 |       |       |       |       |       |       |       |       |
|-----------------|-------|-------|-------|-------|-------|-------|-------|-------|
| Bit             | 7     | 6     | 5     | 4     | 3     | 2     | 1     | 0     |
|                 | PCR27 | PCR26 | PCR25 | PCR24 | PCR23 | PCR22 | PCR21 | PCR20 |
| Initial value : | 0     | 0     | 0     | 0     | 0     | 0     | 0     | 0     |
| R/W             | W     | W     | W     | W     | W     | W     | W     | W     |

|   |                                                 |
|---|-------------------------------------------------|
| 0 | P2n pin functions as input port (Initial value) |
| 1 | P2n pin functions as output port                |

(n = 7 to 0)

## H'FFD3: Port Control Register 3 PCR3: I/O Port

|                 |       |       |       |       |       |       |       |       |
|-----------------|-------|-------|-------|-------|-------|-------|-------|-------|
| Bit             | 7     | 6     | 5     | 4     | 3     | 2     | 1     | 0     |
|                 | PCR37 | PCR36 | PCR35 | PCR34 | PCR33 | PCR32 | PCR31 | PCR30 |
| Initial value : | 0     | 0     | 0     | 0     | 0     | 0     | 0     | 0     |
| R/W             | W     | W     | W     | W     | W     | W     | W     | W     |

|   |                                                 |
|---|-------------------------------------------------|
| 0 | P3n pin functions as input port (Initial value) |
| 1 | P3n pin functions as output port                |

(n = 7 to 0)



**H'FFD4: Port Control Register 4 PCR4: I/O Port**

|               |   |       |       |       |       |       |       |       |       |
|---------------|---|-------|-------|-------|-------|-------|-------|-------|-------|
| Bit           | : | 7     | 6     | 5     | 4     | 3     | 2     | 1     | 0     |
|               |   | PCR47 | PCR46 | PCR45 | PCR44 | PCR43 | PCR42 | PCR41 | PCR40 |
| Initial value | : | 0     | 0     | 0     | 0     | 0     | 0     | 0     | 0     |
| R/W           | : | W     | W     | W     | W     | W     | W     | W     | W     |

|   |                                                 |
|---|-------------------------------------------------|
| 0 | P4n pin functions as input port (Initial value) |
| 1 | P4n pin functions as output port                |

(n = 7 to 0)

**H'FFD6: Port Control Register 6 PCR6: I/O Port**

|               |   |       |       |       |       |       |       |       |       |
|---------------|---|-------|-------|-------|-------|-------|-------|-------|-------|
| Bit           | : | 7     | 6     | 5     | 4     | 3     | 2     | 1     | 0     |
|               |   | PCR67 | PCR66 | PCR65 | PCR64 | PCR63 | PCR62 | PCR61 | PCR60 |
| Initial value | : | 0     | 0     | 0     | 0     | 0     | 0     | 0     | 0     |
| R/W           | : | W     | W     | W     | W     | W     | W     | W     | W     |

| PMR6n | PCR6n | Description                                                             |
|-------|-------|-------------------------------------------------------------------------|
| 0     | 0     | P6n/RPn pin functions as P6n general purpose input port (Initial value) |
|       | 1     | P6n/RPn pin functions as P6n general purpose output port                |
| 1     | *     | P6n/RPn pin functions as RPn realtime output port                       |

Note: \* Don't care.

(n = 7 to 0)

## H'FFD7: Port Control Register 7 PCR7: I/O Port

|                 |       |       |       |       |       |       |       |       |
|-----------------|-------|-------|-------|-------|-------|-------|-------|-------|
| Bit             | 7     | 6     | 5     | 4     | 3     | 2     | 1     | 0     |
|                 | PCR77 | PCR76 | PCR75 | PCR74 | PCR73 | PCR72 | PCR71 | PCR70 |
| Initial value : | 0     | 0     | 0     | 0     | 0     | 0     | 0     | 0     |
| R/W             | W     | W     | W     | W     | W     | W     | W     | W     |

|   |                                                 |
|---|-------------------------------------------------|
| 0 | P7n pin functions as input port (Initial value) |
| 1 | P7n pin functions as output port                |

(n = 7 to 0)

## H'FFD8: Port Control Register 8 PCR8: I/O Port

|                 |       |       |       |       |       |       |       |       |
|-----------------|-------|-------|-------|-------|-------|-------|-------|-------|
| Bit             | 7     | 6     | 5     | 4     | 3     | 2     | 1     | 0     |
|                 | PCR87 | PCR86 | PCR85 | PCR84 | PCR83 | PCR82 | PCR81 | PCR80 |
| Initial value : | 0     | 0     | 0     | 0     | 0     | 0     | 0     | 0     |
| R/W             | W     | W     | W     | W     | W     | W     | W     | W     |

|   |                                                 |
|---|-------------------------------------------------|
| 0 | P8n pin functions as input port (Initial value) |
| 1 | P8n pin functions as output port                |

(n = 7 to 0)

## H'FFD9: Port Mode Register A PMRA: I/O Port

|                 |       |       |   |   |   |   |   |   |
|-----------------|-------|-------|---|---|---|---|---|---|
| Bit             | 7     | 6     | 5 | 4 | 3 | 2 | 1 | 0 |
|                 | PMRA7 | PMRA6 | — | — | — | — | — | — |
| Initial value : | 0     | 0     | 1 | 1 | 1 | 1 | 1 | 1 |
| R/W             | R/W   | R/W   | — | — | — | — | — | — |

Timer B event input edge switching

|   |                                                               |
|---|---------------------------------------------------------------|
| 0 | Timer B event input falling edge is detected. (Initial value) |
| 1 | Timer B event input rising edge is detected.                  |

P67/RP7/TMBI pin switching

|   |                                                                  |
|---|------------------------------------------------------------------|
| 0 | P67/RP7/TMBI pin functions as a P67/RP7 I/O pin. (Initial value) |
| 1 | P67/RP7/TMBI pin functions as a TMBI output pin.                 |

**H'FFDA: Port Mode Register B PMRB: I/O Port**

|                 |   |       |       |       |       |   |   |   |   |
|-----------------|---|-------|-------|-------|-------|---|---|---|---|
| Bit             | : | 7     | 6     | 5     | 4     | 3 | 2 | 1 | 0 |
|                 |   | PMRB7 | PMRB6 | PMRB5 | PMRB4 | — | — | — | — |
| Initial value : |   | 0     | 0     | 0     | 0     | 1 | 1 | 1 | 1 |
| R/W             | : | R/W   | R/W   | R/W   | R/W   | — | — | — | — |

P77/RPB to P74/RPB pin switching

|   |                                                         |
|---|---------------------------------------------------------|
| 0 | P7n/RPm pin functions as a P7n I/O pin. (Initial value) |
| 1 | P7n/RPm pin functions as a RPm output pin.              |

(n = 7 to 4, m = B, A, 9, 8)

## H'FFDB: Port Mode Register 4: PMR4: I/O Port

|               |       |   |   |   |   |   |   |       |
|---------------|-------|---|---|---|---|---|---|-------|
| Bit           | 7     | 6 | 5 | 4 | 3 | 2 | 1 | 0     |
|               | PMR47 | — | — | — | — | — | — | PMR40 |
| Initial value | 1     | 1 | 1 | 1 | 1 | 1 | 1 | 0     |
| R/W           | R/W   | — | — | — | — | — | — | R/W   |

P40/PWM14 pin function select bit

|   |                                                         |
|---|---------------------------------------------------------|
| 0 | P40/PWM14 pin functions as P40 I/O port (Initial value) |
| 1 | P40/PWM14 pin functions as PWM14 output port            |

Note: The H8S/2197S and H8S/2196S do not have PWM14 pin function.

P47/RPTRG pin function select bit

|   |                                                         |
|---|---------------------------------------------------------|
| 0 | P47/RPTRG pin functions as P47 I/O port (Initial value) |
| 1 | P47/RPTRG pin functions as RPTRG I/O pin                |

## H'FFDD: Port Mode Register 6 PMR6: I/O Port

|               |       |       |       |       |       |       |       |       |
|---------------|-------|-------|-------|-------|-------|-------|-------|-------|
| Bit           | 7     | 6     | 5     | 4     | 3     | 2     | 1     | 0     |
|               | PMR67 | PMR66 | PMR65 | PMR64 | PMR63 | PMR62 | PMR61 | PMR60 |
| Initial value | 0     | 0     | 0     | 0     | 0     | 0     | 0     | 0     |
| R/W           | R/W   | R/W   | R/W   | R/W   | R/W   | R/W   | R/W   | R/W   |

P67/RP7 to P60/RP0 pin function select bit

|   |                                                       |
|---|-------------------------------------------------------|
| 0 | P6n/RPn pin functions as P6n I/O port (Initial value) |
| 1 | P6n/RPn pin functions as RPn output port              |

(n = 7 to 0)

## H'FFDE: Port Mode Register 7 PMR7: I/O Port


|               |       |       |       |       |       |       |       |       |
|---------------|-------|-------|-------|-------|-------|-------|-------|-------|
| Bit           | 7     | 6     | 5     | 4     | 3     | 2     | 1     | 0     |
|               | PMR77 | PMR76 | PMR75 | PMR74 | PMR73 | PMR72 | PMR71 | PMR70 |
| Initial value | 0     | 0     | 0     | 0     | 0     | 0     | 0     | 0     |
| R/W           | R/W   | R/W   | R/W   | R/W   | R/W   | R/W   | R/W   | R/W   |

P77/PPG7 to P70/PPG0 pin function select bit


|   |                                                        |
|---|--------------------------------------------------------|
| 0 | P7n/PPGn pin functions as P7n I/O port (Initial value) |
| 1 | P7n/PPGn pin functions as PPGn output port             |

(n = 7 to 0)


H'FFDF: Port Mode Register 8 PMR8: I/O Port

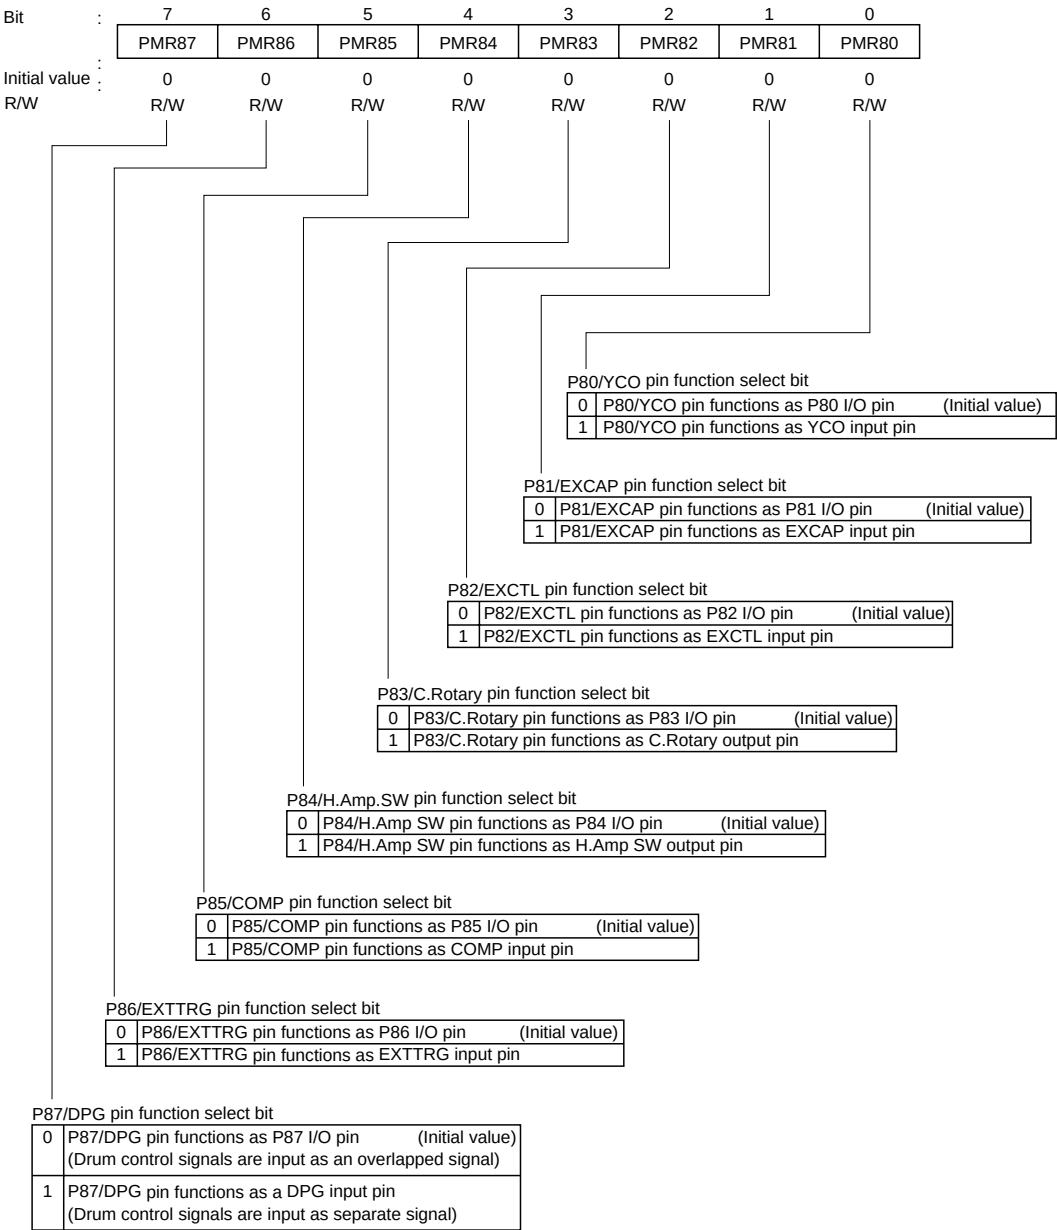

H'FFE0: Port Mode Register C PMRC: I/O Port

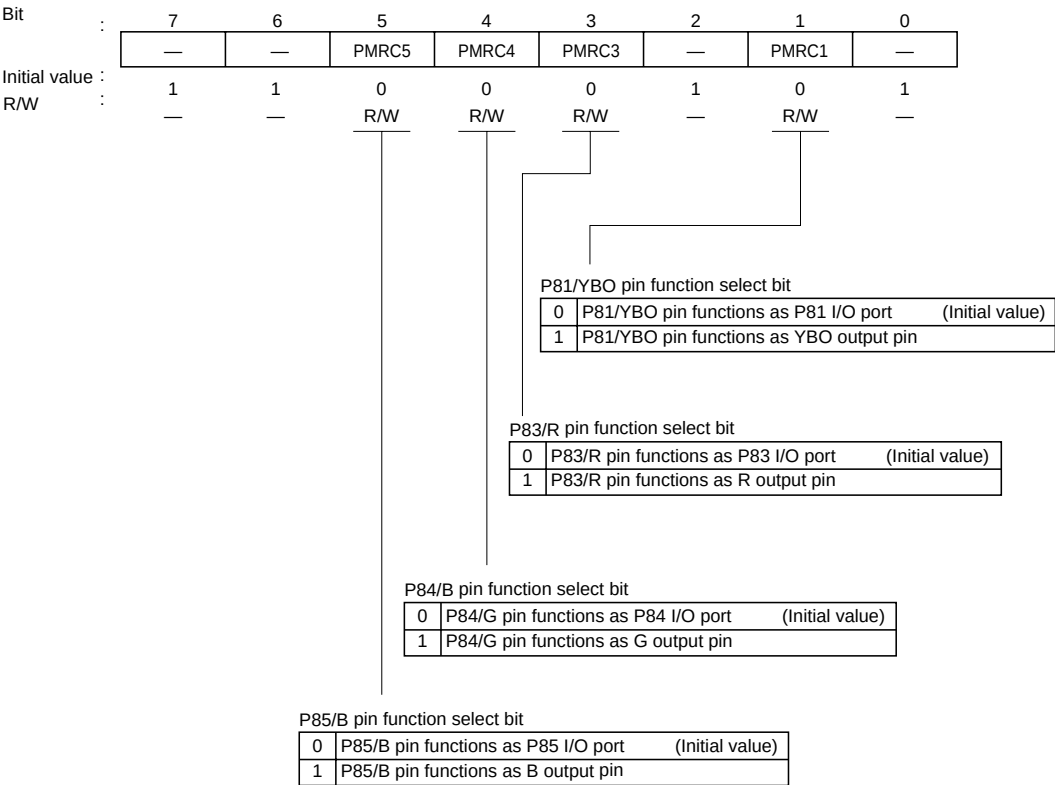

H'FFE1: Pull-Up MOS Select Register 1 PUR1: I/O Port

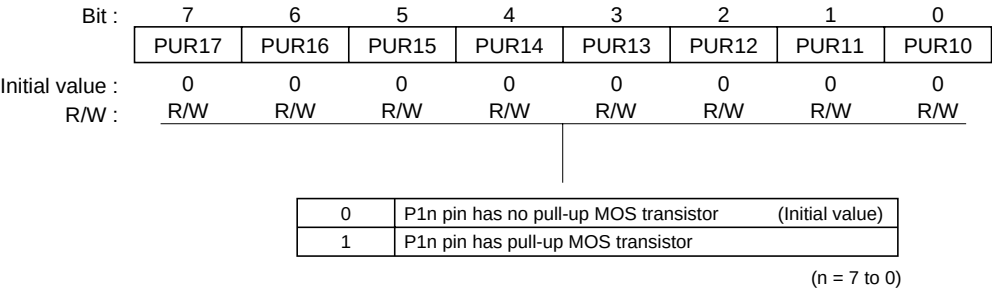

## H'FFE2: Pull-Up MOS Select Register 2 PUR2: I/O Port

|               |   |       |       |       |       |       |       |       |       |
|---------------|---|-------|-------|-------|-------|-------|-------|-------|-------|
| Bit           | : | 7     | 6     | 5     | 4     | 3     | 2     | 1     | 0     |
|               |   | PUR27 | PUR26 | PUR25 | PUR24 | PUR23 | PUR22 | PUR21 | PUR20 |
| Initial value | : | 0     | 0     | 0     | 0     | 0     | 0     | 0     | 0     |
| R/W           | : | R/W   | R/W   | R/W   | R/W   | R/W   | R/W   | R/W   | R/W   |

|   |                                                       |
|---|-------------------------------------------------------|
| 0 | P2n pin has no pull-up MOS transistor (Initial value) |
| 1 | P2n pin has pull-up MOS transistor                    |

(n = 7 to 0)

## H'FFE3: Pull-Up MOS Select Register 3 PUR3: I/O Port

|               |   |       |       |       |       |       |       |       |       |
|---------------|---|-------|-------|-------|-------|-------|-------|-------|-------|
| Bit           | : | 7     | 6     | 5     | 4     | 3     | 2     | 1     | 0     |
|               |   | PUR37 | PUR36 | PUR35 | PUR34 | PUR33 | PUR32 | PUR31 | PUR30 |
| Initial value | : | 0     | 0     | 0     | 0     | 0     | 0     | 0     | 0     |
| R/W           | : | R/W   | R/W   | R/W   | R/W   | R/W   | R/W   | R/W   | R/W   |

|   |                                                       |
|---|-------------------------------------------------------|
| 0 | P3n pin has no pull-up MOS transistor (Initial value) |
| 1 | P3n pin has pull-up MOS transistor                    |

(n = 7 to 0)

## H'FFE4: Realtime Output Trigger Edge Select Register RTPEGR: I/O Port

|               |   |   |   |   |   |   |   |         |         |
|---------------|---|---|---|---|---|---|---|---------|---------|
| Bit           | : | 7 | 6 | 5 | 4 | 3 | 2 | 1       | 0       |
|               |   |   |   |   |   |   |   | RTPEGR1 | RTPEGR0 |
| Initial value | : | 1 | 1 | 1 | 1 | 1 | 1 | 0       | 0       |
| R/W           | : |   |   |   |   |   |   | R/W     | R/W     |

Realtime output trigger edge select bit

| RTPEGR1 | RTPEGR0 | Description                                           |
|---------|---------|-------------------------------------------------------|
| 0       | 0       | Trigger input is disabled (Initial value)             |
|         | 1       | Rising edge of trigger input is selected              |
| 1       | 0       | Falling edge of trigger input is selected             |
|         | 1       | Rising and falling edges of trigger input is selected |

## H'FFE5: Realtime Output Trigger Select Register RTPSR: I/O Port

|                 |        |        |        |        |        |        |        |        |
|-----------------|--------|--------|--------|--------|--------|--------|--------|--------|
| Bit             | 7      | 6      | 5      | 4      | 3      | 2      | 1      | 0      |
|                 | RTPSR7 | RTPSR6 | RTPSR5 | RTPSR4 | RTPSR3 | RTPSR2 | RTPSR1 | RTPSR0 |
| Initial value : | 0      | 0      | 0      | 0      | 0      | 0      | 0      | 0      |
| R/W             | R/W    | R/W    | R/W    | R/W    | R/W    | R/W    | R/W    | R/W    |

|   |                                                                |
|---|----------------------------------------------------------------|
| 0 | External trigger (RPTRG pin) input is selected (Initial value) |
| 1 | Internal trigger (HSW) input is selected                       |

(n = 7 to 0)

## H'FFE6: Realtime Output Trigger Select Register RTPSR2: I/O Port

|                 |         |         |         |         |   |   |   |   |
|-----------------|---------|---------|---------|---------|---|---|---|---|
| Bit             | 7       | 6       | 5       | 4       | 3 | 2 | 1 | 0 |
|                 | RTPSR27 | RTPSR26 | RTPSR25 | RTPSR24 | — | — | — | — |
| Initial value : | 0       | 0       | 0       | 0       | 1 | 1 | 1 | 1 |
| R/W             | R/W     | R/W     | R/W     | R/W     | — | — | — | — |

|   |                                                          |
|---|----------------------------------------------------------|
| 0 | External trigger RPTRG input is selected (Initial value) |
| 1 | Internal trigger HSW input is selected                   |

## H'FFE8: System Control Register SYSCR: System Control

|                 |   |   |       |       |      |   |   |   |
|-----------------|---|---|-------|-------|------|---|---|---|
| Bit             | 7 | 6 | 5     | 4     | 3    | 2 | 1 | 0 |
|                 | — | — | INTM1 | INTM0 | XRST | — | — | — |
| Initial value : | 0 | 0 | 0     | 0     | 1    | 0 | 0 | 1 |
| R/W             | — | — | R     | R/W   | R    | — | — | — |

External reset

|   |                                               |
|---|-----------------------------------------------|
| 0 | Reset is generated by watchdog timer overflow |
| 1 | Reset is generated by external reset input    |

Interrupt control mode

| INTM1 | INTM0 | Interrupt control mode | Interrupt control                                |
|-------|-------|------------------------|--------------------------------------------------|
| 0     | 0     | 0                      | Interrupt is controlled by I bit                 |
|       | 1     | 1                      | Interrupt is controlled by I and UI bits and ICR |
| 1     | 0     | 2                      | Cannot be used in the H8S/2199 Series            |
|       | 1     | 3                      | Cannot be used in the H8S/2199 Series            |



**H'FFE9: Mode Control Register MDCR: System Control**

|               |   |   |   |   |   |   |   |   |               |
|---------------|---|---|---|---|---|---|---|---|---------------|
| Bit           | : | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0             |
|               |   | — | — | — | — | — | — | — | MDS0          |
| Initial value | : | 0 | 0 | 0 | 0 | 0 | 0 | 0 | —*            |
| R/W           | : | — | — | — | — | — | — | — | R             |
|               |   |   |   |   |   |   |   |   | Mode select 0 |

Note: \* Determined by MD0 pin.

# H'FFEA: Standby Control Register SBYCR: System Control

|     |   |      |      |      |      |   |   |      |      |
|-----|---|------|------|------|------|---|---|------|------|
| Bit | : | 7    | 6    | 5    | 4    | 3 | 2 | 1    | 0    |
|     |   | SSBY | STS2 | STS1 | STS0 | — | — | SCK1 | SCK0 |

|               |   |     |     |     |     |   |   |     |     |
|---------------|---|-----|-----|-----|-----|---|---|-----|-----|
| Initial value | : | 0   | 0   | 0   | 0   | 0 | 0 | 0   | 0   |
| R/W           | : | R/W | R/W | R/W | R/W | — | — | R/W | R/W |

System clock select

| SCK1 | SCK0 | System clock select              |
|------|------|----------------------------------|
| 0    | 0    | Bus master is in high-speed mode |
|      | 1    | Medium-speed clock is $\phi/16$  |
| 1    | 0    | Medium-speed clock is $\phi/32$  |
|      | 1    | Medium-speed clock is $\phi/64$  |

Standby timer select bits

| STS2 | STS1 | STS0 | Standby time  |
|------|------|------|---------------|
| 0    | 0    | 0    | 8192 states   |
|      |      | 1    | 16384 states  |
|      | 1    | 0    | 32768 states  |
|      |      | 1    | 65536 states  |
| 1    | 0    | 0    | 131072 states |
|      |      | 1    | 262144 states |
|      | 1    | *    | Reserved      |

Note: \* Don't care.

Software standby

|   |                                                                                                                                                                                                                                             |
|---|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 0 | Transition to sleep mode after execution of SLEEP instruction in high-speed mode or medium-speed mode<br>Transition to subsleep mode after execution of SLEEP instruction in subactive mode                                                 |
| 1 | Transition to stadby mode, subactive mode, or watch mode after execution of SLEEP instruction in high-speed mode or medium-speed mode<br>Transition to watch mode or high-speed mode after execution of SLEEP instruction in subactive mode |

## H'FFEB: Low-Power Control Register LPWRCR: System Control

|               |      |      |       |   |   |   |     |     |
|---------------|------|------|-------|---|---|---|-----|-----|
| Bit           | 7    | 6    | 5     | 4 | 3 | 2 | 1   | 0   |
|               | DTON | LSON | NESEL | — | — | — | SA1 | SA0 |
| Initial value | 0    | 0    | 0     | 0 | 0 | 0 | 0   | 0   |
| R/W           | R/W  | R/W  | R/W   | — | — | — | R/W | R/W |

Subactive mode clock select

| SA1 | SA0 | Subactive mode clock select          |
|-----|-----|--------------------------------------|
| 0   | 0   | Operating clock of CPU is $\phi w/8$ |
| 0   | 1   | Operating clock of CPU is $\phi w/4$ |
| 1   | *   | Operating clock of CPU is $\phi w/2$ |

Note: \* Don't care.

Noise elimination sampling frequency select

|   |                                  |
|---|----------------------------------|
| 0 | Sampling at $\phi$ divided by 16 |
| 1 | Sampling at $\phi$ divided by 4  |

Low-speed on flag

|   |                                                                                                                                                                                                                                                                                                                                                                                                                   |
|---|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 0 | <ul style="list-style-type: none"> <li>When a SLEEP instruction is executed in high-speed mode or medium-speed mode, a transition is made to sleep mode, standby mode, or watch mode</li> <li>When a SLEEP instruction is executed in subactive mode, a transition is made to watch mode, or directly to high-speed mode</li> <li>After watch mode is cleared, a transition is made to high-speed mode</li> </ul> |
| 1 | <ul style="list-style-type: none"> <li>When a SLEEP instruction is executed in high-speed mode a transition is made to watch mode, subactive mode, sleep mode or standby mode.</li> <li>When a SLEEP instruction is executed in subactive mode, a transition is made to subsleep mode or watch mode.</li> <li>After watch mode is cleared, a transition is made to subactive mode</li> </ul>                      |

Direct transfer on flag

|   |                                                                                                                                                                                                                                                                                                                                                                                                     |
|---|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 0 | <ul style="list-style-type: none"> <li>When a SLEEP instruction is executed in high-speed mode or medium-speed mode, a transition is made to sleep mode, standby mode, or watch mode</li> <li>When a SLEEP instruction is executed in subactive mode, a transition is made to watch mode, or directly to high-speed mode</li> </ul>                                                                 |
| 1 | <ul style="list-style-type: none"> <li>When a SLEEP instruction is executed in high-speed mode or medium-speed mode, a transition is made directly to subactive mode*, or a transition is made to sleep mode or standby mode</li> <li>When a SLEEP instruction is executed in subactive mode, a transition is made directly to high-speed mode, or a transition is made to subsleep mode</li> </ul> |

## H'FFEC: Module Stop Control Register MSTPCRH: System Control

## H'FFED: Module Stop Control Register MSTPCRL: System Control

| MSTPCRH       |        |        |        |        |        |        |       | MSTPCRL |       |       |       |       |       |       |       |       |
|---------------|--------|--------|--------|--------|--------|--------|-------|---------|-------|-------|-------|-------|-------|-------|-------|-------|
| Bit           | 7      | 6      | 5      | 4      | 3      | 2      | 1     | 0       | 7     | 6     | 5     | 4     | 3     | 2     | 1     | 0     |
|               | MSTP15 | MSTP14 | MSTP13 | MSTP12 | MSTP11 | MSTP10 | MSTP9 | MSTP8   | MSTP7 | MSTP6 | MSTP5 | MSTP4 | MSTP3 | MSTP2 | MSTP1 | MSTP0 |
| Initial value | 1      | 1      | 1      | 1      | 1      | 1      | 1     | 1       | 1     | 1     | 1     | 1     | 1     | 1     | 1     | 1     |
| R/W           | R/W    | R/W    | R/W    | R/W    | R/W    | R/W    | R/W   | R/W     | R/W   | R/W   | R/W   | R/W   | R/W   | R/W   | R/W   | R/W   |

Module stop

|   |                                         |
|---|-----------------------------------------|
| 0 | Module stop mode is released            |
| 1 | Module stop mode is set (Initial value) |

## H'FFEE: Serial Timer Control Register STCR: System Control

| Bit             | 7 | 6     | 5     | 4 | 3     | 2      | 1 | 0 |
|-----------------|---|-------|-------|---|-------|--------|---|---|
|                 | — | IICX1 | IICX0 | — | FLSHE | OSROME | — | — |
| Initial value : | 0 | 0     | 0     | 0 | 0     | 0      | 0 | 0 |
| R/W             | — | R/W   | R/W   | — | R/W   | R/W    | — | — |

OSD ROM enable

|   |                                            |
|---|--------------------------------------------|
| 0 | OSD ROM is accessed by OSD (Initial value) |
| 1 | OSD ROM is accessed by CPU                 |

Flash memory control register enable bit

|   |                                                               |
|---|---------------------------------------------------------------|
| 0 | Flash memory control register is not selected (Initial value) |
| 1 | Flash memory control register is selected                     |

I<sup>2</sup>C control

Used combined with CKS2 to CKS0 in ICMR0

Note: \* Refer to section 23.2.4, I<sup>2</sup>C Bus Mode Register (ICMR)

## H'FFF0: IRQ Edge Select Register IEGR: Interrupt Controller

|               |   |   |        |        |        |        |        |         |         |
|---------------|---|---|--------|--------|--------|--------|--------|---------|---------|
| Bit           | : | 7 | 6      | 5      | 4      | 3      | 2      | 1       | 0       |
|               |   |   | IRQ5EG | IRQ4EG | IRQ3EG | IRQ2EG | IRQ1EG | IRQ0EG1 | IRQ0EG2 |
| Initial value | : | 0 | 0      | 0      | 0      | 0      | 0      | 0       | 0       |
| R/W           | : |   | R/W    | R/W    | R/W    | R/W    | R/W    | R/W     | R/W     |

IRQ0 pin detected edge select bits

| IRQ0EG1 | IRQ0EG0 | Description                                                                                       |
|---------|---------|---------------------------------------------------------------------------------------------------|
| 0       | 0       | Interrupt request generated at falling edge of $\overline{\text{IRQ0}}$ pin input (Initial value) |
| 0       | 1       | Interrupt request generated at rising edge of $\overline{\text{IRQ0}}$ pin input                  |
| 1       | *       | Interrupt request generated at both falling and rising edge of $\overline{\text{IRQ0}}$ pin input |

Note: \* Don't care.

IRQ5 to  $\overline{\text{IRQ1}}$  pins detected edge select bits

|   |                                                                                                   |
|---|---------------------------------------------------------------------------------------------------|
| 0 | Interrupt request generated at falling edge of $\overline{\text{IRQn}}$ pin input (Initial value) |
| 1 | Interrupt request generated at rising edge of $\overline{\text{IRQn}}$ pin input                  |

(n = 5 to 1)

## H'FFF1: IRQ Enable Register IENR: Interrupt Controller

|               |   |   |   |       |       |       |       |       |       |
|---------------|---|---|---|-------|-------|-------|-------|-------|-------|
| Bit           | : | 7 | 6 | 5     | 4     | 3     | 2     | 1     | 0     |
|               |   |   |   | IRQ5E | IRQ4E | IRQ3E | IRQ2E | IRQ1E | IRQ0E |
| Initial value | : | 0 | 0 | 0     | 0     | 0     | 0     | 0     | 0     |
| R/W           | : |   |   | R/W   | R/W   | R/W   | R/W   | R/W   | R/W   |

IRQ5 to IRQ0 enable bits

|   |                                            |
|---|--------------------------------------------|
| 0 | IRQn interrupt is disabled (Initial value) |
| 1 | IRQn interrupt is enabled                  |

(n = 5 to 0)

## H'FFF2: IRQ Status Register IRQR: Interrupt Controller

|               |   |   |   |        |        |        |        |        |        |
|---------------|---|---|---|--------|--------|--------|--------|--------|--------|
| Bit           | : | 7 | 6 | 5      | 4      | 3      | 2      | 1      | 0      |
|               |   | — | — | IRQ5F  | IRQ4F  | IRQ3F  | IRQ2F  | IRQ1F  | IRQ0F  |
| Initial value | : | 0 | 0 | 0      | 0      | 0      | 0      | 0      | 0      |
| R/W           | : | — | — | R/(W)* | R/(W)* | R/(W)* | R/(W)* | R/(W)* | R/(W)* |

IRQ5 to IRQ0 flag

|   |                                                                                                                                                                                                                                                                                                                                                   |                 |
|---|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------|
| 0 | [Clearing conditions]<br>Cleared by reading IRQnF set to 1, then writing 0 in IRQnF<br>When IRQn interrupt exception handling is executed                                                                                                                                                                                                         | (Initial value) |
| 1 | [Setting conditions]<br>(1) When a falling edge occurs in $\overline{\text{IRQn}}$ input while falling edge detection is set (IRQnEG = 0)<br>(2) When a rising edge occurs in IRQn input while rising edge detection is set (IRQnEG = 0)<br>(3) When a falling or rising edge occurs in IRQ0 input while both-edge detection is set (IRQ0EG1 = 1) |                 |

(n = 5 to 0)

Note: \* Only 0 can be written to clear the flag.

## H'FFF3: Interrupt Control Register A ICRA: Interrupt Controller

## H'FFF4: Interrupt Control Register B ICRB: Interrupt Controller

## H'FFF5: Interrupt Control Register C ICRC: Interrupt Controller

## H'FFF6: Interrupt Control Register D ICRD: Interrupt Controller


|               |   |      |      |      |      |      |      |      |      |
|---------------|---|------|------|------|------|------|------|------|------|
| Bit           | : | 7    | 6    | 5    | 4    | 3    | 2    | 1    | 0    |
|               |   | ICR7 | ICR6 | ICR5 | ICR4 | ICR3 | ICR2 | ICR1 | ICR0 |
| Initial value | : | 0    | 0    | 0    | 0    | 0    | 0    | 0    | 0    |
| R/W           | : | R/W  | R/W  | R/W  | R/W  | R/W  | R/W  | R/W  | R/W  |

Interrupt control level

|   |                                                                  |                 |
|---|------------------------------------------------------------------|-----------------|
| 0 | Corresponding interrupt source is control level 0 (non-priority) | (Initial value) |
| 1 | Corresponding interrupt source is control level 1 (priority)     |                 |


(n = 7 to 0)

H'FFF8: Flash Memory Control Register 1 FLMCR1: FLASH ROM

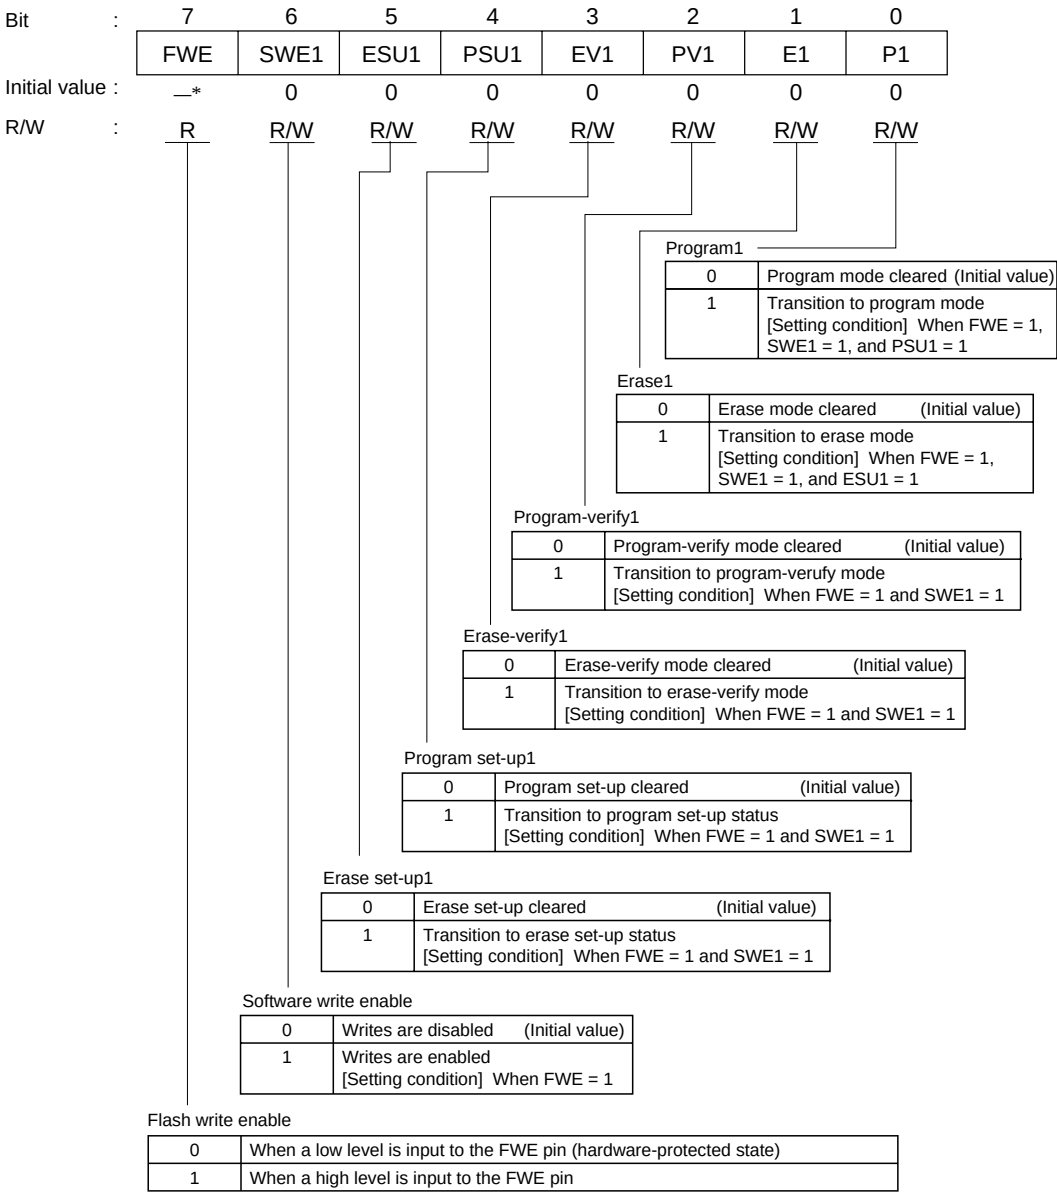

Note: \* Determined by the state of the FWE pin.

## H'FFF9: Flash Memory Control Register 2 FLMCR2: FLASH ROM

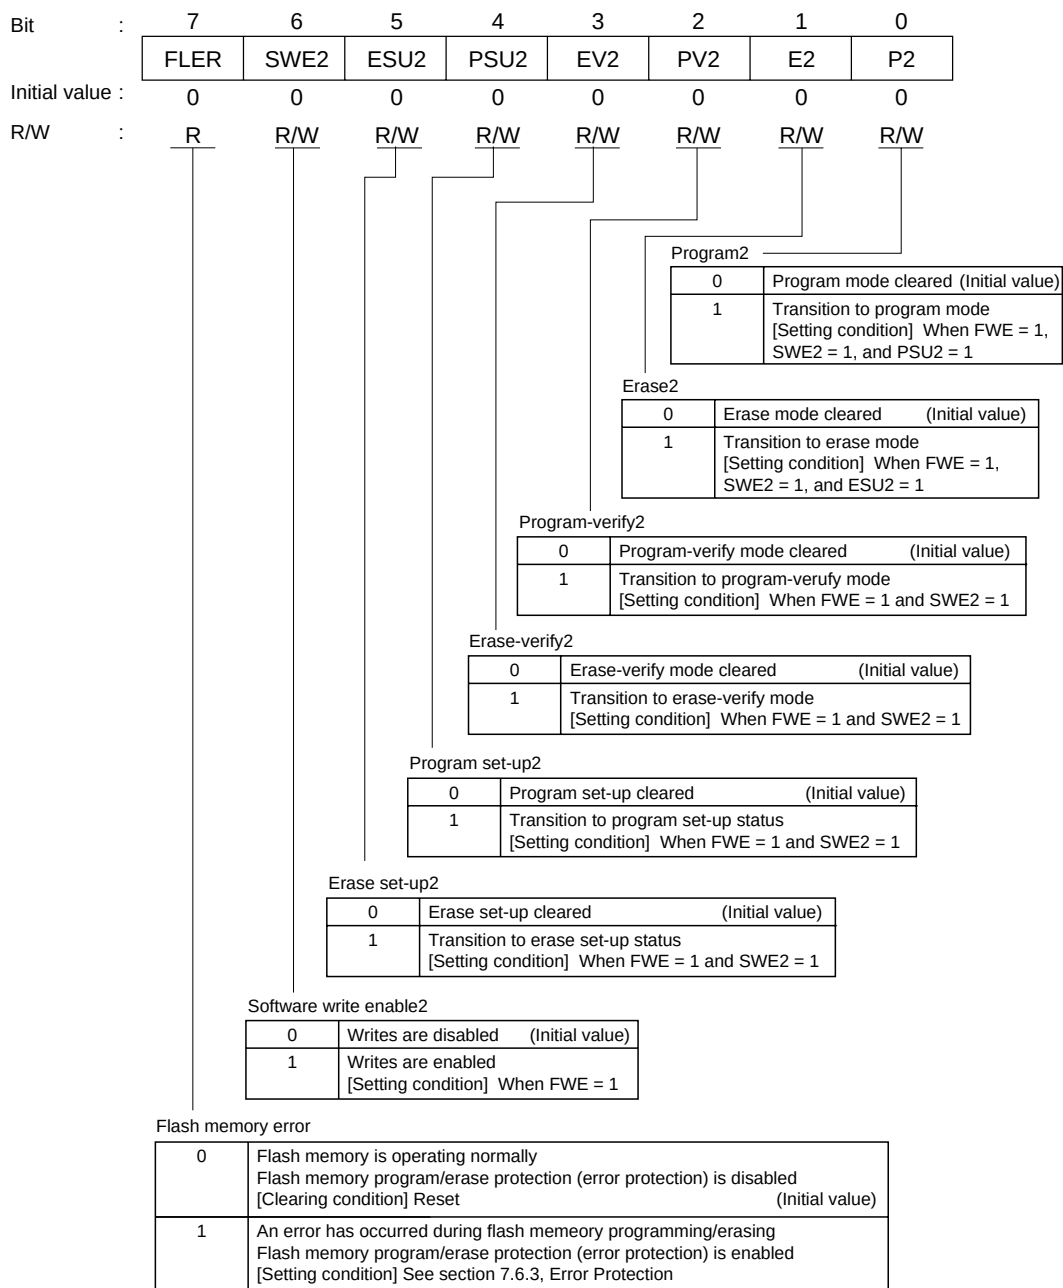



**H'FFFA: Erase Block Select Register 1 EBR1: FLASH ROM**

|               |   |     |     |     |     |     |     |     |     |
|---------------|---|-----|-----|-----|-----|-----|-----|-----|-----|
| Bit           | : | 7   | 6   | 5   | 4   | 3   | 2   | 1   | 0   |
|               |   | EB7 | EB6 | EB5 | EB4 | EB3 | EB2 | EB1 | EB0 |
| Initial value | : | 0   | 0   | 0   | 0   | 0   | 0   | 0   | 0   |
| R/W           | : | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |

**H'FFFB: Erase Block Select Register 2 EBR2: FLASH ROM**

|               |   |      |      |      |      |      |      |     |     |
|---------------|---|------|------|------|------|------|------|-----|-----|
| Bit           | : | 7    | 6    | 5    | 4    | 3    | 2    | 1   | 0   |
|               |   | EB15 | EB14 | EB13 | EB12 | EB11 | EB10 | EB9 | EB8 |
| Initial value | : | 0    | 0    | 0    | 0    | 0    | 0    | 0   | 0   |
| R/W           | : | R/W  | R/W  | R/W  | R/W  | R/W  | R/W  | R/W | R/W |



# Appendix C Pin Circuit Diagrams

## C.1 Pin Circuit Diagrams

Circuit diagrams for all pins except power supply pins are shown in table C.1.

Legend

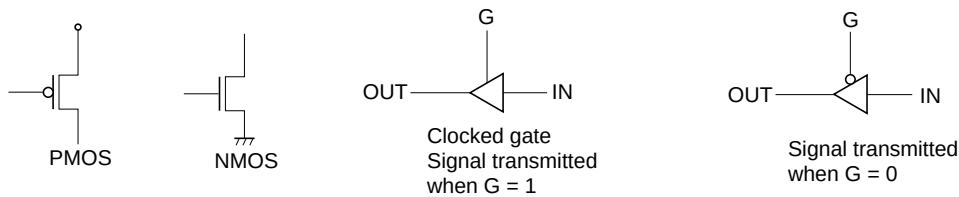
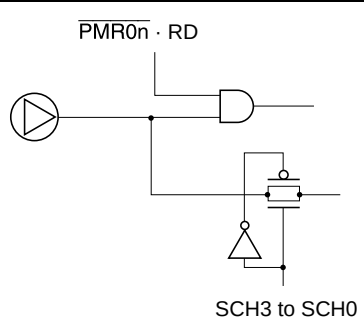
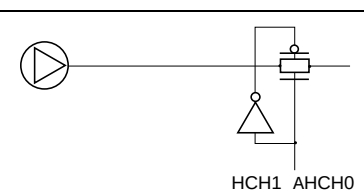


Table C.1 Pin Circuit Diagrams

| Pin Names          | Circuit Diagram                                                                     | Pin States |            |                                        |
|--------------------|-------------------------------------------------------------------------------------|------------|------------|----------------------------------------|
|                    |                                                                                     | At Reset   | Sleep Mode | Power-Down Modes Other Than Sleep Mode |
| P00/AN0 to P07/AN7 |   | Hi-Z       | Retained   | Hi-Z                                   |
| AN8 to ANB         |  | Hi-Z       | Retained   | Hi-Z                                   |

## Pin States

| Pin Names                                                                                        | Circuit Diagram                                                                                                                                                        | At Reset | Sleep Mode | Power-Down Modes Other Than Sleep Mode                                      |
|--------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------|------------|-----------------------------------------------------------------------------|
| P10/ $\overline{\text{IRQ0}}$ to<br>P15/ $\overline{\text{IRQ5}}$<br>P16/ $\overline{\text{IC}}$ | <p>INT = <math>\overline{\text{IRQ0}}</math> to <math>\overline{\text{IRQ5}}</math>, <math>\overline{\text{IC}}</math></p> <p><math>n = 0</math> to <math>6</math></p> | Hi-Z     | Retained   | Pull-up MOS:<br>OFF<br>Subactive mode:<br>Functions<br>Other modes:<br>Hi-Z |
| P17/TMOW                                                                                         |                                                                                                                                                                        | Hi-Z     | Retained   | Pull-up MOS:<br>OFF<br>Subactive mode:<br>Functions<br>Other modes:<br>Hi-Z |
| P20/SI1                                                                                          | <p>RXE: Input control signal determined by SCR and SMR</p>                                                                                                             | Hi-Z     | Retained   | Pull-up MOS:<br>OFF<br>Subactive mode:<br>Functions<br>Other modes:<br>Hi-Z |

When  $\overline{\text{IRQ0}}$  to  $\overline{\text{IRQ5}}$  and  $\overline{\text{IC}}$  are selected, pin input should be fixed high or low.


When SI1 is selected, pin input should be fixed high or low.

Pin Names    Circuit Diagram

At Reset    Sleep Mode

Power-Down Modes Other Than Sleep Mode

P21/SO1

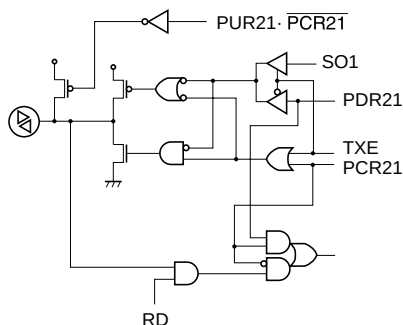


Hi-Z

Retained

Pull-up MOS:  
OFF  
Subactive mode:  
Functions  
Other modes:  
Hi-Z

TXE: Output control signal determined  
by SCR and SMR

P22/SCK1

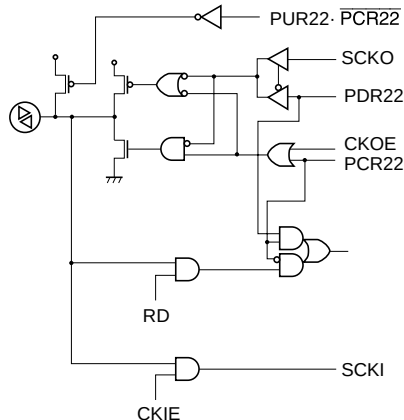

Hi-Z

Retained

Pull-up MOS:  
OFF  
Subactive mode:  
Functions  
Other modes:  
Hi-Z


SCKO: Transfer clock output  
SCKI: Transfer clock input  
CKOE: Transfer clock output control signal  
determined by SMR and SCR  
CKIE: Transfer clock input control signal  
determined by SMR and SCR

When SCK1 is selected,  
pin input should be fixed  
high or low.


## Pin States

| Pin Names                                    | Circuit Diagram                                                                                                                           | At Reset | Sleep Mode | Power-Down Modes Other Than Sleep Mode                                      |
|----------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------|----------|------------|-----------------------------------------------------------------------------|
| P23/SDA1<br>P24/SCL1<br>P25/SDA0<br>P26/SCL0 | <p style="text-align: center;"><math>n = 3, 4, 5, 6</math></p> <p style="text-align: center;">IICE = I<sup>2</sup>C bus enable signal</p> | Hi-Z     | Retained   | Pull-up MOS:<br>OFF<br>Subactive mode:<br>Functions<br>Other modes:<br>Hi-Z |
| P27/SYNCI                                    |                                                                                                                                           | Hi-Z     | Retained   | Pull-up MOS:<br>OFF<br>Subactive mode:<br>Functions<br>Other modes:<br>Hi-Z |

| Pin Names                                                                                 | Circuit Diagram                                                                                                                                                                                                                                                                               | At Reset | Sleep Mode | Power-Down Modes Other Than Sleep Mode                                      |
|-------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------|------------|-----------------------------------------------------------------------------|
| P30/SVI<br>P31/SV2<br>P32/PWM0<br>P33/PWM1<br>P34/PWM2<br>P35/PWM3<br>P36/BUZZ<br>P37/TMO | <p>OUT:<br/> P30/SV1: Servo monitor output<br/> P31/SV2: Servo monitor output<br/> P32/PWM0: 8 bit PWM0 output<br/> P33/PWM1: 8 bit PWM1 output<br/> P34/PWM2: 8 bit PWM2 output<br/> P35/PWM3: 8 bit PWM3 output<br/> P36/BUZZ: Timer J buzzer output<br/> P37/TMO: Timer J timer output</p> | Hi-Z     | Retained   | Pull-up MOS:<br>OFF<br>Subactive mode:<br>Functions<br>Other modes:<br>Hi-Z |
| P40/PWM14                                                                                 | <p>OUT PWM14</p>                                                                                                                                                                                                                                                                              | Hi-Z     | Retained   | Subactive mode:<br>Functions<br>Other modes:<br>Hi-Z                        |

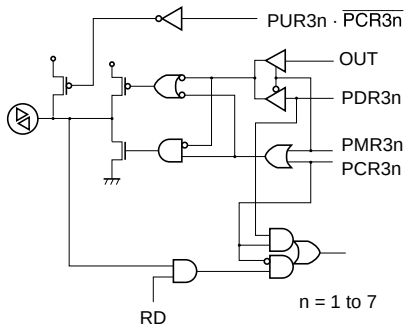


P40/PWM14

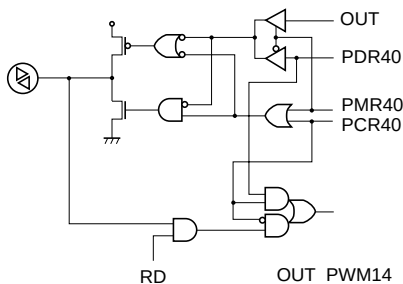

## Pin States

### Pin Names Circuit Diagram

P41/FTIA  
P42/PTIB  
P43/FTIC  
P44/FTID

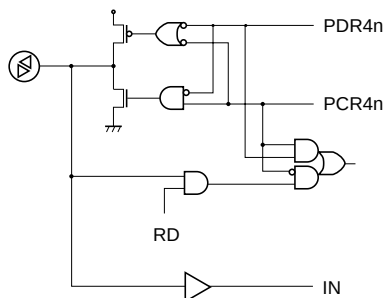

IN = FTIA, FTIB, FTIC, FTID  
n = 1 to 4

At Reset


Sleep  
Mode

Power-Down  
Modes Other  
Than Sleep  
Mode

Hi-Z Retained Subactive mode:  
Functions  
Other modes:  
Hi-Z

As FTIA to FTID always function, a  
high level or a low level should  
always be input to the pins.

P45/FTOA  
P46/PTOB

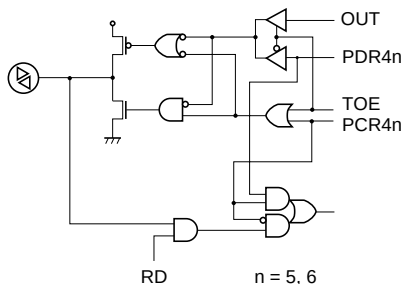

OUT:  
P45/FTOA: Timer X1 output compare  
output FTOA  
P46/FTOB: Timer X1 output compare  
output FTOB  
TOE:  
Output control signal determined  
by TOCR

Hi-Z

Retained

Subactive mode:  
Functions  
Other modes:  
Hi-Z



|                    |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |      |                                                                                                                                               |
|--------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------|-----------------------------------------------------------------------------------------------------------------------------------------------|
| P60/RP0 to P65/RP5 | <p>The diagram shows a pin input circuit with two NPN transistors at the input. The first transistor's emitter is grounded, its base is connected to the input signal, and its collector is connected to a pull-up resistor and the inputs of two AND gates. The second transistor's emitter is also grounded, its base is connected to the input signal through a diode, and its collector is connected to ground. The outputs of these two AND gates are labeled PDRS6n and PCRS6n. There are three more AND gates labeled PMR6n. A common output RD is connected to the inputs of several of these gates. A label n = 0 to 5 indicates multiple instances of this circuit.</p> | Hi-Z | Retained Subactive mode:<br>Functions<br><br>Other modes:<br>Hi-Z                                                                             |
| P66/RP6/<br>ADTRG  | <p>This diagram is similar to the one above but includes an additional output labeled ADTRG. It features two NPN transistors at the input. The first transistor's collector is connected to a pull-up resistor and the inputs of two AND gates leading to PDRS66 and PCRS66. The second transistor's collector is connected to ground. There are three more AND gates labeled PMR66. In addition to the RD output, there is an ADTRG output which is connected to the inputs of some of the AND gates. A TRGE input is shown at the bottom, connected to one of the AND gates.</p>                                                                                                | Hi-Z | Retained Subactive mode:<br>Functions<br><br>Other modes:<br>Hi-Z<br><br>When ADTRG is selected,<br>pin input should be fixed<br>high or low. |





## Pin States

| Pin Names                            | Circuit Diagram | At Reset | Sleep Mode | Power-Down Modes Other Than Sleep Mode                   |
|--------------------------------------|-----------------|----------|------------|----------------------------------------------------------|
| P67/RP7/<br>TMBI                     |                 | Hi-Z     | Retained   | Subactive mode:<br>Functions<br><br>Other modes:<br>Hi-Z |
| P70/PPG0 to<br>P73/PPG3              |                 | Hi-Z     | Retained   | Subactive mode:<br>Functions<br><br>Other modes:<br>Hi-Z |
| P74/PPG4/<br>RP8 to P77/<br>PPG7/RP8 |                 | Hi-Z     | Retained   | Subactive mode:<br>Functions<br><br>Other modes:<br>Hi-Z |

| Pin Names                               | Circuit Diagram                                             | At Reset | Sleep Mode | Power-Down Modes Other Than Sleep Mode                                                                                                              |
|-----------------------------------------|-------------------------------------------------------------|----------|------------|-----------------------------------------------------------------------------------------------------------------------------------------------------|
| P80/YCO                                 |                                                             | Hi-Z     | Retained   | Subactive mode:<br>Functions<br><br>Other modes:<br>Hi-Z                                                                                            |
| P83/<br>C.Rotary/R<br>P84/H.Amp<br>SW/G | <p>OUT1: C.Rotary, H.Amp SW<br/>OUT2: R, G<br/>n = 3, 4</p> | Hi-Z     | Retained   | Subactive mode:<br>Functions<br><br>Other modes:<br>Hi-Z                                                                                            |
| P82/EXCTL<br>P86/<br>EXTTRG             | <p>IN = EXCTL, EXTTRG<br/>n = 2, 6</p>                      | Hi-Z     | Retained   | Subactive mode:<br>Functions<br><br>Other modes:<br>Hi-Z<br><br>When EXCTL and<br>EXTTRG are selected, pin<br>input should be fixed high<br>or low. |

|                                     |                                                                                                                                                  | <b>Pin States</b>                      |                   |                                                          |
|-------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------|-------------------|----------------------------------------------------------|
| <b>Pin Names</b>                    | <b>Circuit Diagram</b>                                                                                                                           | <b>At Reset</b>                        | <b>Sleep Mode</b> | <b>Power-Down Modes Other Than Sleep Mode</b>            |
| P81/EXCAP/<br>YBO<br>P85/COMP/<br>B | <p style="text-align: right;">OUT<br/>PDR8n<br/>PMRCn<br/>PMR8n<br/>PCR8n<br/><br/>RD<br/>IN<br/>n = 1, 5<br/>IN=EXCAP, COMP<br/>OUT= YBO, B</p> | Hi-Z                                   | Retained          | Subactive mode:<br>Functions<br><br>Other modes:<br>Hi-Z |
| P87/DPG                             | <p style="text-align: right;">PDR87<br/>PCR87<br/><br/>RD<br/>DPG</p>                                                                            | Hi-Z                                   | Retained          | Subactive mode:<br>Functions<br><br>Other modes:<br>Hi-Z |
| Csync                               | <p style="text-align: center;">Module STOP</p>                                                                                                   | Pin input should be fixed high or low. |                   |                                                          |
| AUDIOFF<br>VIDEOFF                  | <p style="text-align: right;">OUT<br/>LPM</p>                                                                                                    | Hi-Z                                   | Hi-Z              | Hi-Z                                                     |
| CAPPWM<br>DRMPWM                    |                                                                                                                                                  | Low output                             | Low output        | Low output                                               |
| Vpulse                              | <p style="text-align: center;">Note: Resistance values are reference values.</p>                                                                 | Low output                             | Low output        | Low output                                               |

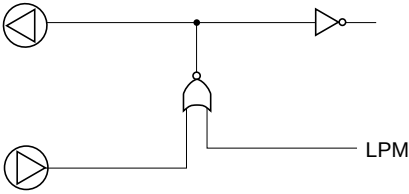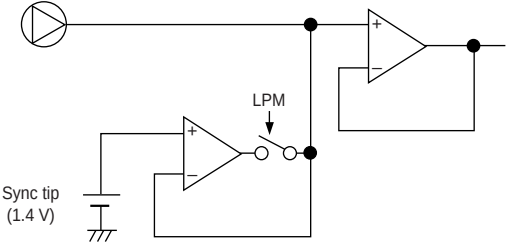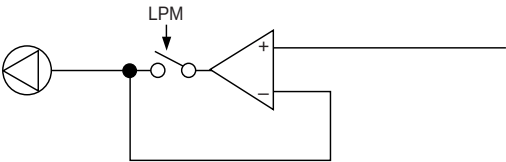

| Pin Names | Circuit Diagram                                                                                                                                                                                                   | Pin States  |             |                                        |
|-----------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------|-------------|----------------------------------------|
|           |                                                                                                                                                                                                                   | At Reset    | Sleep Mode  | Power-Down Modes Other Than Sleep Mode |
| X2        |  <p>Note: The resistance value is a reference value.<br/>When the subclock is not used, connect X1 to VCL and leave X2 open.</p> | Oscillation | Oscillation | Oscillation                            |
| X1        |                                                                                                                                                                                                                   |             |             |                                        |
| OSC2      |                                                                                                                                  | Oscillation | Oscillation | Low output                             |
| OSC1      |                                                                                                                                                                                                                   |             |             |                                        |
| CVin1     |                                                                                                                                  | Hi-Z        | Hi-Z        | Hi-Z                                   |
| CVout     |                                                                                                                                | Hi-Z        | Hi-Z        | Hi-Z                                   |

|             |                 | Pin States                            |             |                                        |
|-------------|-----------------|---------------------------------------|-------------|----------------------------------------|
| Pin Names   | Circuit Diagram | At Reset                              | Sleep Mode  | Power-Down Modes Other Than Sleep Mode |
| 4/2fsc in   |                 | Oscillation                           | Oscillation | —                                      |
| 4/2fsc out  |                 |                                       |             | Low output (Oscillation stopped)       |
| VLPF/Csync  |                 | Pin input should be fixed high or low |             |                                        |
| Csync/Hsync |                 | Hi-Z                                  | Hi-Z        | Hi-Z                                   |
| CVin2       |                 | Hi-Z                                  | Hi-Z        | Hi-Z                                   |

| Pin Names | Circuit Diagram | Pin States    |               |                                        |
|-----------|-----------------|---------------|---------------|----------------------------------------|
|           |                 | At Reset      | Sleep Mode    | Power-Down Modes Other Than Sleep Mode |
| AFCOSC    |                 | Oscillation   | Oscillation   | Hi-Z<br>Oscillation stopped            |
| AFCPC     |                 | $1/2 OV_{CC}$ | $1/2 OV_{CC}$ | —                                      |
| AFCCLPF   |                 | Retained      | Retained      | —                                      |

#### Legend

RD: Read signal

RST: Reset signal

LPM: Power-down mode signal (1 in standby, watch, subactive, and subsleep modes)

Hi-Z: High impedance

SLEEP: Sleep mode signal

Note: Numbers given for resistance values, etc., are reference values.



# Appendix D Port States in Each Processing State

## D.1 Pin Circuit Diagrams

**Table D.1 Port States Overview**

| Port       | Reset          | Active         | Sleep          | Standby        | Watch          | Subactive      | Subsleep       |
|------------|----------------|----------------|----------------|----------------|----------------|----------------|----------------|
| P07 to P00 | High impedance | High impedance | High impedance | High impedance | High impedance | High impedance | High impedance |
| P17 to P10 | High impedance | Functions      | Retained       | High impedance | High impedance | Functions      | Retained       |
| P27 to P20 | High impedance | Functions      | Retained       | High impedance | High impedance | Functions      | Retained       |
| P37 to P30 | High impedance | Functions      | Retained       | High impedance | High impedance | Functions      | Retained       |
| P47 to P40 | High impedance | Functions      | Retained       | High impedance | High impedance | Functions      | Retained       |
| P67 to P60 | High impedance | Functions      | Retained       | High impedance | High impedance | Functions      | Retained       |
| P77 to P70 | High impedance | Functions      | Retained       | High impedance | High impedance | Functions      | Retained       |
| P87 to P80 | High impedance | Functions      | Retained       | High impedance | High impedance | Functions      | Retained       |

# Appendix E Usage Notes

## E.1 Power Supply Rise and Fall Order

Figure E.1 shows the order in which the power supply pins rise when the chip is powered on, and the order in which they fall when the chip is powered down. If the power supply voltages cannot rise and fall simultaneously, power supply operations should be carried out in this order.

- At power-on, wait until the microcomputer section power supply ( $V_{CC}$ ) has risen to the prescribed voltage, then raise the other analog power supplies.
- At power-down, drop the analog power supplies first, followed by the microcomputer section power supply ( $V_{CC}$ ).

When powering up and down, the voltage applied to the pins should not exceed the respective power supply voltage.


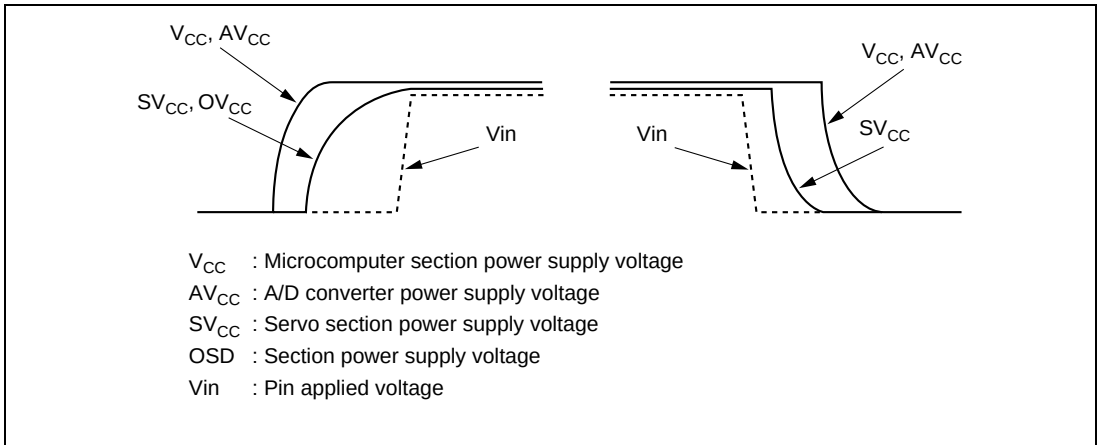


**Figure E.1 Power Supply Rise and Fall Order**

In power-down modes (except sleep mode), the analog power supplies can be controlled at the  $V_{SS}$  level to reduce current dissipation. When the microcomputer section power supply ( $V_{CC}$ ) is dropped to the backup voltage in a power-down mode, the order shown in figure E.2 should be followed. Make sure that the voltage applied to the pins does not exceed the respective power supply voltage.

The A/D converter power supply ( $AV_{CC}$ ) should be set to the same potential as the microcomputer section power supply ( $V_{CC}$ ). In all power-down modes except sleep mode,  $AV_{CC}$  is turned off inside the device. At this time, the  $AV_{CC}$  current dissipation is defined as  $AISTOP$ .

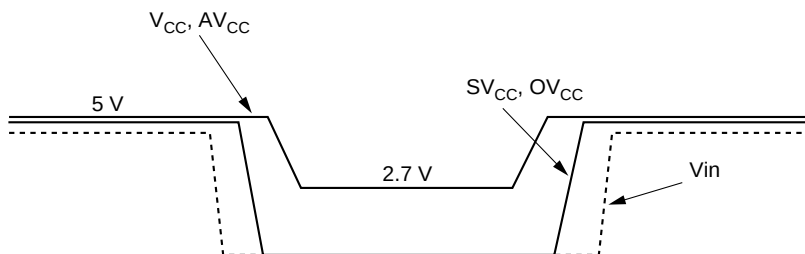

$V_{CC}$  : Microcomputer section power supply voltage  
 $AV_{CC}$  : A/D converter power supply voltage  
 $SV_{CC}$  : Servo section power supply voltage  
 $OV_{CC}$  : OSD section power supply  
 $V_{in}$  : Pin applied voltage

**Figure E.2 Power Supply Control in Power-Down Modes**

When the OSD block power supply ( $OV_{CC}$ ) is raised or dropped, the following order must be observed.

When dropping  $OV_{CC}$ , set the OSD module stop bit, and sync separation module stop bit to 1 to stop each module before dropping  $OV_{CC}$ .

When raising  $OV_{CC}$ , raise  $OV_{CC}$  and wait until the fsc clock settles before clearing the OSD module stop bit, and sync separation module stop bit to 0 to operate each module.

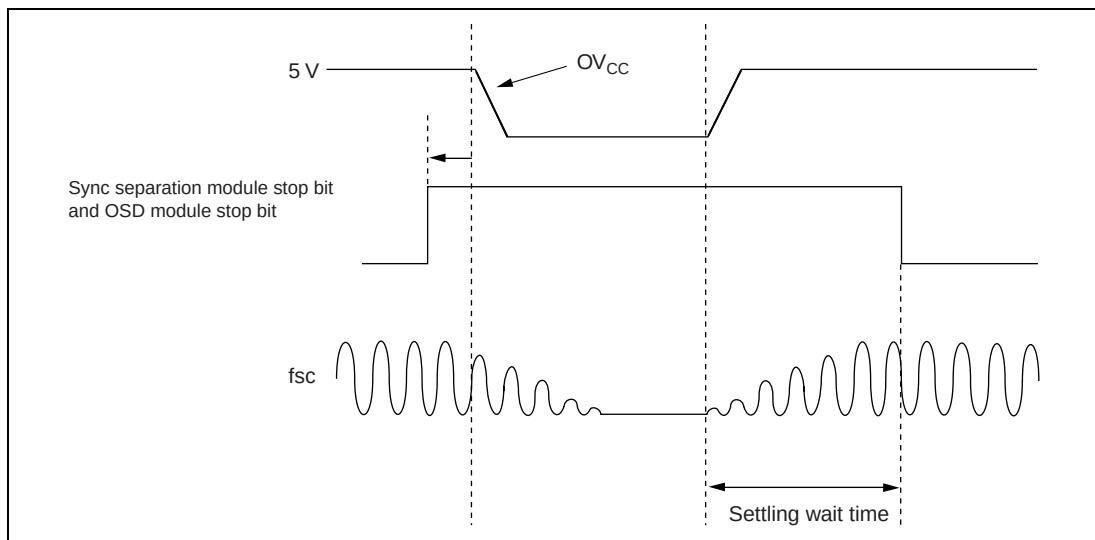


**Figure E.3 Module Stop Bit Setting Order when Raising and Dropping  $OV_{CC}$**

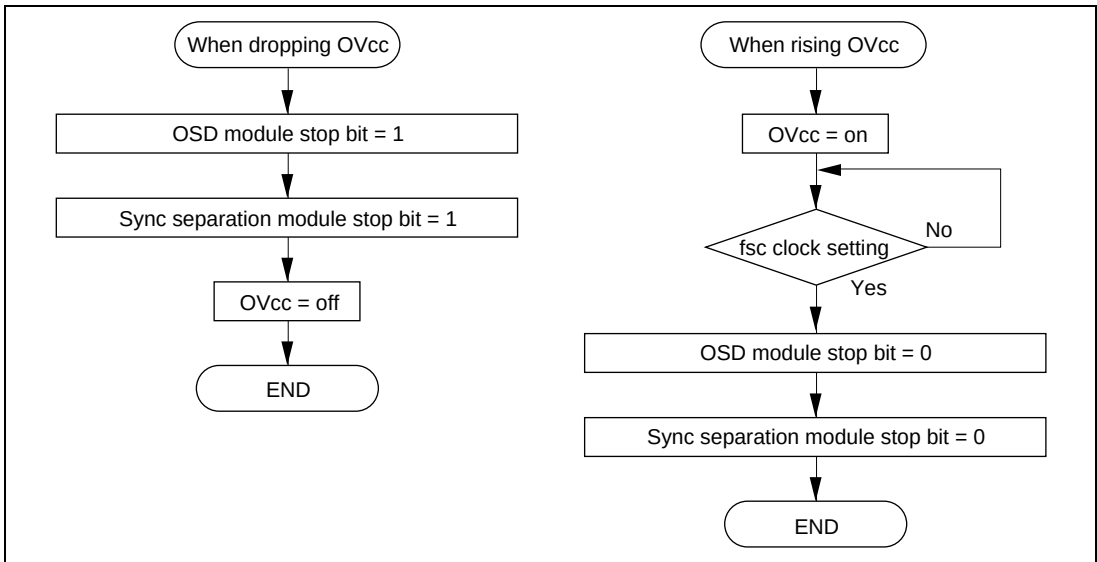


**Figure E.4 Timing chart of Ovcc when rising or dropping**

## E.2 Sample External Circuits

Examples of external circuits for the servo section, and sync signal detection circuit are shown in figures E.5 and E.6

### 1. Servo Section

An example of the external circuit for the DRMPWM output and CAPPWM output pins is shown in figure E.5


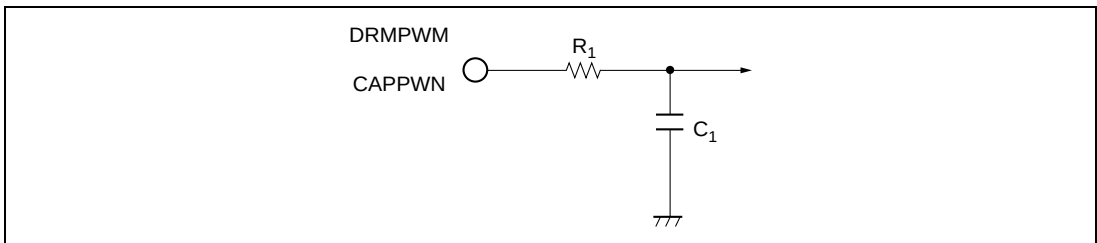


**Figure E.5 Sample External Circuit for Servo Section**

### 2. Sync Signal Detection Circuit Section in Servo Circuit

Figure E.6 shows an example of the external circuit for the sync signal detection circuit section in the servo circuit.

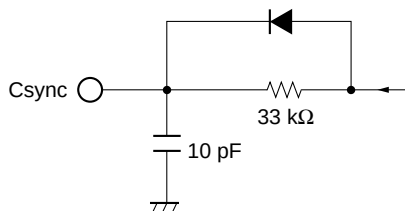

Note: Reference values are shown.  
The board floating capacitance and wiring resistance must also be taken into consideration in determining the values.


**Figure E.6 Example of External Circuit for Sync Signal Detection Circuit Section**

### 3. OSD

An example of the external circuit for the OSD is shown in figure E.7

The circuit configuration and values for the filter section will vary according to the wiring capacitance, impedance, etc.

When designing the board, an appropriate filter should be configured, taking account of the wiring load. Noise prevention measures also need to be taken when designing the board.

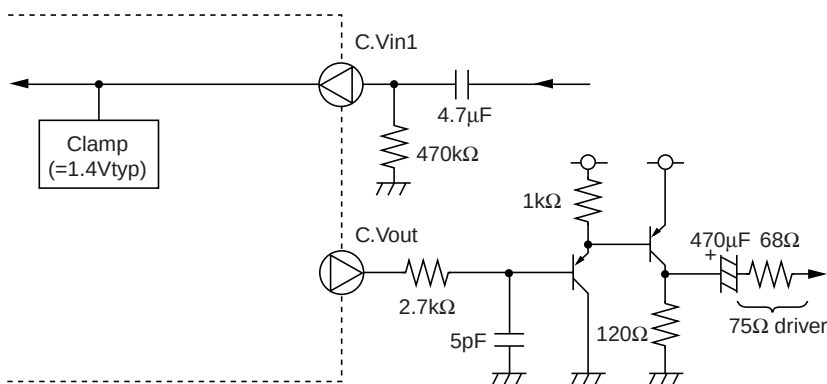

Note: Reference values are shown.  
The board floating capacitance and wiring resistance must also be taken into consideration in determining the values.

**Figure E.7 Example of External Circuit for OSD**

### 4. Sync Separator and Data Slicer

Examples of the external circuits for the sync separator and data slicer are shown in figures E.8 to E.10.

The sync signal separation sources can be selected from the following three: (1) C<sub>Vin2</sub>, (2) C<sub>sync</sub>, and (3) separate H<sub>sync</sub> and V<sub>sync</sub> signals. The external circuit configuration will vary depending on the separation source.

When the data slicer is used, C<sub>Vin2</sub> is recommended as the separation source. When C<sub>sync</sub> or H<sub>sync</sub> and V<sub>sync</sub> are selected as the source, connect to C<sub>Vin2</sub> the same external circuit as when C<sub>Vin2</sub> is selected as the separation source.

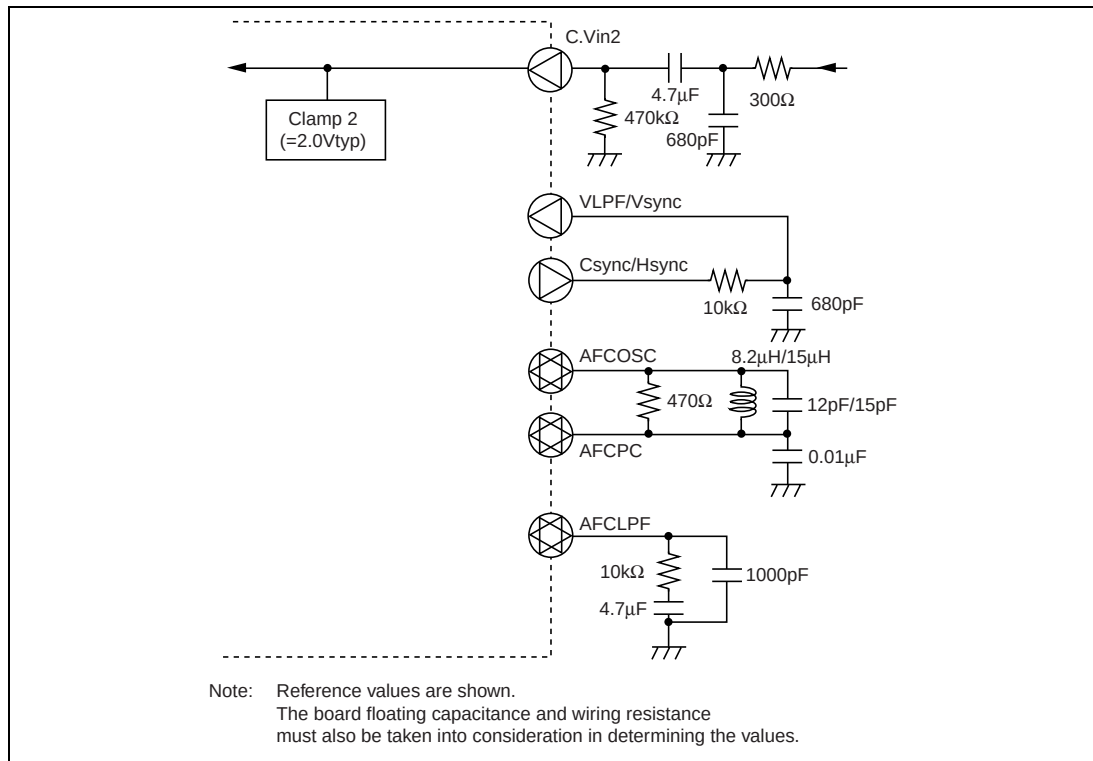


**Figure E.8 Example of External Circuit for Sync Separator and Data Slicer  
(1) Separation from C<sub>Vin2</sub>)**


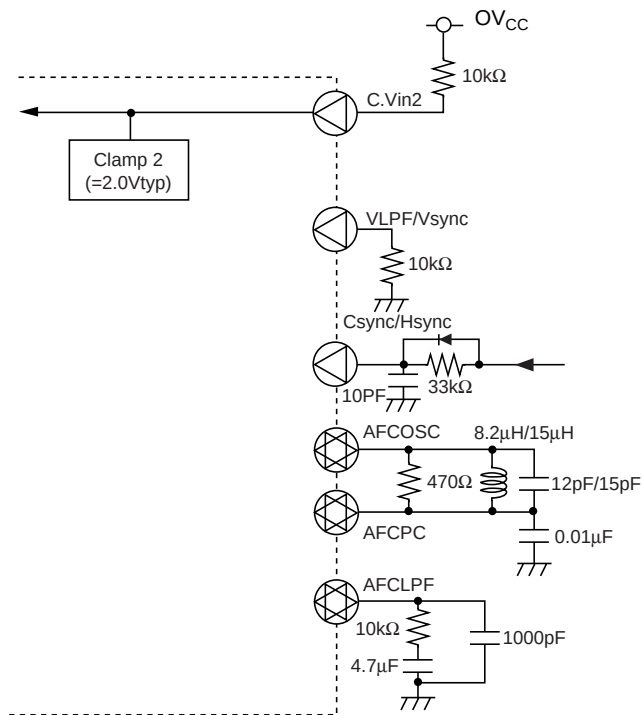


**Figure E.9 Example of External Circuit for Sync Separator and Data Slicer  
((2) Separation from Csync)**



Note: Reference values are shown.  
The board floating capacitance and wiring resistance must also be taken into consideration in determining the values.

**Figure E.10 Example of External Circuit for Sync Separator and Data Slicer  
(3) Separation from Hsync and Vsync)**

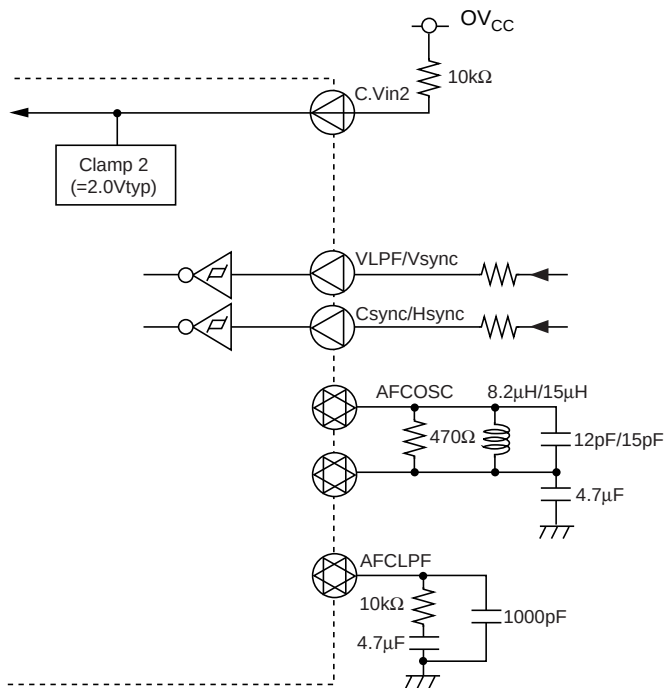

## E.3 Handling of Pins When OSD Is Not Used

Table E.2 shows the handling of pins when the OSD, sync separator, or data slicer is not used.

When none of these modules is used, pin handling differs according to whether or not the ANB pin is used.

**Table E.2 Handling of Pins When OSD Is Not Used**

|                         |                    | Pin Handling                      |                                   |                                   |                                                                                 |                                                                                 |
|-------------------------|--------------------|-----------------------------------|-----------------------------------|-----------------------------------|---------------------------------------------------------------------------------|---------------------------------------------------------------------------------|
| Conditions              |                    |                                   |                                   |                                   | When ANB Pin is Used                                                            | When ANB Pin is Not Used                                                        |
| Module used or not used | OSD                | Used                              | Not used                          | Not used                          | Not used                                                                        | Not used                                                                        |
|                         | Data slicer        | Not used                          | Used                              | Not used                          | Not used                                                                        | Not used                                                                        |
|                         | Sync separator     | Used                              | Used                              | Used                              | Not used                                                                        | Not used                                                                        |
| Pins                    | OSDV <sub>CC</sub> | V <sub>CC</sub>                   | V <sub>CC</sub>                   | V <sub>CC</sub>                   | V <sub>CC</sub>                                                                 | V <sub>SS</sub>                                                                 |
|                         | OSDV <sub>SS</sub> | V <sub>SS</sub>                   | V <sub>SS</sub>                   | V <sub>SS</sub>                   | V <sub>SS</sub>                                                                 | V <sub>SS</sub>                                                                 |
|                         | Csync/Hsync        | Csync/Hsync                       | Csync/Hsync                       | Csync/Hsync                       | 10 kΩ to V <sub>SS</sub>                                                        | V <sub>SS</sub>                                                                 |
|                         | VLPF/Vsync         | VLPF/Vsync                        | VLPF/Vsync                        | VLPF/Vsync                        | 10 kΩ to V <sub>SS</sub>                                                        | V <sub>SS</sub>                                                                 |
|                         | AFCOSC             | AFCOSC                            | AFCOSC                            | AFCOSC                            | 10 kΩ to V <sub>SS</sub>                                                        | V <sub>SS</sub>                                                                 |
|                         | AFCPC              | AFCPC                             | AFCPC                             | AFCPC                             | OPEN                                                                            | V <sub>SS</sub>                                                                 |
|                         | AFCLPF             | AFCLPF                            | AFCLPF                            | AFCLPF                            | 10 kΩ to V <sub>SS</sub>                                                        | V <sub>SS</sub>                                                                 |
|                         | CVin1              | CVin1                             | 10 kΩ to V <sub>SS</sub>          | 10 kΩ to V <sub>SS</sub>          | 10 kΩ to V <sub>SS</sub>                                                        | V <sub>SS</sub>                                                                 |
|                         | CVout              | CVout                             | OPEN                              | OPEN                              | OPEN                                                                            | V <sub>SS</sub>                                                                 |
|                         | 4fsc in            | 4fsc in                           | V <sub>SS</sub>                   | V <sub>SS</sub>                   | V <sub>SS</sub>                                                                 | V <sub>SS</sub>                                                                 |
|                         | 4fsc out           | 4fsc out                          | OPEN                              | OPEN                              | OPEN                                                                            | OPEN                                                                            |
|                         | CVin2              | CVin2 or 10 kΩ to V <sub>SS</sub> | CVin2 or 10 kΩ to V <sub>SS</sub> | CVin2 or 10 kΩ to V <sub>SS</sub> | 10 kΩ to V <sub>SS</sub>                                                        | V <sub>SS</sub>                                                                 |
| Note                    |                    | —                                 | —                                 | —                                 | The registers in the OSD, sync separator, and data slicer must not be accessed. | The registers in the OSD, sync separator, and data slicer must not be accessed. |

# Appendix F Product Lineup

**Table F.1 Product Lineup of H8S/2199R Series**


| Product Type     |           |                  | Product Code | Mark Code         | Package (Hitachi Package Code) |
|------------------|-----------|------------------|--------------|-------------------|--------------------------------|
| H8S/2199R Series | H8S/2199R | Mask ROM version | HD6432199R   | HD6432199R (***)F | 112-pin QFP (FP-112)           |
|                  |           | F-ZTAT version   | HD64F2199R   | HD64F2199RF       | 112-pin QFP (FP-112)           |
|                  | H8S/2198R | Mask ROM version | HD6432198R   | HD6432198R (***)F | 112-pin QFP (FP-112)           |
|                  | H8S/2197R | Mask ROM version | HD6432197R   | HD6432197R (***)F | 112-pin QFP (FP-112)           |
|                  | H8S/2197S | Mask ROM version | HD6432197S   | HD6432197S (***)F | 112-pin QFP (FP-112)           |
|                  | H8S/2196R | Mask ROM version | HD6432196R   | HD6432196R (***)F | 112-pin QFP (FP-112)           |
|                  | H8S/2196S | Mask ROM version | HD6432196S   | HD6432196S (***)F | 112-pin QFP (FP-112)           |

Note: (\*\*) is the ROM code.

## Appendix G Package Dimensions

As of January, 2001

Unit: mm

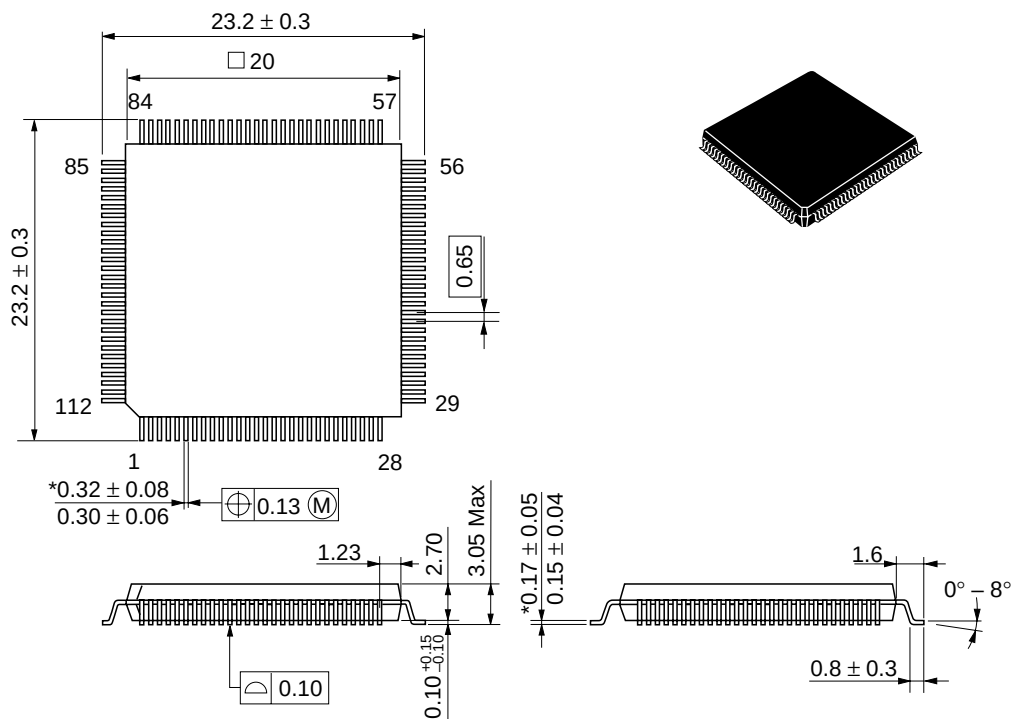

|                        |          |
|------------------------|----------|
| Hitachi Code           | FP-112   |
| JEDEC                  | —        |
| EIAJ                   | Conforms |
| Mass (reference value) | 2.4 g    |

### Figure G.1 Package Dimensions (FP-112)



---

## **H8S/2199R Series, H8S/2199R F-ZTAT™ Hardware Manual**

Publication Date: 1st Edition, February 2001

Published by: Electronic Devices Sales & Marketing Group  
Semiconductor & Integrated Circuits  
Hitachi, Ltd.

Edited by: Technical Documentation Group  
Hitachi Kodaira Semiconductor Co., Ltd.

Copyright © Hitachi, Ltd., 2001. All rights reserved. Printed in Japan.