


HDG12864F-1

Chip On Glass technology

Dimensional Drawing

128 X 64 Dots Graphic

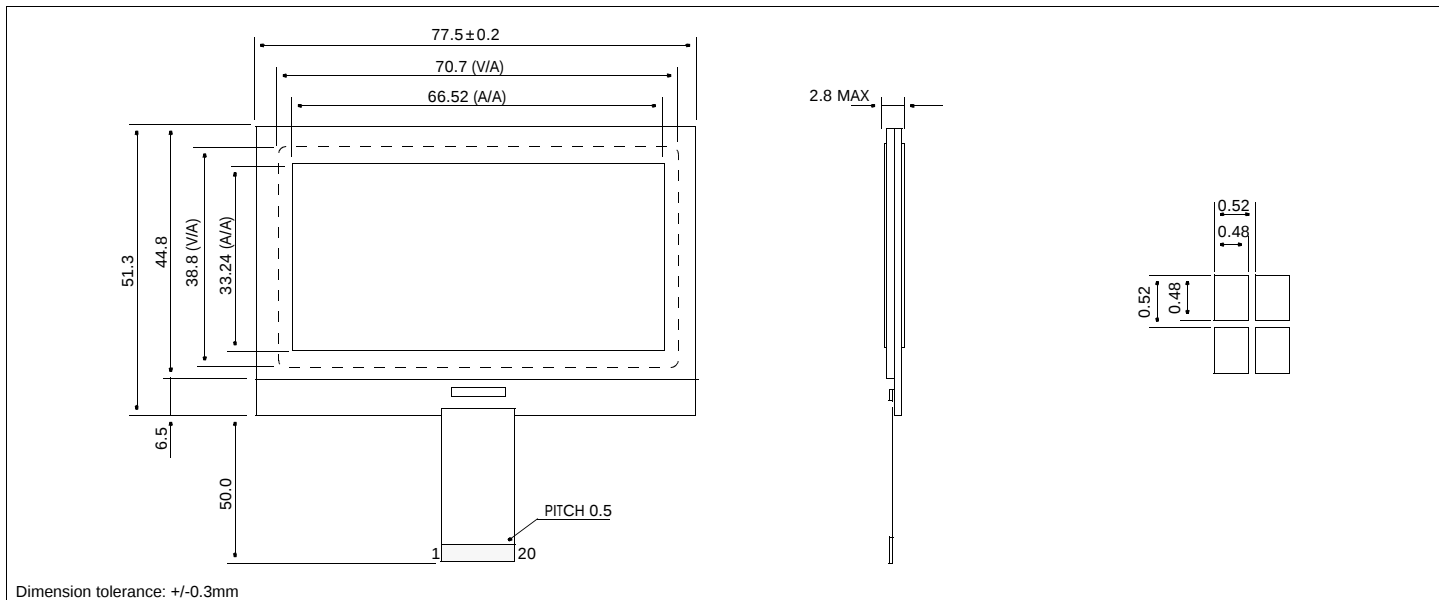


Features

Back light	None
Connection	Flat Flex Cable
Options.....	STN/FSTN, Transflective or Reflective Polarizer
Built-in Controller.....	Epson/S-MOS SED1565

Physical Data

Module Size.....	77.5W x 51.3H x 2.8T mm
Viewing Area Size.....	70.7W x 38.8H mm
Dot Pitch.....	0.52W x 0.52H mm
Dot Size.....	0.48W x 0.48H mm
Weight.....	20 g

Power Supply

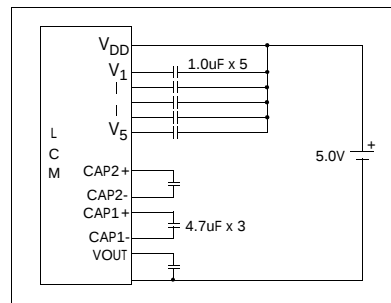

Absolute Maximum Ratings

PARAMETER	SYMBOL	MIN	MAX	UNIT
SUPPLY VOLTAGE	$V_{DD}-V_{SS}$	0	6.0	V
SUPPLY VOLTAGE FOR LCD	$V_{DD}-V_L$	0	16.0	V
INPUT VOLTAGE	V_{IN}	V_{SS}	V_{DD}	V
OPERATING TEMPERATURE	T_{OP}	0	50	°C
STORAGE TEMPERATURE	T_{STG}	-20	70	°C

Electrical Characteristics (VDD=5.0±0.25V 25°C)

PARAMETER	SYM	CONDITION	MIN	TYP	MAX	UNIT
INPUT HIGH VOLTAGE	V_{IH}	-	$0.7V_{DD}$	-	V_{DD}	V
INPUT LOW VOLTAGE	V_{IL}	-	V_{SS}	-	$0.2V_{DD}$	V
OUTPUT HIGH VOLTAGE	V_{OH}	$I_{OH}=0.2mA$	$0.8V_{DD}$	-	V_{DD}	V
OUTPUT LOW VOLTAGE	V_{OL}	$I_{OL}=1.2mA$	V_{SS}	-	$0.2V_{DD}$	V
POWER SUPPLY CURRENT	I_{DD}	$V_{DD}=5V$	-	50	200	μA
POWER SUPPLY FOR LCD	$V_{DD}-V_L$	$TA=25^{\circ}C$	3.6	8.8	15.0	V
DRIVE METHOD	1/64 Duty					

Pin Connections

PIN NO.	SYMBOL	LEVEL	FUNCTION
1	V5	-	Intermediate voltages
2	V4	-	
3	V3	-	
4	V2	-	
5	V1	-	
6	VR	-	Voltage regulator
7	CAP2 +	-	Inverter capacitors
8	CAP2-	-	
9	CAP1-	-	
10	CAP1 +	-	
11	VOUT #	Output	Voltage for contrast control
12	V _{SS}	0V	Power supply
13	V _{DD}	+5V	
14	SI	H/L	Serial data input
15	SCL	L→H	Shift clock
16	RD	L	Read serial data
17	WR	L	Write serial data
18	A0	H/L	H = Data, L = Command
19	RES	L	Reset
20	CS1	L	Chip select

#Has built-in inverter for negative power supply