




CRYSTAL OSCILLATORS HCMOS/TTL 3.3V

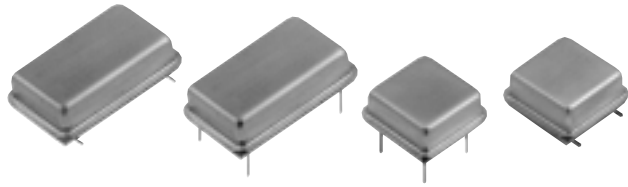

**FULL SIZE D.I.L.
M package**
M1310, M1312,
M3310, M3312

**HALF SIZE D.I.L.
H package**
H1310, H1312,
H3310, H3312

Thru-Hole / Gull Wing Industrial: -40° to +85°C FIXED/TRISTATE, 1 KHz to 100 MHz

FEATURES

- Industrial operating temperature range from -40°C to +85°C accommodates rugged environments
- Low jitter from positive edge to positive edge of 5 ps RMS max ensures stable data transmission
- Internal bypass capacitor delivers superior waveform characteristics
- Stability options of ± 100 ppm and ± 50 ppm
- Guaranteed start-up with ramping DC Supply
- Start up time less than 5 ms
- Tristate feature is standard
- Very low power when tristated

TYPICAL APPLICATIONS

- Telecom and data networking applications that require low jitter and are subjected to rugged environmental conditions, including:
 - ATM
 - Frame relay
 - DSL
 - Gigabit ethernet
 - Fibre channel
 - VoIP


Description

MF Electronics industrial temperature range thru-hole oscillators provide low jitter clock waveforms needed to clock standard HCMOS or TTL circuits in PCBs mounted in rugged environments.

TRISTATE	FIXED OUTPUT	Frequency Stability
Model	Model	
3310	1310	± 100 ppm
3312	1312	± 50 ppm

CONNECTIONS — All models

	"M" Models	"H" Models	Tristate models 3310, 3312	Non-tristate models 1310, 1312
PIN	1	1	Floating or "1": Oscillator runs Ground or "0": Disable or Tristate	Not Used
PIN	7	4	Ground and Case	
PIN	8	5	Output	
PIN	14	8	+3.3V, V_{DD}	

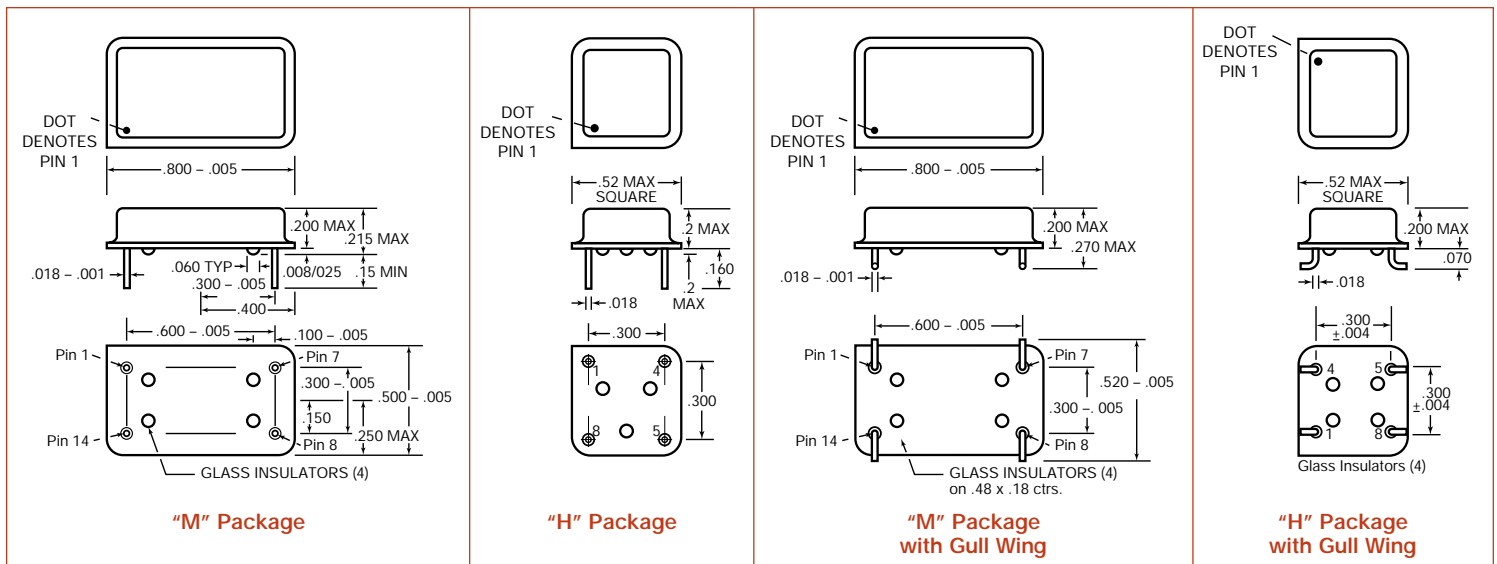



CRYSTAL OSCILLATORS
HCMOS/TTL 3.3V
Thru-Hole /Gull Wing
Industrial: -40° to +85°C
FIXED/TRISTATE, 1 KHz to 100 MHz

FULL SIZE D.I.L.
M package
M1310, M1312,
M3310, M3312

HALF SIZE D.I.L.
H package
H1310, H1312,
H3310, H3312

ELECTRICAL SPECIFICATIONS

Frequency Range 1 KHz to 100 MHz

Frequency Stability Includes calibration at 25°C, operating temperature, change of input voltage, change of load, shock and vibration.

	MIN	TYP	MAX	UNITS
Input Voltage, V_{DD}	3.0	3.3	3.6	volts
Input Current				
1 KHz to 10 MHz		10	20	ma
10.1 to 25 MHz		20	35	ma
25.1 to 50 MHz		25	45	ma
50.1 to 75 MHz		40	50	ma
75.1 to 100 MHz		50	60	ma

Output Levels

"0" Level, sinking 16 ma			0.4	volts
"1" Level, sinking 8 ma	$V_{DD} - .4$			volts

Rise and Fall Times

TTL, from 0.8 to 2.4V	2.4	4	ns
HCMOS, 15 pf, 20 to 80%			
1 KHz to 75 MHz	2.5	4	ns
75.1 to 100 MHz	1.5	2.5	ns
HCMOS, 30 pf, 20 to 80%			
1 KHz to 100 MHz	4.0	6	ns

Jitter

From positive edge to positive edge		5	ps RMS
-------------------------------------	--	---	--------

Symmetry

10 TTL, @ 1.4V	45/55	40/60	percent
HCMOS, @ 50% V_{DD}	45/55	40/60	percent

Aging

First year	3	ppm
After first year	1	ppm/yr

Input Requirements for Pin 1:

"1": On – Pin 1 may float or 2.4V min., sourcing 400 microAmp
"0": Disable or Tristate – Pin 1 requires 0.4V, sinking 400 microAmp

ENVIRONMENTAL SPECIFICATIONS

Temperature

Operating	-40° to +85°C
Storage	-55° to +125°C

Temperature Cycle – Not to exceed ± 5 ppm change when exposed to 2 hours maximum at each temperature from 0 to 120°C, with 25°C reference

Shock – 1000 Gs, 0.35 ms, 1/2 sine wave, 3 shocks in each plane

Vibration – 10-2000 Hz of .06" d.a. or 20 Gs, whichever is less

Humidity – Resistant to 85% R.H. at 85°C

MECHANICAL SPECIFICATIONS

Gross Leak – Each unit checked in 125°C fluorocarbon

Fine Leak – Mass spectrometer leak rate less than 2×10^{-8} atmos, cc/sec of helium

Pins – Kovar, nickel plated with 60/40 solder coat


Bend Test – Will withstand two bends of 90° from reference

Header – Steel, with nickel plate

Case – Stainless steel, type 304


Marking – Marking is permanent

Resistance to Solvents – MIL STD 202, Method 215

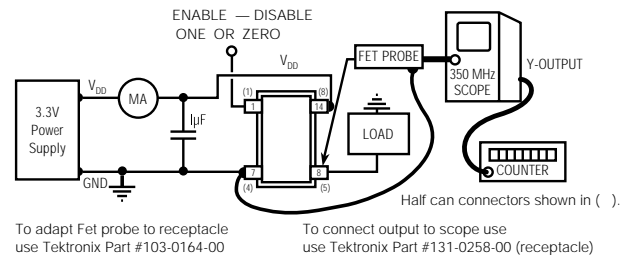

ALL OSCILLATORS HAVE INTERNAL BYPASS CAPACITORS

TEST CIRCUIT



HOW TO ORDER

For Part Number, put package type before model number, and add frequency in MHz, for example:

H 3310 - 50M

M is full size DIL
H is half size DIL

3310 is model type

50 M frequency in MHz

Leave blank for straight leads
Add G for gullwing

SS#	Rev.
M1310	A

MF ELECTRONICS

Unless customer-specific terms and conditions are signed by an officer of MF Electronics, the sale of this and all MF Electronics products are subject to terms and conditions set forth at www.mfelectronics.com/terms