



NTC THERMISTORS: TYPE HTP

HIGH TEMPERATURE PROBES

DESCRIPTION:

The Hi-Temp THERMOPROBE consists of a bead thermistor hermetically sealed in the tip of a shock resistant glass rod. These units are rugged and unaffected by severe environmental exposures, including high density nuclear radiation.

APPLICATIONS:

- Temperature measurement and control
- Temperature compensation
- Controlled temperature soldering stations
- Process oven control


A ruggedized Hi-Temp BEAD THERMISTOR (Type HTBR55) is available on special order.

DATA:

All Hi-Temp THERMISTORS are aged at 450°C for extended periods of time. As such, they exhibit excellent stability for all temperatures at or below 450°C. Intermittent operations at temperatures up to 600°C is permissible. When additional preconditioning is specified, compliance with the performance requirements of MIL-PRF-23648 can be guaranteed.




DIMENSIONS:

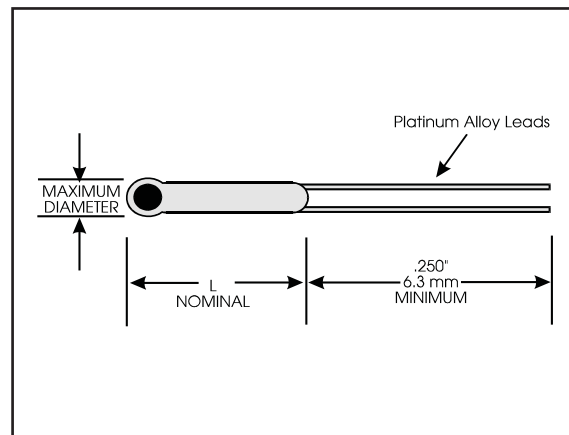

CODING:

The code number to be ordered may be specified as follows:

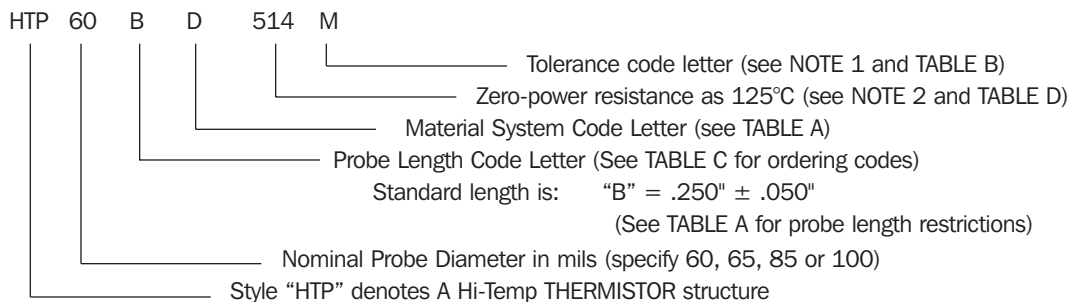

NOTE 1: Special tolerances are available on request. Consult factory for special resistance tolerances, non-standard resistances and/or non-standard temperatures.

NOTE 2: The zero-power resistance at 125°C, expressed in Ohms, is identified by a three digit code number. The first two digits represent significant figures, and the last digit specifies the number of zeros to follow.

Example: For example, 0.06 inch max. diameter x 1/4 inch long glass probe with a zero-power resistance at 125°C of 510k and a tolerance of $\pm 20\%$ would be specified as HTP60BD514M.

BOWTHORPE THERMOMETRICS
Crown Industrial Estate, Priorswood Road
Taunton, Somerset TA2 8QY UK
Tel +44 (0) 1823 335200
Fax +44 (0) 1823 332637

THERMOMETRICS, INC.
808 US Highway 1
Edison, New Jersey 08817-4695 USA
Tel +1 (732) 287 2870
Fax +1 (732) 287 8847

KEYSTONE THERMOMETRICS CORPORATION
967 Windfall Road
St. Marys, Pennsylvania 15857-3397 USA
Tel +1 (814) 834 9140
Fax +1 (814) 781 7969

TABLE A: THERMAL AND ELECTRICAL PROPERTIES:

The following table lists the THERMAL and ELECTRICAL properties for all Hi-Temp THERMISTORS. All definitions and test methods are per MIL-PRF-23648.

THERMISTOR TYPE:	HTP60	HTP65	HTP85	HTP100
BODY DIMENSIONS:				
Max. Diameter:	.060" (1.5 mm)	.065" (1.7 mm)	.085 (2.2 mm)	.100" (2.5 mm)
Standard Length Code "B":	.250" (6.3 mm)	.250" (6.3 mm)	.250" (6.3 mm)	.250" (6.3 mm)
Length Codes Available (Special Order Only)	"A", "C", "D"	"A", "C", "D"	"A", "C", "D"	"A", "C", "D"
lead-wires:				
Nom. Diameter:	.008" (.20 mm)	.008" (.20 mm)	.008" (.20 mm)	.008" (.20 mm)
Minimum Lead Length:	.250" (6.3 mm)	.250" (6.3 mm)	.250" (6.3 mm)	.250" (6.3 mm)
Lead Material:	Platinum Alloy	Platinum Alloy	Platinum Alloy	Platinum Alloy
THERMAL TIME CONSTANT:				
Still Air at 25°C:	12 sec	13 sec	16 sec	22 sec
DISSIPATION CONSTANT:				
Still Air at 25°C:	.60 mW/°C	.65 mW/°C	.80 mW/°C	1.0 mW/°C
Resistance Range @ 125°C (ohms)	100k-2M	100k-2M	100k-2M	100k-2M
Maximum Power Rating:	0.060 Watts	0.065 Watts	0.075 Watts	0.100 Watts

TABLE B: STANDARD TOLERANCES:

Tolerance Code Letter	F	G	J	K	L	M	N	P	Q	R	S
± % Tolerance at 125°C	1	2	5	10	15	20	25	30	40	50	Non-standard – consult factory

TABLE C: PROBE LENGTH CODES: (Refer to Table A for probe length options)

NOMINAL PROBE LENGTH	.125"	.250" (Standard)	.375"	.500"
PROBE LENGTH CODE LETTER	A	B	C	D

The nominal standard values for the Zero-Power Resistance at 125°C, R_{125} are shown in Table D.

Also shown is a curve of R_T/R_{125} vs. Temperature where R_T is the resistance at any temperature.

TABLE D: STANDARD RESISTANCE VALUES			
R_T @ 125°C		Resistance Code	
510k ohms		514	
750k ohms		754	
1.0 Megohm		105	
1.5 Megohm		155	
DATA			
TEMP °C	R_T/R₁₂₅	TEMP °C	R_T/R₁₂₅
125	1.00000	300	.00793
150	.41087	325	.00487
175	.18272	350	.00310
200	.08720	375	.00203
225	.04430	400	.00138
250	.02380	425	.00096
275	.01344	450	.00068

BOWTHORPE THERMOMETRICS
Crown Industrial Estate, Priorswood Road
Taunton, Somerset TA2 8QY UK
Tel +44 (0) 1823 335200
Fax +44 (0) 1823 332637

THERMOMETRICS, INC.
808 US Highway 1
Edison, New Jersey 08817-4695 USA
Tel +1 (732) 287 2870
Fax +1 (732) 287 8847

KEYSTONE THERMOMETRICS CORPORATION
967 Windfall Road
St. Marys, Pennsylvania 15857-3397 USA
Tel +1 (814) 834 9140
Fax +1 (814) 781 7969