
HM5117800 Series

16 M FP DRAM (2-Mword $\times$ 8-bit)
2 k Refresh

HITACHI

ADE-203-632E (Z)
Rev. 5.0
Nov. 1997

Description

The Hitachi HM5117800 is a CMOS dynamic RAM organized 2,097,152-word $\times$ 8-bit. It employs the most advanced CMOS technology for high performance and low power. The HM5117800 offers Fast Page Mode as a high speed access mode. Multiplexed address input permits the HM5117800 to be packaged in standard 28-pin plastic SOJ and 28-pin TSOP.

Features


- Single 5 V ($\pm 10\%$)
- High speed
- Access time: 60 ns/70 ns (max)
- Power dissipation
 - Active mode: 550mW/495 mW (max)
 - Standby mode : 11 mW (max)
: 0.83 mW (max) (L-version)
- Fast page mode capability
- Long refresh period
 - 2048 refresh cycles : 32 ms
: 128 ms (L-version)
- 4 variations of refresh
 - $\overline{\text{RAS}}$ -only refresh
 - $\overline{\text{CAS}}$ -before- $\overline{\text{RAS}}$ refresh
 - Hidden refresh
 - Self refresh (L-version)
- Battery backup operation (L-version)

HM5117800 Series

Ordering Information

Type No.	Access time	Package
HM5117800J-6	60 ns	400-mil 28-pin plastic SOJ (CP-28DA)
HM5117800J-7	70 ns	
HM5117800LJ -6	60 ns	
HM5117800LJ -7	70 ns	
HM5117800S-6	60 ns	300-mil 28-pin plastic SOJ (CP-28DNA)
HM5117800S-7	70 ns	
HM5117800LS-6	60 ns	
HM5117800LS-7	70 ns	
HM5117800TT-6	60 ns	400-mil 28-pin plastic TSOP II (TTP-28DA)
HM5117800TT-7	70 ns	
HM5117800LTT-6	60 ns	
HM5117800LTT-7	70 ns	
HM5117800TS-6	60 ns	300-mil 28-pin plastic TSOP II (TTP-28DB)
HM5117800TS-7	70 ns	
HM5117800LTS-6	60 ns	
HM5117800LTS-7	70 ns	

Pin Arrangement

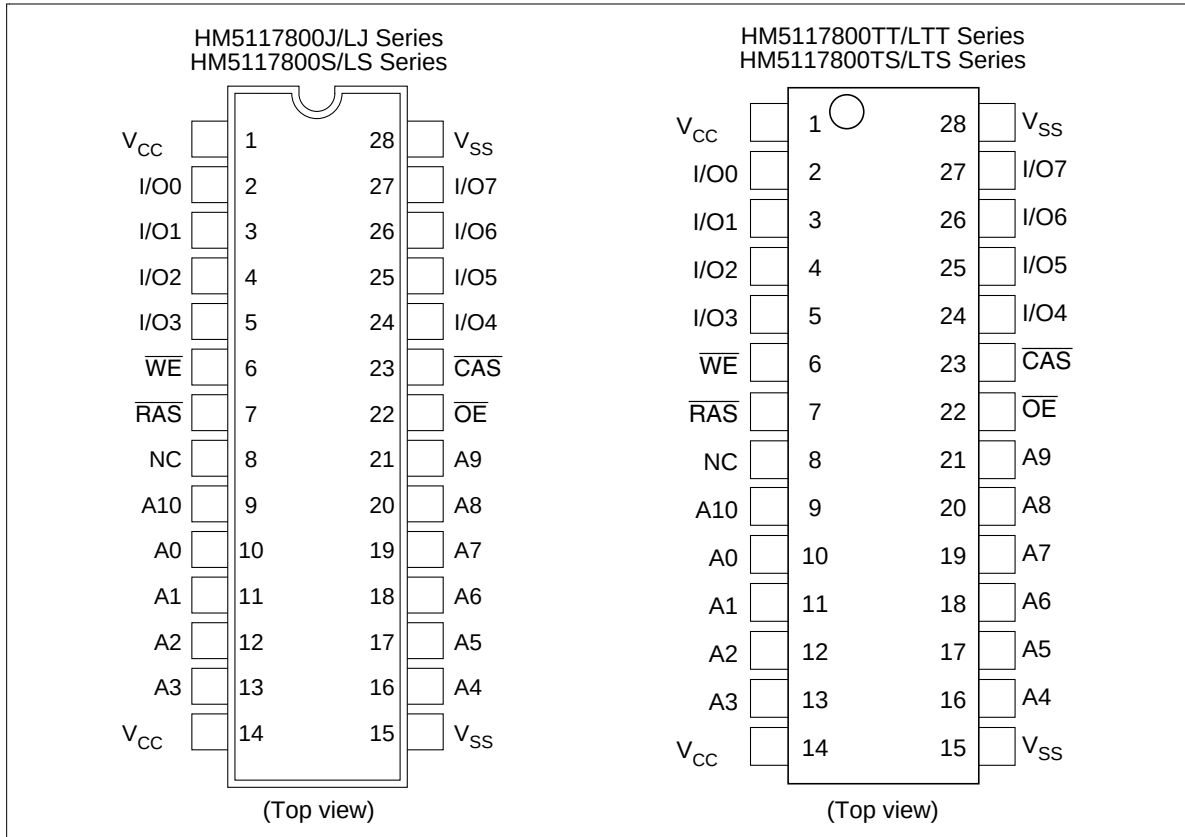


Pin Description

Pin name	Function
A0 to A10	Address input - Row/Refresh address A0 to A10 - Column address A0 to A9
I/O0 to I/O7	Data input/data output
$\overline{\text{RAS}}$	Row address strobe
$\overline{\text{CAS}}$	Column address strobe
$\overline{\text{WE}}$	Read/Write enable
$\overline{\text{OE}}$	Output enable
V_{CC}	Power supply
V_{SS}	Ground
NC	No connection

HM5117800 Series

Block Diagram

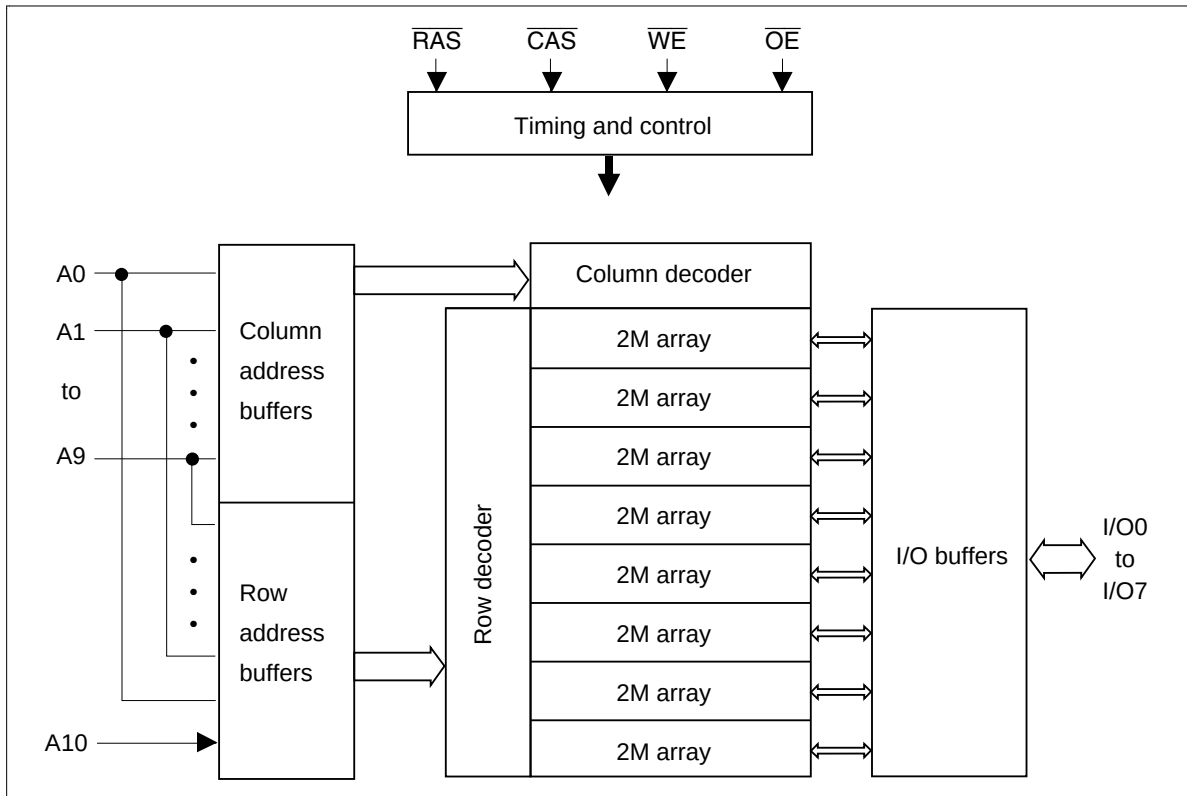

Absolute Maximum Ratings

Parameter	Symbol	Value	Unit
Voltage on any pin relative to V_{SS}	V_T	−1.0 to +7.0	V
Supply voltage relative to V_{SS}	V_{CC}	−1.0 to +7.0	V
Short circuit output current	I_{out}	50	mA
Power dissipation	P_T	1.0	W
Operating temperature	T_{opr}	0 to +70	°C
Storage temperature	T_{stg}	−55 to +125	°C

Recommended DC Operating Conditions ($T_a = 0$ to +70°C)

Parameter	Symbol	Min	Typ	Max	Unit	Note
Supply voltage	V_{CC}	4.5	5.0	5.5	V	1
Input high voltage	V_{IH}	2.4	—	6.5	V	1
Input low voltage	V_{IL}	−1.0	—	0.8	V	1

Note: 1. All voltage referred to V_{SS} .

HM5117800 Series

DC Characteristics (Ta = 0 to +70°C, V_{CC} = 5 V ±10%, V_{SS} = 0 V)

		HM5117800					
		-6		-7			
Parameter	Symbol	Min	Max	Min	Max	Unit	Test conditions
Operating current* ¹ , * ²	I _{CC1}	—	100	—	90	mA	t _{RC} = min
Standby current	I _{CC2}	—	2	—	2	mA	TTL interface RAS, CAS = V _{IH} Dout = High-Z
		—	1	—	1	mA	CMOS interface RAS, CAS ≥ V _{CC} – 0.2V Dout = High-Z
Standby current (L-version)	I _{CC2}	—	150	—	150	μA	CMOS interface RAS, CAS ≥ V _{CC} – 0.2V Dout = High-Z
RAS-only refresh current* ²	I _{CC3}	—	100	—	90	mA	t _{RC} = min
Standby current* ¹	I _{CC5}	—	5	—	5	mA	RAS = V _{IH} CAS = V _{IL} Dout = enable
CAS-before-RAS refresh current	I _{CC6}	—	100	—	90	mA	t _{RC} = min
Fast page mode current* ¹ , * ³	I _{CC7}	—	90	—	85	mA	t _{PC} = min
Battery backup current (Standby with CBR refresh) (L-version)	I _{CC10}	—	500	—	500	μA	CMOS interface Dout = High-Z CBR refresh: t _{RC} = 62.5 μs t _{RAS} ≤ 0.3 μs
Self refresh mode current (L-version)	I _{CC11}	—	300	—	300	μA	CMOS interface RAS, CAS ≤ 0.2V Dout = High-Z
Input leakage current	I _{LI}	–10	10	–10	10	μA	0 V ≤ Vin ≤ 7 V
Output leakage current	I _{LO}	–10	10	–10	10	μA	0 V ≤ Vout ≤ 7 V Dout = disable
Output high voltage	V _{OH}	2.4	V _{CC}	2.4	V _{CC}	V	High Iout = –5 mA
Output low voltage	V _{OL}	0	0.4	0	0.4	V	Low Iout = 4.2 mA

Notes: 1. I_{CC} depends on output load condition when the device is selected. I_{CC} max is specified at the output open condition.

2. Address can be changed once or less while RAS = V_{IL}.

3. Address can be changed once or less while CAS = V_{IH}.

4. CAS = L (≤ 0.2 V) while RAS = L (≤ 0.2 V).

HM5117800 Series

Capacitance ($T_a = 25^\circ\text{C}$, $V_{CC} = 5\text{ V} \pm 10\%$)

Parameter	Symbol	Typ	Max	Unit	Notes
Input capacitance (Address)	C_{I1}	—	5	pF	1
Input capacitance (Clocks)	C_{I2}	—	7	pF	1
Output capacitance (Data-in, Data-out)	$C_{I/O}$	—	7	pF	1, 2

Notes: 1. Capacitance measured with Boonton Meter or effective capacitance measuring method.
2. $\overline{\text{CAS}} = V_{IH}$ to disable Dout.

AC Characteristics ($T_a = 0$ to $+70^\circ\text{C}$, $V_{CC} = 5\text{ V} \pm 10\%$, $V_{SS} = 0\text{ V}$)^{*1, *2, *18}

Test Conditions

- Input rise and fall time: 5 ns
- Input timing reference levels: 0.8 V, 2.4 V
- Output load: 2 TTL gate + C_L (100 pF) (Including scope and jig)

HM5117800 Series

Read, Write, Read-Modify-Write and Refresh Cycles (Common parameters)

		HM5117800					
		-6		-7			
Parameter	Symbol	Min	Max	Min	Max	Unit	Notes
Random read or write cycle time	t _{RC}	110	—	130	—	ns	
$\overline{\text{RAS}}$ precharge time	t _{RP}	40	—	50	—	ns	
$\overline{\text{CAS}}$ precharge time	t _{CP}	10	—	10	—	ns	
$\overline{\text{RAS}}$ pulse width	t _{RAS}	60	10000	70	10000	ns	
$\overline{\text{CAS}}$ pulse width	t _{CAS}	15	10000	18	10000	ns	
Row address setup time	t _{ASR}	0	—	0	—	ns	
Row address hold time	t _{RAH}	10	—	10	—	ns	
Column address setup time	t _{ASC}	0	—	0	—	ns	
Column address hold time	t _{CAH}	10	—	15	—	ns	
$\overline{\text{RAS}}$ to $\overline{\text{CAS}}$ delay time	t _{RCD}	20	45	20	52	ns	3
$\overline{\text{RAS}}$ to column address delay time	t _{RAD}	15	30	15	35	ns	4
$\overline{\text{RAS}}$ hold time	t _{RSH}	15	—	18	—	ns	
$\overline{\text{CAS}}$ hold time	t _{CSH}	60	—	70	—	ns	
$\overline{\text{CAS}}$ to $\overline{\text{RAS}}$ precharge time	t _{CRP}	5	—	5	—	ns	
$\overline{\text{OE}}$ to Din delay time	t _{OED}	15	—	18	—	ns	5
$\overline{\text{OE}}$ delay time from Din	t _{DZO}	0	—	0	—	ns	6
$\overline{\text{CAS}}$ delay time from Din	t _{DZC}	0	—	0	—	ns	6
Transition time (rise and fall)	t _T	3	50	3	50	ns	7

HM5117800 Series

Read Cycle

		HM5117800					
		-6		-7			
Parameter	Symbol	Min	Max	Min	Max	Unit	Notes
Access time from $\overline{\text{RAS}}$	t_{RAC}	—	60	—	70	ns	8, 9
Access time from $\overline{\text{CAS}}$	t_{CAC}	—	15	—	18	ns	9, 10, 17
Access time from address	t_{AA}	—	30	—	35	ns	9, 11, 17
Access time from $\overline{\text{OE}}$	t_{OEA}	—	15	—	18	ns	9
Read command setup time	t_{RCS}	0	—	0	—	ns	
Read command hold time to $\overline{\text{CAS}}$	t_{RCH}	0	—	0	—	ns	12
Read command hold time to $\overline{\text{RAS}}$	t_{RRH}	0	—	0	—	ns	12
Column address to $\overline{\text{RAS}}$ lead time	t_{RAL}	30	—	35	—	ns	
Column address to $\overline{\text{CAS}}$ lead time	t_{CAL}	30	—	35	—	ns	
$\overline{\text{CAS}}$ to output in low-Z	t_{CLZ}	0	—	0	—	ns	
Output data hold time	t_{OH}	3	—	3	—	ns	
Output data hold time from $\overline{\text{OE}}$	t_{OHO}	3	—	3	—	ns	
Output buffer turn-off time	t_{OFF}	—	15	—	15	ns	13
Output buffer turn-off to $\overline{\text{OE}}$	t_{OEZ}	—	15	—	15	ns	13
$\overline{\text{CAS}}$ to Din delay time	t_{CDD}	15	—	18	—	ns	5

Write Cycle

		HM5117800					
		-6		-7			
Parameter	Symbol	Min	Max	Min	Max	Unit	Notes
Write command setup time	t _{WCS}	0	—	0	—	ns	14
Write command hold time	t _{WCH}	10	—	15	—	ns	
Write command pulse width	t _{WP}	10	—	10	—	ns	
Write command to $\overline{\text{RAS}}$ lead time	t _{RWL}	15	—	18	—	ns	
Write command to $\overline{\text{CAS}}$ lead time	t _{CWL}	15	—	18	—	ns	
Data-in setup time	t _{DS}	0	—	0	—	ns	15
Data-in hold time	t _{DH}	10	—	15	—	ns	15

HM5117800 Series

Read-Modify-Write Cycle

		HM5117800					
		-6		-7			
Parameter	Symbol	Min	Max	Min	Max	Unit	Notes
Read-modify-write cycle time	t _{RWC}	155	—	181	—	ns	
RAS to $\overline{WE}$ delay time	t _{RWD}	85	—	98	—	ns	14
CAS to $\overline{WE}$ delay time	t _{CWD}	40	—	46	—	ns	14
Column address to $\overline{WE}$ delay time	t _{AWD}	55	—	63	—	ns	14
$\overline{OE}$ hold time from $\overline{WE}$	t _{OEh}	15	—	18	—	ns	

Refresh Cycle

		HM5117800					
		-6		-7			
Parameter	Symbol	Min	Max	Min	Max	Unit	Notes
CAS setup time (CBR refresh cycle)	t _{CSR}	5	—	5	—	ns	
CAS hold time (CBR refresh cycle)	t _{CHR}	10	—	10	—	ns	
WE setup time (CBR refresh cycle)	t _{WRP}	0	—	0	—	ns	
WE hold time (CBR refresh cycle)	t _{WRH}	10	—	10	—	ns	
RAS precharge to CAS hold time	t _{RPC}	5	—	5	—	ns	

Fast Page Mode Cycle

		HM5117800					
		-6		-7			
Parameter	Symbol	Min	Max	Min	Max	Unit	Notes
Fast page mode cycle time	t _{PC}	40	—	45	—	ns	
Fast page mode $\overline{\text{RAS}}$ pulse width	t _{RASP}	—	100000	—	100000	ns	16
Access time from $\overline{\text{CAS}}$ precharge	t _{CPA}	—	35	—	40	ns	9, 17
$\overline{\text{RAS}}$ hold time from $\overline{\text{CAS}}$ precharge	t _{CPRH}	35	—	40	—	ns	

Fast Page Mode Read-Modify-Write Cycle

		HM5117800					
		-6		-7			
Parameter	Symbol	Min	Max	Min	Max	Unit	Notes
Fast page mode read-modify-write cycle time	t _{PRWC}	85	—	96	—	ns	
$\overline{WE}$ delay time from $\overline{CAS}$ precharge	t _{CPW}	60	—	68	—	ns	14

Refresh

Parameter	Symbol	Max	Unit	Note
Refresh period	t_{REF}	32	ms	2048 cycles
Refresh period (L-version)	t_{REF}	128	ms	2048 cycles

Self Refresh Mode (L-version)

		HM5117800L					
		-6		-7			
Parameter	Symbol	Min	Max	Min	Max	Unit	Notes
$\overline{RAS}$ pulse width (self refresh)	t _{RASS}	100	—	100	—	μs	19, 20, 21, 22
$\overline{RAS}$ precharge time (self refresh)	t _{RPS}	110	—	130	—	ns	
$\overline{CAS}$ hold time (self refresh)	t _{CHS}	−50	—	−50	—	ns	

Notes: 1. AC measurements assume $t_T = 5$ ns.


2. An initial pause of 200 μs is required after power up followed by a minimum of eight initialization cycles (any combination of cycles containing $\overline{RAS}$ -only refresh or $\overline{CAS}$ -before- $\overline{RAS}$ refresh). If the internal refresh counter is used, a minimum of eight $\overline{CAS}$ -before- $\overline{RAS}$ refresh cycles are required.
3. Operation with the t_{RCD} (max) limit insures that t_{RAC} (max) can be met, t_{RCD} (max) is specified as a reference point only; if t_{RCD} is greater than the specified t_{RCD} (max) limit, then access time is controlled exclusively by t_{CAC} .
4. Operation with the t_{RAD} (max) limit insures that t_{RAC} (max) can be met, t_{RAD} (max) is specified as a reference point only; if t_{RAD} is greater than the specified t_{RAD} (max) limit, then access time is controlled exclusively by t_{AA} .
5. Either t_{OED} or t_{CDD} must be satisfied.
6. Either t_{DZO} or t_{DZC} must be satisfied.
7. V_{IH} (min) and V_{IL} (max) are reference levels for measuring timing of input signals. Also, transition times are measured between V_{IH} (min) and V_{IL} (max).
8. Assumes that $t_{RCD} \leq t_{RCD}$ (max) and $t_{RAD} \leq t_{RAD}$ (max). If t_{RCD} or t_{RAD} is greater than the maximum recommended value shown in this table, t_{RAC} exceeds the value shown.
9. Measured with a load circuit equivalent to 2 TTL loads and 100 pF.
10. Assumes that $t_{RCD} \geq t_{RCD}$ (max) and $t_{RCD} + t_{CAC}$ (max) $\geq t_{RAD} + t_{AA}$ (max).
11. Assumes that $t_{RAD} \geq t_{RAD}$ (max) and $t_{RCD} + t_{CAC}$ (max) $\leq t_{RAD} + t_{AA}$ (max).

HM5117800 Series


12. Either t_{RCH} or t_{RRH} must be satisfied for a read cycles.
13. t_{OFF} (max) and t_{OEZ} (max) define the time at which the outputs achieve the open circuit condition and are not referred to output voltage levels.
14. t_{WCS} , t_{RWD} , t_{CWD} , t_{AWD} and t_{CPW} are not restrictive operating parameters. They are included in the data sheet as electrical characteristics only; if $t_{WCS} \geq t_{WCS}(\min)$, the cycle is an early write cycle and the data out pin will remain open circuit (high impedance) throughout the entire cycle; if $t_{RWD} \geq t_{RWD}(\min)$, $t_{CWD} \geq t_{CWD}(\min)$, and $t_{AWD} \geq t_{AWD}(\min)$, or $t_{CWD} \geq t_{CWD}(\min)$, $t_{AWD} \geq t_{AWD}(\min)$ and $t_{CPW} \geq t_{CPW}(\min)$, the cycle is a read-modify-write and the data output will contain data read from the selected cell; if neither of the above sets of conditions is satisfied, the condition of the data out (at access time) is indeterminate.
15. These parameters are referred to $\overline{CAS}$ leading edge in early write cycles and to $\overline{WE}$ leading edge in delayed write or read-modify-write cycles.
16. t_{RASP} defines $\overline{RAS}$ pulse width in Fast page mode cycles.
17. Access time is determined by the longest among t_{AA} , t_{CAC} and t_{CPA} .
18. In delayed write or read-modify-write cycles, $\overline{OE}$ must disable output buffer prior to applying data to the device.
19. Please do not use t_{RASS} timing, $10\ \mu s \leq t_{RASS} \leq 100\ \mu s$. During this period, the device is in transition state from normal operation mode to self refresh mode. If $t_{RASS} \geq 100\ \mu s$, then $\overline{RAS}$ precharge time should use t_{RPS} instead of t_{RP} .
20. If you use $\overline{RAS}$ only refresh or CBR burst refresh mode in normal read/write cycles, 2048 cycles of distributed CBR refresh with $15.6\ \mu s$ interval should be executed within 32 ms immediately after exiting from and before entering into the self refresh mode.
21. If you use distributed CBR refresh mode with $15.6\ \mu s$ interval in normal read/write cycle, CBR refresh should be executed within $15.6\ \mu s$ immediately after exiting from and before entering into self refresh mode.
22. Repetitive self refresh mode without refreshing all memory is not allowed. Once you exit from self refresh mode, all memory cells need to be refreshed before re-entering the self refresh mode again.
23. XXX: H or L (H: $V_{IH}(\min) \leq V_{IN} \leq V_{IH}(\max)$, L: $V_{IL}(\min) \leq V_{IN} \leq V_{IL}(\max)$)
/////: Invalid Dout
When the address, clock and input pins are not described on timing waveforms, their pins must be applied V_{IH} or V_{IL} .

HM5117800 Series

Early Write Cycle

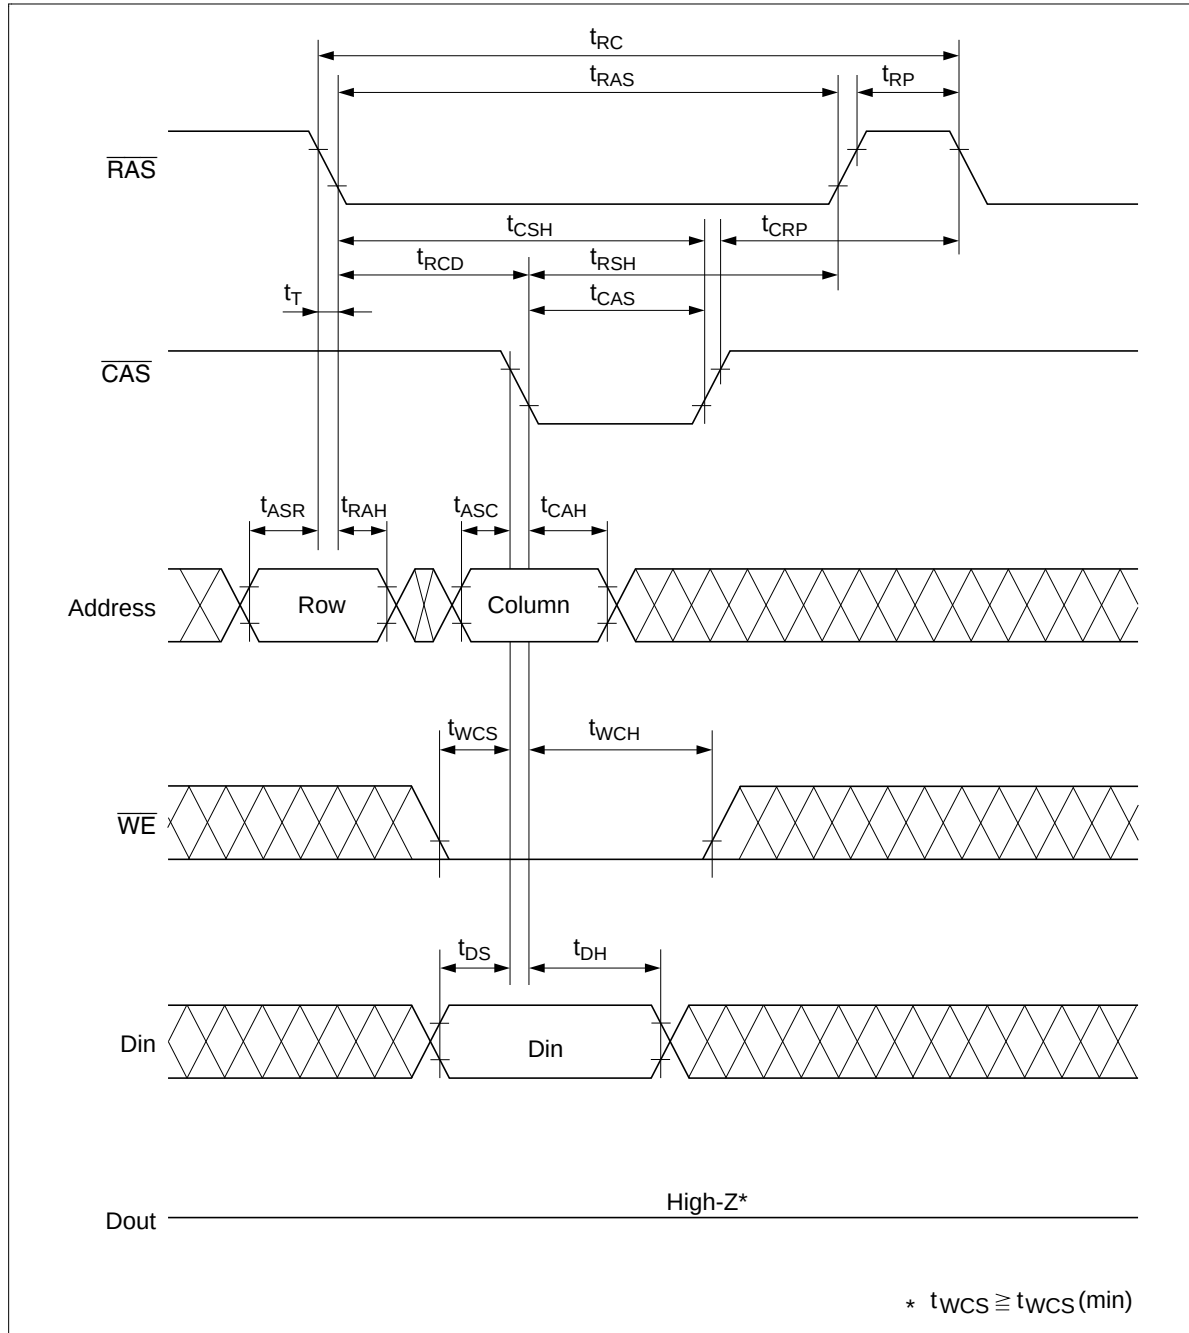


Delayed Write Cycle^{*18}

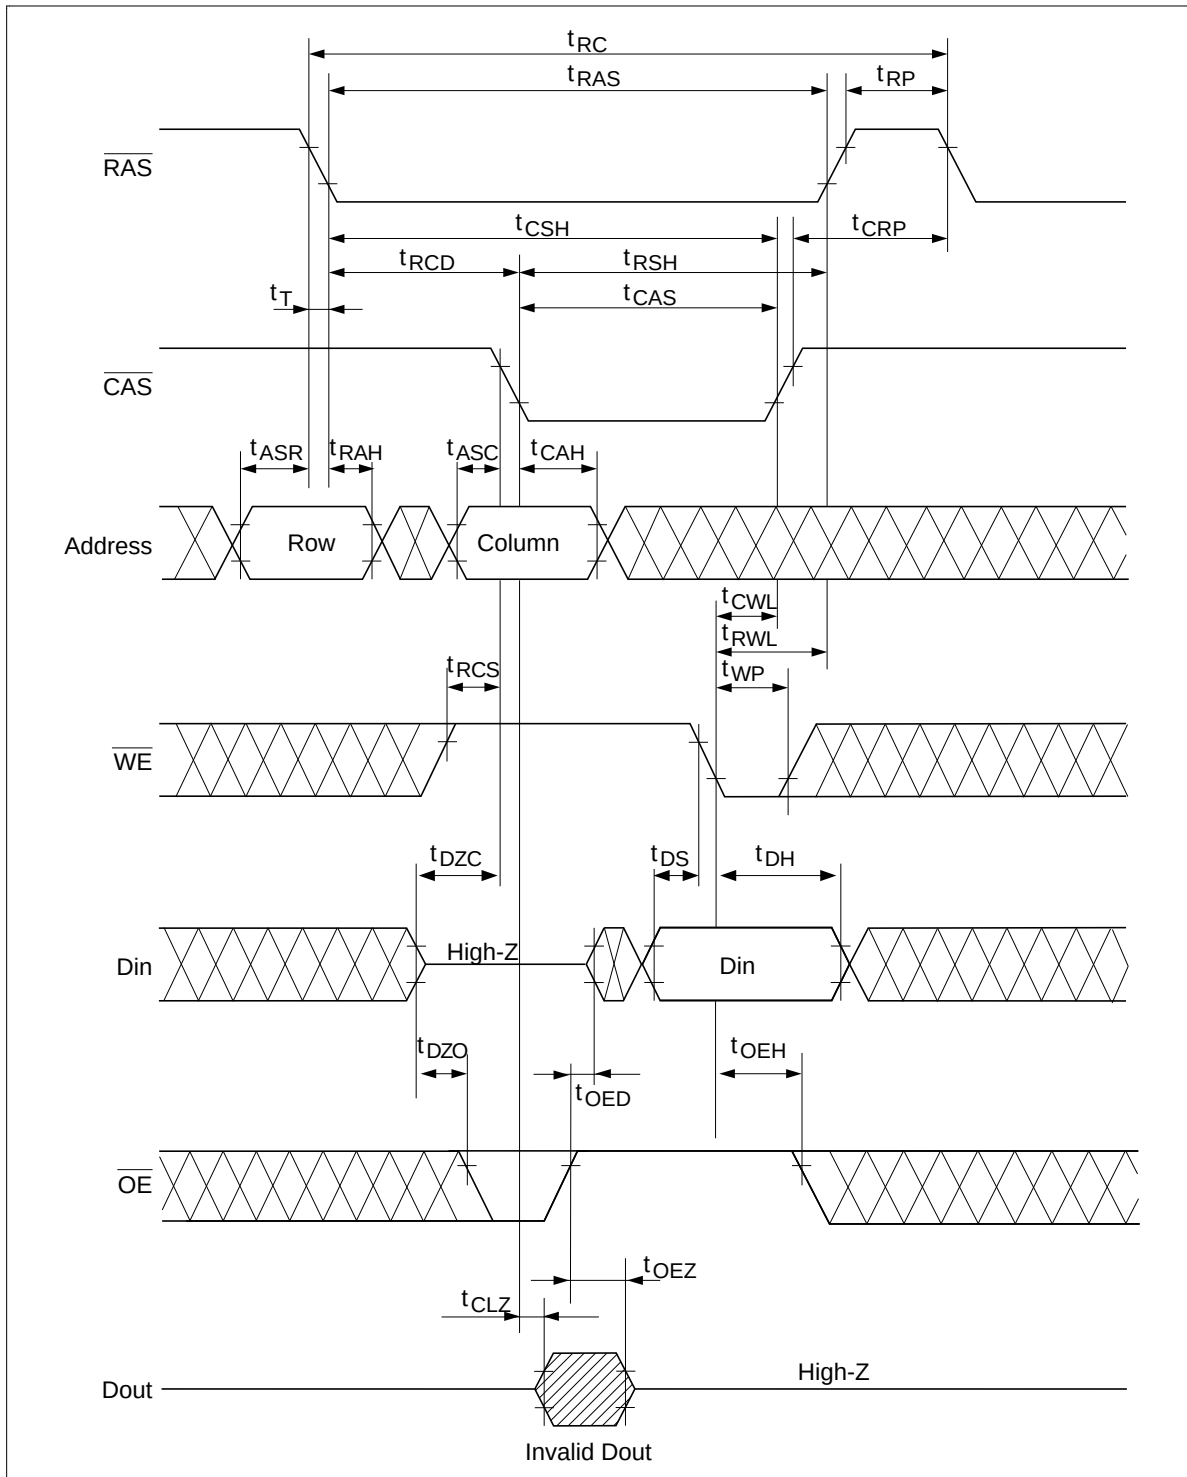


Read-Modify-Write Cycle^{*18}

HM5117800 Series

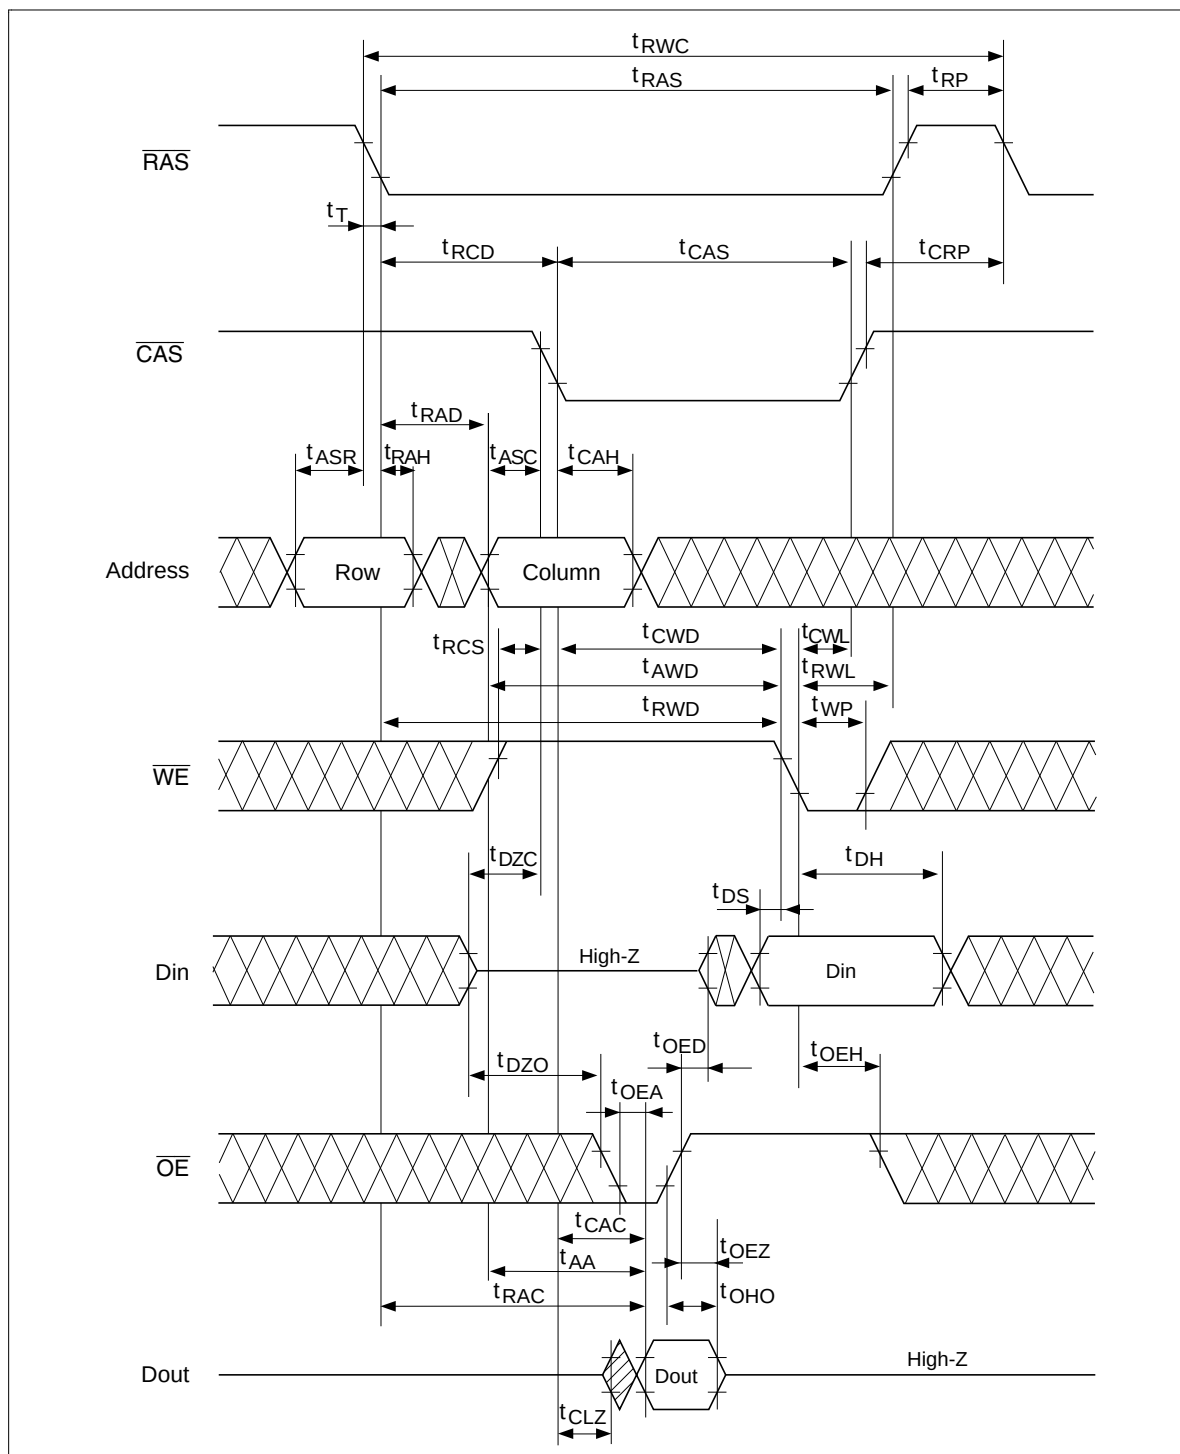


$\overline{\text{RAS}}$ -Only Refresh Cycle

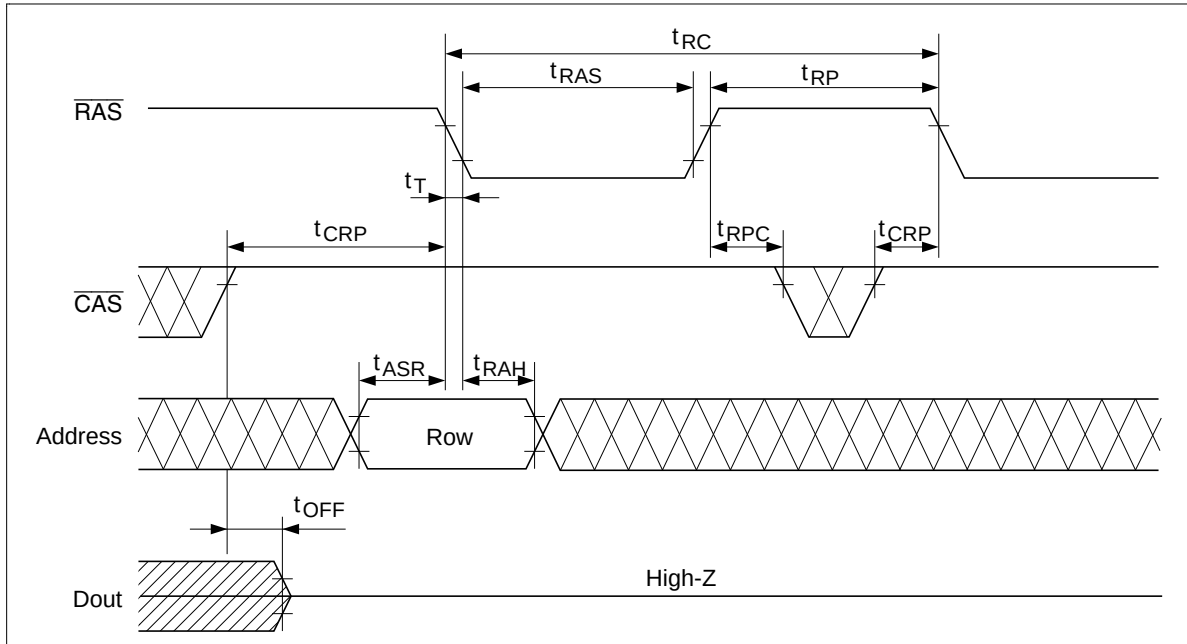


$\overline{\text{CAS}}$ -Before- $\overline{\text{RAS}}$ Refresh Cycle

HM5117800 Series

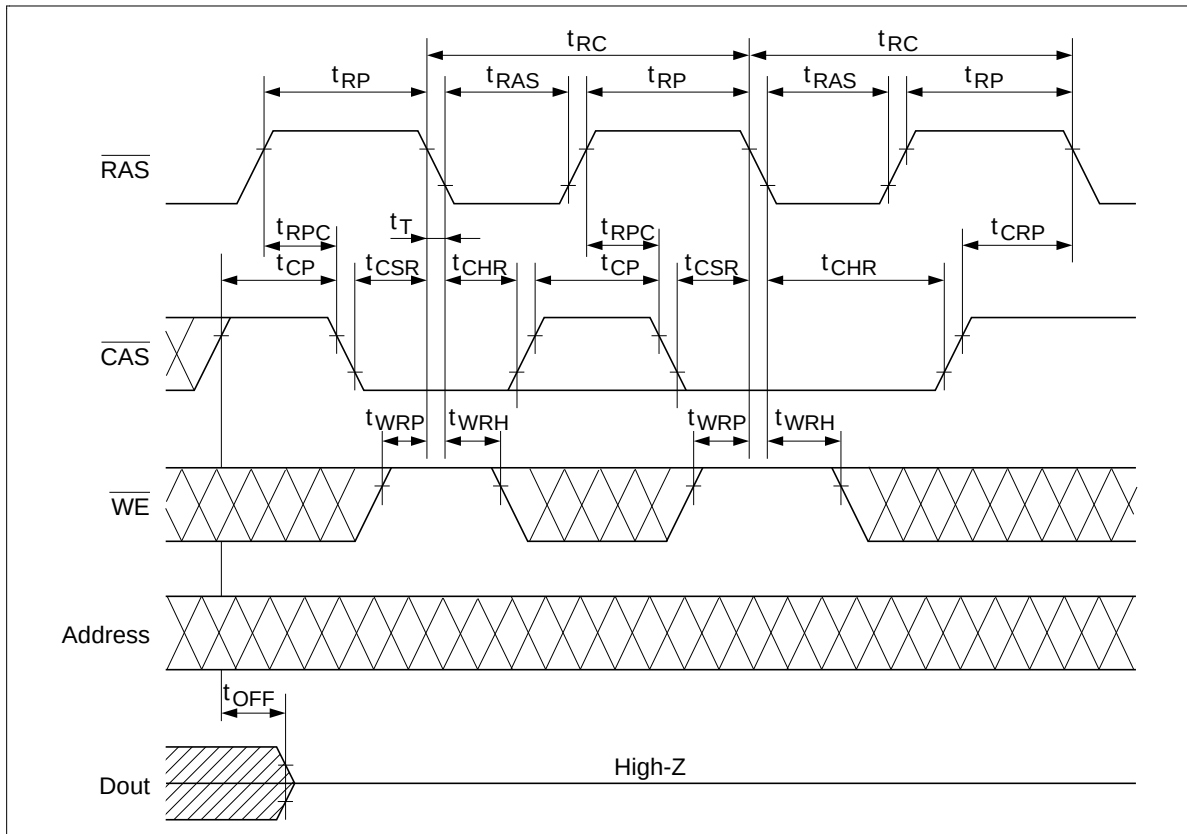


Hidden Refresh Cycle

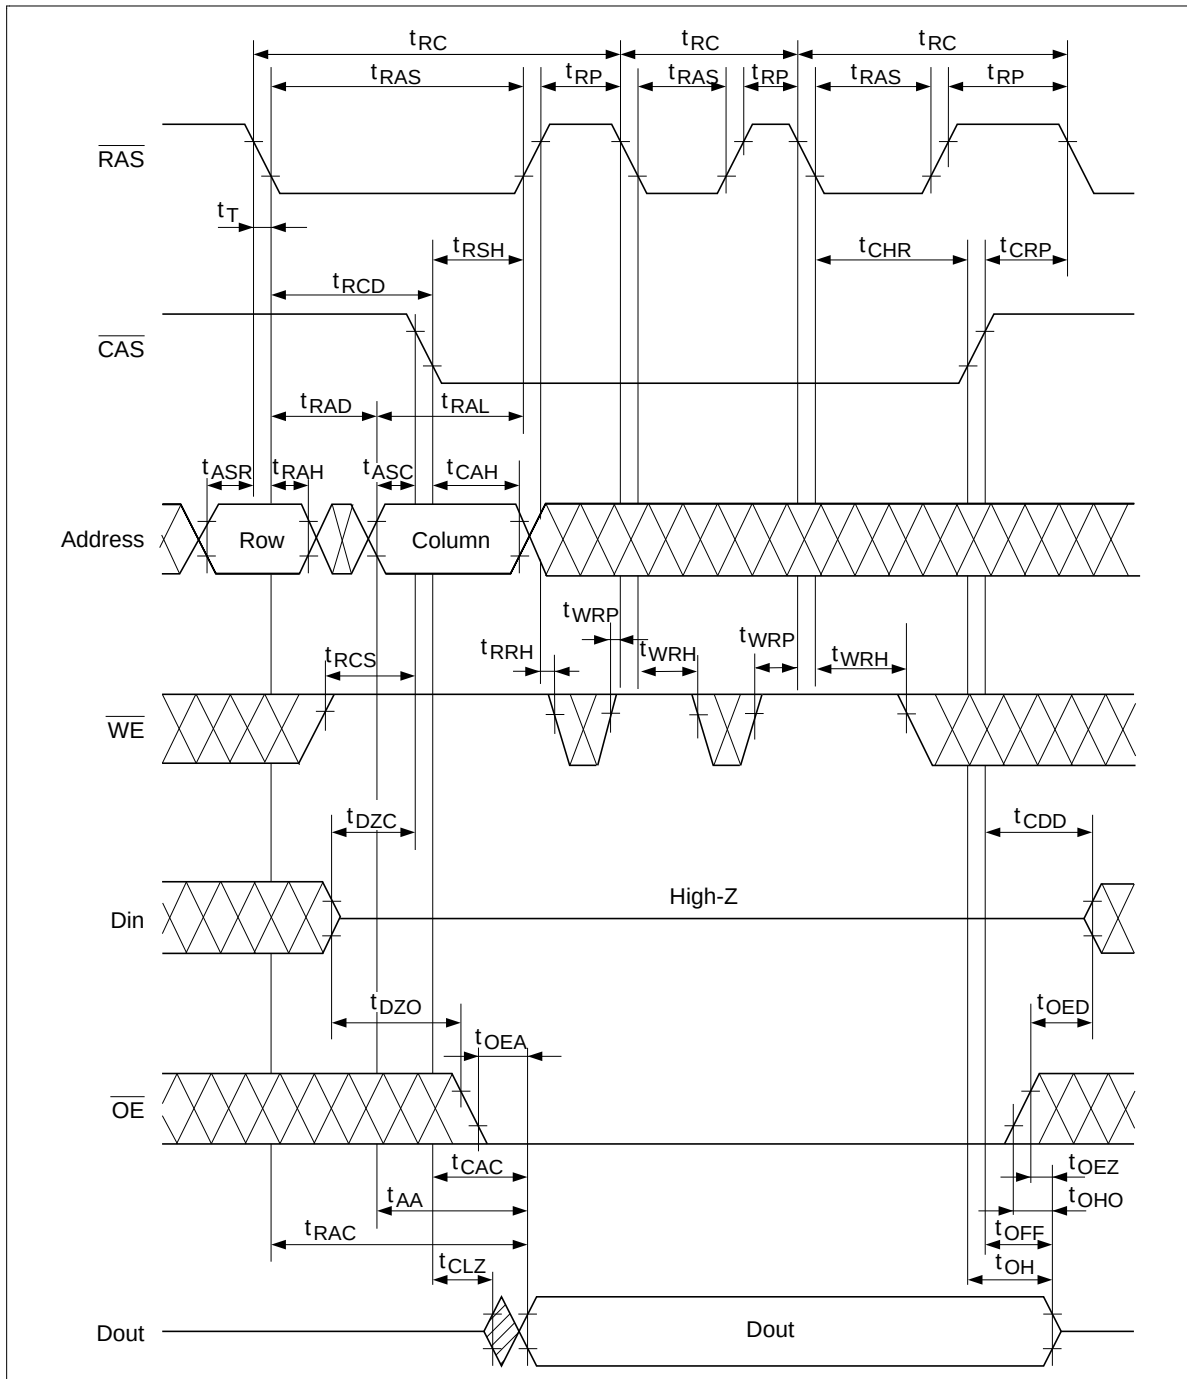


HM5117800 Series

Fast Page Mode Read Cycle

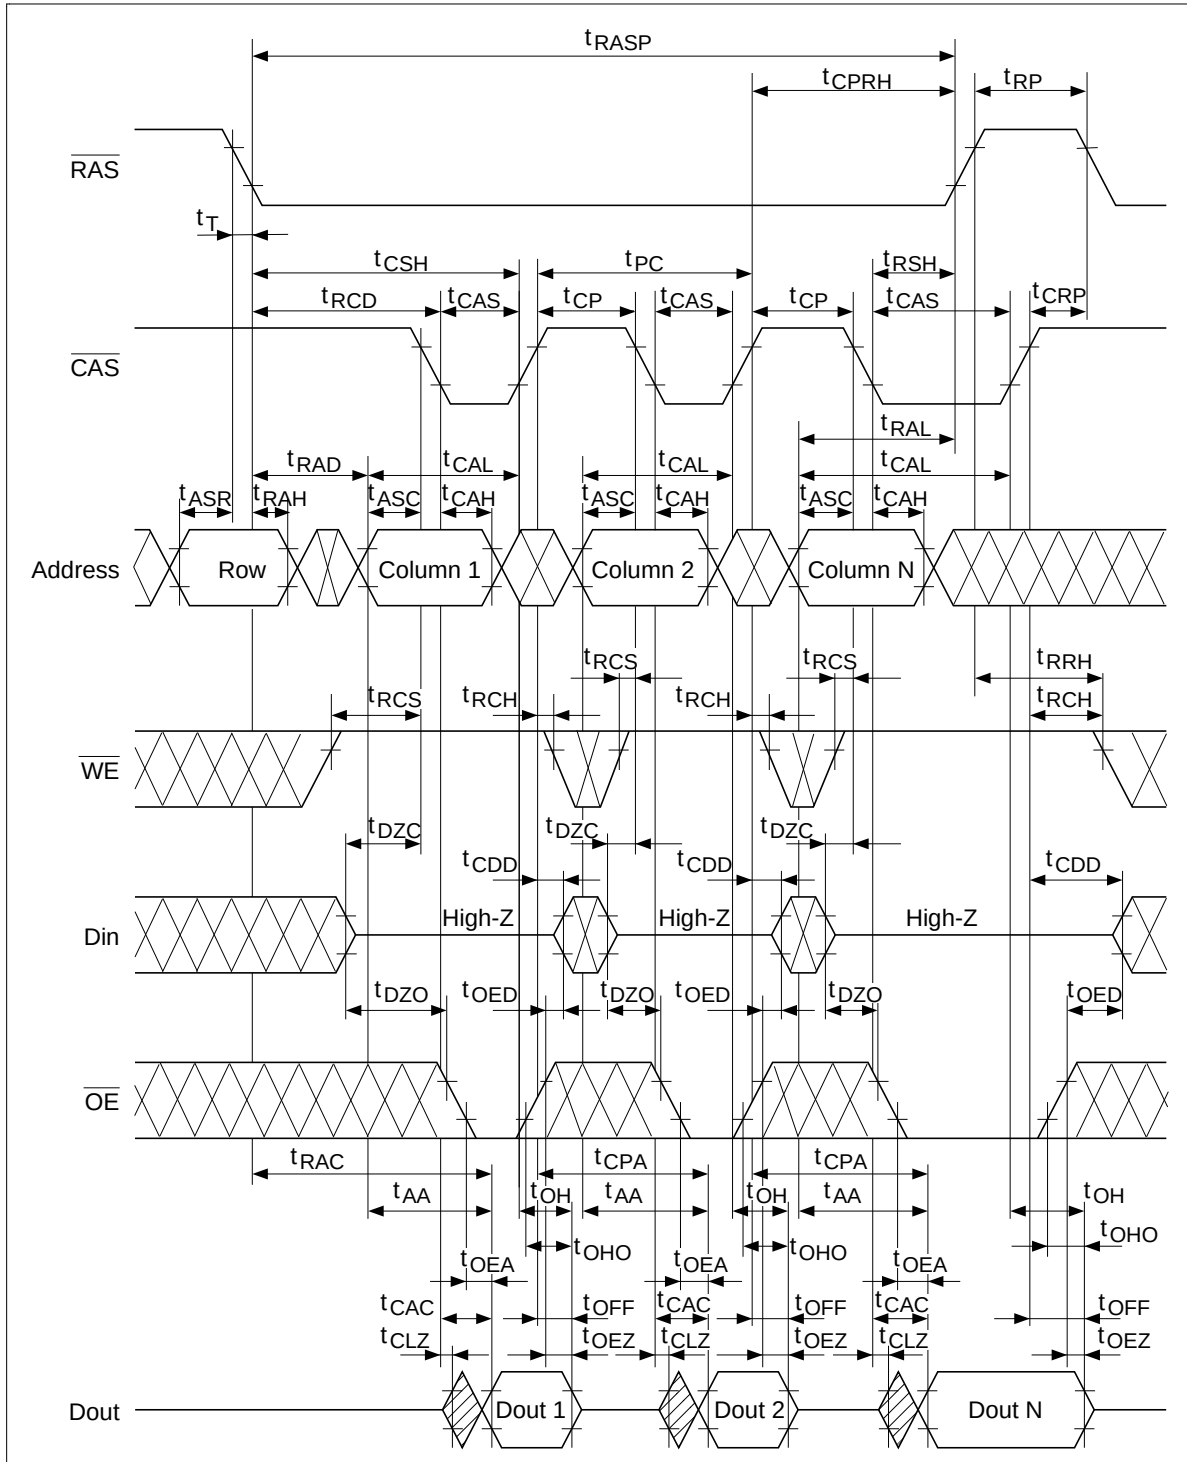


Fast Page Mode Early Write Cycle

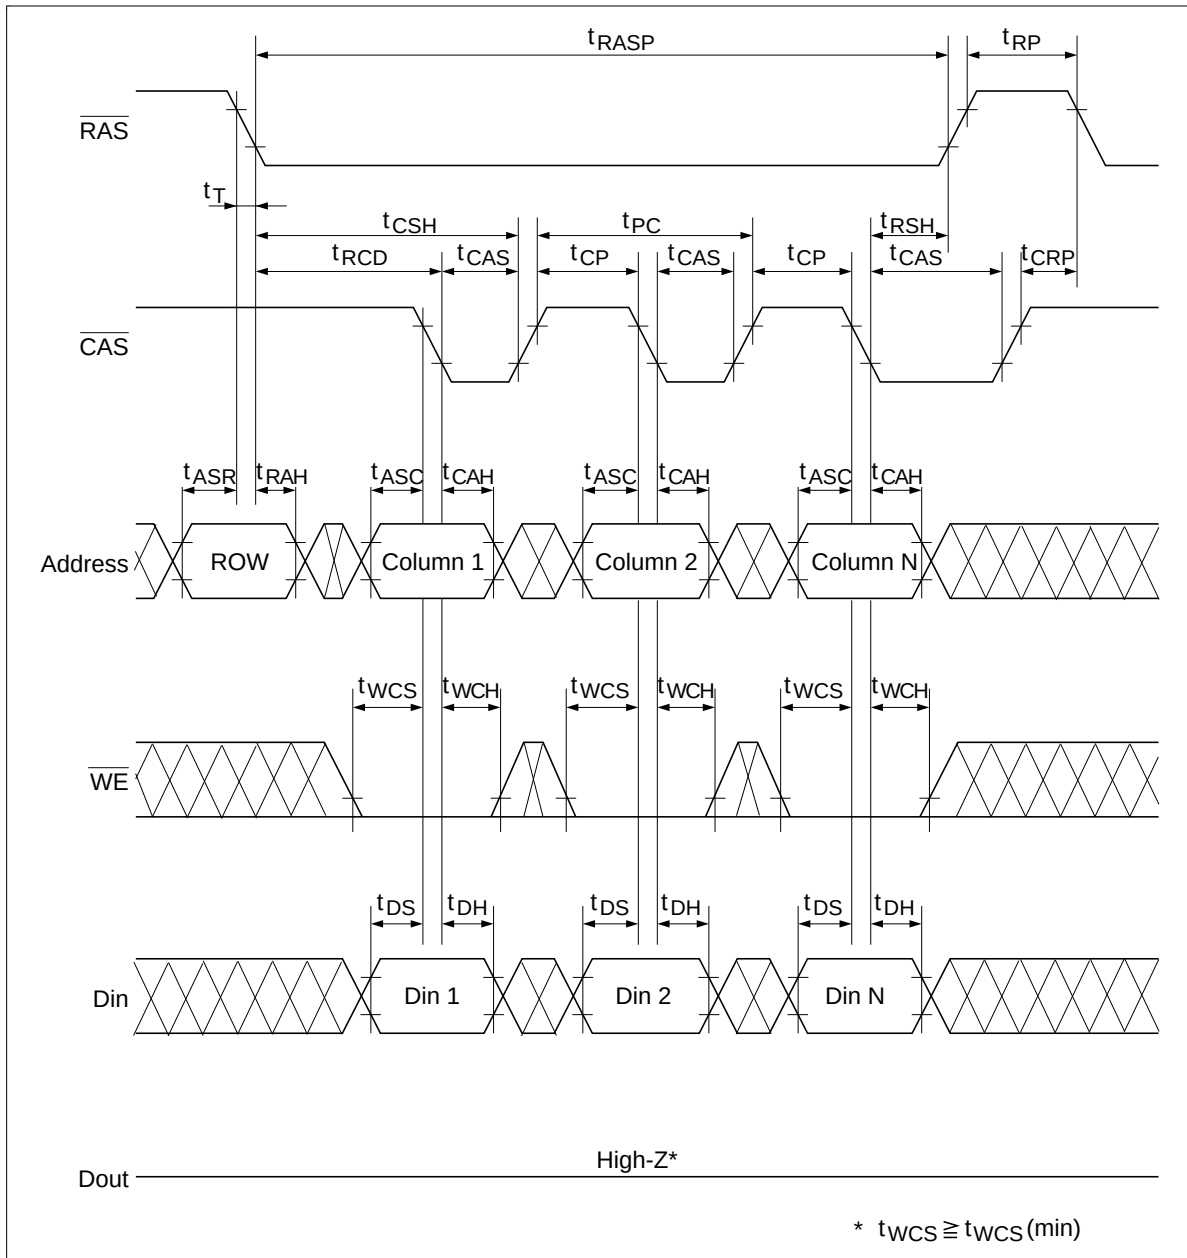


Fast Page Mode Delayed Write Cycle^{*18}

HM5117800 Series

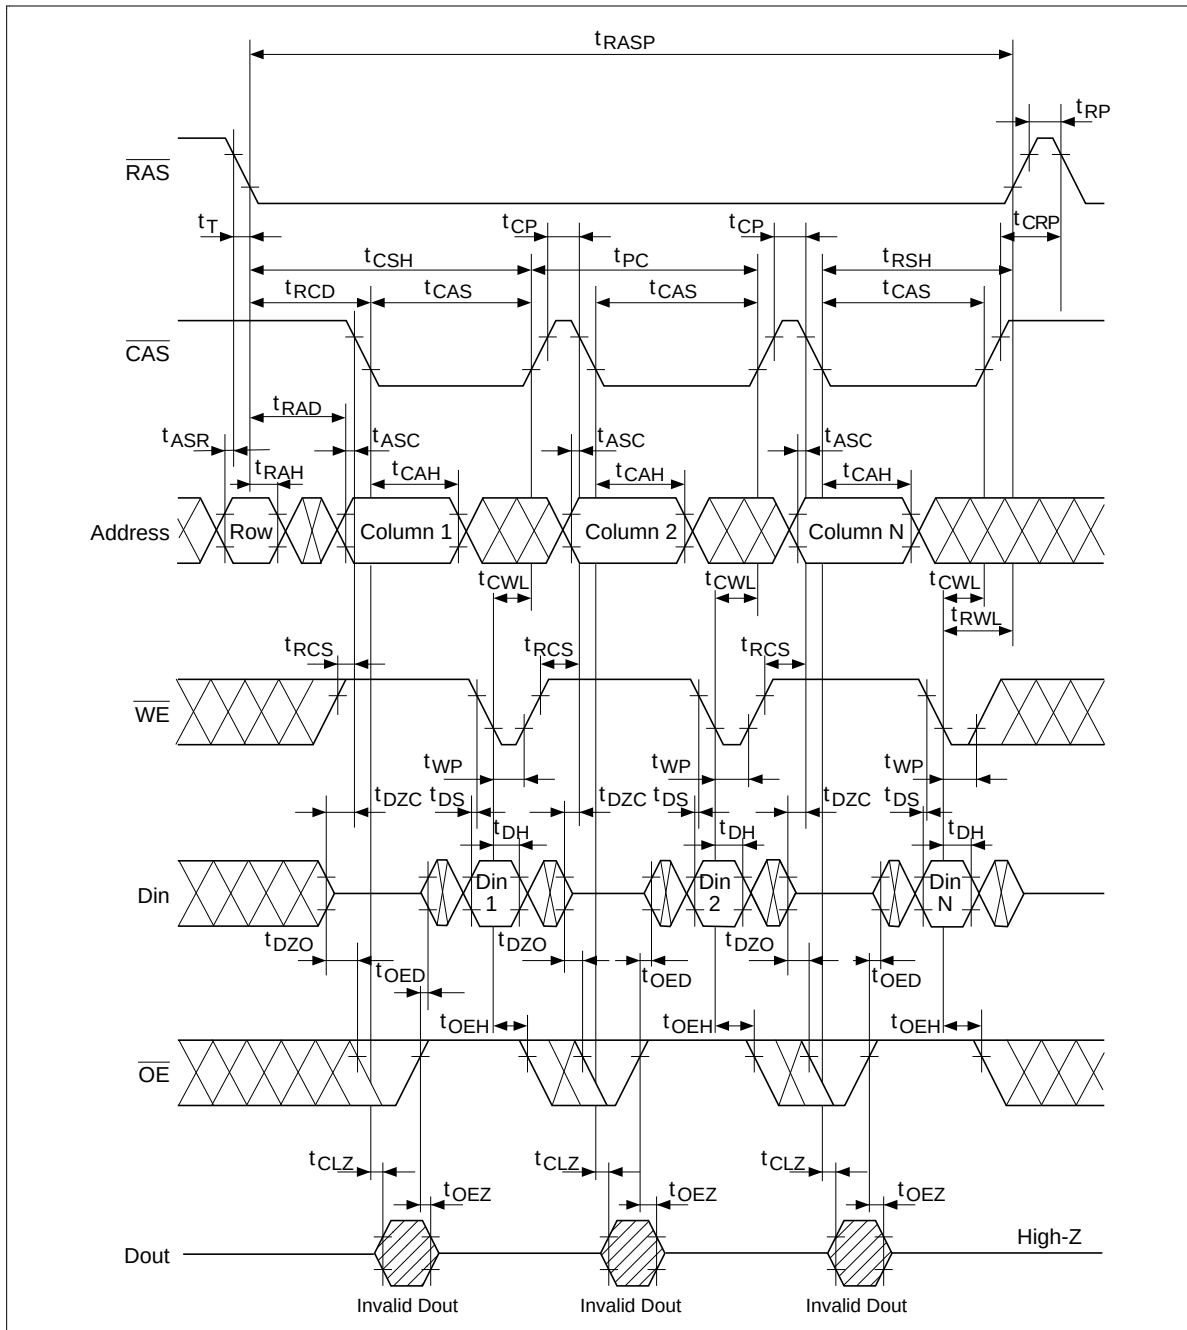


Fast Page Mode Read-Modify-Write Cycle^{*18}

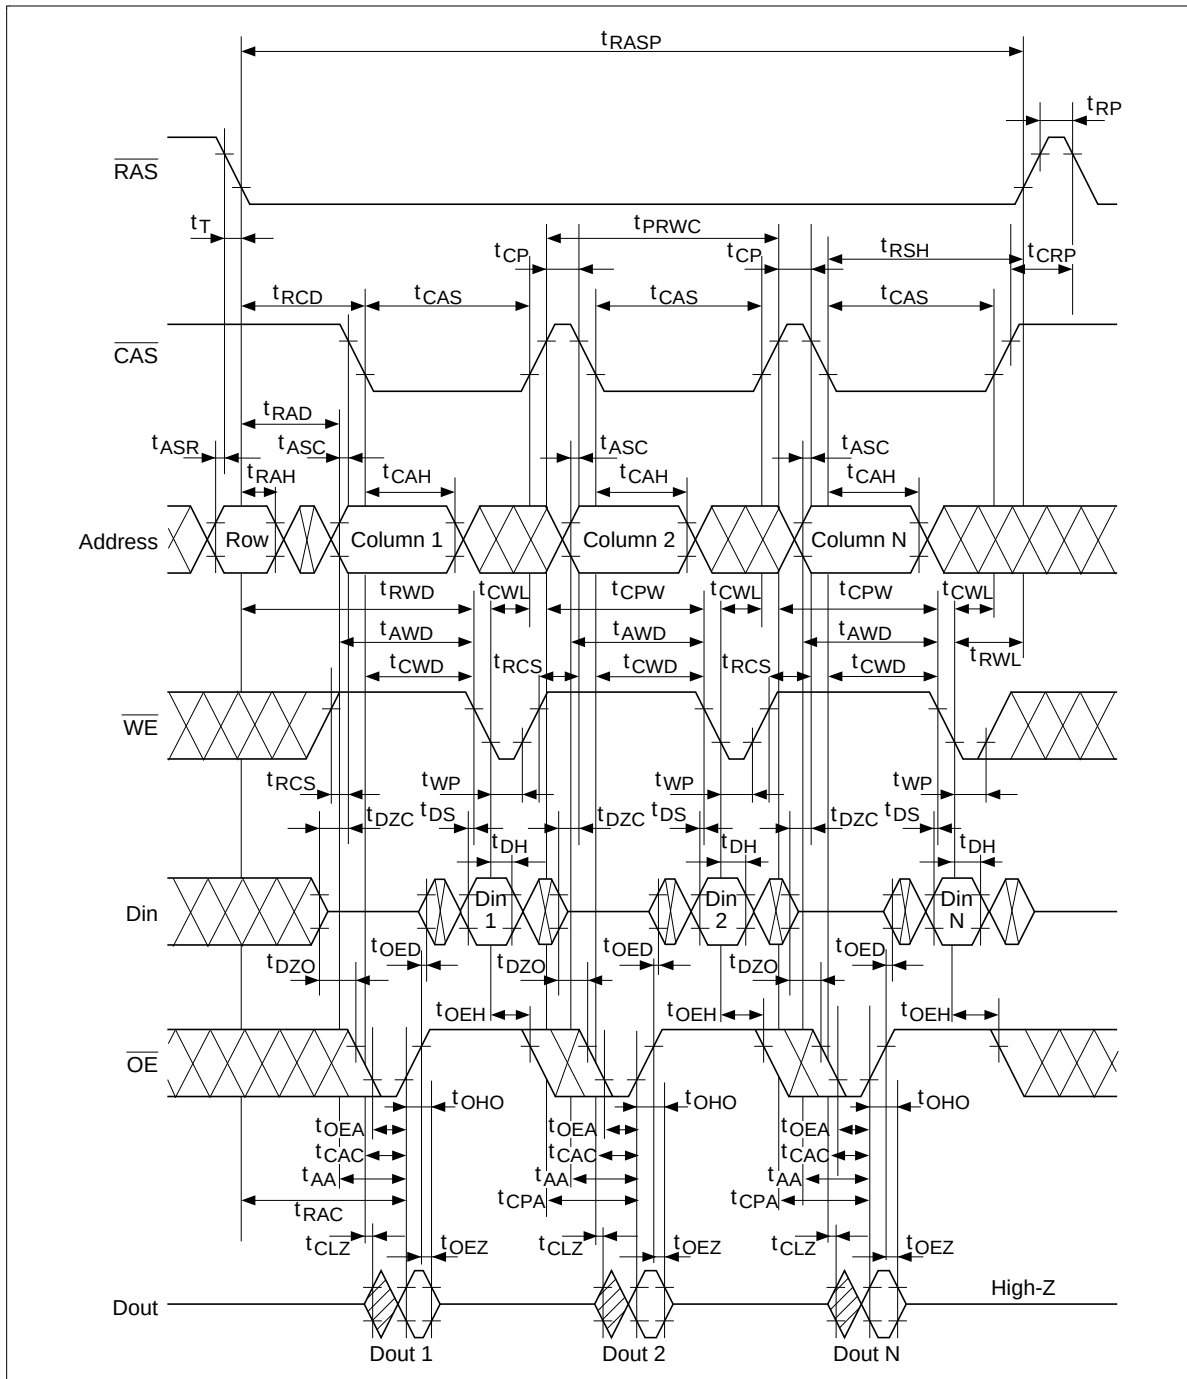

Self Refresh Cycle (L-version)*19, 20, 21, 22

HM5117800 Series

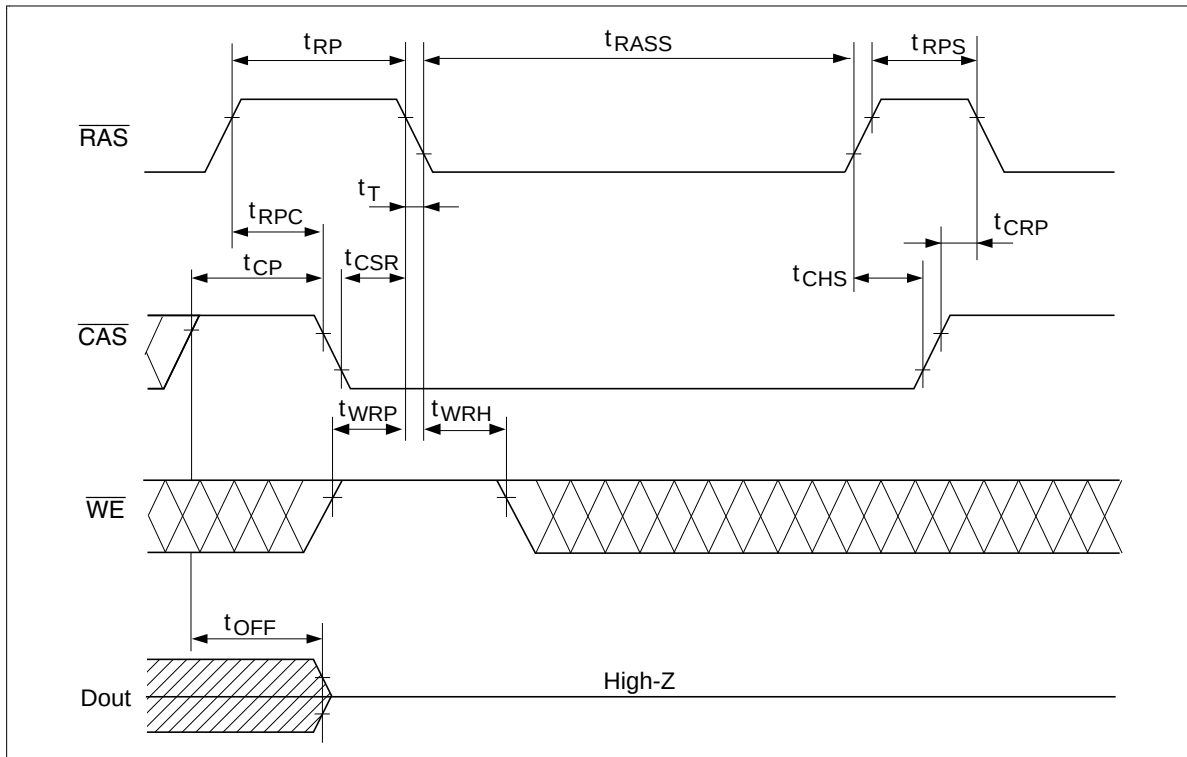


Package Dimensions

HM5117800J/LJ Series (CP-28DA)

HM5117800 Series

Unit: mm

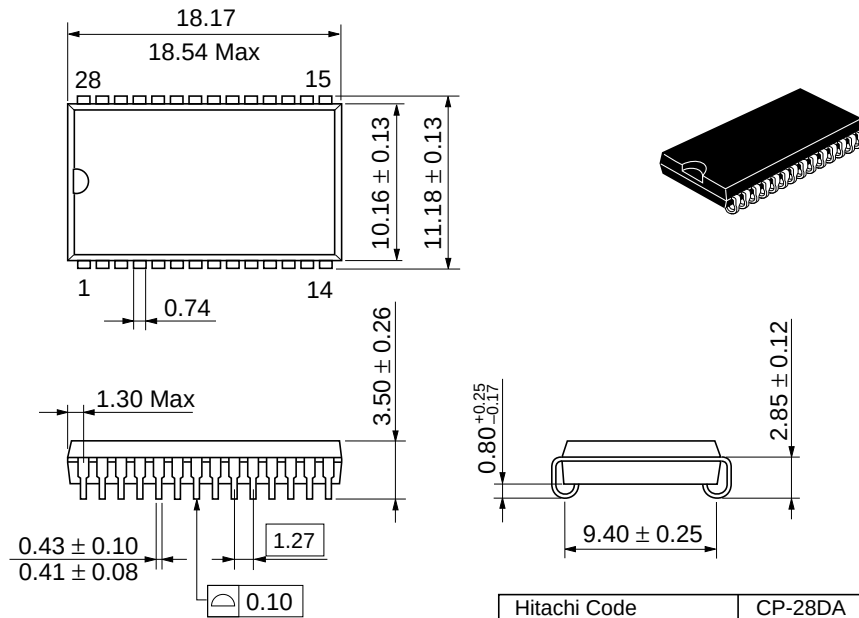


Dimension including the plating thickness
Base material dimension

Hitachi Code	CP-28DA
JEDEC	Conforms
EIAJ	Conforms
Weight (reference value)	1.16 g

HM5117800S/LS Series (CP-28DNA)

HM5117800 Series

Unit: mm

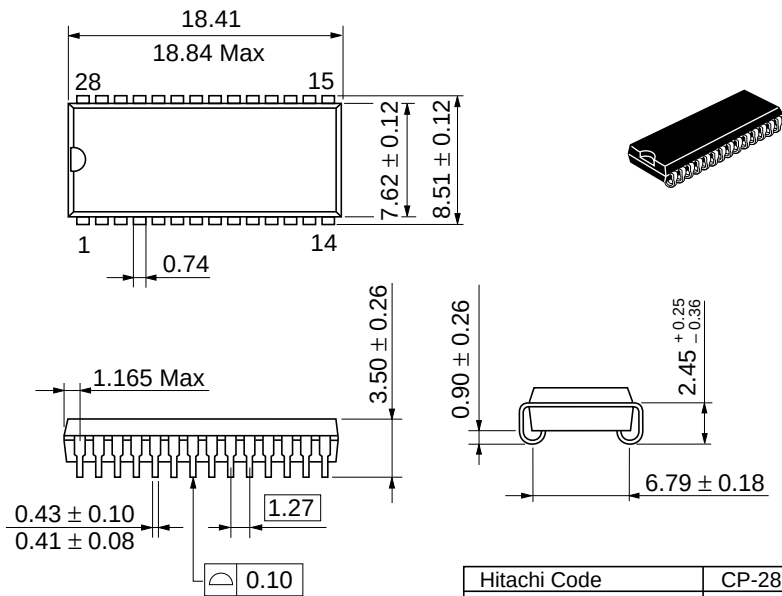


Dimension including the plating thickness
Base material dimension

Hitachi Code	CP-28DNA
JEDEC	—
EIAJ	—
Weight (reference value)	0.95 g

HM5117800TT/LTT Series (TTP-28DA)

Unit: mm

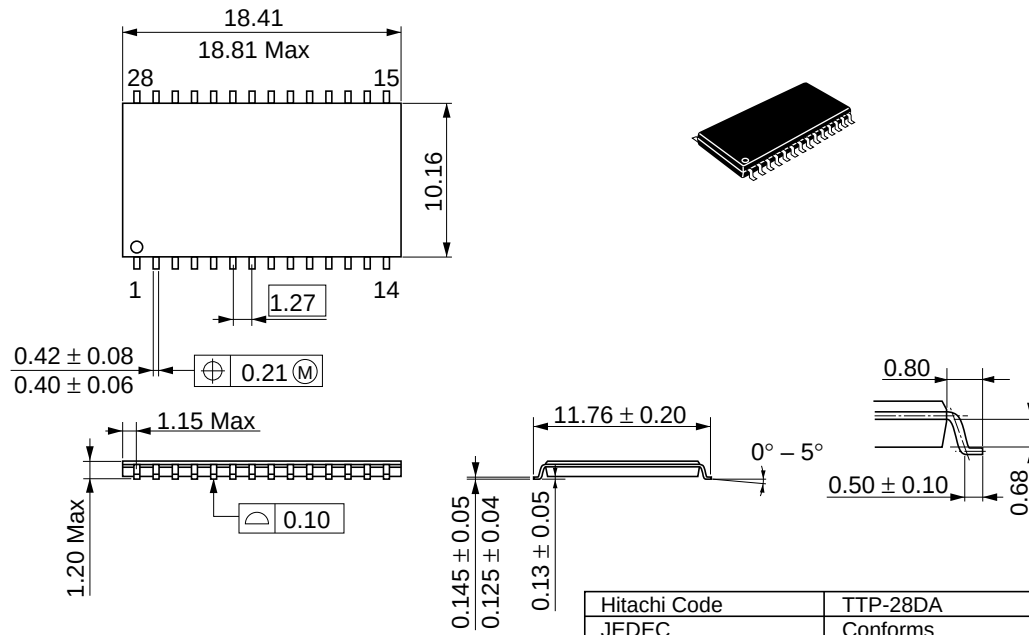


Dimension including the plating thickness
Base material dimension

Hitachi Code	TTP-28DA
JEDEC	Conforms
EIAJ	—
Weight (reference value)	0.43 g

HM5117800 Series

HM5117800TS/LTS Series (TTP-28DB)

Unit: mm

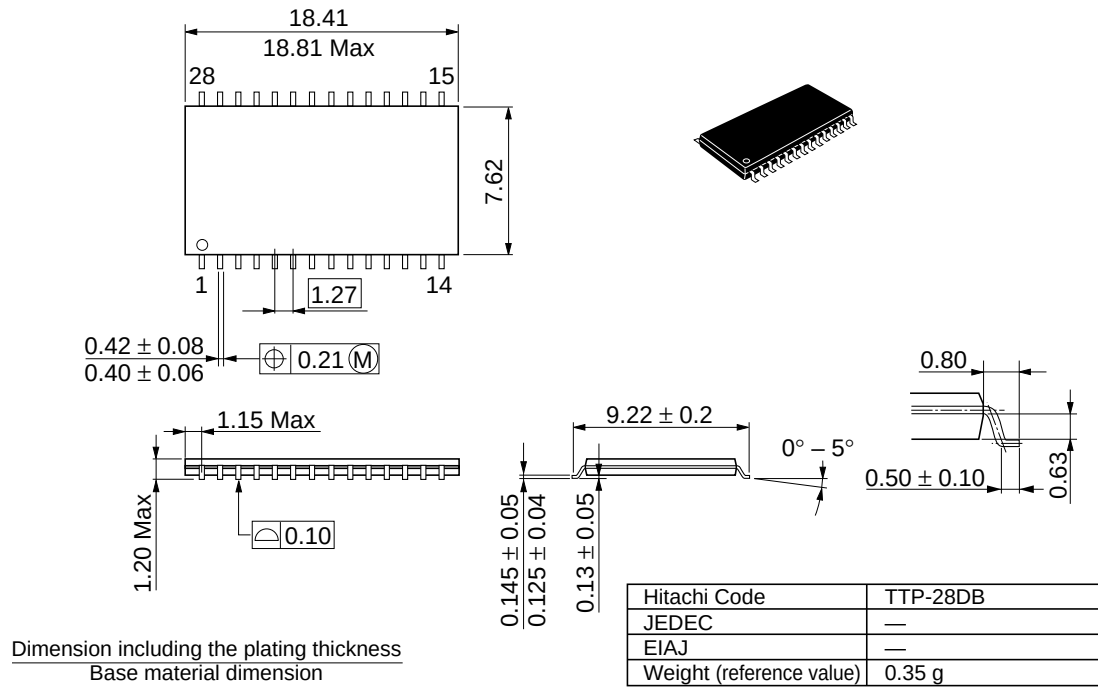

When using this document, keep the following in mind:

1. This document may, wholly or partially, be subject to change without notice.
2. All rights are reserved: No one is permitted to reproduce or duplicate, in any form, the whole or part of this document without Hitachi's permission.
3. Hitachi will not be held responsible for any damage to the user that may result from accidents or any other reasons during operation of the user's unit according to this document.
4. Circuitry and other examples described herein are meant merely to indicate the characteristics and performance of Hitachi's semiconductor products. Hitachi assumes no responsibility for any intellectual property claims or other problems that may result from applications based on the examples described herein.
5. No license is granted by implication or otherwise under any patents or other rights of any third party or Hitachi, Ltd.
6. **MEDICAL APPLICATIONS:** Hitachi's products are not authorized for use in MEDICAL APPLICATIONS without the written consent of the appropriate officer of Hitachi's sales company. Such use includes, but is not limited to, use in life support systems. Buyers of Hitachi's products are requested to notify the relevant Hitachi sales offices when planning to use the products in MEDICAL APPLICATIONS.

HITACHI

Hitachi, Ltd.

Semiconductor & IC Div.
Nippon Bldg., 2-6-2, Ohte-machi, Chiyoda-ku, Tokyo 100, Japan
Tel: Tokyo (03) 3270-2111
Fax: (03) 3270-5109

For further information write to:

Hitachi Semiconductor
(America) Inc.
2000 Sierra Point Parkway
Brisbane, CA. 94005-1897
U S A
Tel: 800-285-1601
Fax: 303-297-0447

Hitachi Europe GmbH
Continental Europe
Dornacher Straße 3
D-85622 Feldkirchen
München
Tel: 089-9 91 80-0
Fax: 089-9 29 30-00

Hitachi Europe Ltd.
Electronic Components Div.
Northern Europe Headquarters
Whitebrook Park
Lower Cookham Road
Maidenhead
Berkshire SL6 8YA
United Kingdom
Tel: 01628-585000
Fax: 01628-585160

Hitachi Asia Pte. Ltd.
16 Collyer Quay #20-00
Hitachi Tower
Singapore 049318
Tel: 535-2100
Fax: 535-1533

Hitachi Asia (Hong Kong) Ltd.
Unit 706, North Tower,
World Finance Centre,
Harbour City, Canton Road
Tsim Sha Tsui, Kowloon
Hong Kong
Tel: 27359218
Fax: 27306071

Copyright © Hitachi, Ltd., 1997. All rights reserved. Printed in Japan.

HM5117800 Series

Revision Record

Rev.	Date	Contents of Modification	Drawn by	Approved by
1.0	Sep. 30, 1996	Initial issue	Y. Kasama	M. Mishima
2.0	Dec. 5, 1996	Addition of HM5117800-5 Series Addition of HM5117800S/LS Series (CP-28DNA) Addition of HM5117800TS/LTS Series (TTP-28DB) Power dissipation (active) 660/605 mW(max) to 605/550/495 mW (max) DC Characteristics I_{CC1} max: 120/110 mA to 110/100/90 mA I_{CC3} max: 120/110 mA to 110/100/90 mA I_{CC6} max: 120/110 mA to 110/100/90 mA I_{CC7} max: 100/90 mA to 100/90/85 mA AC Characteristics t_{RRH} min: 0/0 ns to 5/5/5 ns t_{RPC} min: 0/0 ns to 5/5/5 ns	Y. Kasama	M. Mishima
3.0	Feb. 24, 1997	AC Characteristics t_{RRH} min: 5/5/5 ns to 0/0/0 ns	Y. Kasama	Y. Matsuno
4.0	Jun. 20, 1997	Deletion of HM5117800-5 Series AC Characteristics Notes 10: $t_{RCD} \geq t_{RCD} \text{ (max)}$ and $t_{RAD} \leq t_{RAD} \text{ (max)}$ to $t_{RCD} \geq t_{RCD} \text{ (max)}$ and $t_{RCD} + t_{CAC} \text{ (max)} \geq t_{RAD} + t_{AA} \text{ (max)}$ Notes 11: $t_{RCD} \leq t_{RCD} \text{ (max)}$ and $t_{RAD} \geq t_{RAD} \text{ (max)}$ to $t_{RAD} \geq t_{RAD} \text{ (max)}$ and $t_{RCD} + t_{CAC} \text{ (max)} \leq t_{RAD} + t_{AA} \text{ (max)}$.	Y. Kasama	Y. Matsuno
5.0	Nov. 1997	Change of Subtitle		