

100MHz, JFET Input, High Slew Rate, Uncompensated, Operational Amplifier


The HA-5160 is a wideband, uncompensated, operational amplifier with FET/Bipolar technologies and Dielectric Isolation. This monolithic amplifier features superior high frequency capabilities further enhanced by precision laser trimming of the input stage to provide excellent input characteristics. This device has excellent phase margin at a closed loop gain of 10 without external compensation.

The HA-5160 offers a number of important advantages over similar FET input op amps from other manufacturers. In addition to superior bandwidth and settling characteristics, the Intersil devices have nearly constant slew rate, bandwidth, and settling characteristics over the operating temperature range. This provides the user predictable performance in applications where settling time, full power bandwidth, closed loop bandwidth, or phase shift is critical. Note also that Intersil specified all parameters at ambient (rather than junction) temperature to provide the designer meaningful data to predict actual operating performance.

Complementing the HA-5160's predictable and excellent dynamic characteristics are very low input offset voltage, very low input bias current, and a very high input impedance. This ideal combination of features make these amplifiers most suitable for precision, high speed, data acquisition system designs and for a wide variety of signal conditioning applications. The HA-5160 provides excellent performance for applications which require both precision and high speed performance.

Military version (/883) data sheets are available upon request.

Pinout

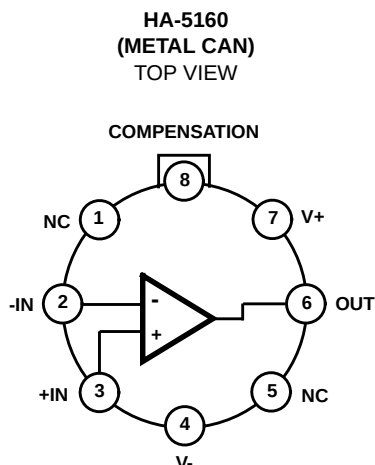

NOTE: Case connected to V-.

Features

- Wide Gain Bandwidth ($A_V \geq 10$) 100MHz
- High Slew Rate 120V/ μ s
- Settling Time 280ns
- Power Bandwidth 1.9MHz
- Offset Voltage 1.0mV
- Bias Current 20pA
- Compensation Pin for Unity Gain Capability

Applications

- Video and RF Amplifiers
- Data Acquisition
- Pulse Amplifiers
- Precision Signal Generation

Ordering Information

PART NUMBER	TEMP. RANGE (°C)	PACKAGE	PKG. NO.
HA2-5160-2	-55 to 125	8 Pin Metal Can	T8.C
HA2-5160-5	0 to 75	8 Pin Metal Can	T8.C

Absolute Maximum Ratings

Voltage Between V+ and V- 40V
 Differential Input Voltage 40V
 Peak Output Current Full Short Circuit Protection

Operating conditions

Temperature Ranges
 HA-5160-2 -55°C to 125°C
 HA-5160-5 0°C to 75°C
 Supply Voltage Range (Typical) $\pm 7V$ to $\pm 18V$

CAUTION: Stresses above those listed in "Absolute Maximum Ratings" may cause permanent damage to the device. This is a stress only rating and operation of the device at these or any other conditions above those indicated in the operational sections of this specification is not implied.

NOTE:

1. θ_{JA} is measured with the component mounted on an evaluation PC board in free air.

Thermal Information

Thermal Resistance (Typical, Note 1) θ_{JA} (°C/W) θ_{JC} (°C/W)
 Metal Can Package 155 67
 Maximum Junction Temperature 175°C
 Maximum Storage Temperature Range -65°C to 150°C
 Maximum Lead Temperature (Soldering 10s) 300°C

Die Characteristics

Number of Transistors 82
 Substrate Potential (Powered Up) Floating

Electrical Specifications $V_{SUPPLY} = \pm 15V$, Unless Otherwise Specified

PARAMETER	TEST CONDITIONS	TEMP. (°C)	HA-5160-2 -55°C to 125°C			HA-5160-5 0°C to 75°C			UNITS
			MIN	TYP	MAX	MIN	TYP	MAX	
INPUT CHARACTERISTICS									
Offset Voltage		25	-	1	3	-	1	3	mV
		Full	-	3	5	-	3	5	mV
Offset Voltage Average Drift		Full	-	10	-	-	20	-	μV/°C
Bias Current		25	-	20	50	-	20	50	pA
		Full	-	5	10	-	5	10	nA
Offset Current		25	-	2	10	-	2	10	pA
		Full	-	2	5	-	2	5	nA
Input Capacitance		25	-	5	-	-	5	-	pF
Input Resistance		25	-	10 ¹²	-	-	10 ¹²	-	Ω
Common Mode Range		Full	±10	±11	-	±10	±11	-	V
TRANSFER CHARACTERISTICS									
Large Signal Voltage Gain	V _{OUT} = ±10V, R _L = 2kΩ	25	75	150	-	75	150	-	kV/V
		Full	60	100	-	60	100	-	kV/V
Common Mode Rejection Ratio	V _{CM} = ±10V	Full	74	80	-	74	80	-	dB
Minimum Stable Gain		25	10	-	-	10	-	-	V/V
Gain Bandwidth Product	A _V ≥ 10	Full	-	100	-	-	100	-	MHz
OUTPUT CHARACTERISTICS									
Output Voltage Swing	R _L = 2kΩ	25	±10	±11	-	±10	±11	-	V
		Full	±10	±11	-	±10	±11	-	V
Output Current	V _{OUT} = ±10V	25	±10	±20	-	±10	±20	-	mA
Output Short Circuit Current		25	-	±35	-	-	±35	-	mA
Full Power Bandwidth (Note 2)	V _{OUT} = ±10V, R _L = 2kΩ	25	1.6	1.9	-	1.6	1.9	-	MHz
Output Resistance	Open Loop	25	-	50	-	-	50	-	Ω
TRANSIENT RESPONSE (Note 3)									
Rise Time	A _V = +10	25	-	20	-	-	20	-	ns
Slew Rate	A _V = +10	25	100	120	-	100	120	-	V/μs

Electrical Specifications $V_{SUPPLY} = \pm 15V$, Unless Otherwise Specified (Continued)

PARAMETER	TEST CONDITIONS	TEMP. (°C)	HA-5160-2 -55°C to 125°C			HA-5160-5 0°C to 75°C			UNITS
			MIN	TYP	MAX	MIN	TYP	MAX	
Settling Time (Note 4)	$A_V = -10$	25	-	280	-	-	280	-	ns
POWER SUPPLY CHARACTERISTICS									
Supply Current		Full	-	8	10	-	8	10	mA
Power Supply Rejection Ratio	$V_S = \pm 10V$ to $\pm 20V$	25	74	86	-	74	86	-	dB

NOTES:

- Full Power Bandwidth guaranteed, based on slew rate measurement using: $FPBW = \frac{\text{Slew Rate}}{2\pi V_{PEAK}}$.
- Refer to Test circuits section of the data sheet.
- Settling Time is measured to 0.2% of final value for a 10V output step.

Test Circuits and Waveforms



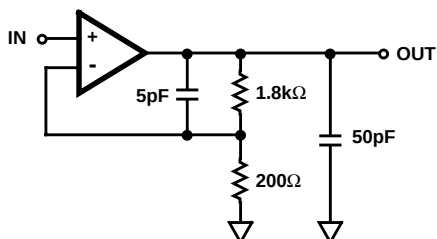


FIGURE 1. LARGE AND SMALL SIGNAL RESPONSE TEST CIRCUIT

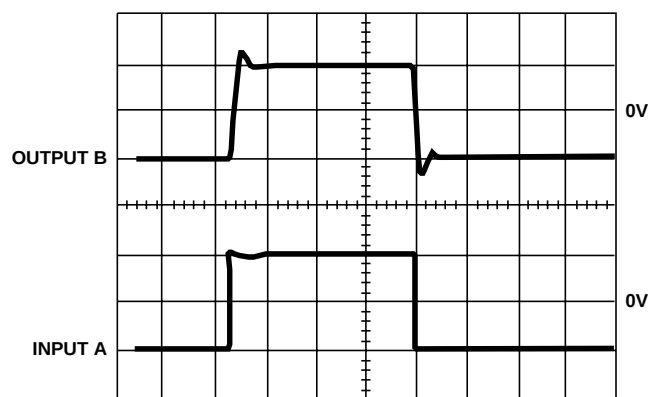

Vertical Scale: A = 0.5V/Div., B = 5V/Div.
Horizontal Scale: 500ns/Div.


LARGE SIGNAL RESPONSE

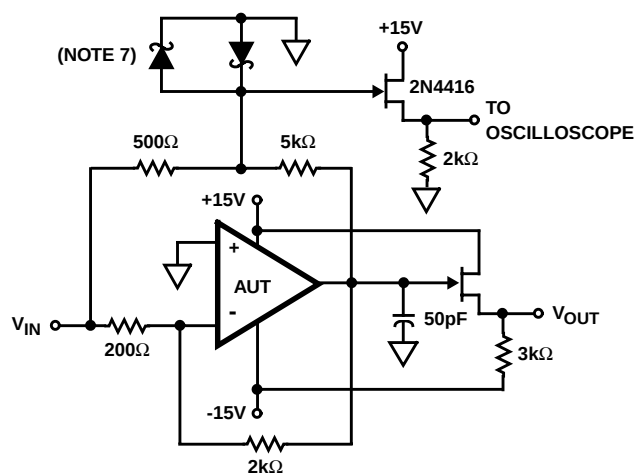

NOTES:

- $A_V = -10$.
- Feedback and summing resistors should be 0.1% matched.
- Clipping diodes are optional. HP5082-2810 recommended.


FIGURE 2. SETTLING TIME TEST CIRCUIT

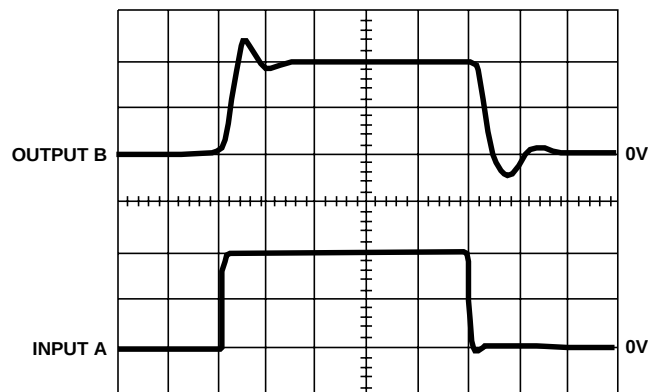

Vertical Scale: A = 10mV/Div., B = 100mV/Div.
Horizontal Scale: 100ns/Div.

SMALL SIGNAL RESPONSE

Schematic Diagram

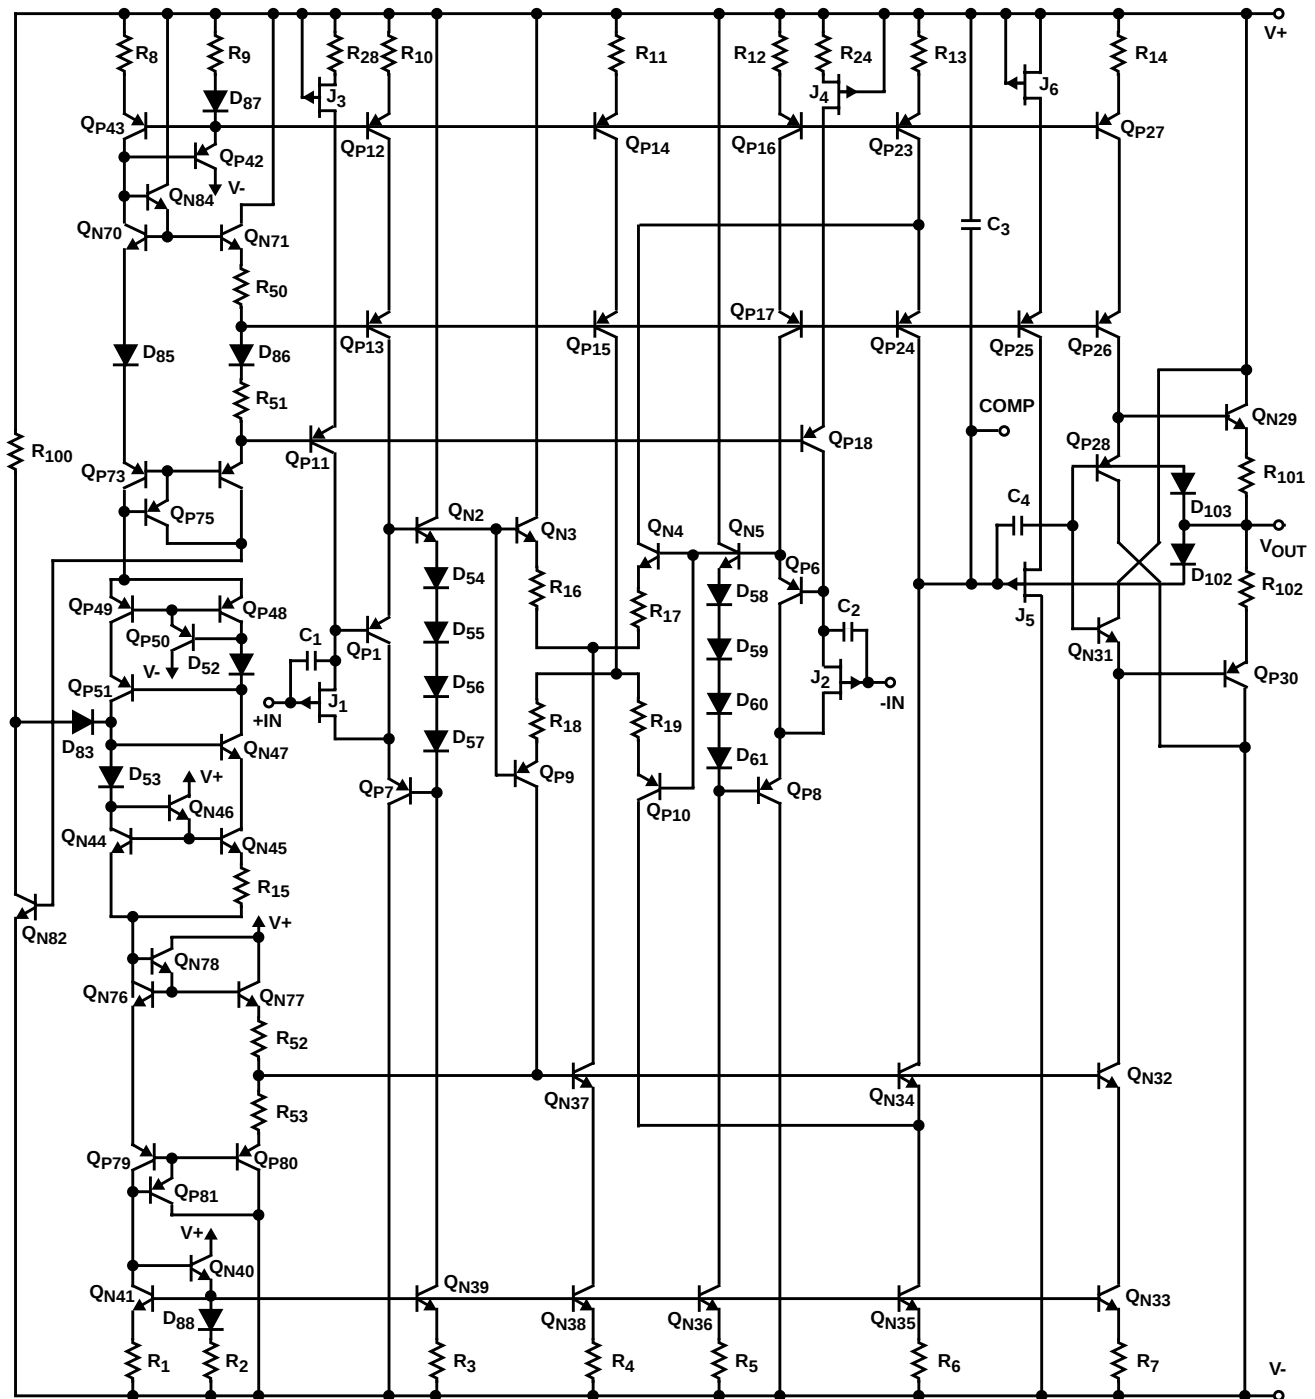

All Intersil semiconductor products are manufactured, assembled and tested under **ISO9000** quality systems certification.

Intersil semiconductor products are sold by description only. Intersil Corporation reserves the right to make changes in circuit design and/or specifications at any time without notice. Accordingly, the reader is cautioned to verify that data sheets are current before placing orders. Information furnished by Intersil is believed to be accurate and reliable. However, no responsibility is assumed by Intersil or its subsidiaries for its use; nor for any infringements of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of Intersil or its subsidiaries.

For information regarding Intersil Corporation and its products, see web site <http://www.intersil.com>

Application Information

Power Supply Decoupling

Although not absolutely necessary, it is recommended that all power supply lines be decoupled with $0.01\mu\text{F}$ ceramic capacitors to ground. Decoupling capacitors should be located as near to the amplifier terminals as possible.

Stability

The phase margin of the HA-5160 will be improved by connecting a small capacitor ($>10\text{pF}$) between the output

and the inverting input of the device. This small capacitor compensates for the input capacitance of the FET.

Capacitive Loads

When driving large capacitive loads ($>100\text{pF}$), it is suggested that a small resistor ($\approx 100\Omega$) be connected in series with the output of the device and inside the feedback loop.

Power Supply Minimum

The absolute supply minimum is $\pm 6\text{V}$ and the safe level is $\pm 7\text{V}$.

Typical Applications

SUGGESTED COMPENSATION FOR UNITY GAIN STABILITY (NOTE)


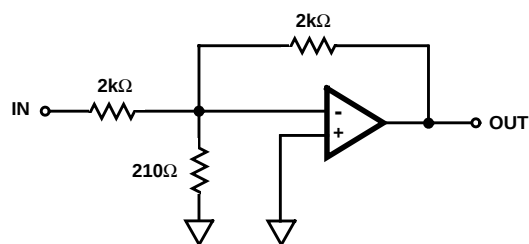


FIGURE 3A. INVERTING UNITY GAIN CIRCUIT

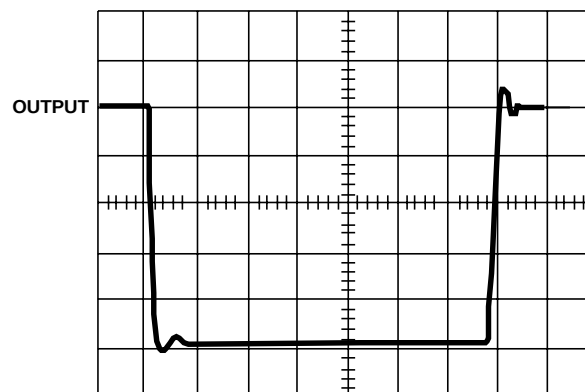

Vertical Scale: 2V/Div.
Horizontal Scale: 500ns/Div.

FIGURE 3B. INVERTING UNITY GAIN PULSE RESPONSE

FIGURE 3. GAIN OF -1


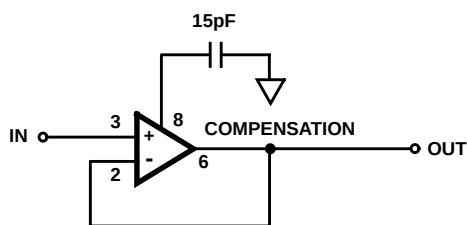


FIGURE 4A. NONINVERTING UNITY GAIN CIRCUIT

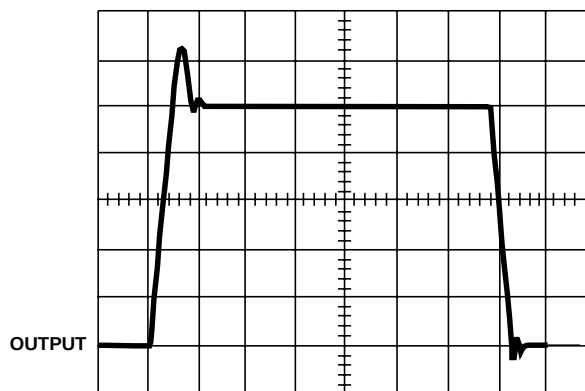

Vertical Scale: 2V/Div.
Horizontal Scale: 500ns/Div.

FIGURE 4B. NONINVERTING UNITY GAIN PULSE RESPONSE

FIGURE 4. GAIN OF +1

NOTE: Values were determined experimentally for optimum speed and settling time.

Typical Performance Curves

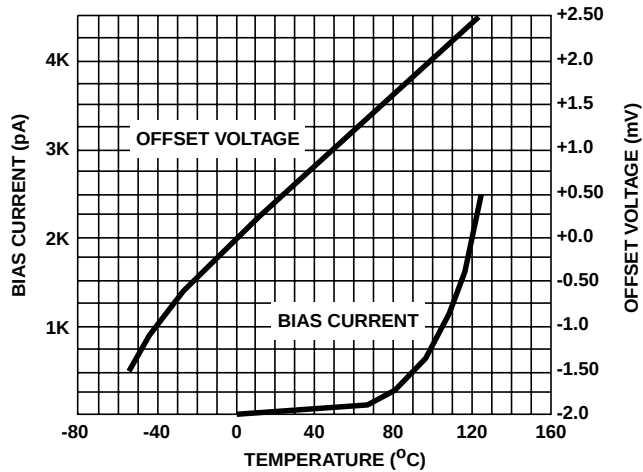


FIGURE 5. INPUT OFFSET VOLTAGE AND BIAS CURRENT vs TEMPERATURE

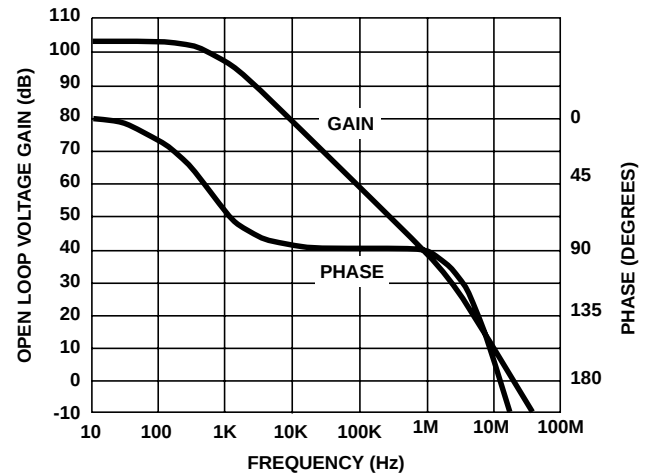


FIGURE 6. OPEN LOOP FREQUENCY RESPONSE

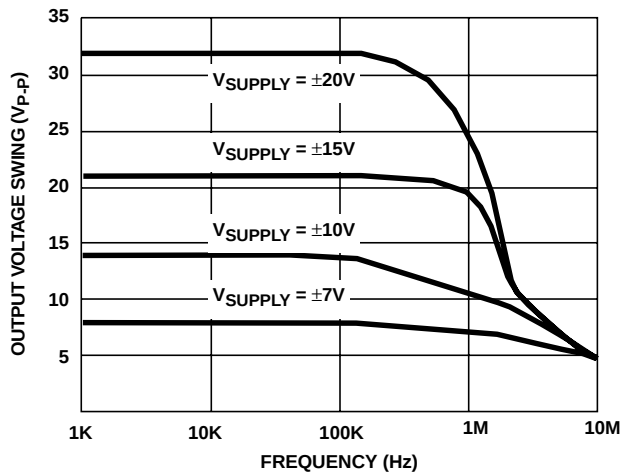


FIGURE 7. OUTPUT VOLTAGE SWING vs FREQUENCY

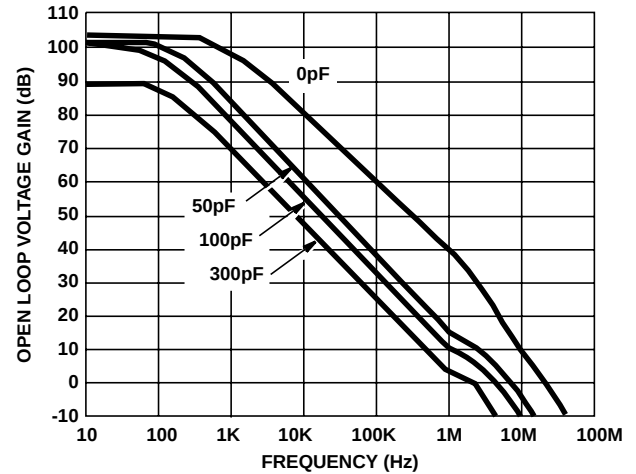


FIGURE 8. OPEN LOOP FREQUENCY RESPONSE FOR VARIOUS COMPENSATION CAPACITANCES

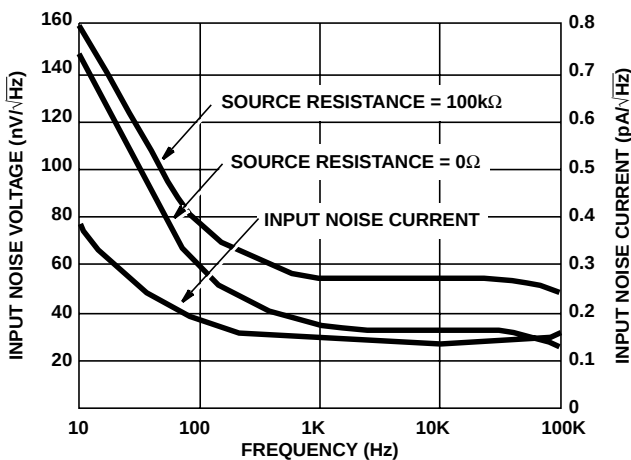


FIGURE 9. INPUT NOISE VOLTAGE AND NOISE CURRENT vs FREQUENCY

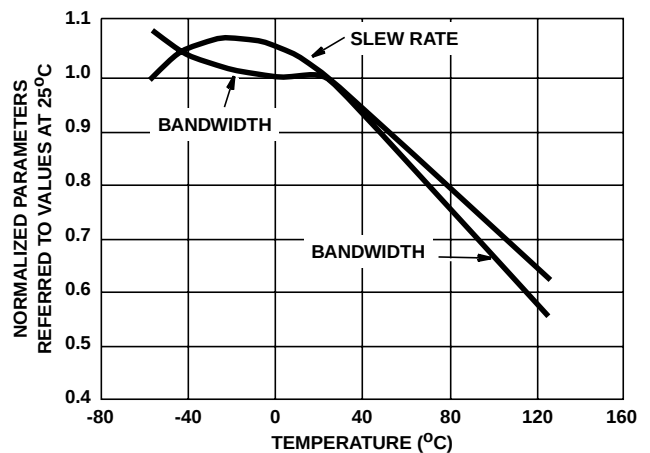


FIGURE 10. NORMALIZED AC PARAMETERS vs TEMPERATURE

Typical Performance Curves (Continued)

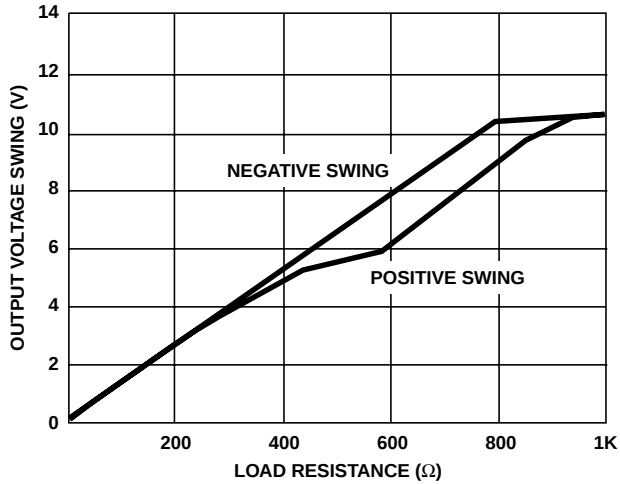


FIGURE 11. OUTPUT VOLTAGE SWING vs LOAD RESISTANCE

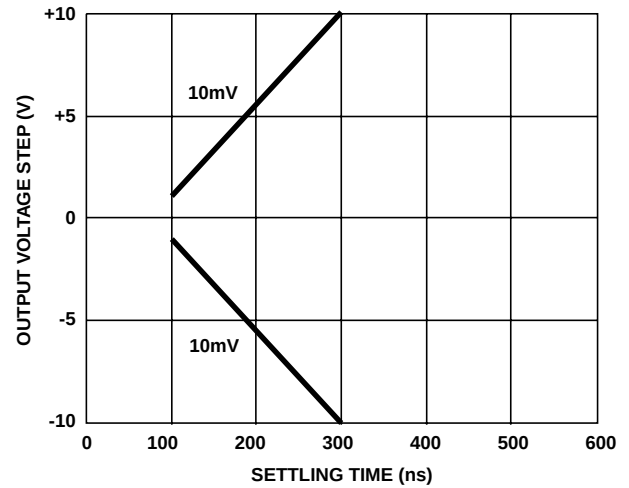


FIGURE 12. SETTLING TIME FOR VARIOUS OUTPUT STEP VOLTAGES

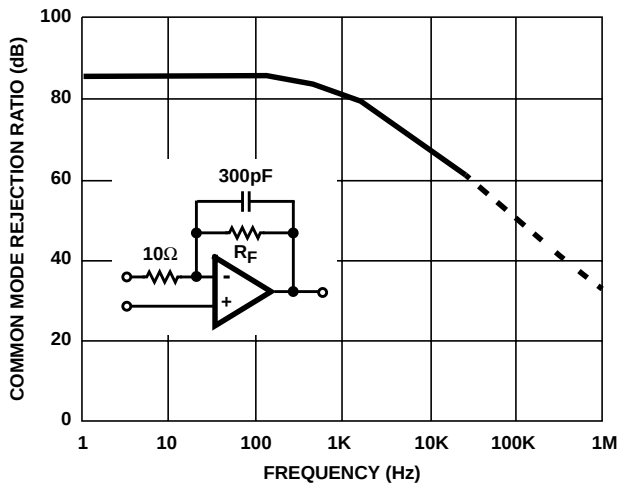


FIGURE 13. COMMON MODE REJECTION RATIO vs FREQUENCY

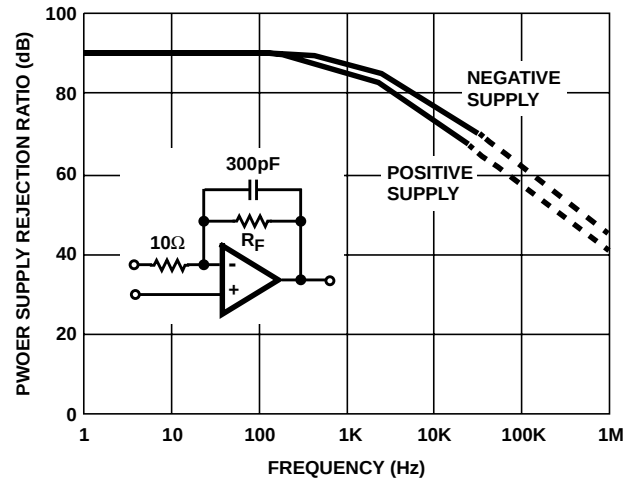


FIGURE 14. POWER SUPPLY REJECTION RATIO vs FREQUENCY

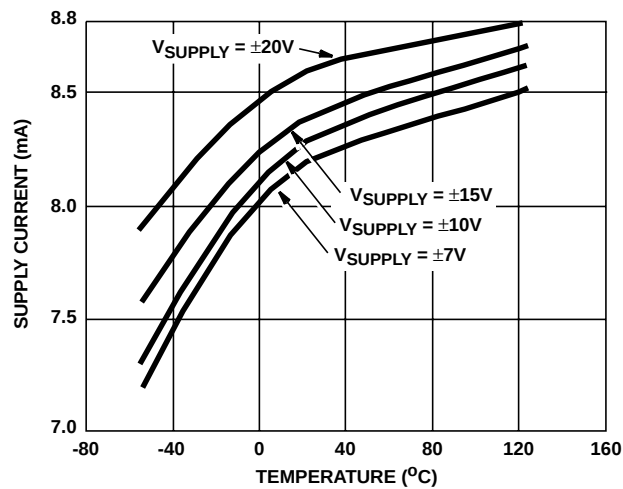


FIGURE 15. POWER SUPPLY CURRENT vs TEMPERATURE