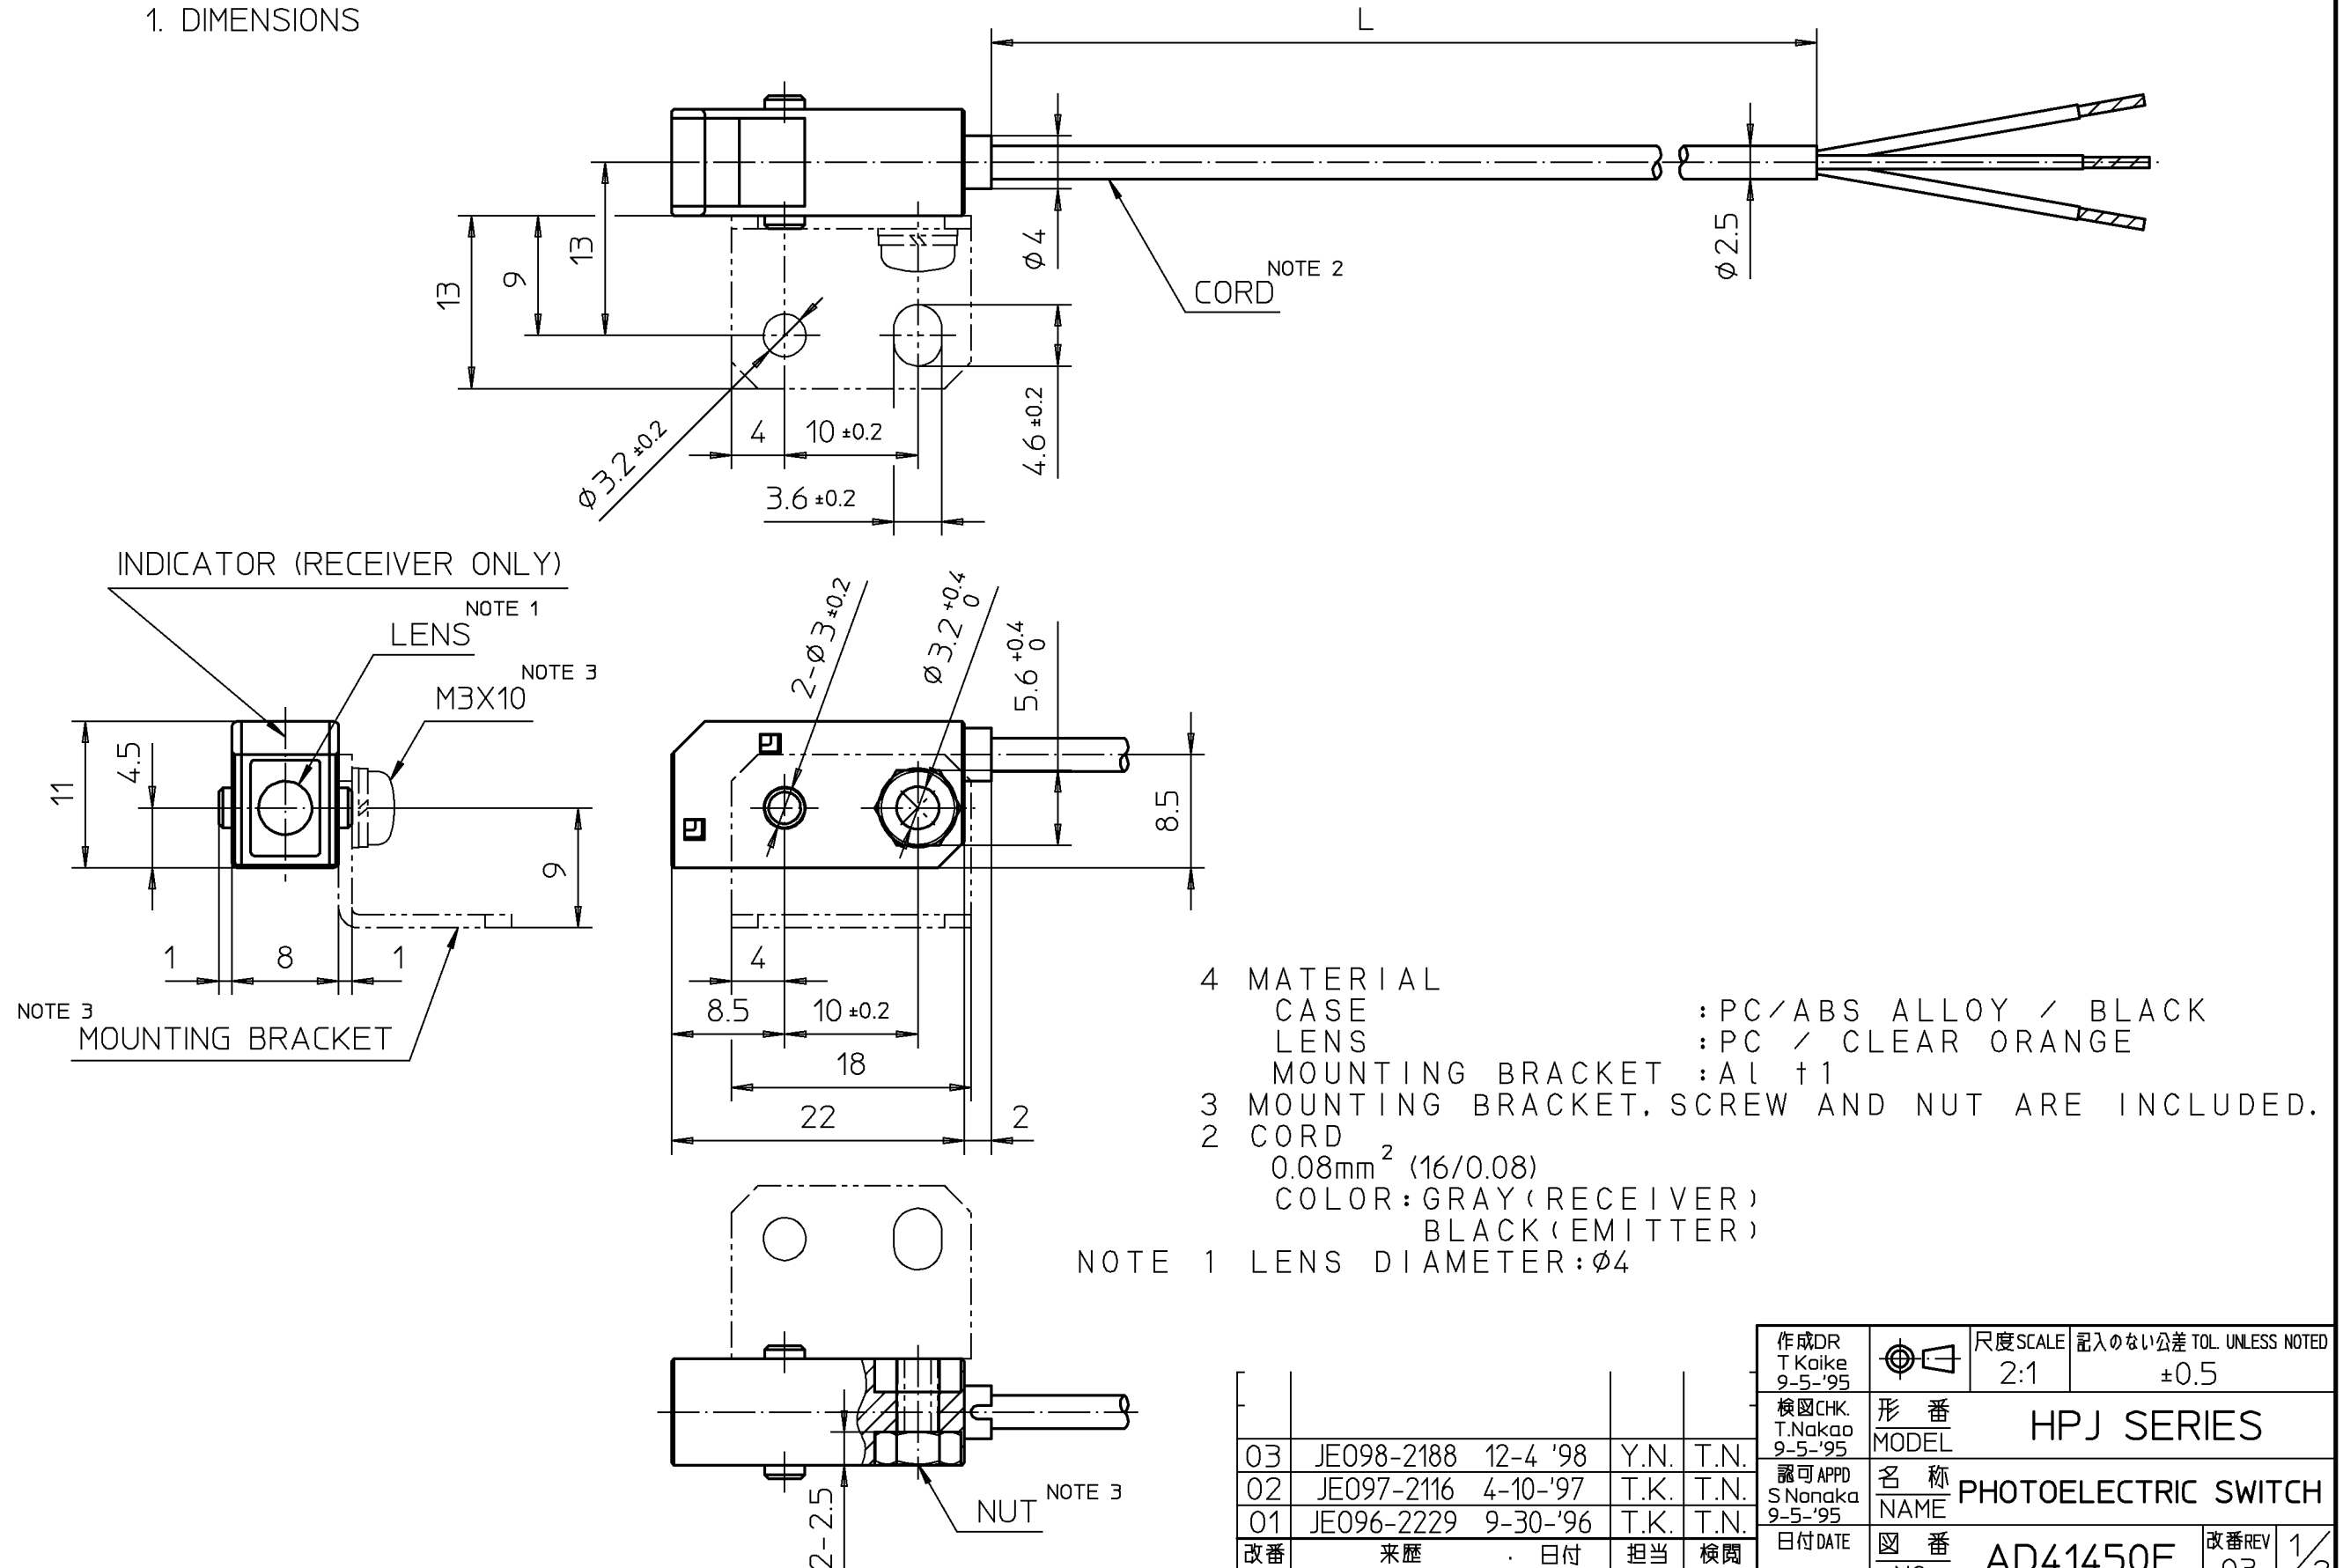


THROUGH SCAN			CORD LENGTH (L)
SET	EMITTER	RECEIVER	
HPJ-T11	HPJ-E11	HPJ-R11	2000 min.
HPJ-T11-L05	HPJ-E11-L05	HPJ-R11-L05	5000 min.

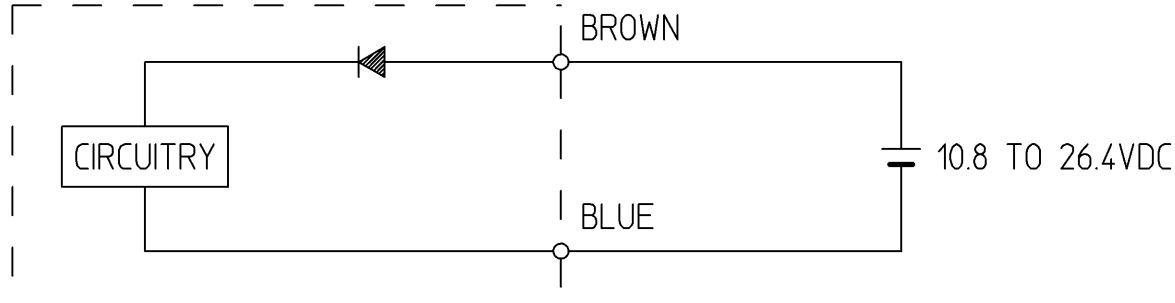
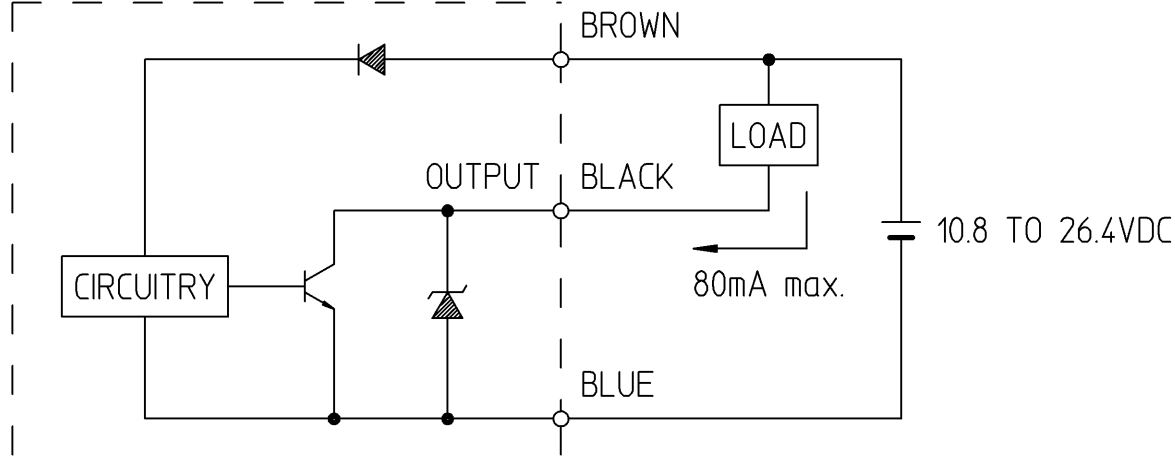
NOTE 2
CORD



4 MATERIAL
CASE : PC/ABS ALLOY / BLACK
LENS : PC / CLEAR ORANGE
MOUNTING BRACKET : AL #1
3 MOUNTING BRACKET, SCREW AND NUT ARE INCLUDED.
2 CORD
0.08mm² (16/0.08)
COLOR: GRAY (RECEIVER)
BLACK (EMITTER)
1 LENS DIAMETER: Ø4

03	JE098-2188	12-4 '98	Y.N.	T.N.
02	JE097-2116	4-10-'97	T.K.	T.N.
01	JE096-2229	9-30-'96	T.K.	T.N.
改番 REV	来歴 RECORD	: 日付 DATE	担当 BY	検閲 APP

作成DR T Kaike 9-5-'95		尺度SCALE 2:1	記入のない公差 TOL. UNLESS NOTED ±0.5
検図CHK. T.Nakao 9-5-'95	形 番 MODEL	HP J SERIES	
認可APPD S Nonaka 9-5-'95	名 称 NAME	PHOTOELECTRIC SWITCH	
日付DATE	図 番 NO.	AD41450E	改番REV 03
			1/2

SR. No.	Yamatake Corporation		製品仕様書 SPECIFICATIONS																																																																																																																																
	2. SPECIFICATIONS																																																																																																																																		
	<table><tr><td></td><td colspan="3">SPECIFICATION</td></tr><tr><td>CATALOG LISTING</td><td colspan="3">EMITTER & RECEIVER:HPJ-T11(-L05) EMITTER : HPJ-E11(-L05) RECEIVER : HPJ-R11(-L05)</td></tr><tr><td>SCANNING TYPE</td><td colspan="3">THROUGH SCAN</td></tr><tr><td>SUPPLY VOLTAGE</td><td colspan="3">10.8 TO 26.4VDC (RIPPLE 10%max.)</td></tr><tr><td>CURRENT CONSUMPTION</td><td colspan="3">40mA max.(EMITTER:20mA max., RECEIVER:20mA max.)</td></tr><tr><td>SCANNING DISTANCE</td><td colspan="3">1.5m</td></tr><tr><td>TARGET</td><td colspan="3">OPAQUE MATERIALS MORE THAN 4mm DIA.</td></tr><tr><td>OPERATING ANGLE</td><td colspan="3">3 TO 30°</td></tr><tr><td>OUTPUT MODE</td><td colspan="3">OPEN COLLECTOR OF NPN TRANSISTOR</td></tr><tr><td>OPERATING MODE</td><td colspan="3">DARK ON</td></tr><tr><td>OUTPUT</td><td colspan="3">LOAD CURRENT : 80mA max.(RESISTIVE LOAD) SATURATION VOLTAGE : 1V max.(AT 80mA LOAD CURRENT) OUTPUT WITHSTAND VOLTAGE : 26.4V</td></tr><tr><td>RESPONCE TIME</td><td colspan="3">1ms max.</td></tr><tr><td>FALSE PULSE (AFTER POWER ON)</td><td colspan="3">1ms max.</td></tr><tr><td>LIGHT SOURCE</td><td colspan="3">INFRARED LED</td></tr><tr><td>INDICATOR</td><td colspan="3">RED 'ON' WITH OUTPUT ON</td></tr><tr><td>AMBIENT LIGHT</td><td colspan="3">INCANDESCENT LIGHT : 3000lx max. SUNLIGHT : 10000lx max.</td></tr><tr><td>OPERATING TEMPERATURE</td><td colspan="3">-20 TO +50℃ (WITHOUT CONDENSATION)</td></tr><tr><td>OPERATING HUMIDITY</td><td colspan="3">35 TO 85%RH (WITHOUT CONDENSATION)</td></tr><tr><td>STORAGE TEMPERATURE</td><td colspan="3">-40 TO +70℃ (WITHOUT CONDENSATION)</td></tr><tr><td>STORAGE HUMIDITY</td><td colspan="3">35 TO 85%RH (WITHOUT CONDENSATION)</td></tr><tr><td>INSHULATION RESISTANCE</td><td colspan="3">20MΩ min.(AT 500VDC)</td></tr><tr><td>DIELECTORIC STRENGTH</td><td colspan="3">1000VAC 50/60Hz 1MINUTE (BETWEEN LIVE PARTS AND ENCLOSURE)</td></tr><tr><td>VIBRATION</td><td colspan="3">10 TO 55Hz 1.5mm DOUBLE AMPLITUDE 2HOURS IN EACH DIRECTION OF X,Y,Z</td></tr><tr><td>SHOCK</td><td colspan="3">500m/s² 3TIMES IN EACH DIRECTION OF X,Y,Z</td></tr><tr><td>SEALING</td><td colspan="3">IP40 (IEC STANDARD)</td></tr><tr><td>WEIGHT</td><td colspan="3">APPROX. 20g (ONLY SENSOR WITH CABLE 2m)</td></tr><tr><td>PROTECTION</td><td colspan="3">REVERSE POLARITY PROTECTION</td></tr><tr><td rowspan="6">EMC</td><td>EN61000-4-2:1995</td><td colspan="2">LEVEL 1</td></tr><tr><td>ENV50140:1993</td><td colspan="2">LEVEL 3</td></tr><tr><td>ENV50204:1995</td><td colspan="2">LEVEL 3</td></tr><tr><td>EN61000-4-4:1995</td><td colspan="2">LEVEL 3</td></tr><tr><td>IEC255-5:1977</td><td colspan="2">LEVEL 0</td></tr><tr><td>ENV50141:1993</td><td colspan="2">LEVEL 3</td></tr></table>					SPECIFICATION			CATALOG LISTING	EMITTER & RECEIVER:HPJ-T11(-L05) EMITTER : HPJ-E11(-L05) RECEIVER : HPJ-R11(-L05)			SCANNING TYPE	THROUGH SCAN			SUPPLY VOLTAGE	10.8 TO 26.4VDC (RIPPLE 10%max.)			CURRENT CONSUMPTION	40mA max.(EMITTER:20mA max., RECEIVER:20mA max.)			SCANNING DISTANCE	1.5m			TARGET	OPAQUE MATERIALS MORE THAN 4mm DIA.			OPERATING ANGLE	3 TO 30°			OUTPUT MODE	OPEN COLLECTOR OF NPN TRANSISTOR			OPERATING MODE	DARK ON			OUTPUT	LOAD CURRENT : 80mA max.(RESISTIVE LOAD) SATURATION VOLTAGE : 1V max.(AT 80mA LOAD CURRENT) OUTPUT WITHSTAND VOLTAGE : 26.4V			RESPONCE TIME	1ms max.			FALSE PULSE (AFTER POWER ON)	1ms max.			LIGHT SOURCE	INFRARED LED			INDICATOR	RED 'ON' WITH OUTPUT ON			AMBIENT LIGHT	INCANDESCENT LIGHT : 3000lx max. SUNLIGHT : 10000lx max.			OPERATING TEMPERATURE	-20 TO +50℃ (WITHOUT CONDENSATION)			OPERATING HUMIDITY	35 TO 85%RH (WITHOUT CONDENSATION)			STORAGE TEMPERATURE	-40 TO +70℃ (WITHOUT CONDENSATION)			STORAGE HUMIDITY	35 TO 85%RH (WITHOUT CONDENSATION)			INSHULATION RESISTANCE	20MΩ min.(AT 500VDC)			DIELECTORIC STRENGTH	1000VAC 50/60Hz 1MINUTE (BETWEEN LIVE PARTS AND ENCLOSURE)			VIBRATION	10 TO 55Hz 1.5mm DOUBLE AMPLITUDE 2HOURS IN EACH DIRECTION OF X,Y,Z			SHOCK	500m/s ² 3TIMES IN EACH DIRECTION OF X,Y,Z			SEALING	IP40 (IEC STANDARD)			WEIGHT	APPROX. 20g (ONLY SENSOR WITH CABLE 2m)			PROTECTION	REVERSE POLARITY PROTECTION			EMC	EN61000-4-2:1995	LEVEL 1		ENV50140:1993	LEVEL 3		ENV50204:1995	LEVEL 3		EN61000-4-4:1995	LEVEL 3		IEC255-5:1977	LEVEL 0		ENV50141:1993	LEVEL 3	
		SPECIFICATION																																																																																																																																	
	CATALOG LISTING	EMITTER & RECEIVER:HPJ-T11(-L05) EMITTER : HPJ-E11(-L05) RECEIVER : HPJ-R11(-L05)																																																																																																																																	
	SCANNING TYPE	THROUGH SCAN																																																																																																																																	
	SUPPLY VOLTAGE	10.8 TO 26.4VDC (RIPPLE 10%max.)																																																																																																																																	
	CURRENT CONSUMPTION	40mA max.(EMITTER:20mA max., RECEIVER:20mA max.)																																																																																																																																	
	SCANNING DISTANCE	1.5m																																																																																																																																	
	TARGET	OPAQUE MATERIALS MORE THAN 4mm DIA.																																																																																																																																	
	OPERATING ANGLE	3 TO 30°																																																																																																																																	
	OUTPUT MODE	OPEN COLLECTOR OF NPN TRANSISTOR																																																																																																																																	
	OPERATING MODE	DARK ON																																																																																																																																	
	OUTPUT	LOAD CURRENT : 80mA max.(RESISTIVE LOAD) SATURATION VOLTAGE : 1V max.(AT 80mA LOAD CURRENT) OUTPUT WITHSTAND VOLTAGE : 26.4V																																																																																																																																	
	RESPONCE TIME	1ms max.																																																																																																																																	
	FALSE PULSE (AFTER POWER ON)	1ms max.																																																																																																																																	
	LIGHT SOURCE	INFRARED LED																																																																																																																																	
	INDICATOR	RED 'ON' WITH OUTPUT ON																																																																																																																																	
	AMBIENT LIGHT	INCANDESCENT LIGHT : 3000lx max. SUNLIGHT : 10000lx max.																																																																																																																																	
OPERATING TEMPERATURE	-20 TO +50℃ (WITHOUT CONDENSATION)																																																																																																																																		
OPERATING HUMIDITY	35 TO 85%RH (WITHOUT CONDENSATION)																																																																																																																																		
STORAGE TEMPERATURE	-40 TO +70℃ (WITHOUT CONDENSATION)																																																																																																																																		
STORAGE HUMIDITY	35 TO 85%RH (WITHOUT CONDENSATION)																																																																																																																																		
INSHULATION RESISTANCE	20MΩ min.(AT 500VDC)																																																																																																																																		
DIELECTORIC STRENGTH	1000VAC 50/60Hz 1MINUTE (BETWEEN LIVE PARTS AND ENCLOSURE)																																																																																																																																		
VIBRATION	10 TO 55Hz 1.5mm DOUBLE AMPLITUDE 2HOURS IN EACH DIRECTION OF X,Y,Z																																																																																																																																		
SHOCK	500m/s ² 3TIMES IN EACH DIRECTION OF X,Y,Z																																																																																																																																		
SEALING	IP40 (IEC STANDARD)																																																																																																																																		
WEIGHT	APPROX. 20g (ONLY SENSOR WITH CABLE 2m)																																																																																																																																		
PROTECTION	REVERSE POLARITY PROTECTION																																																																																																																																		
EMC	EN61000-4-2:1995	LEVEL 1																																																																																																																																	
	ENV50140:1993	LEVEL 3																																																																																																																																	
	ENV50204:1995	LEVEL 3																																																																																																																																	
	EN61000-4-4:1995	LEVEL 3																																																																																																																																	
	IEC255-5:1977	LEVEL 0																																																																																																																																	
	ENV50141:1993	LEVEL 3																																																																																																																																	
3. CONNECTION																																																																																																																																			
EMITTER (HPJ-E11(-L05)) 																																																																																																																																			
RECEIVER (HPJ-R11(-L05)) 																																																																																																																																			
<table><tr><td rowspan="4">[</td><td></td><td></td><td></td><td></td><td>作成DR. K.TSUTSUI 8-23-'95</td><td rowspan="4"></td><td rowspan="4">尺度SCALE 記入のない公差TOL. UNLESS NOTED</td></tr><tr><td></td><td></td><td></td><td></td><td>検図CHK. T.Nakao 9-5-'95</td></tr><tr><td></td><td></td><td></td><td></td><td>認可APPD. S.Nonaka 9-5-'95</td></tr><tr><td></td><td></td><td></td><td></td><td>日付DATE</td></tr><tr><td>改番REV.</td><td>来歴RECORD</td><td>日付DATE</td><td>担当BY</td><td>検閲APPD.</td><td>形番MODEL</td><td colspan="2">HPJ SERIES</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td>名称NAME</td><td colspan="2">PHOTOELECTRIC SWICH</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td>図番NO.</td><td>AD41450E</td><td>改番REV. 03</td></tr></table>				[					作成DR. K.TSUTSUI 8-23-'95		尺度SCALE 記入のない公差TOL. UNLESS NOTED					検図CHK. T.Nakao 9-5-'95					認可APPD. S.Nonaka 9-5-'95					日付DATE	改番REV.	来歴RECORD	日付DATE	担当BY	検閲APPD.	形番MODEL	HPJ SERIES							名称NAME	PHOTOELECTRIC SWICH							図番NO.	AD41450E	改番REV. 03																																																																																	
[						作成DR. K.TSUTSUI 8-23-'95		尺度SCALE 記入のない公差TOL. UNLESS NOTED																																																																																																																											
						検図CHK. T.Nakao 9-5-'95																																																																																																																													
						認可APPD. S.Nonaka 9-5-'95																																																																																																																													
					日付DATE																																																																																																																														
改番REV.	来歴RECORD	日付DATE	担当BY	検閲APPD.	形番MODEL	HPJ SERIES																																																																																																																													
					名称NAME	PHOTOELECTRIC SWICH																																																																																																																													
					図番NO.	AD41450E	改番REV. 03																																																																																																																												
<table><tr><td>03</td><td>～</td><td>～</td><td>～</td></tr><tr><td>02</td><td>～</td><td>～</td><td>～</td></tr><tr><td>01</td><td>～</td><td>～</td><td>～</td></tr></table>				03	～	～	～	02	～	～	～	01	～	～	～																																																																																																																				
03	～	～	～																																																																																																																																
02	～	～	～																																																																																																																																
01	～	～	～																																																																																																																																
頁	改番																																																																																																																																		