



厦 门 华 联 电 子 有 限 公 司

Xiamen Hualian Electronics Co., Ltd.

产 品 规 格 书

SPECIFICATION

产品名称：红色超高亮发光二极管

DESCRIPTION: RED SUPER BRIGHT LED

型号 MODEL: HFR40501C-15

电 话：(0592) 6037469

传 真：(0592) 6037471

E-mail : xmhlec@public.xm.fj.cn

Website : www.xmhl.com

地 址：厦门火炬高技术产业开发区华联电子大厦

邮 编：361006

1、特点 (FEATURES) :

- 驱动电流低, 发光强度高。 Low Drive Current, High Intensity of Light Emission.
- 快速响应时间, 可用脉冲驱动。 Fast Response Time, Pulse Driven.
- 环氧树脂无色透明封装。 Water Clear Plastic Molding

2、极限参数 (ABSOLUTE MAXIMUM RATINGS) (Ta=25℃):

参数名称 PARAMETER	符号 SYMBOL	额定值 RATING	单位 UNIT
正向脉冲电流(1) Forward Pulse Current	I _{FBM}	100	mA
正向电流 Forward Current	I _{FM}	30	mA
反向电压 Reverse Voltage	V _R	5	V
耗散功率 Power Dissipation	P _D	100	mW
工作温度 Operating Temperature	Topr	-25~+80	℃
贮存温度 Storage Temperature	Tstg	-30~+100	℃
焊接温度 (5 秒) (2) Soldering Heat (5s)	Tsol	260	℃


(1) 占空比 Duty: 1/10, 频率 Frequency: 1KHz

(2) 离器件本体 2 mm 以上 Up to 2 mm from the body.

3、光电参数 (OPTOELECTRIC CHARACTERISTICS) (Ta=25℃):

参数名称 PARAMETER	符号 SYMBOL	测试条件 TEST CONDITION	最小值 MIN	典型值 TYP	最大值 MAX	单位 UNIT
正向电压 Forward Voltage	V _F	I _F =20mA	-	1.9	2.5	V
反向电流 Reverse Current	I _R	V _R =5V	-	-	10	μ A
发光强度 Luminous Intensity	I _V	I _F =20mA	1000	2200	-	mcd
峰值波长 Peak Wavelength	λ _P	I _F =20mA	-	660	-	nm
半强角 Viewing Angle	2 θ _{1/2}	I _F =20mA	-	16	-	deg

4、外形尺寸 (DIMENSION)

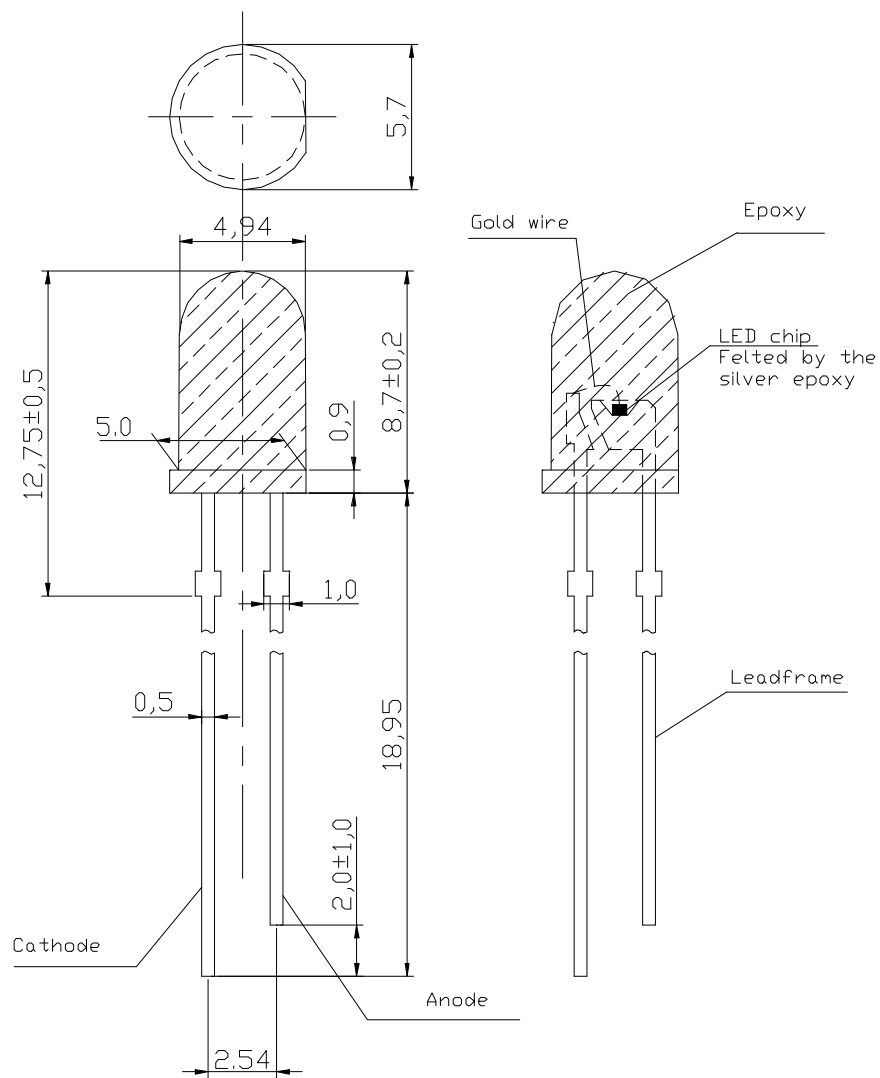


Unindicated tolerance: ±0.1mm

5、特性曲线 (Characteristics Curve)


FORWARD CURRENT VS. FORWARD VOLTAGE

正向电流--正向电压




RELATIVE LUMINOUS INTENSITY VS. FORWARD CURRENT

相对光强--正向电流




FORWARD CURRENT VS. AMBIENT TEMPERATURE

正向电流--环境温度




RELATIVE INTENSITY VS. AMBIENT TEMPERATURE

相对光强--环境温度




RELATIVE INTENSITY VS. WAVELENGTH

相对光强--波长



RADIATION PATTERN


辐射图

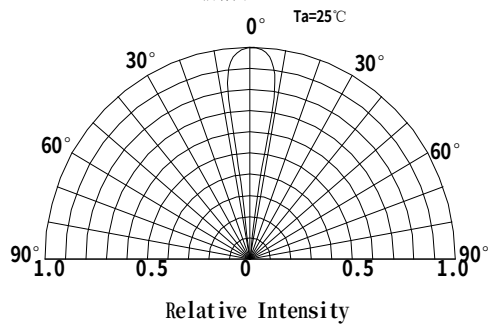

6. 包装方式 Packing


6.1 用 $95 \times 200 \text{mm}^2$ 塑料袋内包装, 500 只/袋。

Internally packed with $95 \times 200 \text{mm}^2$ plastic bags, 500pcs/bag.

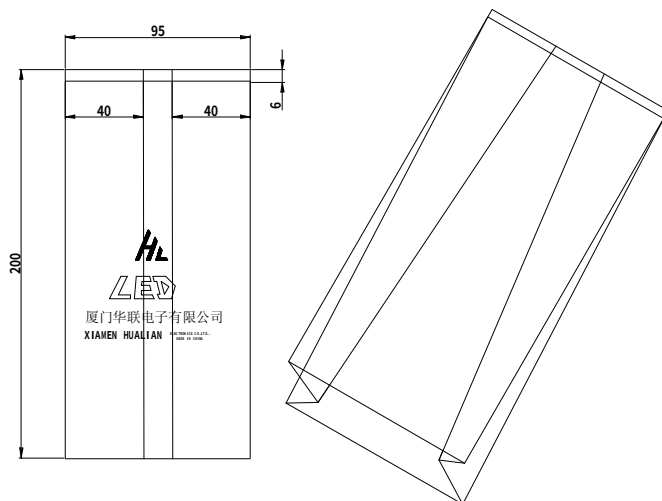

6.2 外包装用纸盒($220 \times 220 \times 190 \text{mm}^3$), 10000 只/盒。

Externally Packed with $220 \times 220 \times 190 \text{mm}^3$ cartons, 10000 pcs/carton.

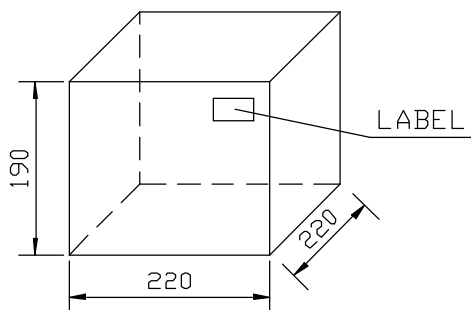

6.3 标识 Label

 Xiamen Hualian Electronics Co., Ltd.	P/N: _____
	Lot No.: _____
	Qty.: _____
	Insp.: _____

7. 注意事项 Precautions


7.1 引线成型 Forming

- 1) 引线成型需在焊接前完成。Leads should be formed before soldering.
- 2) 不能以引线基材为支点成型。Do not form the leads with their bases as a fulcrum.
- 3) 成型位置应离环氧本体 5mm 以上。Forming location should be up to 5mm from the epoxy body.

7.2 安装 Installation

LED 安装在 PCB 上，不能造成对引线施加压力。

Installation on PCB do not apply physical stress to the leads when mounting LED lamps on PCB.

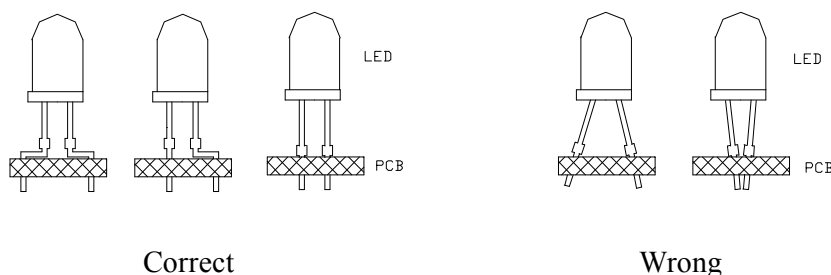

7.3 焊接 Soldering

- 1) 环氧不可浸入锡槽内。Do not dip epoxy body into solder bath.
- 2) 加热过程中不能对引线施加压力。Do not apply stress to the leads while they are heated.
- 3) 使用电烙铁焊接时，电烙铁的功率应小于等于 30W，焊接时间应小于 3 秒。

When soldering LED, the solder iron power should be not more than 30W and with the soldering time not more than 3 seconds.

9.4 清洗 Cleaning

- 1) 在任何情况下，清洗时间应在常温 1 分钟之内进行。

In any case, the cleaning time should be 1 minute or less at a normal temperature.

- 2) 不可用水清洗，以免腐蚀引线，推荐使用酒精。

Do not clean LEDs with water as the remains may rust the leads. Alcohol is suggested to be used.

- 3) 用超声波清洗 LED 时，超声功率和时间应分别小于 300W 和 30 秒；PCB 和 LED 不能接触振荡器；不能使 PCB 上 LED 产生共振。

When LEDs are ultrasonic-washed, use the ultrasonic output power of less than 300W and the time of less than 30s; do not let the PCB and LEDs touch on the oscillator; do not resonate

the LEDs attached on the PCB.

8. 建议使用方式 Suggested way of usage.

LED 使用时必须串联一个保护电阻，正向直流电流为 20mA 左右。

When using LED, it must use a protective resistor in series with DC current about 20 mA.