


SATCOM / "1 ppm Forever" Temperature Compensated Crystal Oscillators

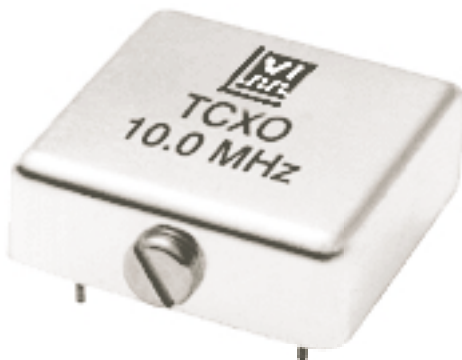

Features

- Frequency from 0.5 MHz to 160 MHz
- Stability to ± 0.05 ppm 0 to 50°C
- +5Vdc to +24Vdc supply voltage options
- Sinewave, HCMOS, TTL options
- Over 500,000 units produced

Applications

- SATCOM
- Base Stations and Picocells
- LMDS, WLL, SONET, Stratum 3

Description

The SATCOM and "1 ppm Forever" series of Temperature Compensated Crystal Oscillators (TCXO's) are available in frequencies from 0.5 MHz to 160 MHz.

These series offer performance for short term stability, phase noise, G sensitivity, aging and temperature stability normally only associated with Oven Controlled Crystal Oscillators (OCXO's), while consuming typically < 20 mA.

With over 500,000 units produced, Vectron International has more experience with this type of TCXO than the rest of the industry combined.

SATCOM / "1 ppm Forever" TCXO

Performance Characteristics

Characteristics		
Output Options:	AC = ACMOS 0.5 to 160 MHz HC = HCMOS 0.5 to 160 MHz TD = 10 TTL 0.5 to 160 MHz RG = 0 dBm 50 ohm 3.0 to 30 MHz RC = +7.0 dBm 50 ohm 3.0 to 90 MHz	
Stability Options: (Other stability options are available)	A58 = ± 0.05 ppm 0°C to +50°C B17 = ± 0.1 ppm 0°C to +70°C CB7 = ± 0.25 ppm -20°C to +70°C D57 = ± 0.5 ppm -40°C to +85°C E16 = ± 1.0 ppm -55°C to +85°C	
Supply Voltage: (Other voltage options are available)	AC = +12 Vdc $\pm 5\%$ HC = +12 Vdc $\pm 5\%$ TD = +12 Vdc $\pm 5\%$ RG = +5 Vdc $\pm 5\%$ RC = +12 Vdc $\pm 5\%$	
Allan Variance (typical):	$\pm 1 \times 10^{-10}$ at tau = 1 sec	
Aging:	"1 ppm Forever" < 0.2 ppm / 1 st year < 0.7 ppm / 10 years SATCOM < 0.5 ppm / 1 st year < 2.0 ppm / 10 years	
Phase Noise (typical): 10 MHz, RC option	-110 dBc / Hz @ 10 Hz offset -135 dBc / Hz @ 100 Hz offset -150 dBc / Hz @ 1 kHz offset -155 dbc / Hz @ 100 kHz offset	
Typical P/N (SATCOM) ("1 ppm Forever")	RCR7HYA58C 10.00 MHz RGR5HXA37C 15.00 MHz	


HY is predetermined, HX is for "1 ppm Forever" max temp range -20 to +70

Note: Not all stabilities are available with all options. Vectron International does not recommend wave soldering, IR reflow or other elevated temperature processing without consulting the factory.
 For AC, HC and TD outputs with frequencies above 30 MHz a low phase noise PLL multiplier **will** be used.
 Please inform the factory of your phase noise requirements.

SATCOM / "1 ppm Forever" TCXO

Pin	Function
1	Output
2	+Vdd
3	Gnd, Case
4	Gnd / V tune
5	Gnd

Frequency Adjust:	
Option	Specification
HY	± 3 ppm min. via external voltage, 0 to +5 Vdc
HX	NONE

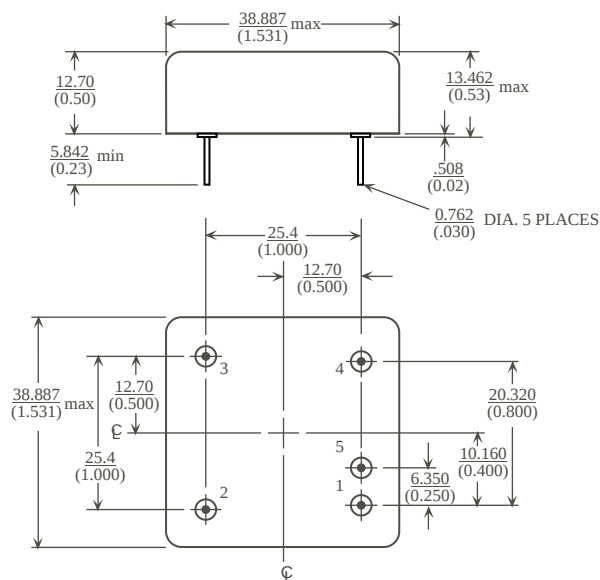


R5 PACKAGE

mm
(in.)

Pin	Function
1	Output
2	+Vdd
3	Gnd, Case
4	Gnd
5	Gnd

Frequency Adjust:	
Option	Specification
HY & HX	± 3 ppm min. via internal mechanical adjust

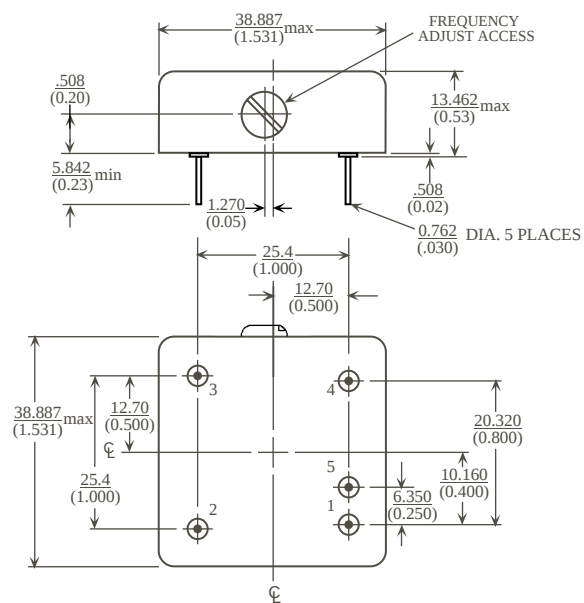


R7 PACKAGE

SATCOM / "1 ppm Forever" TCXO

Pin	Function
1	Output
2	+Vdd
3	Gnd, Case
4	Gnd
5	Gnd

Frequency Adjust:	
Option	Specification
HY & HX	± 3 ppm min. via internal mechanical adjust

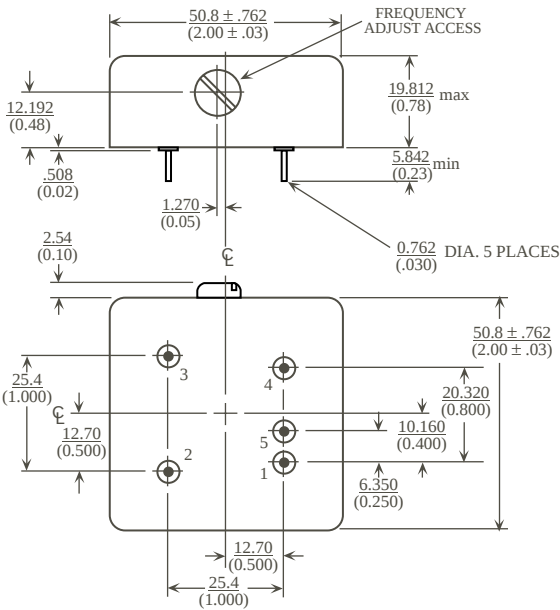


S5 PACKAGE

mm
(in.)

Pin	Function
1	Output
2	+Vdd
3	Gnd, Case
4	Gnd / V tune
5	Gnd

Frequency Adjust:	
Option	Specification
HY	± 3 ppm min. via external voltage, 0 to +5 Vdc
HX	NONE

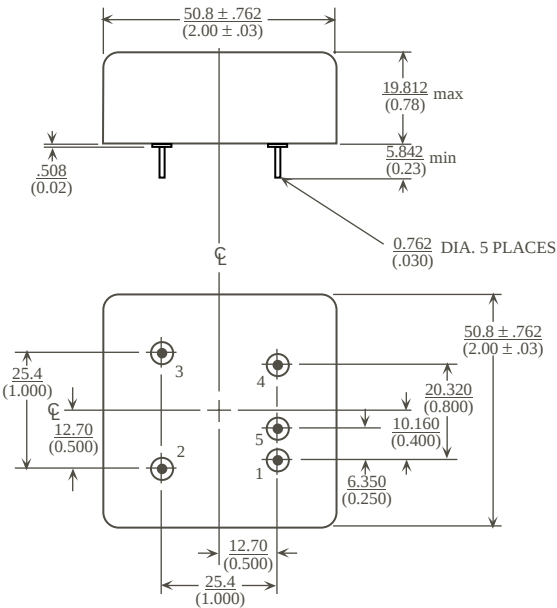




S7 PACKAGE

SATCOM / "1 ppm Forever" TCXO

Output Option	AC	HC	TD
Output	ACMOS	HCMOS	10 TTL
Voh min.	+4.5 Vdc	+4.5 Vdc	+2.4 Vdc
Voh max.	+0.5 Vdc	+0.5 Vdc	+0.5 Vdc
Load (typical)	100 k ohm // 10 pF	100 k ohm // 10 pF	10 TTL
Duty Cycle	50% $\pm$ 10%	50% $\pm$ 10%	50% $\pm$ 10%
Rise and Fall	3 nS max.	5 nS max.	10 nS max.

Output Option	RG	RC
Output	Sinewave	Sinewave
Level	0 dBm to +6 dBm	+7.0 dBm to +13 dBm
Load	50 ohm	50 ohm
Harmonics / Sub	-20 dBc max.	-20 dBc max.
Other Spurious	-60 dBc max.	-60 dBc max.


Test Loads:

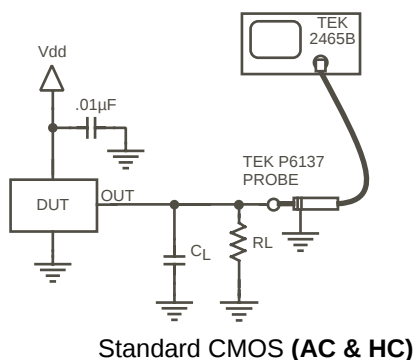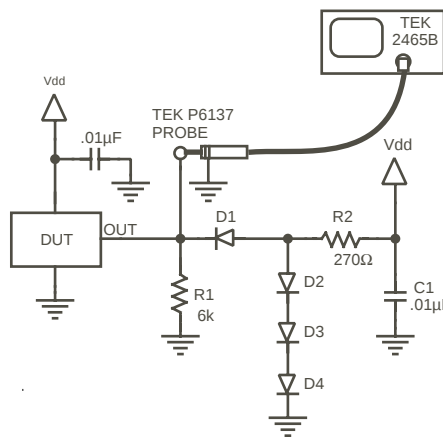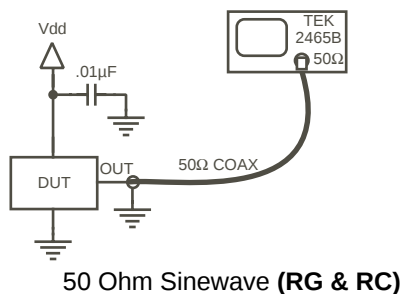


SATCOM / "1 ppm Forever" TCXO

How to Order

For HY Option:

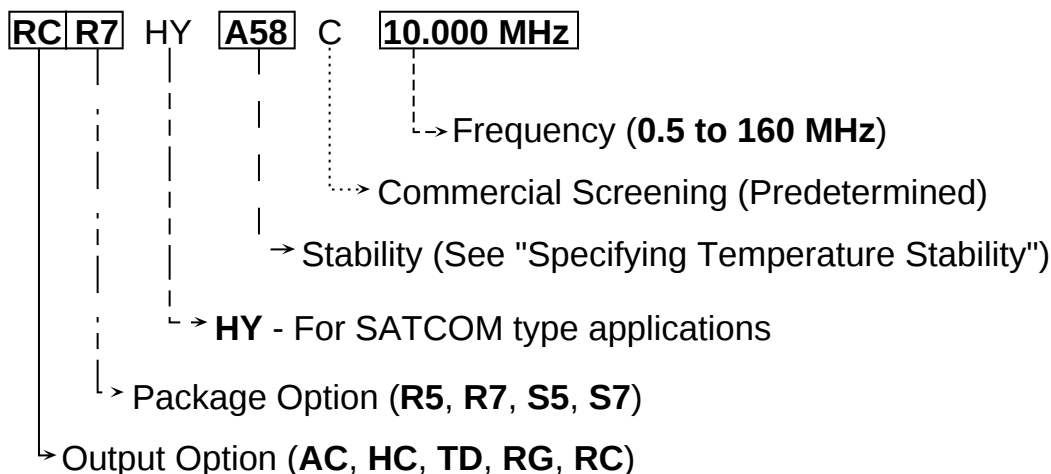

For HX Option:

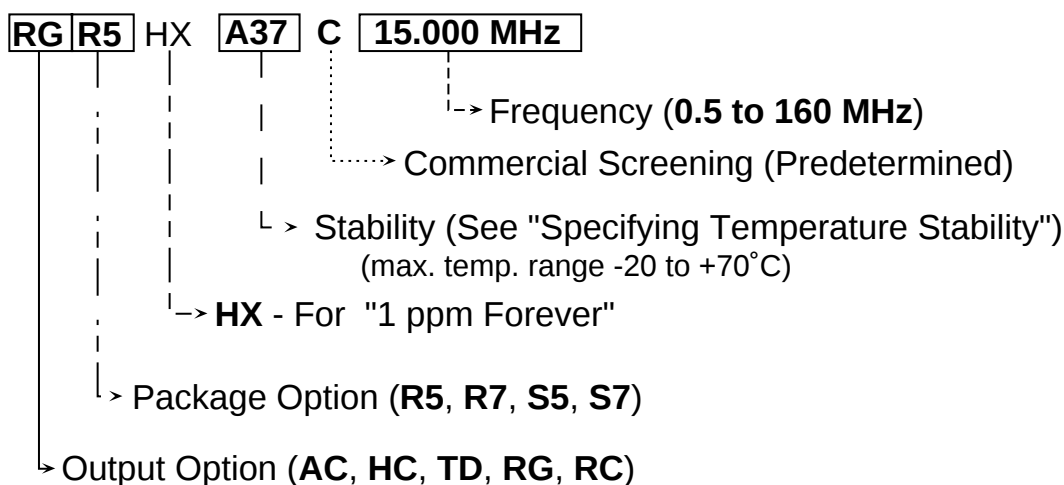

Visit Our Website at
www.vectron.com

For additional information please contact:



www.vectron.com

USA: Vectron International • 166 Glover Avenue, Norwalk CT 06856 Tel: 1-888-VECTRON-1 • Fax: 1-888-FAX-VECTRON
EUROPE: In Denmark, Finland, Ireland, Israel, Norway, Spain, UK Tel: 44 (0) 1703 766-288 • Fax: 44 (0) 1703 766 822
In Austria, Belgium, France, Germany, Italy, Luxembourg
Netherlands, Sweden, Switzerland Tel: 49 (0) 72 63 6480 • Fax: 49 (0) 72 63 6196
ASIA: In China, Taiwan, Japan, Tel: 603-598-0070 • Fax: 603-598-0075
In Korea, Singapore, Australia, India Tel: 203-853-4433 • Fax: 203-849-1423

Vectron International reserves the right to make changes to the product(s) and/or information contained herein without notice.
No liability is assumed as a result of their use or application. No rights under any patent accompany the sale of any such product(s) or information