





Consumer Crystals

SMCX-1



Hmax = 1.3
Hmax = 1.5
Hmax = 2.5


overtone	Frequency [MHz]
1	10 - 40
3	35 - 90
5	90 - 150



Calibration tolerance: ± 20 ppm, ± 30 ppm, ± 50 ppm
Temperature stability from -10°C to $+60^{\circ}\text{C}$: ± 30 ppm, ± 50 ppm

All dimensions in mm (max)

HC-49 / S-SMD


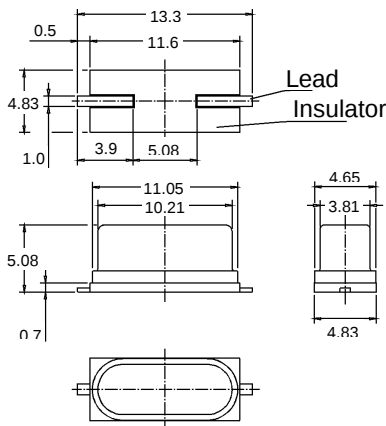


overtone	Frequency [MHz]
1	3.5 - 41
3	26 - 60

Calibration tolerance: ± 50 ppm
Temperature stability from -20°C to $+70^{\circ}\text{C}$: ± 50 ppm

All dimensions in mm (max)

SMCX-2

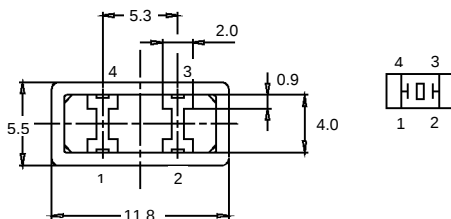

overtone	Frequency [MHz]
1	3.5 - 30

Calibration tolerance: ± 50 ppm
Temperature stability from -20°C to $+70^{\circ}\text{C}$: ± 50 ppm

All dimensions in mm (max)
Other SMD-packages upon request.



VECTRON
INTERNATIONAL
A DOVER TECHNOLOGIES COMPANY

166 Glover Avenue
Norwalk, CT 06856

Tel: 1-888-VECTRON-1
Fax: 1-888-FAX-VECTRON
www.vectron.com