
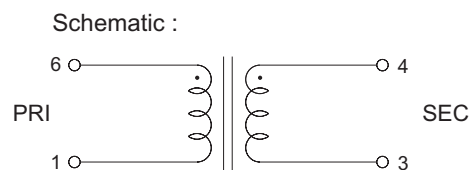


Line Filters

EMI Common-Mode Suppression Inductors

HFZ24V Type

Mechanical Dimension: Unit: mm

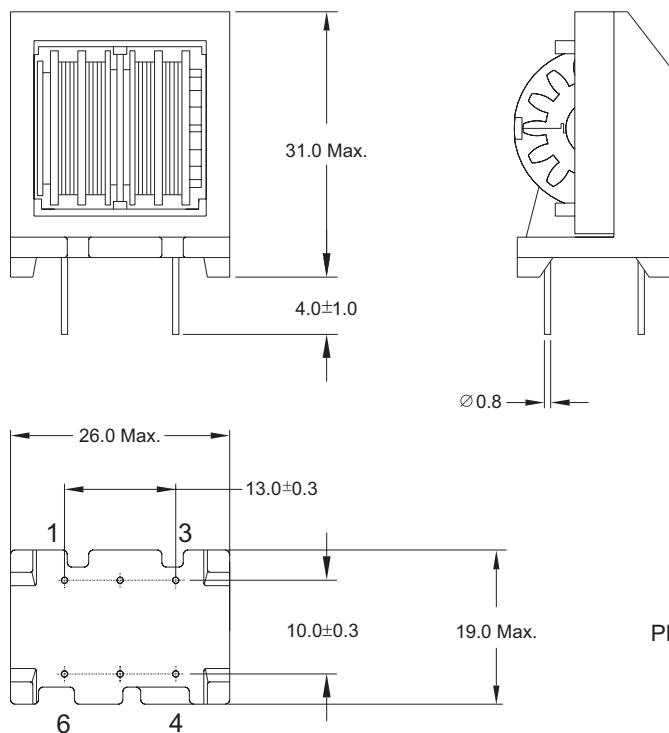

Electrical Characteristics:

■ AT 25°C, 40KHz/1V Tested:

PART NO.	INDUCTANCE (mH) MIN	DCR (mΩ) MAX	RATED CURRENT (Aac)	TEMPERATURE RISE (°C) MAX
HFZ24V01	78.0	2015	0.3	45
HFZ24V02	68.0	1815	0.4	45
HFZ24V03	54.5	1390	0.5	45
HFZ24V04	35.0	930	0.6	45
HFZ24V05	22.0	550	0.9	45
HFZ24V06	18.0	490	1.0	45
HFZ24V07	14.7	360	1.1	45
HFZ24V08	9.9	250	1.4	45
HFZ24V09	8.1	220	1.5	45
HFZ24V10	6.0	155	1.8	45
HFZ24V11	4.4	115	2.0	45
HFZ24V12	2.9	87	2.4	45

* WITHSTANDING VOLTAGE BETWEEN L1 & L2 1.5KV 1 MINUTE
* GOOD DIFFERENCE IN WINDING L1 & L2 INDUCTANCE



沙井欣旺电子有限公司

XINWANG ELECTRONICS, INC.
TEL: 0755-29696626 FAX: 0755-27289711
E-mail: zhangxf815@163.com