

IS201, IS202, IS203, IS204,
ISD201, ISD202, ISD203, ISD204,
ISQ201, ISQ202, ISQ203, ISQ204



HIGH DENSITY PHOTOTRANSISTOR OPTICALLY COUPLED ISOLATORS

APPROVALS

- UL recognised, File No. E91231

'X' SPECIFICATION APPROVALS

- VDE 0884 in 3 available lead form : -
 - STD
 - G form
 - SMD approved to CECC 0080
- EN60950 pending

DESCRIPTION

The IS20*, ISD20*, ISQ20* coupled isolators consist of infrared light emitting diodes and NPN silicon photo packages.

FEATURES

Options :-



10mm lead spread - add G after part no.

Tape&reel - add SMT&R after part no.

- High Isolation Voltage ($5.3\text{kV}_{\text{RMS}}, 7.5\text{kV}_{\text{PK}}$)
- High BV_{CEO} (70V min)
- All electrical parameter 100% tested
- Custom electrical selections available

APPLICATIONS

- Computer terminals
- Industrial systems controllers
- Signal transmission between systems of different potentials and impedances

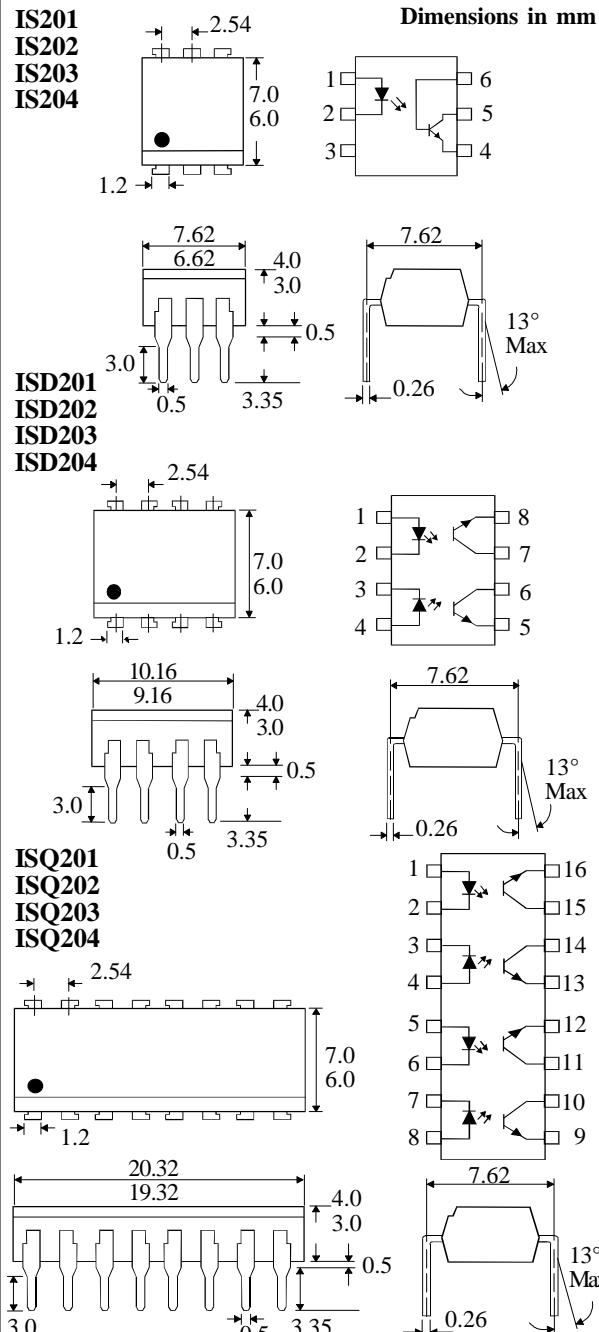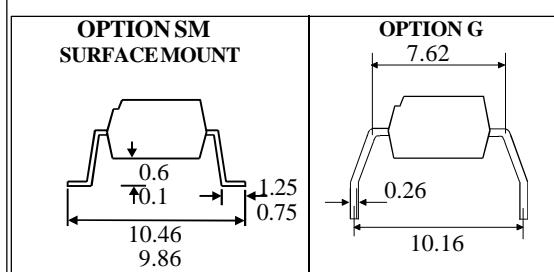

ISOCOM COMPONENTS LTD
Unit 25B, Park View Road West,
Park View Industrial Estate, Brenda Road
Hartlepool, Cleveland, TS25 1YD
Tel: (01429) 863609 Fax : (01429) 863581

ISOCOM INC
1024 S. Greenville Ave, Suite 240,
Allen, TX 75002 USA
Tel: (214) 495-0755 Fax: (214) 495-0901
e-mail info@isocom.com
<http://www.isocom.com>

ABSOLUTE MAXIMUM RATINGS
(25°C unless otherwise specified)

Storage Temperature	-55°C to + 125°C
Operating Temperature	-55°C to + 100°C
Lead Soldering Temperature (1/16 inch (1.6mm) from case for 10 secs)	260°C

INPUT DIODE

Forward Current	50mA
Reverse Voltage	6V
Power Dissipation	70mW

OUTPUT TRANSISTOR

Collector-emitter Voltage BV _{CEO}	70V
Emitter-collector Voltage BV _{ECO}	6V
Power Dissipation	150mW

POWER DISSIPATION

Total Power Dissipation	200mW
(derate linearly 2.67mW/°C above 25°C)	

ELECTRICAL CHARACTERISTICS (T_A = 25°C Unless otherwise noted)

PARAMETER		MIN	TYP	MAX	UNITS	TEST CONDITION
Input	Forward Voltage (V _F) Reverse Voltage (V _R) Reverse Current (I _R)	6	1.2	1.65	V	I _F = 50mA
				10	µA	I _R = 10µA V _R = 6V
Output	Collector-emitter Breakdown (BV _{CEO}) (Note 2)	70			V	I _C = 1mA
	Emitter-collector Breakdown (BV _{ECO}) Collector-emitter Dark Current (I _{CEO})	6		50	V nA	I _E = 100µA V _{CE} = 10V
Coupled	Current Transfer Ratio (CTR) (Note 2) IS201, ISD201, ISQ201 IS201, ISD201, ISQ201 IS202, ISD202, ISQ202 IS202, ISD202, ISQ202 IS203, ISD203, ISQ203 IS203, ISD203, ISQ203 IS204, ISD204, ISQ204 IS204, ISD204, ISQ204 Collector-emitter Saturation Voltage V _{CE(SAT)} Input to Output Isolation Voltage V _{ISO}	75 10 125 30 225 50 200 100 0.2 5300 7500		250 450 400	% % %	10mA I _F , 10V V _{CE} 1mA I _F , 10V V _{CE} 10mA I _F , 10V V _{CE} 1mA I _F , 10V V _{CE} 10mA I _F , 10V V _{CE} 1mA I _F , 10V V _{CE} 10mA I _F , 10V V _{CE} 1mA I _F , 10V V _{CE} 10mA I _F , 2mA I _C See note 1 See note 1 V _{IO} = 500V (note 1) I _F = 10mA V _{CE} = 5V, R _L = 75Ω
	Input-output Isolation Resistance R _{ISO} Output Turn on Time t _{ON} Output Turn off Time t _{OFF}	5x10 ¹⁰		3.0 2.5	Ω µs µs	

Note 1 Measured with input leads shorted together and output leads shorted together.

Note 2 Special Selections are available on request. Please consult the factory.

