



Low Cost DDR Phase Lock Loop Zero Delay Buffer

Recommended Application:

DDR Zero Delay Clock Buffer


Product Description/Features:

- Low skew, low jitter PLL clock driver
- I²C for functional and output control
- Feedback pins for input to output synchronization
- Spread Spectrum tolerant inputs
- 3.3V tolerant CLK_INT input

Switching Characteristics:


- PEAK - PEAK jitter (66MHz): <120ps
- PEAK - PEAK jitter (>100MHz): <75ps
- CYCLE - CYCLE jitter (66MHz): <120ps
- CYCLE - CYCLE jitter (>100MHz): <65ps
- OUTPUT - OUTPUT skew: <100ps
- Output Rise and Fall Time: 650ps - 950ps
- DUTY CYCLE: 49.5% - 50.5%

Pin Configuration

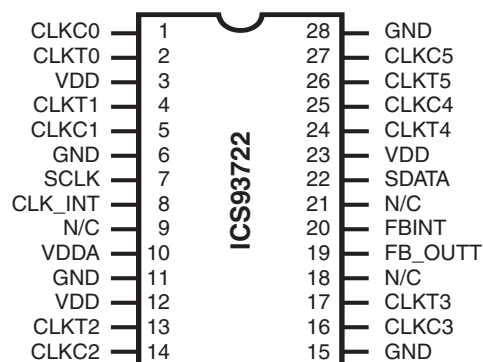

28-Pin SSOP

Block Diagram

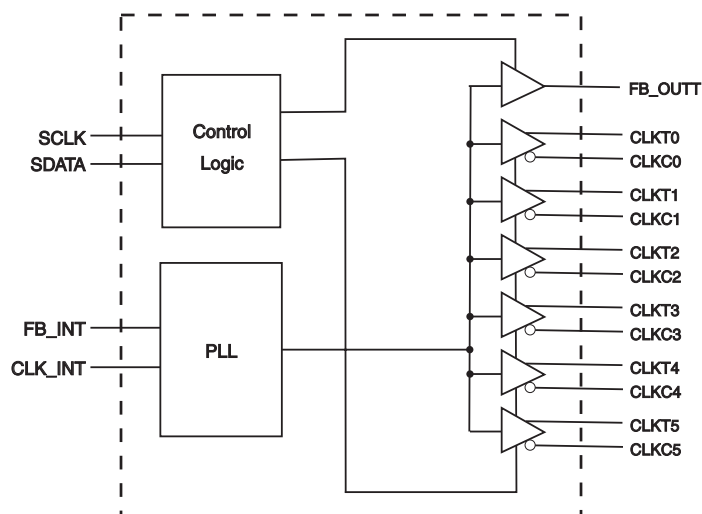

Functionality

INPUTS		OUTPUTS			PLL State
AVDD	CLK_INT	CLKT	CLKC	FB_OUTT	
2.5V (nom)	L	L	H	L	on
2.5V (nom)	H	H	L	H	on
2.5V (nom)	<20MHz) ⁽¹⁾	Z	Z	Z	off



Advance Information

Pin Descriptions

PIN NUMBER	PIN NAME	TYPE	DESCRIPTION
6, 11, 15, 28	GND	PWR	Ground
27, 25, 16, 14, 5, 1	CLKC(5:0)	OUT	"Complementary" clocks of differential pair outputs.
26, 24, 17, 13, 4, 2	CLKT(5:0)	OUT	"True" Clock of differential pair outputs.
3, 12, 23	VDD	PWR	Power supply 2.5V
7	SCLK	IN	Clock input of I ² C input, 5V tolerant input
8	CLK_INT	IN	"True" reference clock input
9, 18, 21	N/C	-	Not connected
10	VDDA	PWR	Analog power supply, 2.5V
19	FB_OUTT	OUT	"True" " Feedback output, dedicated for external feedback. It switches at the same frequency as the CLK. This output must be wired to FB_INT.
20	FB_INT	IN	"True" Feedback input, provides feedback signal to the internal PLL for synchronization with CLK_INT to eliminate phase error.
22	SDATA	IN	Data input for I ² C serial input, 5V tolerant input

Bytes 0 to 4 are reserved power up default = 1.

Byte 5: Output Control (1= enable, 0= disable)

BIT	PIN#	PWD	DESCRIPTION
Bit 7	2, 1	1	CLK0 (T&C)
Bit 6	4, 5	1	CLK1 (T&C)
Bit 5	-	1	Reserved
Bit 4	-	1	Reserved
Bit 3	13, 14	1	CLK2 (T&C)
Bit 2	17, 16	1	CLK3 (T&C)
Bit 1	-	1	Reserved
Bit 0	-	1	Reserved

Byte 6: Output Control (1= enable, 0= disable)

BIT	PIN#	PWD	DESCRIPTION
Bit7	-	1	Reserved
Bit6	-	1	Reserved
Bit5	-	1	Reserved
Bit4	-	1	Reserved
Bit3	24, 25	1	CLK4 (T&C)
Bit2	-	1	Reserved
Bit1	26, 27	1	CLK5 (T&C)
Bit0	-	1	Reserved

Note: PWD = Power Up Default



Absolute Maximum Ratings

Supply Voltage (VDD & AVDD)	-0.5V to 3.6V
Logic Inputs	GND-0.5 V to V _{DD} +0.5 V
Ambient Operating Temperature	0°C to +85°C
Storage Temperature	-65°C to +150°C

Stresses above those listed under *Absolute Maximum Ratings* may cause permanent damage to the device. These ratings are stress specifications only and functional operation of the device at these or any other conditions above those listed in the operational sections of the specifications is not implied. Exposure to absolute maximum rating conditions for extended periods may affect product reliability.

Electrical Characteristics - Input/Supply/Common Output Parameters

T_A = 0 - 85°C; Supply Voltage AVDD, VDD = 2.5 V +/- 0.2V (unless otherwise stated)

PARAMETER	SYMBOL	CONDITIONS	MIN	TYP	MAX	UNITS
Input High Current	I _{IH}	VI = VDD or GND				μA
Input Low Current	I _{IL}	VI = VDD or GND				μA
Operating Supply Current	I _{DD2.5}	CL = 0pf				mA
	I _{DDPD}	CL = 0pf			100	μA
Output High Current	I _{OH}	VDD = 2.3V, V _{OUT} = 1V	-18			mA
Output Low Current	I _{OL}	VDD = 2.3V, V _{OUT} = 1.2V	26			mA
High Impedance Output Current	I _{OZ}	VDD=2.7V, Vout=VDD or GND			±10	μA
Input Clamp Voltage	V _{IK}	Iin = -18mA				V
High-level output voltage	V _{OH}	VDD = min to max, IOH = -1 mA				V
		VDD = 2.3V, IOH = -12 mA				V
Low-level output voltage	V _{OL}	VDD = min to max I _{OL} =1 mA			0.1	
		VDD = 2.3V IOH=12 mA			0.6	V
Input Capacitance ¹	C _{IN}	VI = GND or VDD				pF
Output Capacitance ¹	C _{OUT}	VOU = GND or VDD		3		pF

¹Guaranteed by design, not 100% tested in production.

Recommended Operating Condition

T_A = 0 - 85°C; Supply Voltage AVDD, VDD = 2.5 V +/- 0.2V (unless otherwise stated)

PARAMETER	SYMBOL	CONDITIONS	MIN	TYP	MAX	UNITS
Analog/core supply voltage	A _{VDD}		2.3	2.5	2.7	V
Input voltage level	V _{IN}					V
Input differential-pair crossing voltage	V _{IC}					V
Output differential-pair crossing voltage	V _{OC}					V

¹Guaranteed by design, not 100% tested in production.



Advance Information

Timing Requirements

$T_A = 0 - 85^\circ\text{C}$; Supply Voltage AVDD, VDD = 2.5 V +/- 0.2V (unless otherwise stated)

PARAMETER	SYMBOL	CONDITIONS	MIN	MAX	UNITS
Operating clock frequency	freq_{op}		66	170	MHz
Input clock duty cycle	d_{in}		40	60	%
CLK stabilization	T_{STAB}	from VDD = 3.3V to 1% target freq.		100	μs

Switching Characteristics

PARAMETER	SYMBOL	CONDITION	MIN	TYP	MAX	UNITS
Jitter; Absoulte Jitter	T_{jabs}	66MHz			120	ps
		100/125/133/167MHz			75	ps
Cycle to Cycle Jitter1	$T_{\text{cyc}} - T_{\text{cyc}}$	66MHz			110	ps
		100/125/133/167MHz			65	ps
Phase error	$t_{(\text{phase error})}$		-150		150	ps
Output to Output Skew	T_{skew}				100	ps
Pulse skew	T_{skewp}				100	ps
Duty cycle	D_C^2	66MHz to 100MHz	49.5		50.5	%
		101MHz to 167MHz	49		51	%
Rise Time, Fall Time	t_r, t_f	Load = 120 Ω /16pF	650	800	950	ps

Notes:

- Refers to transition on noninverting output.
- While the pulse skew is almost constant over frequency, the duty cycle error increases at higher frequencies. This is due to the formula: duty cycle= t_{wH}/t_c , were the cycle (t_c) decreases as the frequency goes up.



General I²C serial interface information

The information in this section assumes familiarity with I²C programming.
For more information, contact ICS for an I²C programming application note.

How to Write:

- Controller (host) sends a start bit.
- Controller (host) sends the write address D2_(H)
- ICS clock will **acknowledge**
- Controller (host) sends a dummy command code
- ICS clock will **acknowledge**
- Controller (host) sends a dummy byte count
- ICS clock will **acknowledge**
- Controller (host) starts sending first byte (Byte 0) through byte 6
- ICS clock will **acknowledge** each byte *one at a time*.
- Controller (host) sends a Stop bit

How to Write:	
Controller (Host)	ICS (Slave/Receiver)
Start Bit	
Address D2 _(H)	
	ACK
Dummy Command Code	
	ACK
Dummy Byte Count	
	ACK
Byte 0	
	ACK
Byte 1	
	ACK
Byte 2	
	ACK
Byte 3	
	ACK
Byte 4	
	ACK
Byte 5	
	ACK
Byte 6	
	ACK
Stop Bit	

How to Read:

- Controller (host) will send start bit.
- Controller (host) sends the read address D3_(H)
- ICS clock will **acknowledge**
- ICS clock will send the **byte count**
- Controller (host) acknowledges
- ICS clock sends first byte (**Byte 0**) through **byte 6**
- Controller (host) will need to acknowledge each byte
- Controller (host) will send a stop bit

How to Read:	
Controller (Host)	ICS (Slave/Receiver)
Start Bit	
Address D3 _(H)	
	ACK
	Byte Count
ACK	
	Byte 0
ACK	
	Byte 1
ACK	
	Byte 2
ACK	
	Byte 3
ACK	
	Byte 4
ACK	
	Byte 5
ACK	
	Byte 6
ACK	
Stop Bit	


Notes:

1. The ICS clock generator is a slave/receiver, I²C component. It can read back the data stored in the latches for verification.
Read-Back will support Intel PIIX4 "Block-Read" protocol.
2. The data transfer rate supported by this clock generator is 100K bits/sec or less (standard mode)
3. The input is operating at 3.3V logic levels.
4. The data byte format is 8 bit bytes.
5. To simplify the clock generator I²C interface, the protocol is set to use only "**Block-Writes**" from the controller. The bytes must be accessed in sequential order from lowest to highest byte with the ability to stop after any complete byte has been transferred. The Command code and Byte count shown above must be sent, but the data is ignored for those two bytes. The data is loaded until a Stop sequence is issued.
6. At power-on, all registers are set to a default condition, as shown.

ICS93722



Advance Information

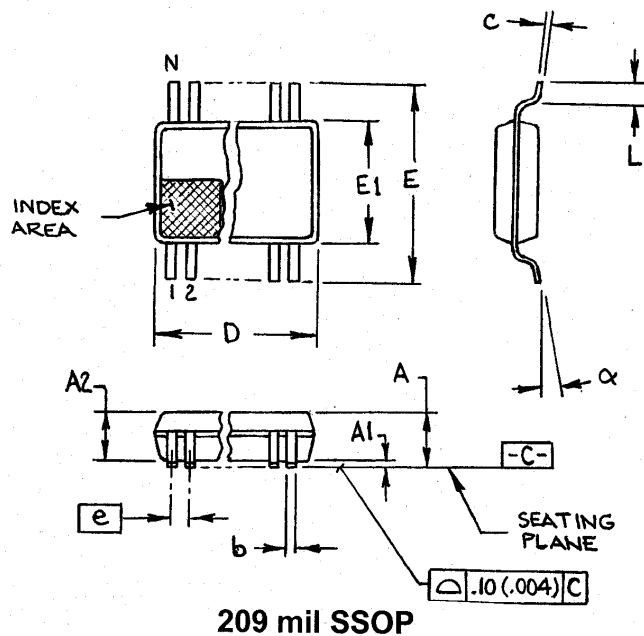

SYMBOL	In Millimeters COMMON DIMENSIONS		In Inches COMMON DIMENSIONS	
	MIN	MAX	MIN	MAX
A	-	2.00	-	.079
A1	0.05	-	.002	-
A2	1.65	1.85	.065	.073
b	0.22	0.38	.009	.015
c	0.09	0.25	.0035	.010
D	SEE VARIATIONS		SEE VARIATIONS	
E	7.40	8.20	.291	.323
E1	5.00	5.60	.197	.220
e	0.65 BASIC		0.0256 BASIC	
L	0.55	0.95	.022	.037
N	SEE VARIATIONS		SEE VARIATIONS	
α	0°	8°	0°	8°

VARIATIONS

N	D mm.		D (inch)	
	MIN	MAX	MIN	MAX
28	9.90	10.50	.390	.413

MO-150 JEDEC
Doc# 10-0033 6/100 Rev B

Ordering Information

ICS93722yFT

Example:

ICS XXXX y F - T

Designation for tape and reel packaging

Package Type
F=SSOP

Revision Designator (will not correlate with datasheet revision)

Device Type

Prefix