

Product Bulletin



ISBP2 Series Integrated Two-Stage Isolators/Bandpass Filters

The ISBP2 Series hybrid components are high-performance optical assemblies that combine the functions of a polarization insensitive two-stage isolator and a bandpass filter into a single compact package.

The overall insertion loss is reduced by eliminating unnecessary splicing and coupling to the fibers. Their high performance characteristics make them ideally suitable for laboratory and field applications.

These components are configured with Corning SMF-28 fibers.

L-band hybrid components are also available.


Key Features

- Miniature package
- Very high isolation
- Low wavelength ripple, polarization dependent loss (PDL), and polarization mode dispersion (PMD)
- Typical losses of 0.9 dB (signal)
- Designed for stable and highly reliable performance


Applications

- Compact erbium doped fiber amplifier (EDFA) modules
- Forward/backward pump design with 1532 nm rejector

Transmission Spectrum

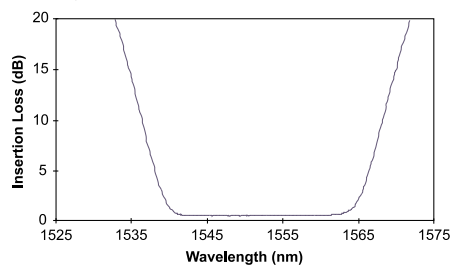

Configuration



Ports 1, 2: Corning SMF-28

Qualification and Reliability Tests

Type of Test	Conditions	Duration
Damp heat	85 °C and 85% RH	2500 hours
High temperature storage	85 °C	2500 hours
Low temperature storage	-40 °C	2500 hours
Temperature cycling	-40 to 75 °C	500 cycles
Temperature humidity cycling	-40 to 75 °C, 90% RH	5 cycles
Water immersion	43 °C	340 hours
Vibration	10-2000-10 Hz	12 cycles x 3axis
Impact	500 G, 8 impacts x 3 axis	5 cycles
Cable retention	0.5 kg for 1 minute	3 pulls/fiber

Specifications

Parameter			Premium Grade	Standard Grade
Model			ISBP2+1P	ISBP2+1S
Signal wavelength	λ		1542 to 1560 nm	
Filter rejection	at 1532 nm	typical minimum	25 dB 20 dB	25 dB 20 dB
Insertion loss ¹	1→2 over λ	typical maximum	0.8 dB 1.1 dB	1.0 dB 1.3 dB
Isolation	2→1 over λ at 23 °C	typical minimum	50 dB 45 dB	45 dB 40 dB
Return loss	all ports	minimum	55 dB	50 dB
PDL	1→2 over λ	typical maximum	0.07 dB 0.15 dB	0.09 dB 0.2 dB
PMD	1→2 over $\lambda/2$	maximum	0.05 ps	0.05 ps
Maximum optical power		300 mW		
Dimensions	(cylindrical D x L)		5.5 x 39 mm	
Operating temperature			0 to 60 °C	
Storage temperature			-40 to 85 °C	

1. Measured without connectors.

Note: These specifications are applicable over the operating temperature range unless otherwise specified.

Ordering Information

Indicate your requirements by selecting one option from each configuration table. Please print the corresponding codes in the available boxes to form your part number. For more information on this or other products and their availability, please contact your local JDS Uniphase sales representative or JDS Uniphase directly at 613 727-1303, or by fax 613 727-8284, or via email at sales@ca.jdsunph.com, or visit our Web site at www.jdsunph.com.

Sample: ISBP2+1SA1.0NC

ISBP2+1

Code	Grade
S	Standard
P	Premium

Code	Fiber Type (all ports)
A	9/125/250 Corning SMF-28 ¹
E	900 μ m tight buffer ²
D	900 μ m clear Hytel loose tube ²

Code	Connector Type (all ports)
NC	No connector ¹
FP	FC/PC
FA	FC/APC
SP	ST/PC
SC	SC/PC
SU	SC/APC

Code	Typical Fiber Length (all ports)
0.5	0.5 meter
1.0	1.0 meter ¹
1.5	1.5 meters
2.0	2.0 meters

1. Standard
2. Recommended with connectorized device.

Hytel is a registered trademark of DuPont.
SMF-28 is a registered trademark of Corning Incorporated.



JDS Uniphase Corporation
570 West Hunt Club Road
Nepean (Ottawa), Ontario
K2G 5W8 Canada

Tel 613 727-1303
Fax 613 727-8284
sales@ca.jdsunph.com
www.jdsunph.com

All information contained herein is believed to be accurate and is subject to change without notice. No responsibility is assumed for its use. JDS Uniphase Corporation, its subsidiaries and affiliates, or manufacturer, reserve the right to make changes, without notice, to product design, product components, and product manufacturing methods. Some specific combinations of options may not be available. Please contact JDS Uniphase for more information. ©JDS Uniphase Corporation. All rights reserved.

MKT-DS-0116 Rev.D 10/99 Printed in Canada