

ILC5061

Power Supply reset Monitor with 1% Precision

Features

- All-CMOS design in SOT-23 or SC70 package
- $\pm 1\%$ precision in Reset Detection
- Only $1\mu\text{A}$ of I_q
- 2mA of sink current capability
- Built-in hysteresis of 5% of detection voltage
- Voltage options of 2.6, 2.9, 3.1, 4.4, and 4.6V fit most supervisory applications
- Open-Drain Reset Output

Applications

- Microprocessor reset circuits
- Memory battery back-up circuitry
- Power-on reset circuits
- Portable and battery powered electronics


Description

All-CMOS Monitor circuits in either a 3-lead SOT-23 or SC70 package offer the best performance in power consumption and accuracy.


The ILC5061 comes in a series of $\pm 1\%$ accurate trip voltages to fit most microprocessor applications. Even though its output can sink 2mA, the device draws only $1\mu\text{A}$ in normal operation.

Additionally, a built-in hysteresis of 5% of detect voltage simplifies system design.

Block Diagram



Pin Package Configurations

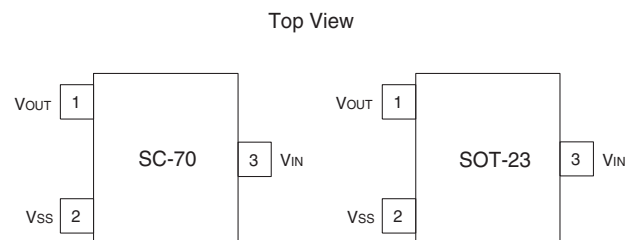

Absolute Maximum Ratings

Parameter		Symbol	Ratings	Units
Input Voltages		V_{IN}	12	V
Output Current		I_{OUT}	50	mA
Output Voltages		V_{OUT}	$V_{SS}-0.3 \sim +V_{IN}+0.3$	V
Continuous Total Power Dissipation	SOT 23	P_d	150	mW
Operation Ambient temperature		T_{opr}	-30~+80	°C
Storage Temperature		T_{stg}	-40~+125	°C

Electrical Characteristics $T_A = 25^\circ\text{C}$

Parameter	Symbol	Conditions	Min	Type	Max	Units
Detect Fail Voltage	V_{DF}		$V_{DF} \times 0.99$	V_{DF}	$V_{DF} \times 1.01$	V
Hysteresis Range	V_{HYS}		$V_{DF} \times 0.02$	$V_{DF} \times 0.05$	$V_{DF} \times 0.08$	V
Supply Current	I_{SS}	$V_{IN} = 1.5\text{V}$ $V_{IN} = 2.0\text{V}$ $V_{IN} = 3.0\text{V}$ $V_{IN} = 4.0\text{V}$ $V_{IN} = 5.0\text{V}$		0.9 1.0 1.3 1.6 2.0	2.6 3.0 3.4 3.8 4.2	μA
Operating Voltage	V_{IN}	$V_{DF} = 2.1 \sim 6.0\text{V}$	1.5		10.0	V
Output Current	I_{OUT}	N-ch $V_{DS} = 0.5\text{V}$ $V_{IN} = 1.0\text{V}$ $V_{IN} = 2.0\text{V}$ $V_{IN} = 3.0\text{V}$ $V_{IN} = 4.0\text{V}$ $V_{IN} = 5.0\text{V}$		2.2 7.7 10.1 11.5 13.0		mA
Temperature Characteristics	$DV_{DF}/(DT_{opr} \times V_{DF})$	$-30^\circ\text{C} \leq T_{opr} \leq 80^\circ\text{C}$	-200	± 100	+200	Ppm/°C
Delay Time Release Voltage Output Inversion)	T_{DLY} (V_{DR} to V_{OUT} inversion)				0.1	ms


Note:

1. An additional resistor between the V_{IN} pin and supply voltage may cause deterioration of the characteristics due to increasing V_{DR} .




Functional Description

The following designators 1~6 refer to the timing diagram below.


1. While the input voltage (V_{IN}) is higher than the detect voltage (V_{DF}), the V_{OUT} output pin is at high impedance state.
2. When the input V_{IN} voltage falls lower than V_{DF} , V_{OUT} drops near to ground voltage
3. If the input voltage further decreases below the minimum operating voltage (V_{MIN}), the V_{OUT} output becomes unstable. In this condition, if the V_{OUT} pin is pulled up, V_{OUT} indicates the V_{IN} voltage.
4. During an increase of the input voltage from the V_{SS} voltage, V_{OUT} is not stable in the voltage below the V_{MIN} . Exceeding that level, the output stays at the ground level (V_{SS}) between the minimum operating voltage (V_{MIN}) and the detect release voltage (V_{DR}).
5. If the input voltage increases more than V_{DR} , then the V_{OUT} output pin is at high impedance state.
6. The difference between V_{DR} and V_{DF} is the hysteresis in the system.

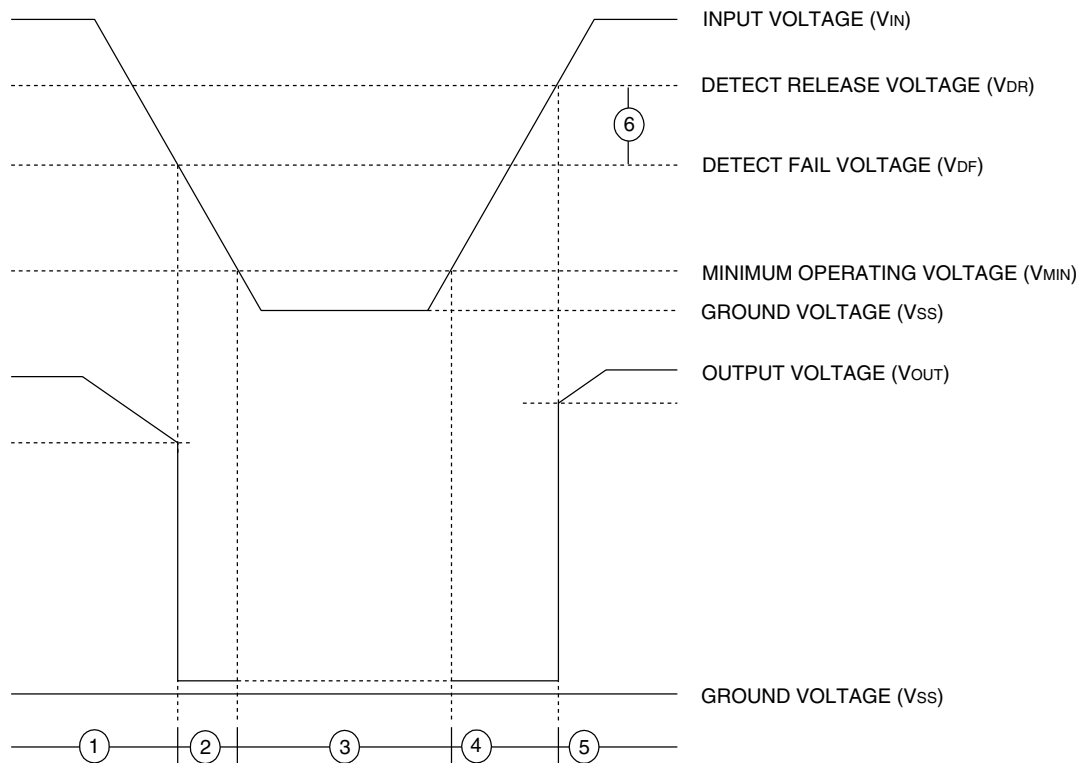



Typical Performance Characteristics (General conditions for all curves)

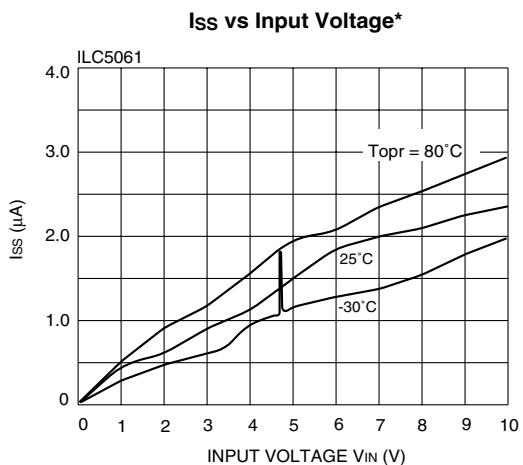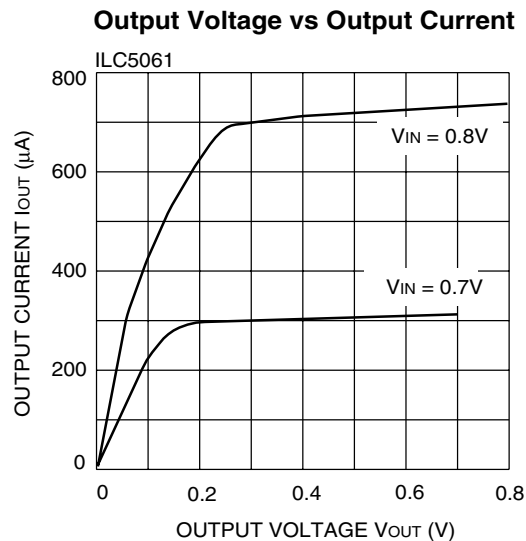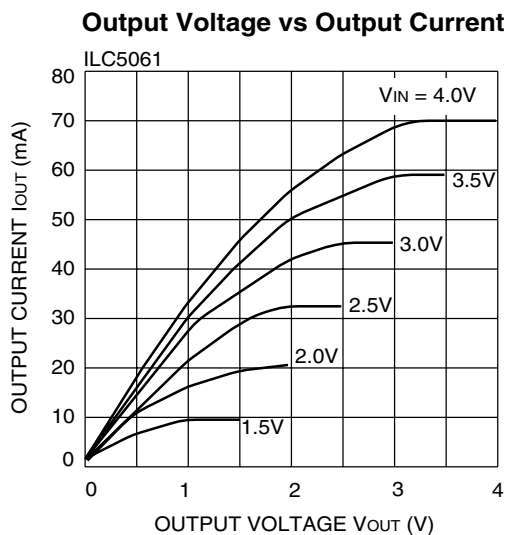





* A spike of 1/2 to 1 μA may appear as V_{IN} crosses V_{DR} or V_{DF}

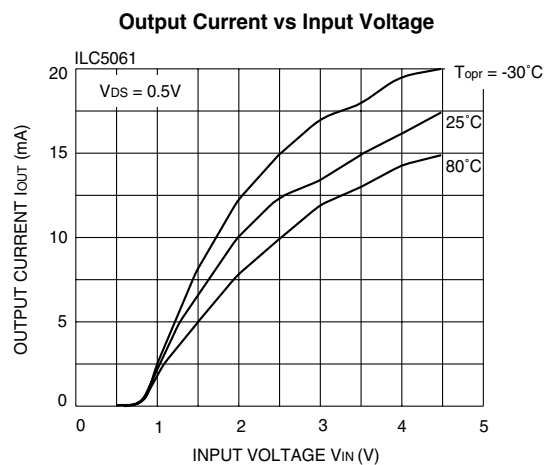

SOT-23 Package

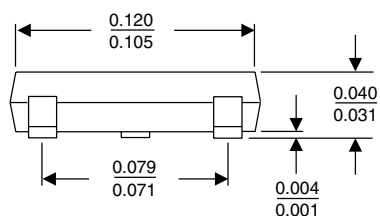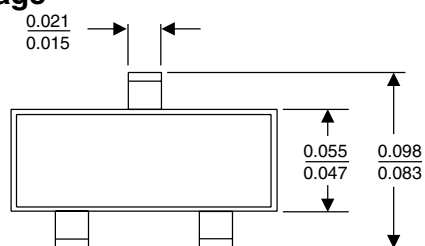

SC70 Package

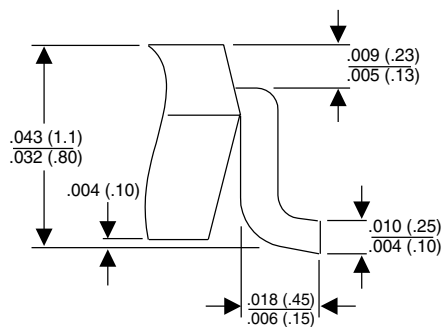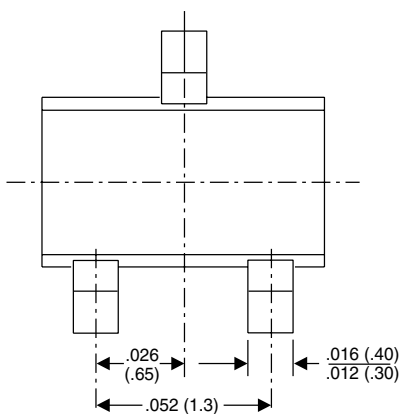

Ordering Information

PART NUMBER	TOP MARKING	RESET THRESHOLD (V)	OUTPUT TYPE	PACKAGE	PACKING METHOD
ILC5061AM23	M3AY	2.3 ± 1%	Open-Drain, active LOW	3-Pin, SOT23	3000 units in T&R
ILC5061AM25	M5AY	2.5 ± 1%	Open-Drain, active LOW	3-Pin, SOT23	3000 units in T&R
ILC5061AM26	M6AY	2.6 ± 1%	Open-Drain, active LOW	3-Pin, SOT23	3000 units in T&R
ILC5061AM27	M7AY	2.7 ± 1%	Open-Drain, active LOW	3-Pin, SOT23	3000 units in T&R
ILC5061AM28	M8AY	2.8 ± 1%	Open-Drain, active LOW	3-Pin, SOT23	3000 units in T&R
ILC5061AM29	M9AY	2.9 ± 1%	Open-Drain, active LOW	3-Pin, SOT23	3000 units in T&R
ILC5061AM31	N1AY	3.1 ± 1%	Open-Drain, active LOW	3-Pin, SOT23	3000 units in T&R
ILC5061AM32	N2AY	3.2 ± 1%	Open-Drain, active LOW	3-Pin, SOT23	3000 units in T&R
ILC5061AM34	N4AY	3.4 ± 1%	Open-Drain, active LOW	3-Pin, SOT23	3000 units in T&R
ILC5061AM44	P4AY	4.4 ± 1%	Open-Drain, active LOW	3-Pin, SOT23	3000 units in T&R
ILC5061AM46	P6AY	4.6 ± 1%	Open-Drain, active LOW	3-Pin, SOT23	3000 units in T&R
ILC5061M23	M3Y	2.3 ± 2%	Open-Drain, active LOW	3-Pin, SOT23	3000 units in T&R
ILC5061M25	M5Y	2.5 ± 2%	Open-Drain, active LOW	3-Pin, SOT23	3000 units in T&R
ILC5061M26	M6Y	2.6 ± 2%	Open-Drain, active LOW	3-Pin, SOT23	3000 units in T&R
ILC5061M27	M7Y	2.7 ± 2%	Open-Drain, active LOW	3-Pin, SOT23	3000 units in T&R
ILC5061M28	M8Y	2.8 ± 2%	Open-Drain, active LOW	3-Pin, SOT23	3000 units in T&R
ILC5061M29	M9Y	2.9 ± 2%	Open-Drain, active LOW	3-Pin, SOT23	3000 units in T&R
ILC5061M31	N1Y	3.1 ± 2%	Open-Drain, active LOW	3-Pin, SOT23	3000 units in T&R
ILC5061M32	N2Y	3.2 ± 2%	Open-Drain, active LOW	3-Pin, SOT23	3000 units in T&R
ILC5061M34	N4Y	3.4 ± 2%	Open-Drain, active LOW	3-Pin, SOT23	3000 units in T&R
ILC5061M44	P4Y	4.4 ± 2%	Open-Drain, active LOW	3-Pin, SOT23	3000 units in T&R
ILC5061M46	P6Y	4.6 ± 2%	Open-Drain, active LOW	3-Pin, SOT23	3000 units in T&R
ILC5061AIC23	M3AY	2.3 ± 1%	Open-Drain, active LOW	3-Pin, SC70	3000 units in T&R
ILC5061AIC25	M5AY	2.5 ± 1%	Open-Drain, active LOW	3-Pin, SC70	3000 units in T&R
ILC5061AIC26	M6AY	2.6 ± 1%	Open-Drain, active LOW	3-Pin, SC70	3000 units in T&R
ILC5061AIC27	M7AY	2.7 ± 1%	Open-Drain, active LOW	3-Pin, SC70	3000 units in T&R
ILC5061AIC28	M8AY	2.8 ± 1%	Open-Drain, active LOW	3-Pin, SC70	3000 units in T&R
ILC5061AIC29	M9AY	2.9 ± 1%	Open-Drain, active LOW	3-Pin, SC70	3000 units in T&R
ILC5061AIC31	N1AY	3.1 ± 1%	Open-Drain, active LOW	3-Pin, SC70	3000 units in T&R
ILC5061AIC32	N2AY	3.2 ± 1%	Open-Drain, active LOW	3-Pin, SC70	3000 units in T&R
ILC5061AIC34	N4AY	3.4 ± 1%	Open-Drain, active LOW	3-Pin, SC70	3000 units in T&R
ILC5061AIC44	P4AY	4.4 ± 1%	Open-Drain, active LOW	3-Pin, SC70	3000 units in T&R
ILC5061AIC46	P6AY	4.6 ± 1%	Open-Drain, active LOW	3-Pin, SC70	3000 units in T&R
ILC5061IC23	M3Y	2.3 ± 2%	Open-Drain, active LOW	3-Pin, SC70	3000 units in T&R
ILC5061IC25	M5Y	2.5 ± 2%	Open-Drain, active LOW	3-Pin, SC70	3000 units in T&R
ILC5061IC26	M6Y	2.6 ± 2%	Open-Drain, active LOW	3-Pin, SC70	3000 units in T&R
ILC5061IC27	M7Y	2.7 ± 2%	Open-Drain, active LOW	3-Pin, SC70	3000 units in T&R
ILC5061IC28	M8Y	2.8 ± 2%	Open-Drain, active LOW	3-Pin, SC70	3000 units in T&R
ILC5061IC29	M9Y	2.9 ± 2%	Open-Drain, active LOW	3-Pin, SC70	3000 units in T&R
ILC5061IC31	N1Y	3.1 ± 2%	Open-Drain, active LOW	3-Pin, SC70	3000 units in T&R
ILC5061IC32	N2Y	3.2 ± 2%	Open-Drain, active LOW	3-Pin, SC70	3000 units in T&R
ILC5061IC34	N4Y	3.4 ± 2%	Open-Drain, active LOW	3-Pin, SC70	3000 units in T&R
ILC5061IC44	P4Y	4.4 ± 2%	Open-Drain, active LOW	3-Pin, SC70	3000 units in T&R
ILC5061IC46	P6Y	4.6 ± 2%	Open-Drain, active LOW	3-Pin, SC70	3000 units in T&R

Note 1: Last digit in the "Top Marking" information (represented by "Y" in the above table) represents internal assembly lot number

Note 2: Orientation of Tape & Reeled devices is Right.

DISCLAIMER

FAIRCHILD SEMICONDUCTOR RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY, FUNCTION OR DESIGN. FAIRCHILD DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT DESCRIBED HEREIN; NEITHER DOES IT CONVEY ANY LICENSE UNDER ITS PATENT RIGHTS, NOR THE RIGHTS OF OTHERS.

LIFE SUPPORT POLICY

FAIRCHILD'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF THE PRESIDENT OF FAIRCHILD SEMICONDUCTOR CORPORATION. As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury of the user.
2. A critical component in any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.