


OCXO I403 Series

Square 26 mm TTL/HCMOS

STANDARD SPECIFICATIONS

Frequency	2.500 to 20.000 MHz			
Cut	AT , SC			
Output	TTL/HCMOS Compatible			
Level	‘0’= 0.4 Vdc Max., ‘1’=2.4 Vdc Min.		‘0’=0.1 Vcc Max., ‘1’=0.9 Vcc Min.	
Duty Cycles	50%±5%			
Rise/Fall Time	<10 ns			
Stability				
Temperature	AT: ±1.5 x 10 ⁻⁷ *, SC: ±6 x 10 ⁻⁸ *			
Supply Voltage ±5%	To ±0.05ppm			
Load	To ±0.05ppm			
Aging	AT: ±0.5 ppm/year max		SC: ±0.1 ppm/year max	
Warm up	To within ±0.1ppm in 10 minutes			
	AT Cut		SC Cut	
Phase Noise	Offset	Phase Noise	Offset	Phase Noise
	10 Hz	-110dBc	10 Hz	-115dBc
	100 Hz	-135 dBc	100 Hz	-140 dBc
	1,000 Hz	-140 dBc	1,000 Hz	-145 dBc
	10,000 Hz	-145 dBc	10,000 Hz	-145 dBc
Voltage Control	0.0 VDC to +4.0 VDC			
Voltage Control Range	AT: ±2.0 ppm SC: ±0.5 ppm			
Slope	Negative Slope			
Power Supplies				
Supply Voltage	+5 Vdc ±5%			
Supply current max. during warm up	700 mA			
Supply current typ. @25 ^o C SS	240 mA			
Temperature				
Operating Temperature	-30°C ~ +70°C *			
Storage Temperature	-55°C to +125°C			

- Stability is related to operating temperature

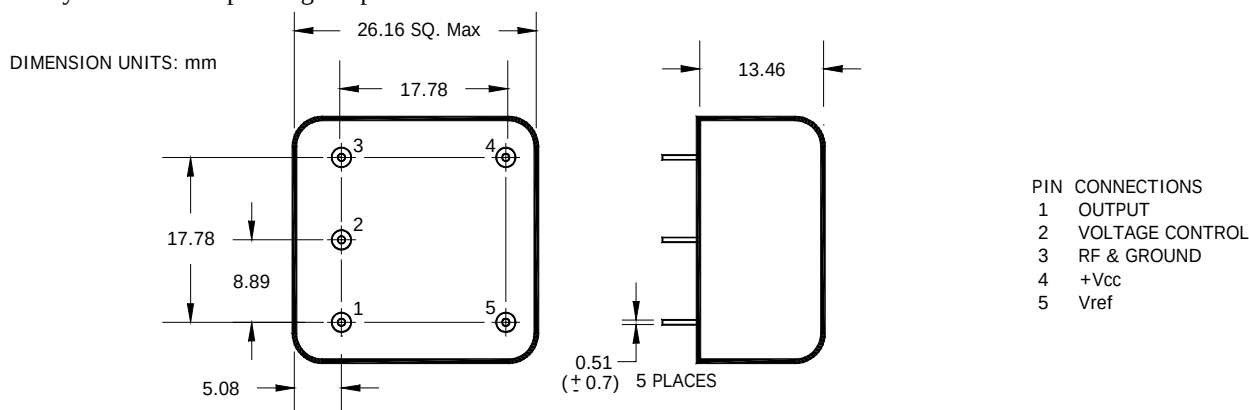

ILSI America

5458 Louie Lane Reno, NV 89511 Phone: 775-851-8880 • Fax: 775-851-8882

• email: e-mail@ilsiamerica.com • www.ilsiamerica.com

Specifications subject to change without notice