
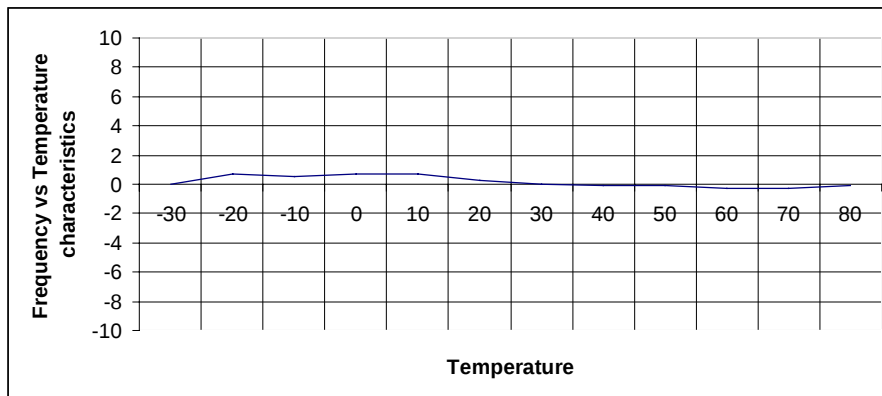


VCTCXO I704 Series

SMD 5 mm x 7 mm Clipped Sine wave

Frequency	12.6/12.8/13.0/14.4/16.8/19.2/19.68/19.8 MHz.
Output Level	Clipped Sine Wave
Level	1.0 V _{p-p} Min
Output Load	10 Kohms/10 pF
Harmonics	-5 dBm Max.
Stability	
Frequency vs. Temperature	±2.5 ppm Max
Frequency vs. Supply Voltage	±0.3 ppm Max ±5%
Frequency vs. Load	±0.2 ppm Max ±10%
Aging @ 25°C	± 1.0 ppm/year Max
Control Voltage	1.5 Vdc ± 1.0 Vdc
Voltage Control Range	± 5 ppm to ± 12ppm
Supply Voltage	3.0Vdc ±5%
Current	2.0 mA Max @25°C
Temperature	
Operating	-20°C to +75°C
Storage	-40°C to +85°C
Part Number	I704-4Q-xxxx

Part Number Guide		Sample Part #:	I704-3Q-13.000
		Temperature Range	Frequency Stability
I704		3	Q
			Frequency
			13.000 MHz

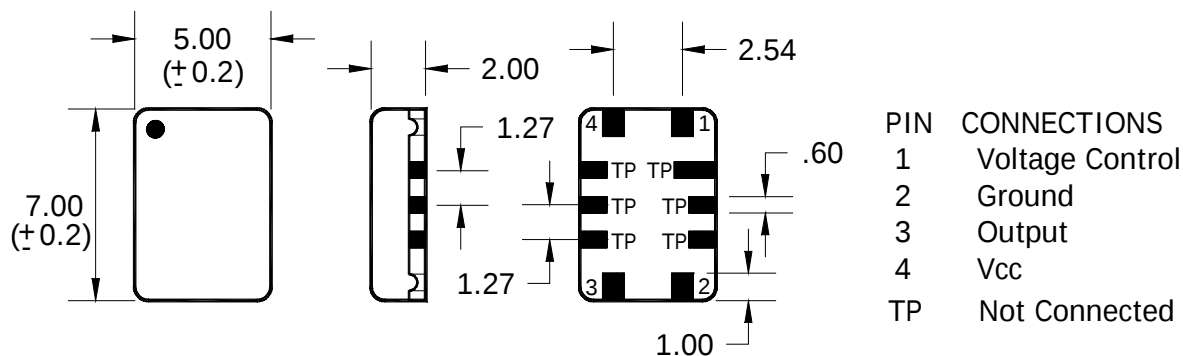

ILSI America

5458 Louie Lane Reno, NV 89511 Phone: 775-851-8880 • Fax: 775-851-8882

• email: e-mail@ilsiamerica.com • www.ilsiamerica.com

Specifications subject to change without notice

