


VCXO I601 Series

SMD TTL

Frequency	2.000 MHz ~ 40.000 MHz
Output Level	'0'= 0.4 Vdc Max., '1'=2.4 Vdc Min.
Duty Cycle	40/60% Min.
Output Load	10 TTL Max.
Stability	
Frequency vs.Temperature	± 25.0 ppm
Aging @ 25°C	± 5.0 ppm Max
Normal Test Temperature	25°C
Control Voltage	2.5 ± 2.0 VDC
Voltage Control Range	± 75.0 ppm
Supply Voltage	5.0VDC ±5%
Current	30 mA Max
Temperature	
Operating	-20°C ~ +75°C
Storage	-40°C to +125°C
Part number	I601-3AM-xxxx

Part Number Guide		Sample Part #: I601- 3AM-20.000		
	Temperature Range	Frequency Stability	Pullability	Frequency
I601	3	A	M	20.000 MHz

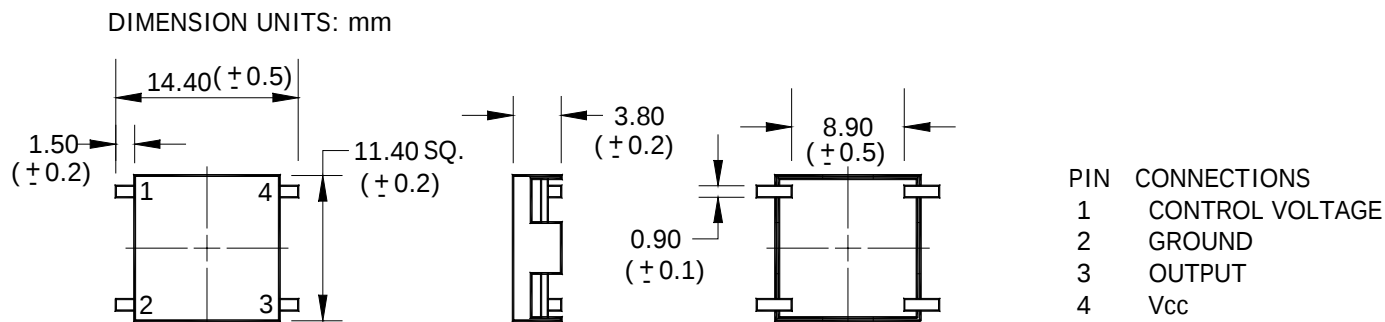

ILSI America
 5458 Louie Lane Reno, NV 89511 Phone: 775-851-8880 • Fax: 775-851-8882
 • email: e-mail@ilsiamerica.com • www.ilsiamerica.com
 Specifications subject to change without notice