



Frequency Generator for PentiumPro™ Based Systems

General Description

The **ICS9169C-46** is a Clock Synthesize/Driver chip for Pentium, PentiumPro or Cyrix 68x86 based motherboards using SDRAM.

Features include sixteen CPU outputs, twelve of which can be used to support up to three SDRAM modules. The PCICLK output can be buffered with an external, low cost zero delay buffer. Additionally, the device meets the Pentium and PentiumPro power-up stabilization, which requires that CPU and PCI clocks be stable within 2ms after power-up.


The **ICS9169C-46** clock outputs are designed for low EMI emissions. Controlled rise and fall times, unique output driver circuits and innovative circuit layout techniques enable the **ICS9169C-46** to have lower EMI than other clock devices.

The **ICS9169C-46** accepts a 14.318MHz reference crystal or clock as its input and runs from a 3.3V supply.


Features

- 16 selectable CPU clocks up to 66.66 MHz
- One synchronous PCI clock.
- One USB clock at 48MHz, meets Intel jitter, accuracy, as well as rise and fall time requirements
- One I/O clock at 24MHz
- One Ref. Clock at 14.318MHz
- CPU clocks to PCI clock skew of 1-4ns (CPU early)
- Low CPU and PCI clock jitter <200ps
- Low skew outputs, skew window 250ps for CPU clocks and for PCI clocks
- Improved output drivers are designed for low EMI
- Test Mode
- 3.3V±10% operation
- Space saving and low cost 34-pin SSOP package

Block Diagram

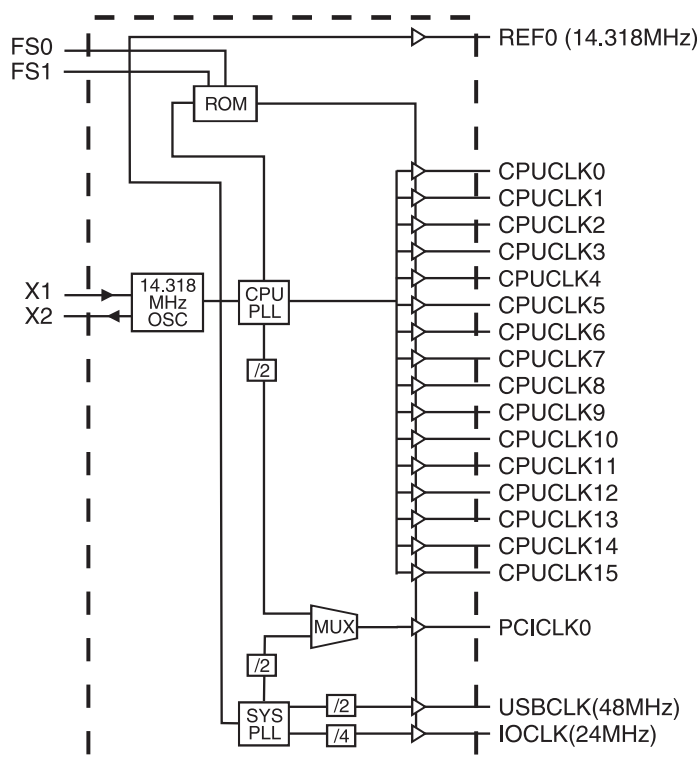

Pin Configuration

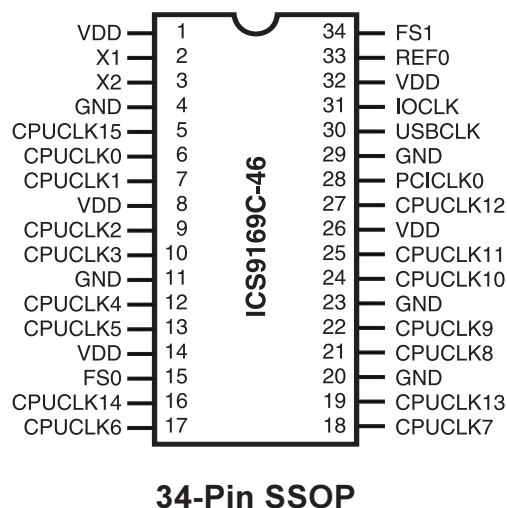

Pentium is a trademark on Intel Corporation.



Pin Descriptions

PIN NUMBER	PIN NAME	TYPE	DESCRIPTION
1, 8, 14, 26, 32	V _{DD}	PWR	Voltage Supply
2	X1	IN	Reference crystal input
3	X2	OUT	Reference crystal feedback
4, 11, 20, 23, 29	GND	PWR	Ground
5, 6, 7, 9, 10, 12, 13, 16, 17, 18, 19, 21, 22, 24, 25, 27	CPUCLK(0:15)	OUT	CPU clock outputs
15, 34	FS (0:1)	IN	CPU clock select input bits. These devices have internal pull-ups
28	PCICLK	OUT	BUS clock output
30	USBCLK	OUT	USB clock output 48 MHz
31	IOCLK	OUT	I/O clock output 24 MHz
33	REF0	OUT	Reference clock output (14.318 MHz)

Functionality

3.3V±10%, 0-70 °C

Crystal (X1, X2) = 14.31818 MHz

FS1	FS0	XTALIN	CPUCLK (0:15) (MHz)	PCICLK0 (MHz)	REF(0:1) (MHz)	USBCLK (MHz)	IOCLK (MHz)
0	0	14.318MHz	Hi-Z	Hi-Z	Hi-Z	Hi-Z	Hi-Z
0	1	14.318MHz	66.67	33.3	14.318	48	24
1	0	14.318MHz	50.0	25.0	14.318	48	24
1	1	14.318MHz	60.0	30.0	14.318	48	24

Actual Output Frequencies

Output Clocks	Target Frequency (MHz)	Actual Frequency (MHz)
CPUCLK (0:15)	50.0	48.83
CPUCLK (0:15)	60.0	60.0
CPUCLK (0:15)	66.67	68.66
USBCLK	48	48.008
IOCLK	24	24.004



Technical Pin Function Descriptions

VDD

This is the power supply to the internal logic of the device as well as the following clock output buffers:

This pin may be operated at any voltage between 3.0 to 3.7 volts. Clocks from the listed buffers that it supplies will have a voltage swing from ground to this level. For the actual guaranteed high and low voltage levels of these clocks, please consult the AC parameter table in this data sheet.

GND(VSS)

This is the power supply ground return pin for the internal logic of the device as well as the following clock output buffers:

- A. REF clock output buffers
- B. CPU clock output buffers

X1

This pin serves one of two functions. When the device is used with a crystal, X1 acts as the input pin for the reference signal that comes from the discrete crystal. When the device is driven by an external clock signal, X1 is the device' input pin for that reference clock. This pin also implements an internal crystal loading capacitor that is connected to ground. See the data tables for the value of the capacitor.

X2

This pin is used only when the device uses a Crystal as the reference frequency source. In this mode of operation, X2 is an output signal that drives (or excites) the discrete crystal. This pin also implements an internal crystal loading capacitor that is connected to ground. See the data tables for the value of the capacitor.

CPUCLK (0:15)

This pin is the clock output that drives processor and other CPU related circuitry that require clocks which are in tight skew tolerance with the CPU clock. See the Functionality table at the beginning of this data sheet for a list of the specific frequencies that this clock operates at and the selection codes that are necessary to produce these frequencies.

PCICLK

Clock output driver.

FS0, FS1

These pins control the frequency of the clocks at the CPU, and PCI. See the Functionality table at the beginning of this data sheet for a list of the specific frequencies that this clock operates at and the selection codes that are necessary to produce these frequencies. If a "1" value is desired for a specific frequency selection bit, a 10K ohm resistor must be connected from the appropriate FS pin to the VDD supply. If a "0" value is desired, then the 10K resistor must be connected to ground.

48MHz

This is a fixed frequency clock that is typically used to drive USB peripheral device needs.

24MHz

This is a fixed frequency clock that is typically used to drive super I/O peripheral device needs.

REF0

This is a fixed frequency clock that runs at the same frequency as the input reference clock (typically 14.31818 MHz) is and typically used to drive Video and ISA BUS requirements.



Absolute Maximum Ratings

Supply Voltage	7.0 V
Logic Inputs	GND–0.5 V to $V_{DD}+0.5$ V
Ambient Operating Temperature	0°C to +70°C
Storage Temperature	–65°C to +150°C

Stresses above those listed under *Absolute Maximum Ratings* may cause permanent damage to the device. These ratings are stress specifications only and functional operation of the device at these or any other conditions above those listed in the operational sections of the specifications is not implied. Exposure to absolute maximum rating conditions for extended periods may affect product reliability.

Electrical Characteristics at 3.3V

$V_{DD} = 3.0 - 3.7$ V, $T_A = 0 - 70^\circ$ C unless otherwise stated

DC Characteristics						
PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNITS
Input Low Voltage	V_{IL}		-	-	$0.2V_{DD}$	V
Input High Voltage	V_{IH}		$0.7V_{DD}$	-	-	V
Input Low Current	I_{IL}	$V_{IN}=0$ V	-28.0	-10.5	-	μ A
Input High Current	I_{IH}	$V_{IN}=V_{DD}$	-5.0	-	5.0	μ A
Output Low Current ¹	I_{OL}	$V_{OL}=0.8$ V; for CPU, PCI, REF CLKS	16.0	25.0	-	mA
Output High Current ¹	I_{OH}	$V_{OL}=2.0$ V; for CPU, PCI, REF CLKS	-	-30.0	-14.0	mA
Output Low Current ¹	I_{OL}	$V_{OL}=0.8$ V; for Fixed CLK	19.0	30.0	-	mA
Output High Current ¹	I_{OH}	$V_{OL}=2.0$ V; for Fixed CLK	-	-38.0	-16.0	mA
Output Low Voltage ¹	V_{OL}	$I_{OL}=8$ mA; for CPU, PCI, REF	-	0.3	0.4	V
Output High Voltage ¹	V_{OH}	$I_{OH}=-8$ mA; for CPU, PCI, REF	2.4	2.8	-	V
Output Low Voltage ¹	V_{OL}	$I_{OL}=18$ mA; Fixed CLK's	-	0.3	0.4	V
Output High Voltage ¹	V_{OH}	$I_{OH}=-18$ mA; Fixed CLK's	2.4	2.8	-	V
Supply Current	I_{DD}	@66.6 MHz; all outputs unloaded	-	95	115	mA

Note 1: Parameter is guaranteed by design and characterization. Not 100% tested in production.



Electrical Characteristics at 3.3V


$V_{DD} = 3.0 - 3.7V$, $T_A = 0 - 70^\circ C$ unless otherwise stated

AC Characteristics						
PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNITS
Rise Time ¹	T_{r1}	20pF load, 0.8 to 2.0V; All Except Ref	-	0.9	1.2	ns
Fall Time ¹	T_{f1}	20pF load, 2.0 to 0.8V; All Except Ref	-	0.8	1.2	ns
Rise Time ¹	T_{r2}	30pF load, 0.8 - 2.0V All Except Ref	-	1.1	1.4	ns
Fall Time ¹	T_{f2}	30pF load, 2.0 - 0.8V All Except Ref	-	1.0	1.2	ns
Rise Time ¹	T_{r3}	45pF load; 0.8 - 2.0V; Ref		1.6	2.4	ns
Fall Time ¹	T_{f3}	45pF load; 2.0 - 0.8V; Ref		1.4	2.4	ns
Duty Cycle ¹	D_t	20, 30, 45pF load @ $V_{OUT}=1.5V$	45	50	55	%
Jitter, One Sigma ¹	T_{j1s1}	CPU & PCI Clocks	-	50	150	ps
Jitter, Absolute ¹	T_{jab1}	CPU & PCI Clocks (@ 60 & 66MHz)	-250	-	250	ps
Jitter, Absolute ¹	T_{jab1}	CPU & PCI Clocks (50MHz)	-400	-	400	ps
Jitter, One Sigma ¹	T_{j1s2}	Ref & Fixed CLKs	-	1	3	%
Jitter, Absolute ¹	T_{jab2}	Ref & Fixed CLKs	-25	1.0	2.5	%
Jitter - Cycle to Cycle	T_{cc}	CPU Outputs	-	290	350	ps
		PCI Output	-	350	500	ps
		REF0	-	1.5	2.0	%
		Fixed Clocks	-	4.5	6	%
Input Frequency ¹	F_i		12.0	14.318	16.0	MHz
Logic Input Capacitance ¹	C_{IN}	Logic input pins	-	5	-	pF
Crystal Oscillator Capacitance ¹	C_{INX}	X1, X2 pins	-	18	-	pF
Power-on Time ¹	t_{on}	From $V_{DD}=1.6V$ to 1st crossing of 66.6 MHz V_{DD} supply ramp < 40ms	-	1.9	2.0	ms
Frequency Settling Time ¹	t_s	From 1st crossing of acquisition to <1% settling	-	2.0	4.0	ms
Clock Skew ¹ (window)	T_{sk1}	CPU to CPU; Same Load; @ 1.5V	-	188	250	ps
Clock Skew ¹ (window)	T_{sk2}	CPU(20pF) - CPU (30pF); @ 1.5V	-	300	500	ps
Clock Skew ¹	T_{sk3}	CPU 20pF to PCI 7.5pF, @ 1.5V (CPU is Early)	1	1.2	3.0	ns
Rise Time	T_{r3}	45pF; 0.8 - 2.0V; Ref only	-	1.6	2.4	ns
Fall Time	T_{f3}	45pF; 2.0 - 0.8V; Ref only	-	1.4	2.4	ns

Note 1: Parameter is guaranteed by design and characterization. Not 100% tested in production.



ICS9169C-46

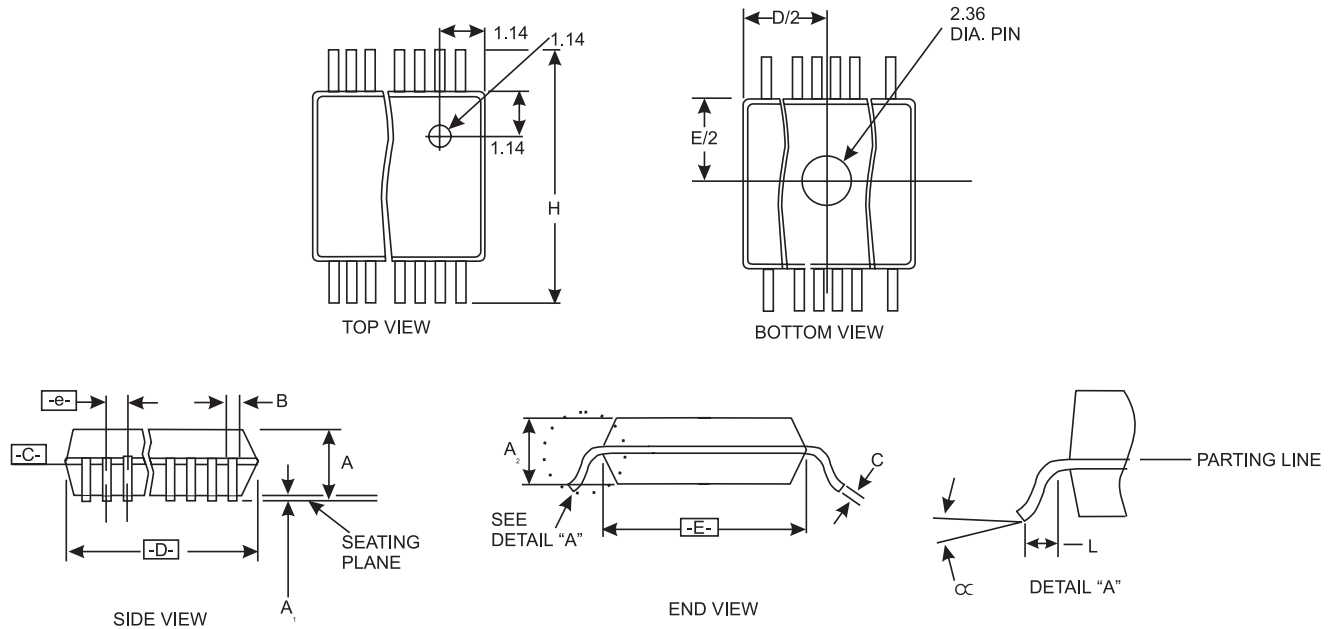

SSOP Package

SYMBOL	COMMON DIMENSIONS			VARIATIONS	D			N
	MIN.	NOM.	MAX.		MIN.	NOM.	MAX.	
A	.097	.101	.104	AA	.701	.706	.711	34
A1	.005	.009	.0115					
A2	.090	.092	.094					
B	.014	.016	.019					
C	.0091	.010	.0125					
D	See Variations							
E	.292	.296	.299					
e	.040 BSC							
H	.400	.406	.410					
h	.010	.013	.016					
L	.024	.032	.040					
N	See Variations							
∞	0°	5°	8°					
X	.085	.093	.100					

Dimensions are in Inches

Ordering Information

ICS9169CF-46

Example:

ICS XXXX F - PPP

Pattern Number (2 or 3 digit number for parts with ROM code patterns)

Package Type
F=SSOP

Device Type (consists of 3 or 4 digit numbers)

Prefix

ICS, AV = Standard Device