




B-2形外壳尺寸

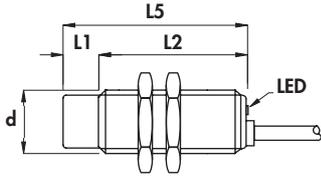


C形外壳尺寸

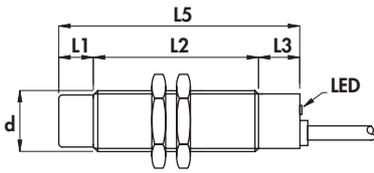

D-1形外壳尺寸

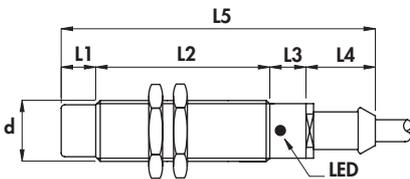

H形外壳尺寸

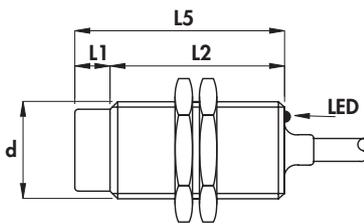

直径	M18x1	M28x1.5
螺母	型号	SW24
	厚度	4mm
最大扭矩	35Nm	80Nm

技术参数:

- △工作电压: 见参数表
- △最大波纹: 10%
- △空载电流: 10mA
- △电压降: 见参数表
- △工作温度: -25~75℃
- △最大温度漂移: ±10%
- △重复精度: 2%
- △开关迟滞: 10%
- △防护等级: IP67
- △开关状态显示: 黄色LED
- △电缆内芯截面积: 0.34mm²(5毫米电缆)
- 0.50mm²(6毫米电缆)
- △短路及过载保护: 有
- △反向连接保护: 有
- △电脉冲抑制(EMC): 符合EN60947-5-2
- △允许冲击和震动: 符合IEC68-2-27IEC68-2-6
- 材质:**
- △电缆: 2m PVC CE120-2211; 90℃; 300V; 0.R
- △传感器: 不锈钢
- △感应面: 塑料



外形类型	齐非 齐平	L1	L2	L3	L4	L5	电 缆 直 径	外 壳 直 径	感 应 距 离	频 率	工 作 电 流	型号及接线图		
												mm	mm	mm
B-2	--	50	--	--	50	5	M18x1	5	1	200	IM18-OPY-F005C/Ct50	IM18-CPY-F005C/Ct50	IM18-RPY-F005C/Ct50	
B-2	10	40	--	--	50	5	M18x1	8	1	200	IM18-OPY-N008C/Ct50	IM18-CPY-N008C/Ct50	IM18-RPY-N008C/Ct50	
电压: 5--40VDC (电压降1.5V)														
C	--	58	12	--	70	5	M18x1	5	1	400	IM18-OPY-F005C	IM18-CPY-F005C	IM18-RPY-F005C	
D-1	--	60	12	20	92	6	M18x1	5	1	400	IM18-OPY-F005C/Sh	IM18-CPY-F005C/Sh	IM18-RPY-F005C/Sh	
C	10	48	12	--	70	5	M18x1	8	1	400	IM18-OPY-N008C	IM18-CPY-N008C	IM18-RPY-N008C	
D-1	10	50	12	20	92	6	M18x1	8	1	400	IM18-OPY-N008C/Sh	IM18-CPY-N008C/Sh	IM18-RPY-N008C/Sh	
H	--	60	--	--	60	6	M28x1.5	10	0.8	400	IM28-OPY-F010C	IM28-CPY-F010C	IM28-RPY-F010C	

注:表格中所列型号为PNP型,把中间字母"P"改为"N"即为NPN型

