


ITB Series Bi-color LED Assembly

Electro-Optical Characteristics And Ratings

Color Code	Emitted Color	Rated Current (mA)	Typ. Intensity (mcd)	Continuous Forward Current Max (mA)	Forward Voltage		Reverse Breakdown Voltage Min. (V)	Peak Wavelength (nm)
					Typ. (V)	Max (V)		
1	Red	10	10	25	2.2	3	5.0	635
2	Green	10	8.5	25	2.3	3	5.0	602
3	Orange	10	6.5	25	2.1	2.8	5.0	630
4	Yellow	10	10	20	2.2	3	5.0	583

Description And Features

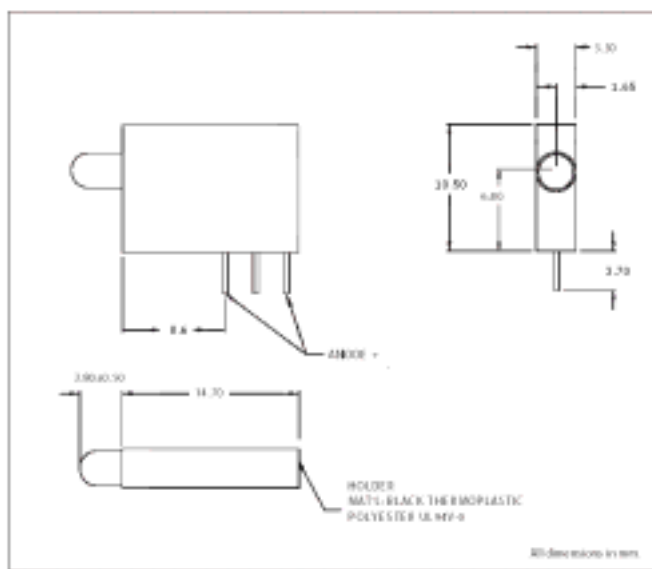

Features:

- Space saving design suitable for high density system
- Quick assembly

Technical data:

- Temperature range -40 ° C to 85 ° C
- Main body material Temperature resistant thermoplastic
- Soldering temperature <5s/<260 ° C

Ordering information

