


TOSHIBA CMOS DIGITAL INTEGRATED CIRCUIT SILICON MONOLITHIC

T6M45, JT6M45-AS

T6M45, JT6M45-AS CMOS SINGLE-CHIP LSI FOR LCD CALCULATOR

The T6M45, JT6M45-AS is a single-chip microcomputer for 12-digit or 10-digit 2-memory calculator.

T6M45, JT6M45-AS can drive the liquid crystal display (LCD). Single power supply operation, wide operating voltage range and low-power consumption make it suitable for 1.5 V solar battery operated calculator. Besides T6M45, JT6M45-AS can be selectable with a pin-programmable to function of Power timer and Memory hold.

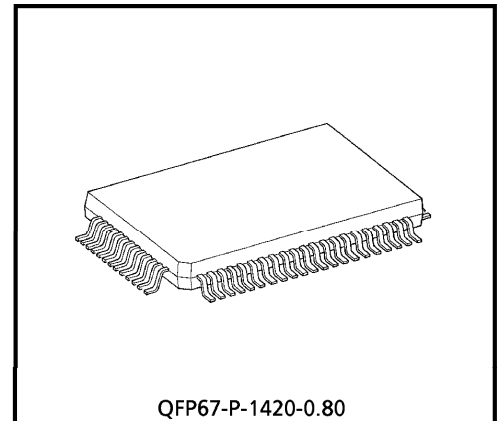

Weight : 1.20 g (Typ.)

FEATURES

Operational Features :

- 12 digits or 10 digits (selectable with a pin-programmable) of data, 2 digits of sign, error symbol, memory load symbol.
- Algebraic mode.
- Standard 4 functions (+, -, ×, ÷)
- Memory and grand total (GT) memory calculation.
- Accumulating GT memory register with count up (down) item counter.
- Automatic percentage operation with add-on, discount.
- Automatic delta percentage, mark-up and markdown operations.
- Square root.
- Constant calculation.
- Chain calculation.

980910EBA1

- TOSHIBA is continually working to improve the quality and the reliability of its products. Nevertheless, semiconductor devices in general can malfunction or fail due to their inherent electrical sensitivity and vulnerability to physical stress. It is the responsibility of the buyer, when utilizing TOSHIBA products, to observe standards of safety, and to avoid situations in which a malfunction or failure of a TOSHIBA product could cause loss of human life, bodily injury or damage to property. In developing your designs, please ensure that TOSHIBA products are used within specified operating ranges as set forth in the most recent products specifications. Also, please keep in mind the precautions and conditions set forth in the TOSHIBA Semiconductor Reliability Handbook.
- The products described in this document are subject to the foreign exchange and foreign trade laws.
- The information contained herein is presented only as a guide for the applications of our products. No responsibility is assumed by TOSHIBA CORPORATION for any infringements of intellectual property or other rights of the third parties which may result from its use. No license is granted by implication or otherwise under any intellectual property or other rights of TOSHIBA CORPORATION or others.
- The information contained herein is subject to change without notice.


- Change sign.
- Floating minus.
- Key roll over function (2 keys).
- Fixed point ("0", "1", "2", "3", "4" or "6" places) or floating point (selectable with a switch).
- Adding point mode (selectable with a switch).
- Rounding switches (rounding up, down and off).
- Leading zero suppression.
- Trailing zero suppression.
- Punctuation on display, commas for thousands.
- Memory and GT memory contents indicator, turned on with non-zero in the memory and GT memory.
- Registration overflow, indicating that too many digits are entered (the most significant digit are protected).
- Result overflow, indicating during calculation (most function key are locked as it happened).
- Memory overflow indicating to flashing of memory load mark.

Electrical Features


- Complementary output buffer for direct driving of liquid crystal display (F.E.M LCD).
- Oscillator/clock generator internal to chip.
- Keyboard encoding internal to chip.
- Keyboard denouncing internal to chip.
- Automatic power on clear.
- Wide supply voltage range (- 1.2 ~ - 2.0 V).
- Very low power consumption (3.3 μ W typ.).
- Quad in line flat package.

SYSTEM BLOCK DIAGRAM


Battery Type

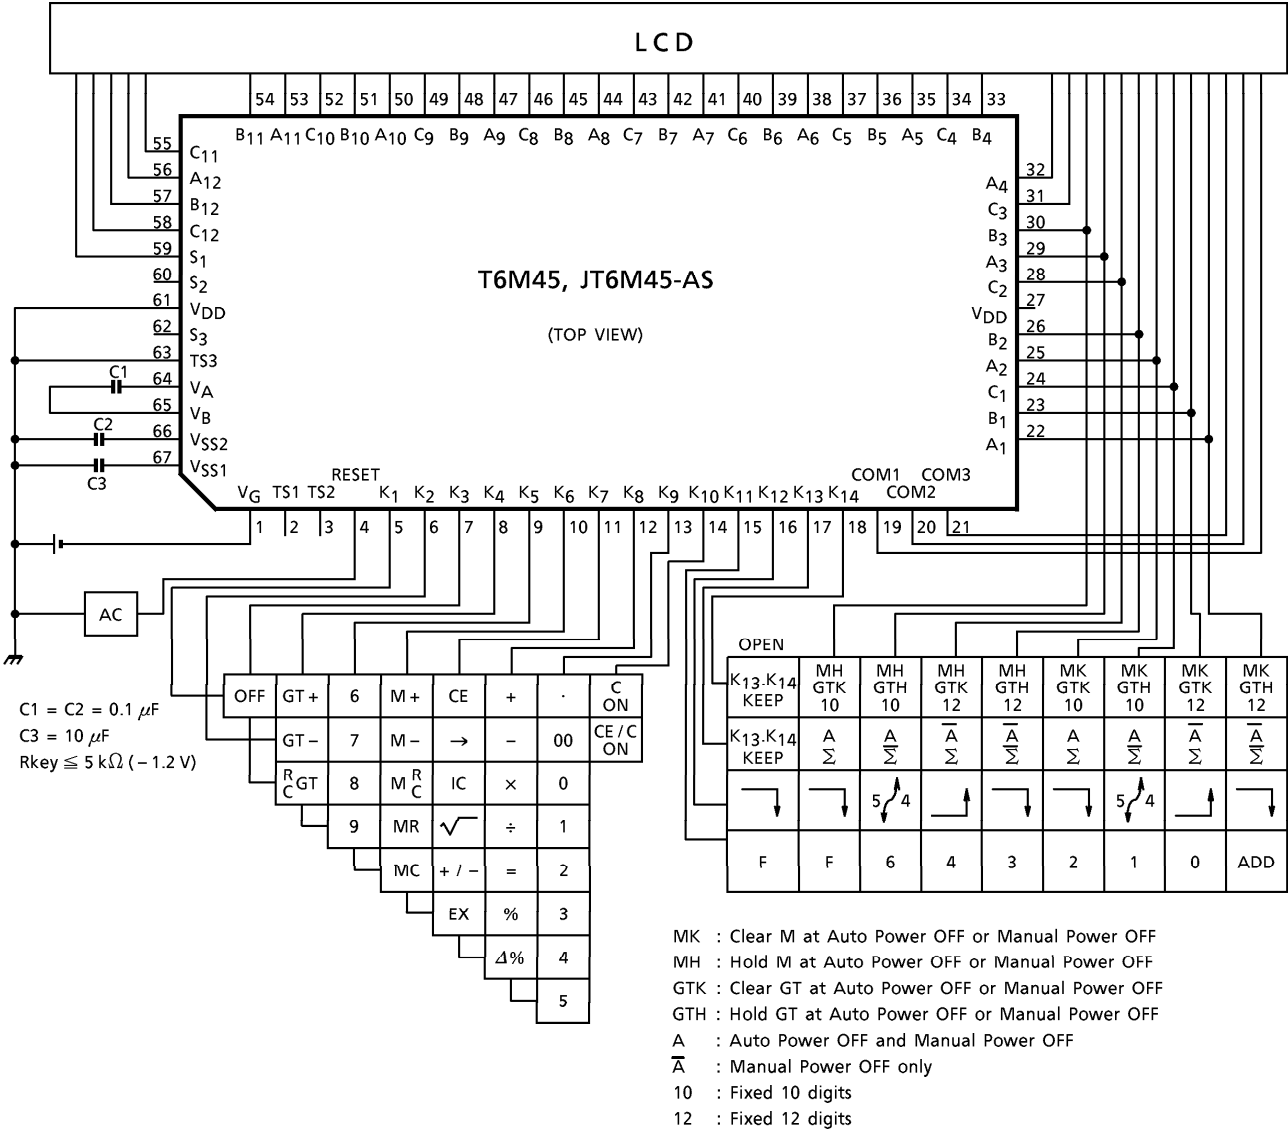

Dual Type

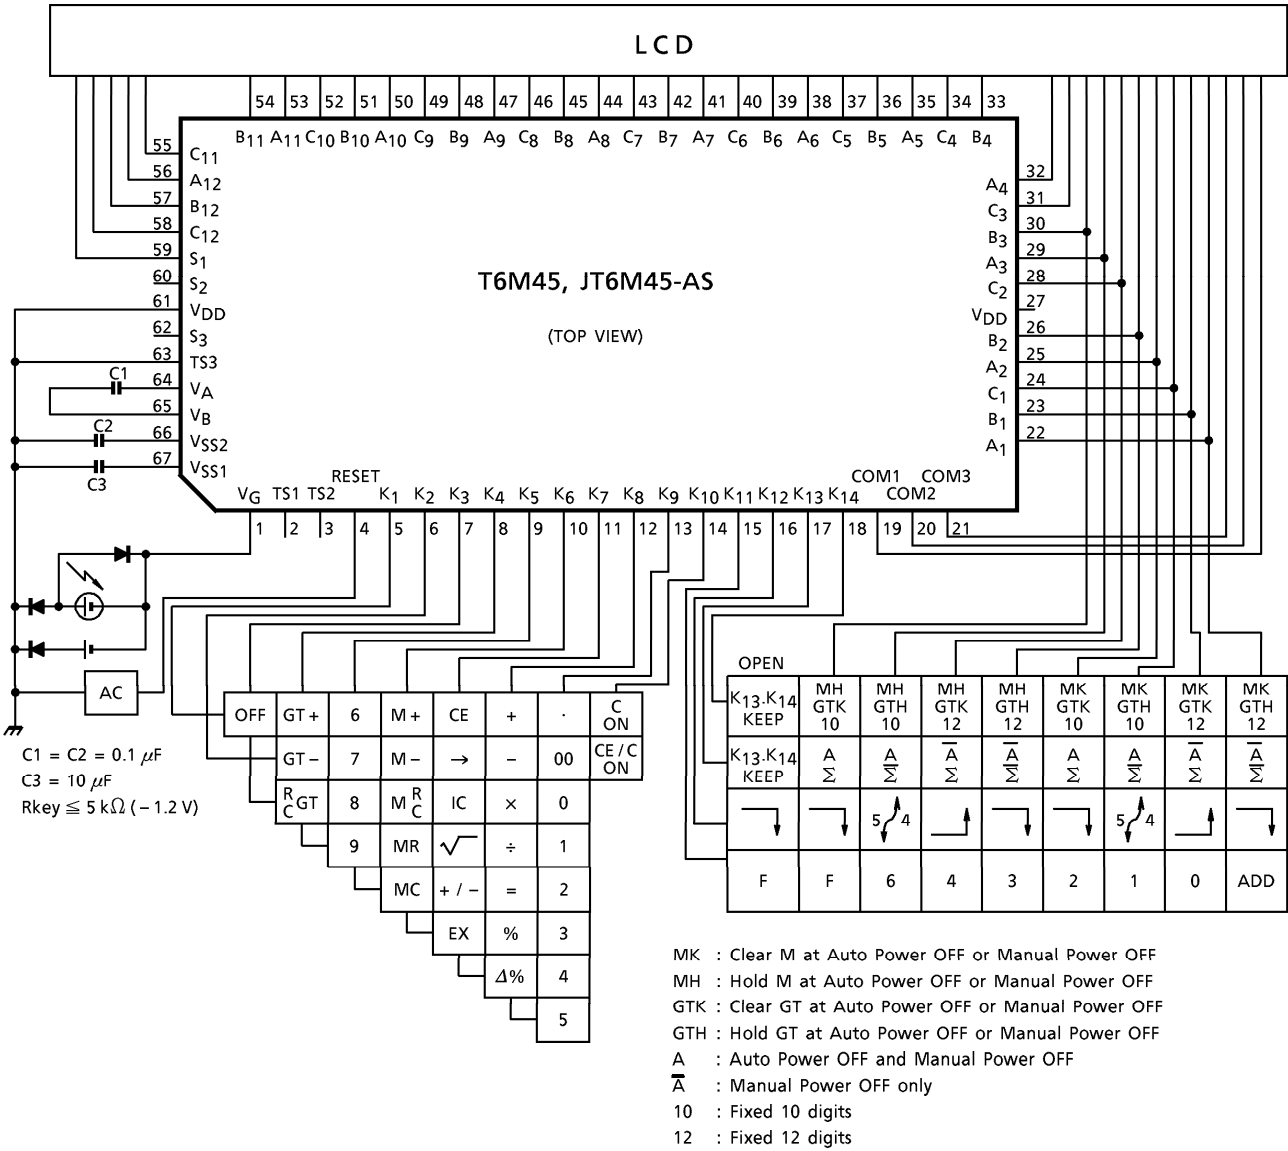


Solar Type

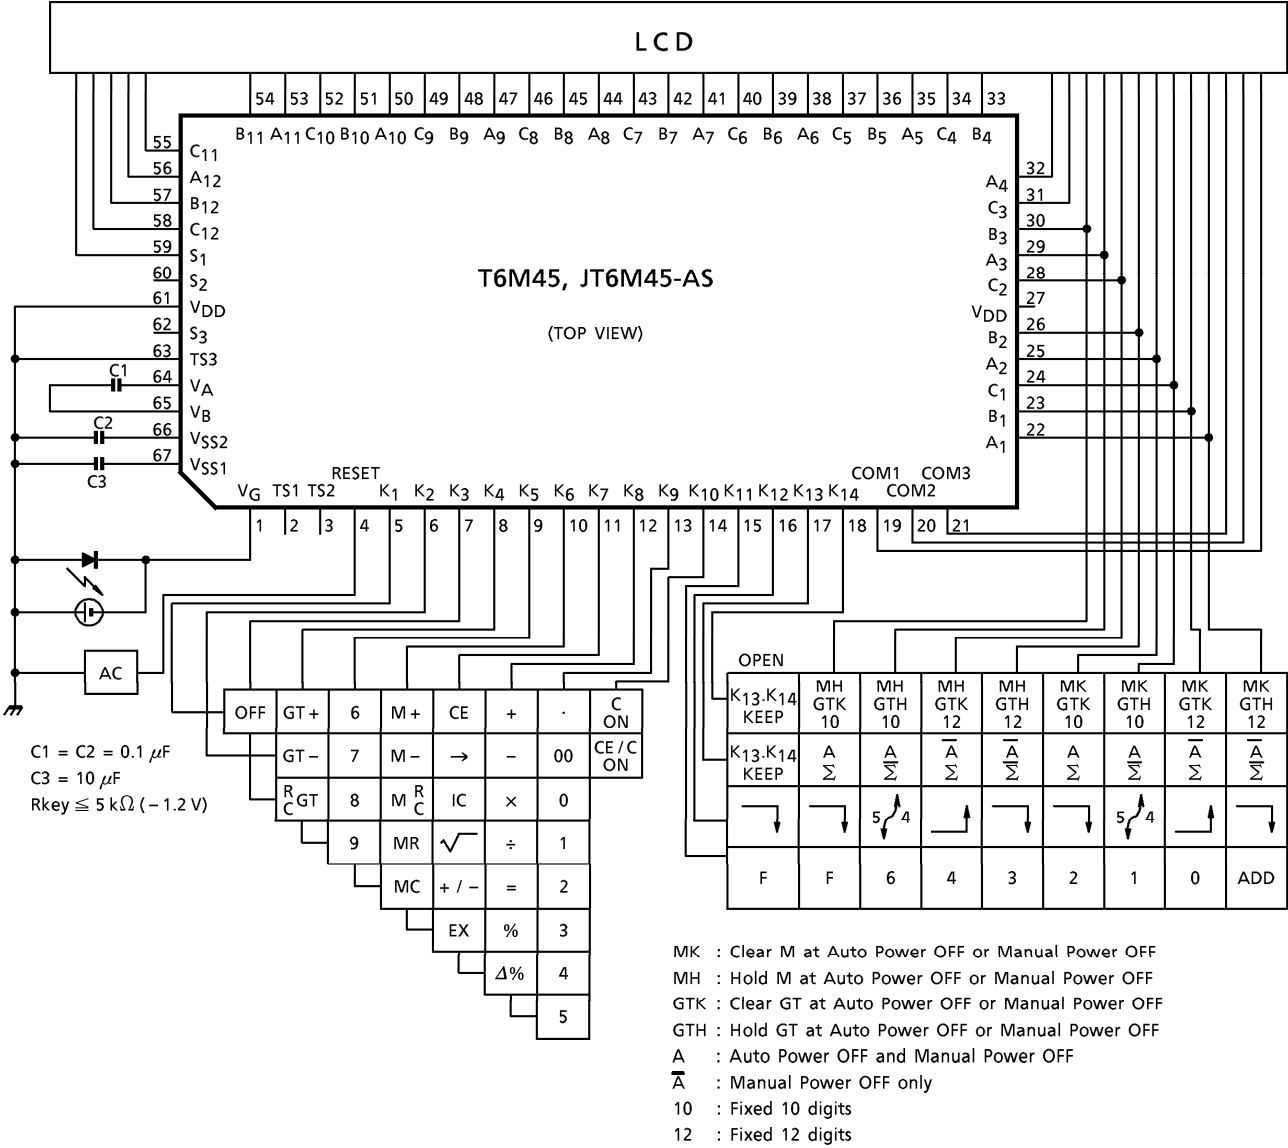


CONNECTION OF LCD

Select of 10 digits

SEGMENT

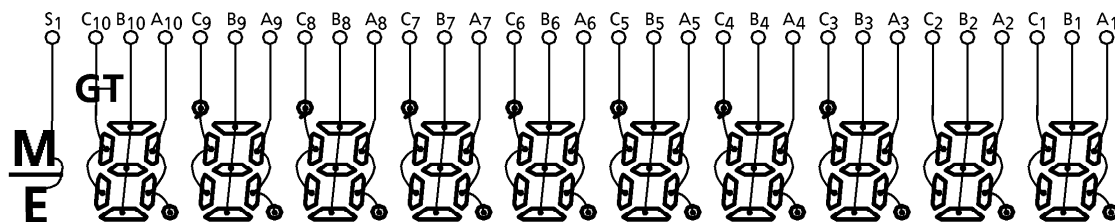


COMMON

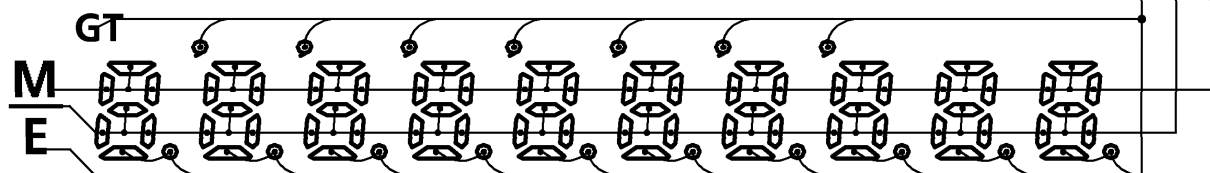


Select of 12 digits


SEGMENT

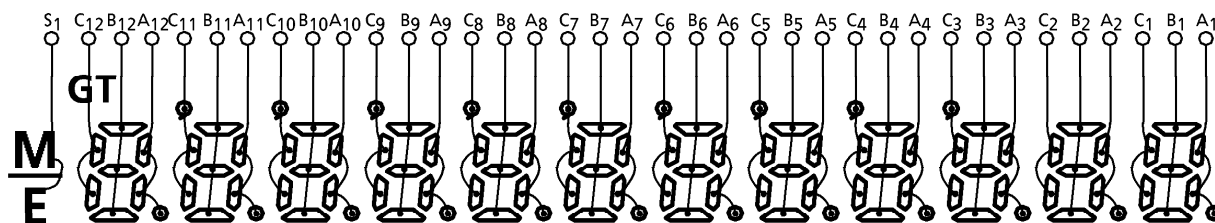


COMMON

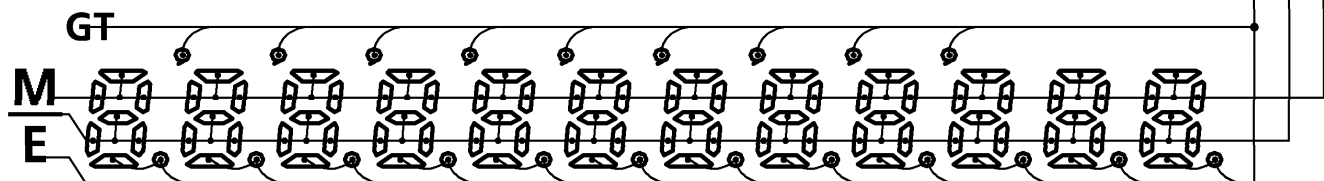

KEY CONNECTION

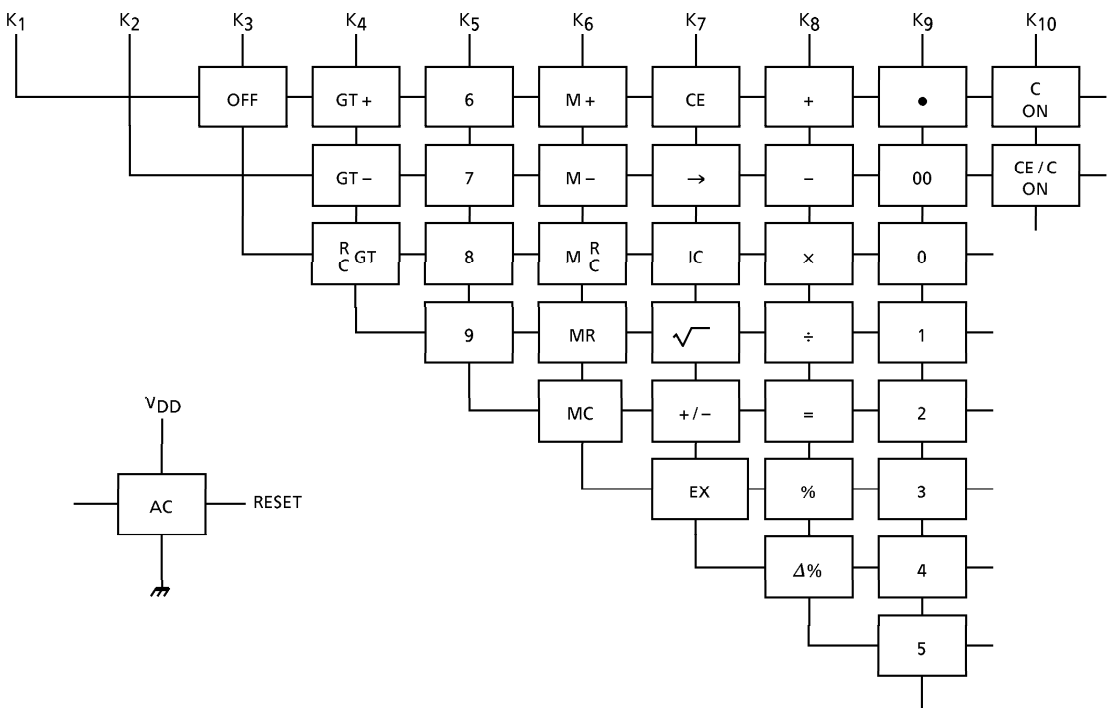


Touch Key

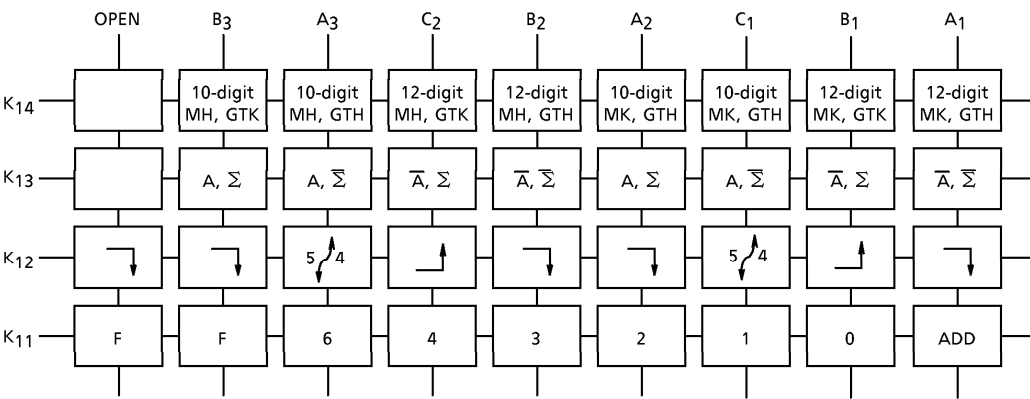

Lock Key

- K14 Selectable with Calculated Digits and Memory Hold Status.
MH (Memory Hold), MK (Memory Kill), GTH (GT memory Hold) and GTK (GT memory Kill) at Auto Power OFF or OFF Key.
- K13 Selectable with Auto Power OFF mode and Total switch.
- K12 Rounding switches.
- K11 Selectable with Fixed point or Floating mode.

PIN CONNECTION

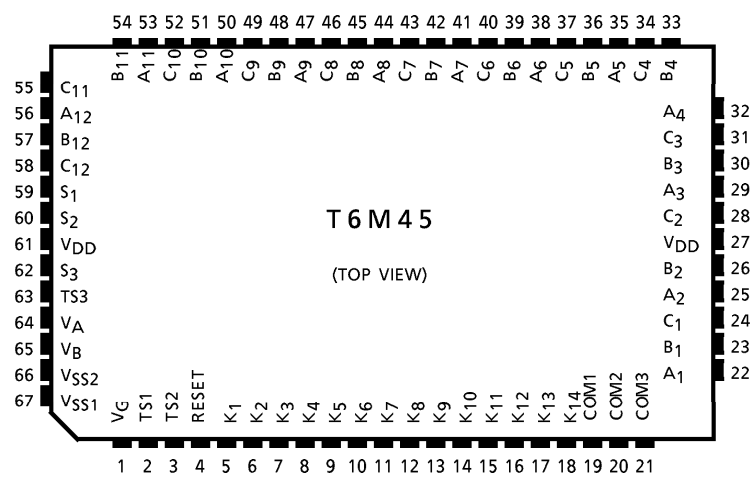

SPECIFICATION OF CALCULATOR

Speed of Calculation (standard oscillating frequency $f\phi = 48\text{ kHz}$)

Numeral		11.8~17.7 ms
Function	$\left\{ \begin{array}{l} 1 \text{ [+]} \\ 1 \text{ [+] } 2 \text{ [+]} \end{array} \right.$	$\left\{ \begin{array}{l} 25.6 \text{ ms} \\ 95.2 \text{ ms} \end{array} \right.$
Addition and Subtract	$\left\{ \begin{array}{l} 1 \text{ } 2 \text{ } 3 \text{ [+] } 1 \text{ [=]} \\ 999999999 \text{ [-] } 0.000000001 \text{ [=]} \end{array} \right.$	$\left\{ \begin{array}{l} 89.1 \text{ ms} \\ 111.8 \text{ ms} \end{array} \right.$
Multiply	$\left\{ \begin{array}{l} 1 \text{ } 2 \text{ } 3 \text{ [x] } 2 \text{ [=]} \\ 1 \text{ [x] } 999999999 \text{ [=]} \end{array} \right.$	$\left\{ \begin{array}{l} 109.6 \text{ ms} \\ 207.7 \text{ ms} \end{array} \right.$
Device	$\left\{ \begin{array}{l} 1 \text{ } 2 \text{ } 3 \text{ [\div] } 3 \text{ [=]} \\ 999999999 \text{ [\div] } 1 \text{ [=]} \end{array} \right.$	$\left\{ \begin{array}{l} 147.9 \text{ ms} \\ 249.0 \text{ ms} \end{array} \right.$
Memory calculation	$\left\{ \begin{array}{l} 2 \text{ [M +]} \\ 999999999 \text{ [\div] } 1 \text{ [M +]} \end{array} \right.$	$\left\{ \begin{array}{l} 143.3 \text{ ms} \\ 296.2 \text{ ms} \end{array} \right.$
Square root	$\left\{ \begin{array}{l} 999999999 \text{ [\sqrt{}]} \\ 2 \text{ [\sqrt{}]} \end{array} \right.$	$\left\{ \begin{array}{l} 167.7 \text{ ms} \\ 125.0 \text{ ms} \end{array} \right.$

Keys for Calculator

0	,	0	~	9	: Number
					</

Operation Example

1. Fixed Point calculation

① Key	Display	Fixed Point Place
$\boxed{C}$	0.	DP = 3 (5 / 4)
2	2.	
$\boxed{\div}$	2.	
3	3.	
$\boxed{=}$	0.667	
2	2.	
$\boxed{\cdot}$	2.	
3	2.3	
$\boxed{+}$	2.3	
4	4.	
$\boxed{M+}$	6.300	
1	1.	
$\boxed{\cdot}$	1.	
2	1.2	
$\boxed{M+}$	1.200	
$\boxed{MR}$	7.5	

② Key	Display	Fixed Point Place
$\boxed{C}$	0.	DP = 0 ($\uparrow$)
1	1.	
$\boxed{\cdot}$	1.	
2	1.2	
3	1.23	
$\boxed{+}$	1.23	
1	1.	
$\boxed{\cdot}$	1.	
1	1.1	
$\boxed{=}$	3.	
9	9.	
$\boxed{\sqrt{}}$	3.	
$\boxed{\times}$	3.	
1	1.	
$\boxed{\cdot}$	1.	
1	1.1	DP = F
$\boxed{=}$	3.3	

2. Adding Point mode calculation

Key	Display	Key	Display	Key	Display
$\boxed{C}$	0.	$\boxed{M+}$	0.02M	$\boxed{=}$	33.27M –
1	1.	3	3.M	2	2.M
23	123.	.	3.M	$\boxed{+}$	0.02M
$\boxed{+}$	1.23	123	3.123M	9	9.M
3	3.	$\boxed{M+}$	3.12M	$\boxed{\cdot}$	9.M
$\boxed{=}$	1.26	$\boxed{MR}$	3.14M	$\boxed{\sqrt{}}$	3.M
3	3.	$\boxed{C}$	0.M	$\boxed{=}$	3.02M
2	32.	1	1.M		
$\boxed{\times}$	32.	23	123.M		
3	3.	$\boxed{-}$	1.23M		
$\boxed{\cdot}$	3.	3	3.M		
000	3.000	4	34.M		
$\boxed{=}$	96.00	$\boxed{\cdot}$	34.M		
2	2.	5	34.5M		

3. Constant Calculation

① Multiplication

Key	Display	Constant
k	k	
$\boxed{\times}$	k	
a	a	
$\boxed{=}$	k·a	k ×
b	b	k ×
$\boxed{=}$	k·b	k ×

③ Addition

a	a	
$\boxed{+}$	a	
k	k	
$\boxed{=}$	a + k	+ k
b	b	+ k
$\boxed{=}$	b + k	+ k

② Division

Key	Display	Constant
a	a	
$\boxed{\div}$	a	
k	k	
$\boxed{=}$	a / k	÷ k
b	b	÷ k
$\boxed{=}$	b / k	÷ k

④ Subtraction

a	a	
$\boxed{-}$	a	
k	k	
$\boxed{=}$	a – k	– k
b	b	– k
$\boxed{=}$	b – k	– k

⑤ Percentage

k	k	
$\boxed{\times}$	k	
a	a	
$\boxed{\%}$	$k \cdot a / 100$	$k \times$
b	b	$k \times$
$\boxed{\%}$	$k \cdot b / 100$	$k \times$

⑦ Add-on

k	k	
$\boxed{+}$	k	
a	a	
$\boxed{\%}$	$k \cdot (1 + a / 100)$	$k +$
b	b	$k +$
$\boxed{\%}$	$k \cdot (1 + b / 100)$	$k +$

4. $\Delta\%$ Calculation

① Key Display

a	a
$\boxed{+}$	a
b	b
$\boxed{\Delta\%}$	$100 \cdot (a + b) / b$

5. Mark-up, Mark-down Calculation

① Mark-up

Key	Display
a	a
$\boxed{\div}$	a
b	b
$\boxed{\Delta\%}$	$a / (1 - b / 100)$
$\boxed{\Delta\%}$	$ a / (1 - b / 100) - a $

⑥ Percentage

a	a	
$\boxed{\div}$	a	
k	k	
$\boxed{\%}$	$100 \cdot a / k$	$+ k$
b	b	$\div k$
$\boxed{\%}$	$100 \cdot b / k$	$\div k$

⑧ Discount

k	k	
$\boxed{-}$	k	
a	a	
$\boxed{\%}$	$k \cdot (1 - a / 100)$	$k -$
b	b	$k -$
$\boxed{\%}$	$k \cdot (1 - b / 100)$	$k -$

② Key Display

a	a
$\boxed{-}$	a
b	b
$\boxed{\Delta\%}$	$100 \cdot (a - b) / b$

② Mark-down

Key	Display
a	a
$\boxed{\div}$	a
b	b
$\boxed{+/-}$	$-b$
$\boxed{\Delta\%}$	$a / (1 + b / 100)$
$\boxed{\Delta\%}$	$ a / (1 + b / 100) - a $

6. Add-on, Discount Calculation

Add-on

Key	Display
① a	a
$\times$	a
b	b
$\%$	$a \cdot b / 100$
$+$	$a \cdot b / 100$
$=$	$a (1 + b / 100)$
③ a	a
$+$	a
b	b
$\%$	$a (1 + b / 100)$
⑤ a	a
$\times$	a
b	b
$\Delta\%$	$a (1 + b / 100)$

Discount

Key	Display
② a	a
$\times$	a
b	b
$\%$	$a \cdot b / 100$
$-$	$a \cdot b / 100$
$=$	$a (1 - b / 100)$
④ a	a
$-$	a
b	b
$\%$	$a (1 - b / 100)$
⑥ a	a
$\times$	a
b	b
$+/-$	-b
$\Delta\%$	$a (1 - b / 100)$

7. Average Operation use of the Item Counter

Key	Display	Item Counter
A	A	0
$+$	A	1
B	B	1
$+$	A + B	2
C	C	2
$+$	A + B + C	3
D	D	3
$+$	A + B + C + D	4

Key	Display	Item Counter
$-$	A + B + C + D	2
D	D	2
$+$	A + B + C	3
E	E	3
$=$	A + B + C + E	4
$\div$	A + B + C + E	4
IC	4	4
$=$	(A + B + C + E) / 4	5

MAXIMUM RATINGS


CHARACTERISTICS	SYMBOL	RATING	UNIT
Supply Voltage	V_G	+0.3 ~ -2.0	V
Input Voltage	V_{IN}	+0.3 ~ V_G - 0.3	V
Operating Temperature	T_{opr}	0 ~ 40	°C
Storage Temperature	T_{stg}	-55 ~ 125	°C

ELECTRICAL CHARACTERISTICS ($V_G = -1.5 \pm 0.2$ V, $V_{SS2} = -3.0 \pm 0.4$ V, $V_{DD} = 0$ V, $T_a = 25^\circ\text{C}$)

CHARACTERISTICS	SYMBOL	TEST CIRCUIT	PIN NAME	TEST CONDITION	MIN	TYP.	MAX	UNIT
Operating Voltage	V_G	—	—	—	-1.2	-1.5	-2.0	V
"1" Input Voltage	$V_{IH}(1)$	—	K ₃ ~K ₁₀ RESET	—	$V_G + 0.4$	—	V_G	V
"1" Input Voltage	$V_{IH}(2)$	—	K ₁₁ ~K ₁₄	—	$V_{SS2} + 0.4$	—	V_{SS2}	V
"0" Input Voltage	V_{IL}	—	K ₃ ~K ₁₄ RESET	—	0	—	-0.4	V
"1" Output Voltage	$V_{OH}(1)$	—	SEGMENT COM1~3	—	$V_{SS2} + 0.2$	—	V_{SS2}	V
"0" Output Voltage	$V_{OL}(1)$	—	SEGMENT COM1~3	—	0	—	-0.2	V
"M" Output Voltage	V_{OM}	—	COM1~3	—	$V_G + 0.2$	—	$V_G - 0.2$	V
"1" Output Voltage	$V_{OH}(2)$	—	K ₁ ~K ₁₀	—	$V_G + 0.2$	—	V_G	V
"0" Output Voltage	$V_{OL}(2)$	—	K ₁ ~K ₁₄	—	0	—	-0.2	V
"1" Output Resistance	R_{OH}	—	SEGMENT COM1~3	$V_{OUT} = V_{SS2} + 0.5$ V	—	—	70	k Ω
"0" Output Resistance	R_{OL}	—	SEGMENT COM1~3	$V_{OUT} = -0.5$ V	—	—	70	k Ω
Key Pull Up Resistance	$R_{KEYH}(1)$	—	RESET	$V_{OUT} = 0$ V	156	—	364	k Ω
	$R_{KEYH}(2)$	—	K ₁ ~K ₁₀	$V_{OUT} = 0$ V	240	—	560	
Key Read Pull Up Resistance	$R_{KEYH}(3)$	—	K ₁ ~K ₁₀	$V_{OUT} = 0$ V	30	—	600	k Ω
Key Pull Down Resistance	$R_{KEYL}(1)$	—	RESET K ₁ ~K ₁₀	$V_{OUT} = -0.5$ V	—	—	10	k Ω
	$R_{KEYL}(2)$	—	K ₁₁ ~K ₁₄	$V_{OUT} = V_{SS2}$	120	—	800	
Oscillating Frequency	(WAIT)	$f_{\phi WAIT}$	—	$V_G = -1.5$ V	5.4	9.0	12.6	kHz
	(OPERATE)	$f_{\phi OP}$	—	$V_G = -1.5$ V	28.8	48	67.2	
Frame Frequency	f_F	—	SEGMENT COM1~3	$V_G = -1.5$ V	56.3	93.8	131	Hz

CHARACTERISTIC		SYMBOL	TEST CIR- CUIT	PIN NAME	TEST CONDITION	MIN	TYP.	MAX	UNIT
Supply Current	1 (WAIT)	I _{DDWAIT}	—	—	V _G = -1.5 V	—	2.2	3.4	μA
	2 (OPERATE)	I _{DDOP}	—	—	V _G = -1.2 V	—	7.0	11.0	
	3 (OFF)	I _{DDOFF}	—	—	V _G = -1.5 V	—	—	2.0	
Power Off Timer Times		T	—	—	V _G = -1.5 V	429	600	1001	s

WAVEFORMS FOR DISPLAY

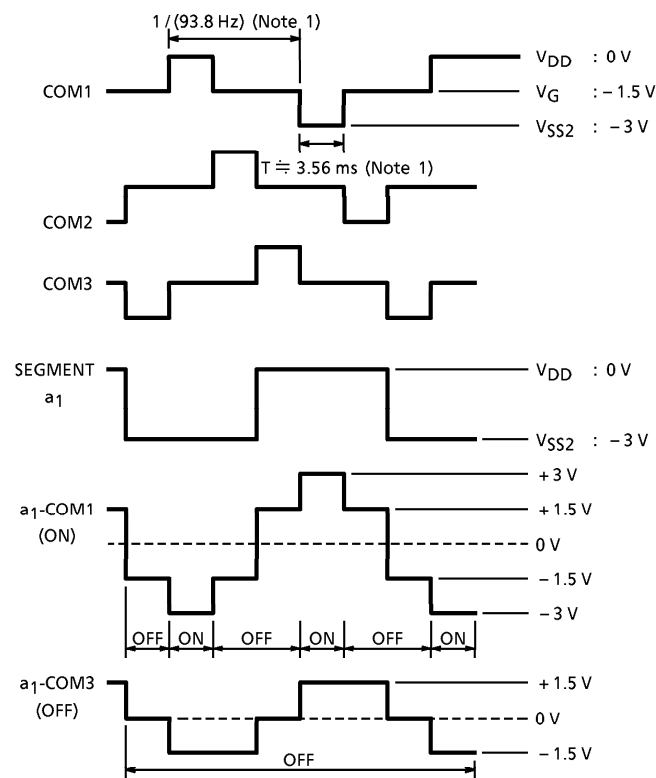

(Note 1) : at $f_{\phi} = 9 \text{ kHz}$

PAD LOCATION TABLE


(μm)

NAME	X POINT	Y POINT
V _{SS1}	971	- 1469
V _{SS2}	775	- 1469
V _B	609	- 1469
V _A	424	- 1469
TS3	252	- 1469
S ₃	100	- 1469
V _{DD}	- 52	- 1469
S ₂	- 203	- 1469
S ₁	- 355	- 1469
C ₁₂	- 507	- 1469
B ₁₂	- 659	- 1469
A ₁₂	- 810	- 1469
C ₁₁	- 980	- 1469
B ₁₁	- 1162	- 1469
A ₁₁	- 1358	- 1469
C ₁₀	- 1408	- 1193
B ₁₀	- 1408	- 1042
A ₁₀	- 1408	- 890
C ₉	- 1408	- 738
B ₉	- 1408	- 586
A ₉	- 1408	- 435
C ₈	- 1408	- 283
B ₈	- 1408	- 131
A ₈	- 1408	20
C ₇	- 1408	172
B ₇	- 1408	324
A ₇	- 1408	475
C ₆	- 1408	627
B ₆	- 1408	779
A ₆	- 1408	936
C ₅	- 1408	1119
B ₅	- 1358	1469
A ₅	- 1169	1469

NAME	X POINT	Y POINT
C ₄	- 999	1469
B ₄	- 847	1469
A ₄	- 696	1469
C ₃	- 544	1469
B ₃	- 392	1469
A ₃	- 240	1469
C ₂	- 89	1469
(TS4)	89	1469
B ₂	241	1469
A ₂	392	1469
C ₁	544	1469
B ₁	696	1469
A ₁	847	1469
COM3	999	1469
COM2	1166	1469
COM1	1358	1469
K ₁₄	1408	1175
K ₁₃	1408	1023
K ₁₂	1408	871
K ₁₁	1408	720
K ₁₀	1408	503
K ₉	1408	352
K ₈	1408	200
K ₇	1408	48
K ₆	1408	- 104
K ₅	1408	- 255
K ₄	1408	- 407
K ₃	1408	- 559
K ₂	1408	- 710
K ₁	1408	- 862
RESET	1408	- 1023
(TS2)	1408	- 1175
(TS1)	1367	- 1469
V _G	1160	- 1469


(Note) : () Do not connect.

CHIP LAYOUT

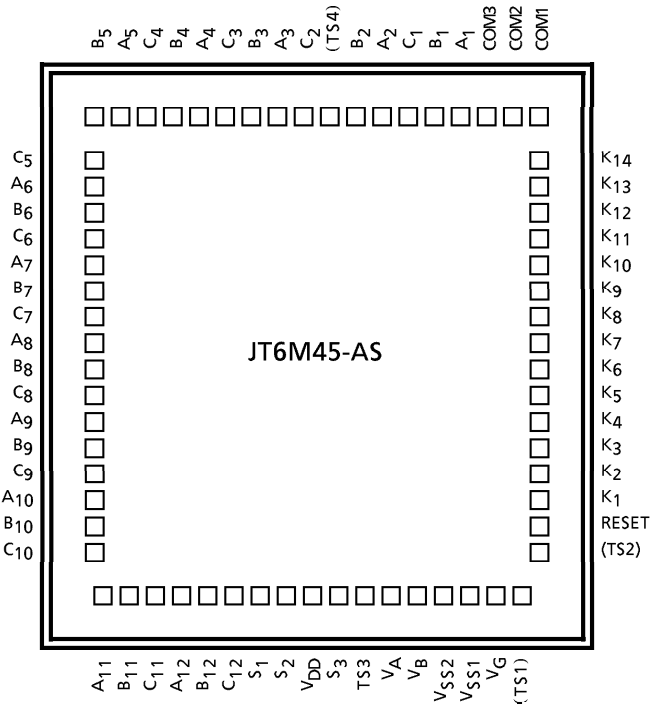

Chip size : 3.28 × 3.46 (mm)
Chip thickness : 440 ± 30 μm
Substrate : VDD

PAD LAYOUT

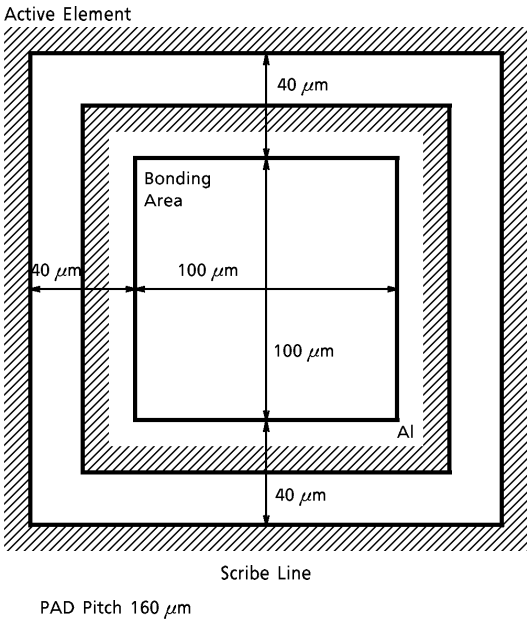

QFP67-P-1420-0.80

Technical drawing of a rectangular component, likely a PCB or a similar electronic component, showing dimensions and callouts.

Overall Dimensions:

- Width: 24.1 ± 0.4
- Height: 18.1 ± 0.4

Internal Dimensions and Spacing:

- Top horizontal spacing: 20.0 ± 0.2
- Left vertical spacing: 2.2 TYP
- Right vertical spacing: 3.8 TYP
- Bottom horizontal spacing: 2.0 TYP
- Bottom horizontal spacing: 0.3 ± 0.1
- Bottom horizontal spacing: 2.0 TYP
- Bottom horizontal spacing: 0.15 ± 0.1
- Bottom horizontal spacing: 1.85 ± 0.2
- Bottom horizontal spacing: 2.25 MAX

Callouts and Features:

- 54, 33, 55, 67, 32, 22, 1, 21
- 2.0 TYP
- 1.2 TYP
- 0.8
- 0.2 $^{+0.1}_{-0.05}$
- 1.35 ± 0.2

2000-03-22 18/18