


J3-20001 / 20002


10 to 100 MHz 3-Port Quadrature Hybrids

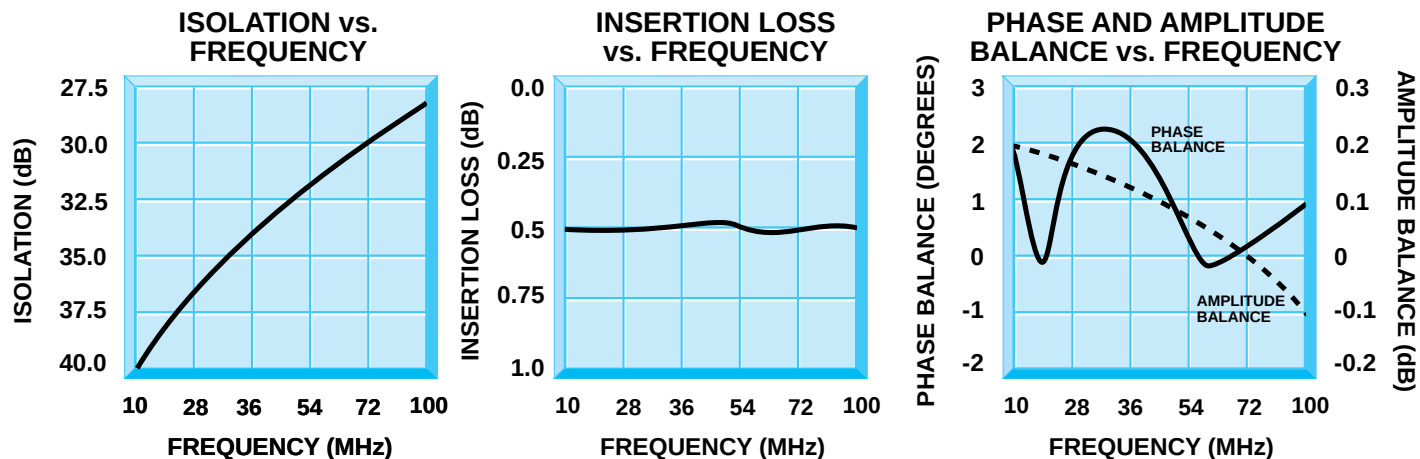


Guaranteed Specifications (-54° to +85°C)

Frequency Range	10 to 100 MHz
Isolation	25 dB Min.
Insertion Loss	1.2 dB Max.
VSWR	1.3:1 Max.
Phase Balance	$\pm 3^\circ$ Max.
Amplitude Balance	± 0.5 dB Max.
Impedance	50 Ohms
Power Handling	3 Watts Max.

Mechanical Outline

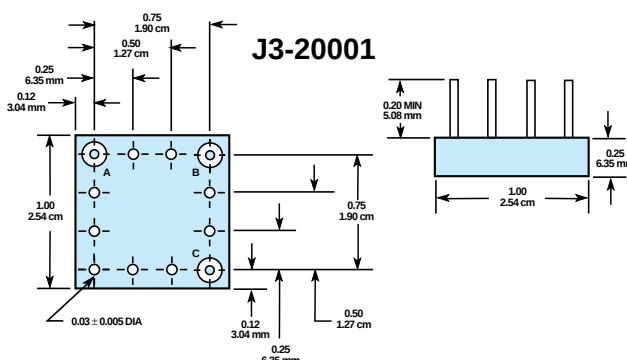

J3-20002

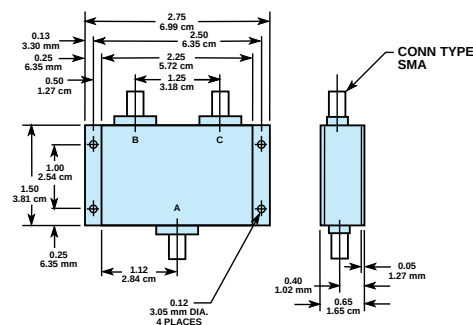

Truth Table

A	INPUT
B	0° OUTPUT
C	-90° OUTPUT

SIGNAL
TECHNOLOGY CORPORATION
OLEKTRON OPERATION

28 Tozer Road • Beverly, MA 01915-5579
Tel. 978.922.0019 • Fax 978.927.9328