


# Surface Mount LED J Series for low current or superbright use, 0358 Series Reverse Mount with Inner Lens



The 0358 series is designed to mount to pads on the lower side of a pcb with the LED viewed through a hole. This has the benefit maintaining all parts of the LED below the surface of the PCB, making it especially suitable for use with membrane overlays and applications where a smooth front surface is desired. It is the same as the 0348 series except that it incorporates a lens to provide a different view effect.

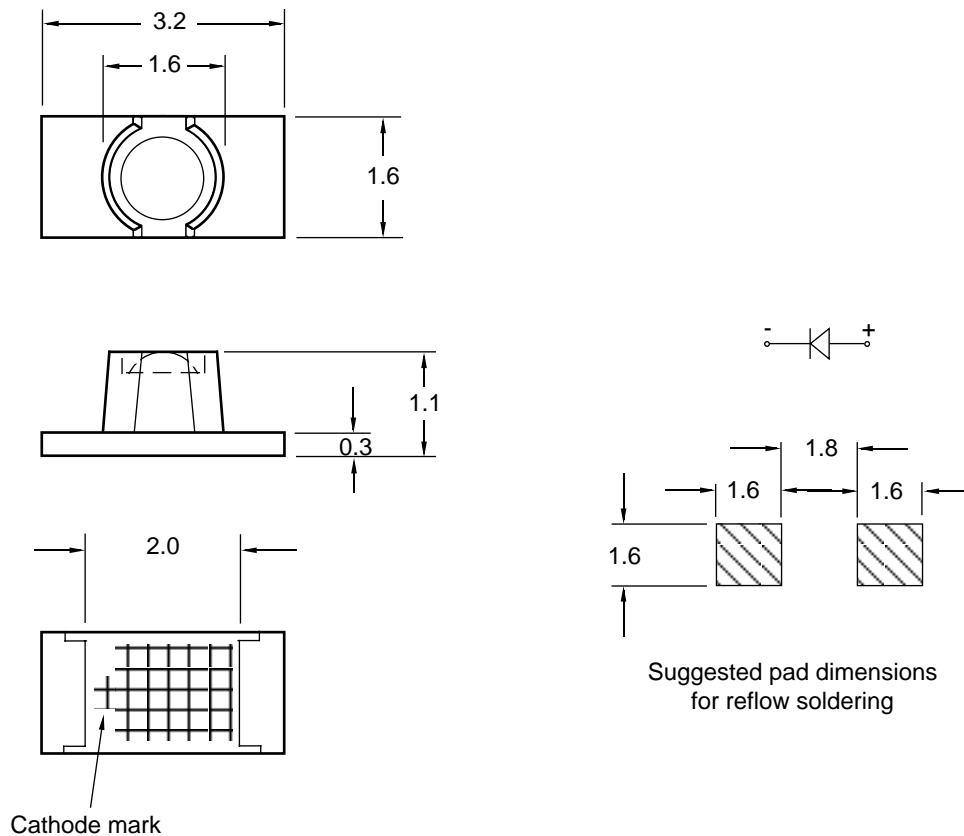

## GENERAL INFORMATION

Operating Temperature Range	-40 °C to +85 °C
Storage Temperature Range	-40 °C to +90 °C
Reflow Soldering Temperature	260 °C for 5 sec max

## APPLICATION INFORMATION (ALL RATINGS AT 25 °C AMBIENT)

Part No.	Emitted Color	Peak	$\Delta\lambda$	Absolute Maximum Ratings					E/O Characteristics					
		$\lambda$		Pd	If (mA)		Ir	Vr	Iv (mcd) @ If=20mA			Vf (V) @ If=20mA		$2\Theta_{1/2}$
		(nm)	(nm)	(mW)	dc	1/10 duty @ 1 kHz	@Vr=5V ( $\mu$ A)	(V)	2mA	Min	Typ	Min	Typ	(Deg)
JRC0358	Red	632	20	60	25	160	10	5	3	18	44	2.0	2.4	130
JGC0358	Green	575	20	60	25	160	10	5	1	12	18	2.0	2.4	130
JYC0358	Yellow	591	15	60	25	160	10	5	3	18	45	2.0	2.4	130
JOC0358	Orange	621	18	60	25	160	10	5	3	18	45	2.0	2.4	130
JYOC0358	YelOrng	611	17	60	25	160	10	5	3	18	45	2.0	2.4	130

Specifications subject to change without notice. Dimensions are in mm±0.3 unless stated otherwise.

IDEA, Inc., 1300-B Pioneer St., Brea, CA 92821

Ph:562-697-4332, 800-LED-IDEA; Fax: 562-690-1352 013S-J0358