

JHD162G SERIES

CHARACTERISTICS

DISPLAY CONTENT : 16 CHAR x 2ROW

CHAR. DOTS : 5 x 8

DRIVING MODE : 1/16D


AVAILABLE TYPES :

- TN , STN(YELLOW GREEN、 GREY、 B/W)
- REFLECTIVE、 WITH EL OR LED BACKLIGHT
- EL/100VAC , 400HZ
- LED/4.2VDC


PARAMETER ($V_{DD}=5.0V \pm 10\%$, $V_{SS}=0V$, $T_a=25$)

Parameter	Symbol	Testing Criteria	Standard Values			Unit
			Min.	Typ.	Max	
Supply voltage	$V_{DD}-V_{SS}$	-	4.5	5.0	5.5	V
Input high voltage	V_{IH}	-	2.2	-	V_{DD}	V
Input low voltage	V_{IL}	-	-0.3	-	0.6	V
Output high voltage	V_{OH}	$-I_{OH}=0.2mA$	2.4	-	-	V
Output low voltage	V_{OL}	$I_{OL}=1.2mA$	-	-	0.4	V
Operating current	I_{DD}	$V_{DD}=5.0V$	-	1.5	3.0	mA

APPLICATION CIRCUIT

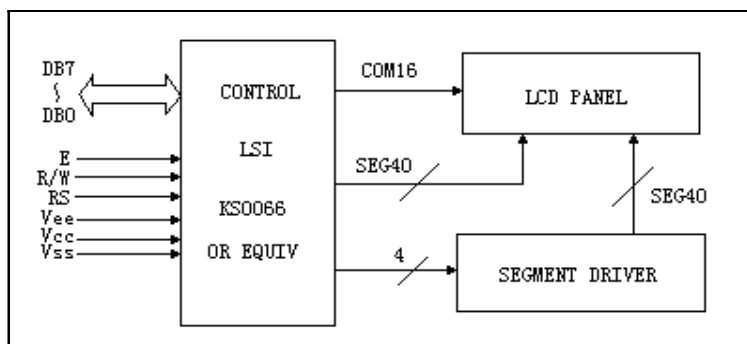

DIMENSIONS/DISPLAY CONTENT

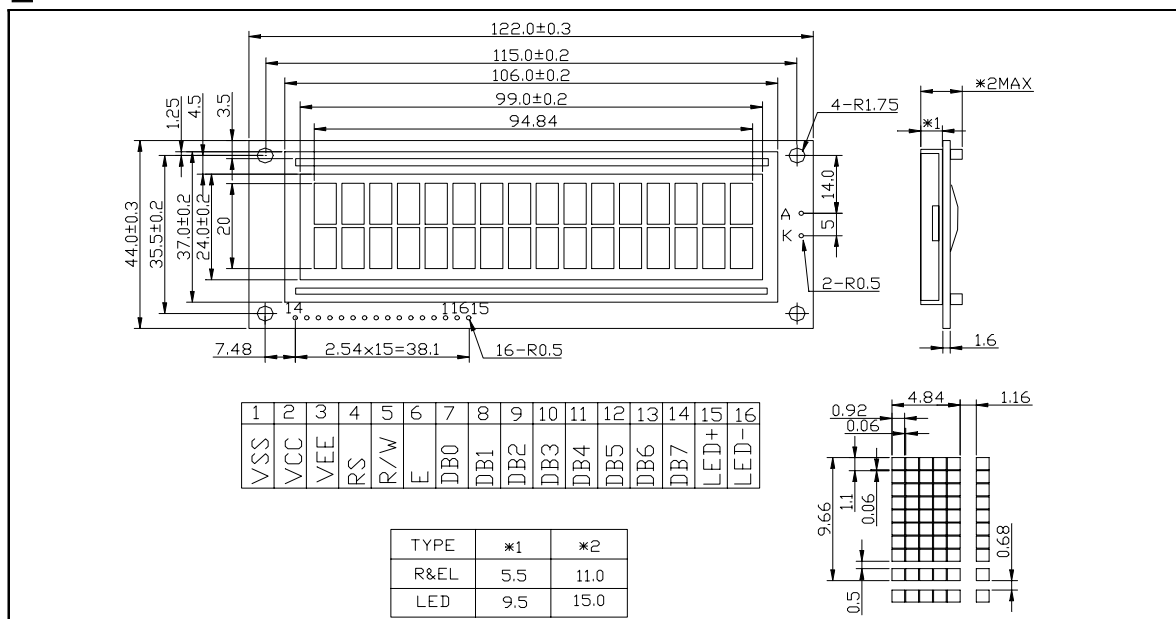

PIN CONFIGURATION

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
VSS	VCC	VEE	RS	R/W	E	DB0	DB1	DB2	DB3	DB4	DB5	DB6	DB7	LED+	LED-