

**Revision History**

## Revision .0 (Feb. 1998)

- Input leakage Currents (Inputs / DQ) of Component level are changed.  
I<sub>IL</sub>(Inputs) :  $\pm 5\mu\text{A}$  to  $\pm 1\mu\text{A}$ , I<sub>IL</sub>(DQ) :  $\pm 5\mu\text{A}$  to  $\pm 1.5\mu\text{A}$ .
- C<sub>in</sub> to be measured at V<sub>DD</sub> = 3.3V, T<sub>A</sub> = 23°C, f = 1MHz, V<sub>REF</sub> = 1.4V  $\pm$  200 mV.

## Revision .1 (Mar. 1998)

- AC Operating Condition is changed as defined :
  - V<sub>IH</sub>(max) = 5.6V AC. The overshoot voltage duration is  $\leq 3\text{ns}$ .
  - V<sub>IL</sub>(min) = -2.0V AC. The undershoot voltage duration is  $\leq 3\text{ns}$ .

# KMM374S203CT

# PC100 SDRAM MODULE

## KMM374S203CT SDRAM DIMM

2Mx72 SDRAM DIMM with ECC based on 2Mx8, 4K Refresh, 3.3V Synchronous DRAMs with SPD

### GENERAL DESCRIPTION

The Samsung KMM374S203CT is a 2M bit x 72 Synchronous Dynamic RAM high density memory module. The Samsung KMM374S203CT consists of nine CMOS 2M x 8 bit Synchronous DRAMs in TSOP-II 400mil package and a 1K or 2K EEPROM in 8-pin TSSOP package on a 168-pin glass-epoxy substrate. Two 0.1uF decoupling capacitors are mounted on the printed circuit board in parallel for each SDRAM.

The KMM374S203CT is a Dual In-line Memory Module and is intended for mounting into 168-pin edge connector sockets.

Synchronous design allows precise cycle control with the use of system clock. I/O transactions are possible on every clock cycle. Range of operating frequencies, programmable latencies allows the same device to be useful for a variety of high bandwidth, high performance memory system applications.

### FEATURE

- Performance range
  - Max Freq. (Speed)
  - KMM374S203CT-G8 125MHz (8ns)
  - KMM374S203CT-GH 100MHz (10ns)
  - KMM374S203CT-GL 100MHz (10ns)
- Burst Mode Operation
- Auto & Self Refresh Capability (4096 cycles / 64ms)
- LVTTTL compatible inputs and outputs
- Single 3.3V  $\pm$  0.3V power supply
- MRS cycle with address key programs
  - Latency (Access from column address)
  - Burst Length (1, 2, 4, 8 & Full page)
  - Data Scramble (Sequential & Interleave)
- All inputs are sampled at the positive going edge of the system clock
- Serial Presence Detect with EEPROM
- PCB : **Height(1,250mil)**, single sided component

### PIN CONFIGURATIONS (Front Side / Back Side)

| Pin | Front | Pin | Front  | Pin | Front | Pin | Back | Pin | Back  | Pin | Back  |
|-----|-------|-----|--------|-----|-------|-----|------|-----|-------|-----|-------|
| 1   | Vss   | 29  | DQM1   | 57  | DQ18  | 85  | Vss  | 113 | DQM5  | 141 | DQ50  |
| 2   | DQ0   | 30  | CS0    | 58  | DQ19  | 86  | DQ32 | 114 | CS1   | 142 | DQ51  |
| 3   | DQ1   | 31  | DU     | 59  | VDD   | 87  | DQ33 | 115 | RAS   | 143 | VDD   |
| 4   | DQ2   | 32  | Vss    | 60  | DQ20  | 88  | DQ34 | 116 | Vss   | 144 | DQ52  |
| 5   | DQ3   | 33  | A0     | 61  | NC    | 89  | DQ35 | 117 | A1    | 145 | NC    |
| 6   | VDD   | 34  | A2     | 62  | *VREF | 90  | VDD  | 118 | A3    | 146 | *VREF |
| 7   | DQ4   | 35  | A4     | 63  | *CKE1 | 91  | DQ36 | 119 | A5    | 147 | NC    |
| 8   | DQ5   | 36  | A6     | 64  | Vss   | 92  | DQ37 | 120 | A7    | 148 | Vss   |
| 9   | DQ6   | 37  | A8     | 65  | DQ21  | 93  | DQ38 | 121 | A9    | 149 | DQ53  |
| 10  | DQ7   | 38  | A10/AP | 66  | DQ22  | 94  | DQ39 | 122 | BA0   | 150 | DQ54  |
| 11  | DQ8   | 39  | *BA1   | 67  | DQ23  | 95  | DQ40 | 123 | *A11  | 151 | DQ55  |
| 12  | Vss   | 40  | VDD    | 68  | Vss   | 96  | Vss  | 124 | VDD   | 152 | Vss   |
| 13  | DQ9   | 41  | VDD    | 69  | DQ24  | 97  | DQ41 | 125 | *CLK1 | 153 | DQ56  |
| 14  | DQ10  | 42  | CLK0   | 70  | DQ25  | 98  | DQ42 | 126 | *A12  | 154 | DQ57  |
| 15  | DQ11  | 43  | Vss    | 71  | DQ26  | 99  | DQ43 | 127 | Vss   | 155 | DQ58  |
| 16  | DQ12  | 44  | DU     | 72  | DQ27  | 100 | DQ44 | 128 | CKE0  | 156 | DQ59  |
| 17  | DQ13  | 45  | CS2    | 73  | VDD   | 101 | DQ45 | 129 | CS3   | 157 | VDD   |
| 18  | VDD   | 46  | DQM2   | 74  | DQ28  | 102 | VDD  | 130 | DQM6  | 158 | DQ60  |
| 19  | DQ14  | 47  | DQM3   | 75  | DQ29  | 103 | DQ46 | 131 | DQM7  | 159 | DQ61  |
| 20  | DQ15  | 48  | DU     | 76  | DQ30  | 104 | DQ47 | 132 | *A13  | 160 | DQ62  |
| 21  | CB0   | 49  | VDD    | 77  | DQ31  | 105 | CB4  | 133 | VDD   | 161 | DQ63  |
| 22  | CB1   | 50  | NC     | 78  | Vss   | 106 | CB5  | 134 | NC    | 162 | Vss   |
| 23  | Vss   | 51  | NC     | 79  | CLK2  | 107 | Vss  | 135 | NC    | 163 | *CLK3 |
| 24  | NC    | 52  | CB2    | 80  | NC    | 108 | NC   | 136 | CB6   | 164 | NC    |
| 25  | NC    | 53  | CB3    | 81  | WP    | 109 | NC   | 137 | CB7   | 165 | **SA0 |
| 26  | VDD   | 54  | Vss    | 82  | **SDA | 110 | VDD  | 138 | Vss   | 166 | **SA1 |
| 27  | WE    | 55  | DQ16   | 83  | **SCL | 111 | CAS  | 139 | DQ48  | 167 | **SA2 |
| 28  | DQM0  | 56  | DQ17   | 84  | VDD   | 112 | DQM4 | 140 | DQ49  | 168 | VDD   |

### PIN NAMES

| Pin Name    | Function                       |
|-------------|--------------------------------|
| A0 ~ A10/AP | Address Input (multiplexed)    |
| BA0         | Select Bank                    |
| DQ0 ~ DQ63  | Data Input / Output            |
| CB0 ~ CB7   | Check Bit (data-in / data-out) |
| CLK0 , CLK2 | Clock Input                    |
| CKE0        | Clock Enable Input             |
| CS0, CS2    | Chip Select Input              |
| RAS         | Row Address Strobe             |
| CAS         | Column Address Strobe          |
| WE          | Write Enable                   |
| DQM0 ~ 7    | DQM                            |
| VDD         | Power Supply (3.3V)            |
| Vss         | Ground                         |
| *VREF       | Power Supply for Reference     |
| SDA         | Serial Data I/O                |
| SCL         | Serial Clock                   |
| SA0 ~ 2     | Address in EEPROM              |
| WP          | Write Protection               |
| DU          | Don't use                      |
| NC          | No Connection                  |



- \* These pins are not used in this module.  
\*\* These pins should be NC in the system which does not support SPD.

SAMSUNG ELECTRONICS CO., Ltd. reserves the right to change products and specifications without notice.

## PIN CONFIGURATION DESCRIPTION

| Pin                     | Name                          | Input Function                                                                                                                                                                                                                                                |
|-------------------------|-------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| CLK                     | <i>System Clock</i>           | Active on the positive going edge to sample all inputs.                                                                                                                                                                                                       |
| $\overline{\text{CS}}$  | <i>Chip Select</i>            | Disables or enables device operation by masking or enabling all inputs except CLK, CKE and DQM                                                                                                                                                                |
| CKE                     | <i>Clock Enable</i>           | Masks system clock to freeze operation from the next clock cycle.<br>CKE should be enabled at least one cycle prior to new command.<br>Disable input buffers for power down in standby.<br>CKE should be enabled 1CLK+t <sub>ss</sub> prior to valid command. |
| A0 ~ A10/AP             | <i>Address</i>                | Row / column addresses are multiplexed on the same pins.<br>Row address : RA0 ~ RA10, column address : CA0 ~ CA8                                                                                                                                              |
| BA0                     | <i>Bank Select Address</i>    | Selects bank to be activated during row address latch time.<br>Selects bank for read/write during column address latch time.                                                                                                                                  |
| $\overline{\text{RAS}}$ | <i>Row Address Strobe</i>     | Latches row addresses on the positive going edge of the CLK with $\overline{\text{RAS}}$ low.<br>Enables row access & precharge.                                                                                                                              |
| $\overline{\text{CAS}}$ | <i>Column Address Strobe</i>  | Latches column addresses on the positive going edge of the CLK with $\overline{\text{CAS}}$ low.<br>Enables column access.                                                                                                                                    |
| $\overline{\text{WE}}$  | <i>Write Enable</i>           | Enables write operation and row precharge.<br>Latches data in starting from $\overline{\text{CAS}}$ , $\overline{\text{WE}}$ active.                                                                                                                          |
| DQM0 ~ 7                | <i>Data Input/Output Mask</i> | Makes data output Hi-Z, t <sub>SHZ</sub> after the clock and masks the output.<br>Blocks data input when DQM active. (Byte masking)                                                                                                                           |
| DQ0 ~ 63                | <i>Data Input/Output</i>      | Data inputs/outputs are multiplexed on the same pins.                                                                                                                                                                                                         |
| CB0 ~ 7                 | <i>Check bit</i>              | Check bits for ECC.                                                                                                                                                                                                                                           |
| WP                      | <i>Write Protection</i>       | WP pin is connected to V <sub>cc</sub> .<br>When WP is "high", EEPROM Programming will be inhibited and the entire memory will be write - protected.                                                                                                          |
| VDD/VSS                 | <i>Power Supply/Ground</i>    | Power and ground for the input buffers and the core logic.                                                                                                                                                                                                    |

## PC100 SDRAM MODULE



## ABSOLUTE MAXIMUM RATINGS

| Parameter                                         | Symbol                             | Value      | Unit |
|---------------------------------------------------|------------------------------------|------------|------|
| Voltage on any pin relative to Vss                | V <sub>IN</sub> , V <sub>OUT</sub> | -1.0 ~ 4.6 | V    |
| Voltage on V <sub>DD</sub> supply relative to Vss | V <sub>DD</sub> , V <sub>DDQ</sub> | -1.0 ~ 4.6 | V    |
| Storage temperature                               | T <sub>STG</sub>                   | -55 ~ +150 | °C   |
| Power dissipation                                 | P <sub>D</sub>                     | 9          | W    |
| Short circuit current                             | I <sub>OS</sub>                    | 50         | mA   |

**Note :** Permanent device damage may occur if ABSOLUTE MAXIMUM RATINGS are exceeded.

Functional operation should be restricted to recommended operating condition.

Exposure to higher than recommended voltage for extended periods of time could affect device reliability.

## DC OPERATING CONDITIONS AND CHARACTERISTICS

Recommended operating conditions (Voltage referenced to V<sub>ss</sub> = 0V, T<sub>A</sub> = 0 to 70 °C)

| Parameter                        | Symbol                             | Min  | Typ | Max                   | Unit | Note                   |
|----------------------------------|------------------------------------|------|-----|-----------------------|------|------------------------|
| Supply voltage                   | V <sub>DD</sub> , V <sub>DDQ</sub> | 3.0  | 3.3 | 3.6                   | V    |                        |
| Input logic high voltage         | V <sub>IH</sub>                    | 2.0  | 3.0 | V <sub>DDQ</sub> +0.3 | V    | 1                      |
| Input logic low voltage          | V <sub>IL</sub>                    | -0.3 | 0   | 0.8                   | V    | 2                      |
| Output logic high voltage        | V <sub>OH</sub>                    | 2.4  | -   | -                     | V    | I <sub>OH</sub> = -2mA |
| Output logic low voltage         | V <sub>OL</sub>                    | -    | -   | 0.4                   | V    | I <sub>OL</sub> = 2mA  |
| Input leakage current(Inputs)    | I <sub>IL</sub>                    | -9   | -   | 9                     | uA   | 3                      |
| Input leakage current (I/O pins) | I <sub>IL</sub>                    | -1.5 | -   | 1.5                   | uA   | 3,4                    |

**Note :** 1. V<sub>IH</sub> (max) = 5.6V AC. The overshoot voltage duration is ≤ 3ns.

2. V<sub>IL</sub> (min) = -2.0V AC. The undershoot voltage duration is ≤ 3ns.

3. Any input 0V ≤ V<sub>IN</sub> ≤ V<sub>DDQ</sub>.

Input leakage currents include HI-Z output leakage for all bi-directional buffers with Tri-State outputs.

4. Dout is disabled, 0V ≤ V<sub>OUT</sub> ≤ V<sub>DDQ</sub>.

CAPACITANCE (V<sub>DD</sub> = 3.3V, T<sub>A</sub> = 23°C, f = 1MHz, V<sub>REF</sub> = 1.4V ± 200 mV)

| Pin                                                                          | Symbol            | Min | Max | Unit |
|------------------------------------------------------------------------------|-------------------|-----|-----|------|
| Address (A0 ~ A10/AP, BA0)                                                   | C <sub>ADD</sub>  | 45  | 65  | pF   |
| $\overline{\text{RAS}}$ , $\overline{\text{CAS}}$ , $\overline{\text{WE}}$   | C <sub>IN</sub>   | 45  | 65  | pF   |
| CKE (CKE0)                                                                   | C <sub>CKE</sub>  | 40  | 60  | pF   |
| Clock (CLK0, CLK2)                                                           | C <sub>CLK</sub>  | 30  | 40  | pF   |
| $\overline{\text{CS}}$ ( $\overline{\text{CS0}}$ , $\overline{\text{CS2}}$ ) | C <sub>CS</sub>   | 30  | 40  | pF   |
| DQM (DQM0 ~ DQM7)                                                            | C <sub>DQM</sub>  | 5   | 15  | pF   |
| DQ (DQ0 ~ DQ63)                                                              | C <sub>OUT1</sub> | 5   | 15  | pF   |
| CB (CB0 ~ CB7)                                                               | C <sub>OUT2</sub> | 5   | 15  | pF   |

## DC CHARACTERISTICS


(Recommended operating condition unless otherwise noted, T<sub>A</sub> = 0 to 70 °C)

| Parameter                                                             | Symbol             | Test Condition                                                                                                                              | CAS Latency | Version |     |     | Unit | Note |
|-----------------------------------------------------------------------|--------------------|---------------------------------------------------------------------------------------------------------------------------------------------|-------------|---------|-----|-----|------|------|
|                                                                       |                    |                                                                                                                                             |             | -8      | -H  | -L  |      |      |
| Operating Current<br>(One Bank Active)                                | I <sub>CC1</sub>   | Burst Length =1<br>t <sub>RC</sub> ≥t <sub>RC</sub> (min)<br>I <sub>OL</sub> = 0 mA                                                         |             | 810     | 765 | 765 | mA   | 1    |
| Precharge Standby Current<br>in power-down mode                       | I <sub>CC2P</sub>  | CKE≤V <sub>IL</sub> (max), t <sub>CC</sub> = 15ns                                                                                           |             | 9       |     |     | mA   |      |
|                                                                       | I <sub>CC2PS</sub> | CKE & CLK≤V <sub>IL</sub> (max), t <sub>CC</sub> = ∞                                                                                        |             | 9       |     |     |      |      |
| Precharge Standby Current<br>in non power-down mode                   | I <sub>CC2N</sub>  | CKE≥V <sub>IH</sub> (min), $\overline{CS}$ ≥V <sub>IH</sub> (min), t <sub>CC</sub> = 15ns<br>Input signals are changed one time during 30ns |             | 135     |     |     | mA   |      |
|                                                                       | I <sub>CC2NS</sub> | CKE≥V <sub>IH</sub> (min), CLK≤V <sub>IL</sub> (max), t <sub>CC</sub> = ∞<br>Input signals are stable                                       |             | 36      |     |     |      |      |
| Active Standby Current<br>in power-down mode                          | I <sub>CC3P</sub>  | CKE≤V <sub>IL</sub> (max), t <sub>CC</sub> = 15ns                                                                                           |             | 18      |     |     | mA   |      |
|                                                                       | I <sub>CC3PS</sub> | CKE & CLK≤V <sub>IL</sub> (max), t <sub>CC</sub> = ∞                                                                                        |             | 9       |     |     |      |      |
| Active Standby Current<br>in non power-down mode<br>(One Bank Active) | I <sub>CC3N</sub>  | CKE≥V <sub>IH</sub> (min), $\overline{CS}$ ≥V <sub>IH</sub> (min), t <sub>CC</sub> = 15ns<br>Input signals are changed one time during 30ns |             | 225     |     |     | mA   |      |
|                                                                       | I <sub>CC3NS</sub> | CKE≥V <sub>IH</sub> (min), CLK≤V <sub>IL</sub> (max), t <sub>CC</sub> = ∞<br>Input signals are stable                                       |             | 135     |     |     | mA   |      |
| Operating Current<br>(Burst Mode)                                     | I <sub>CC4</sub>   | I <sub>OL</sub> = 0 mA<br>Page Burst<br>2Banks Activated<br>t <sub>CCD</sub> = 2CLKs                                                        | 3           | 990     | 885 | 885 | mA   | 1    |
|                                                                       |                    |                                                                                                                                             | 2           | 765     | 885 | 765 |      |      |
| Refresh Current                                                       | I <sub>CC5</sub>   | t <sub>RC</sub> ≥t <sub>RC</sub> (min)                                                                                                      |             | 495     |     |     | mA   | 2    |
| Self Refresh Current                                                  | I <sub>CC6</sub>   | CKE≤0.2V                                                                                                                                    |             | 9       |     |     | mA   |      |


**Note :** 1. Measured with outputs open.  
2. Refresh period is 64ms.

**AC OPERATING TEST CONDITIONS** ( $V_{DD} = 3.3V \pm 0.3V$ ,  $T_A = 0$  to  $70^\circ C$ )

| Parameter                                 | Value               | Unit |
|-------------------------------------------|---------------------|------|
| Input levels ( $V_{ih}/V_{il}$ )          | 2.4 / 0.4           | V    |
| Input timing measurement reference level  | 1.4                 | V    |
| Input rise and fall time                  | $t_r / t_f = 1 / 1$ | ns   |
| Output timing measurement reference level | 1.4                 | V    |
| Output load condition                     | See Fig. 2          |      |

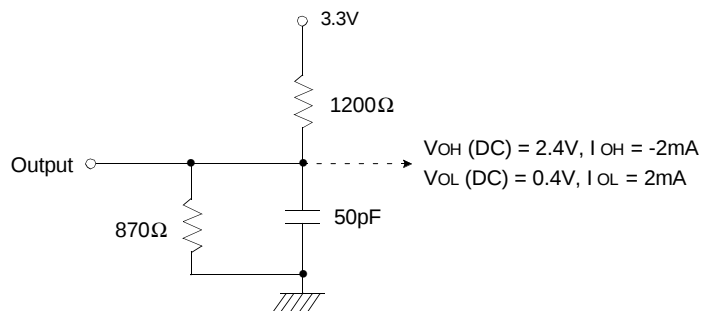

(Fig. 1) DC Output Load Circuit

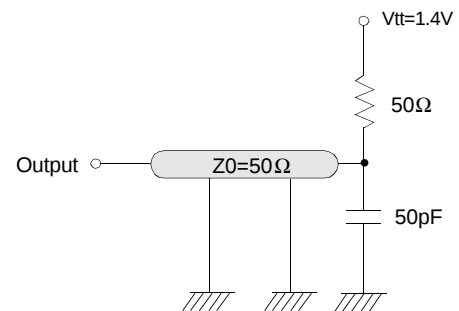

(Fig. 2) AC Output Load Circuit

**OPERATING AC PARAMETER**

(AC operating conditions unless otherwise noted)

| Parameter                                                |               | Symbol    | Version |    |    | Unit | Note |
|----------------------------------------------------------|---------------|-----------|---------|----|----|------|------|
|                                                          |               |           | -8      | -H | -L |      |      |
| Row active to row active delay                           |               | tRRD(min) | 16      | 20 | 20 | ns   | 1    |
| $\overline{\text{RAS}}$ to $\overline{\text{CAS}}$ delay |               | tRCD(min) | 20      | 20 | 20 | ns   | 1    |
| Row precharge time                                       |               | tRP(min)  | 20      | 20 | 20 | ns   | 1    |
| Row active time                                          |               | tRAS(min) | 48      | 50 | 50 | ns   | 1    |
|                                                          |               | tRAS(max) | 100     |    |    | us   |      |
| Row cycle time                                           |               | tRC(min)  | 68      | 70 | 70 | ns   | 1    |
| Last data in to row precharge                            |               | tRDL(min) | 1       |    |    | CLK  | 2    |
| Last data in to new col. address delay                   |               | tCDL(min) | 1       |    |    | CLK  | 2    |
| Last data in to burst stop                               |               | tBDL(min) | 1       |    |    | CLK  | 2    |
| Col. address to col. address delay                       |               | tCCD(min) | 1       |    |    | CLK  | 3    |
| Number of valid output data                              | CAS Latency=3 |           | 2       |    |    | ea   | 4    |
|                                                          | CAS Latency=2 |           | 1       |    |    |      |      |

- Note :**
1. The minimum number of clock cycles is determined by dividing the minimum time required with clock cycle time and then rounding off to the next higher integer.
  2. Minimum delay is required to complete write.
  3. All parts allow every cycle column address change.
  4. In case of row precharge interrupt, auto precharge and read burst stop.

**AC CHARACTERISTICS** (AC operating conditions unless otherwise noted)**Refer to the individual component, not the whole module.**

| Parameter                 |               | Symbol | -8  |      | -H  |      | -L  |      | Unit | Note |
|---------------------------|---------------|--------|-----|------|-----|------|-----|------|------|------|
|                           |               |        | Min | Max  | Min | Max  | Min | Max  |      |      |
| CLK cycle time            | CAS Latency=3 | tcc    | 8   | 1000 | 10  | 1000 | 10  | 1000 | ns   | 1    |
|                           | CAS Latency=2 |        | 12  |      | 10  |      | 12  |      |      |      |
| CLK to valid output delay | CAS Latency=3 | tsac   |     | 6    |     | 6    |     | 6    | ns   | 1, 2 |
|                           | CAS Latency=2 |        |     | 6    |     | 6    |     | 7    |      |      |
| Output data hold time     | CAS Latency=3 | toH    | 3   |      | 3   |      | 3   |      | ns   | 2    |
|                           | CAS Latency=2 |        | 3   |      | 3   |      | 3   |      |      |      |
| CLK high pulse width      |               | tCH    | 3   |      | 3   |      | 3   |      | ns   | 3    |
| CLK low pulse width       |               | tCL    | 3   |      | 3   |      | 3   |      | ns   | 3    |
| Input setup time          |               | tSS    | 2   |      | 2   |      | 2   |      | ns   | 3    |
| Input hold time           |               | tSH    | 1   |      | 1   |      | 1   |      | ns   | 3    |
| CLK to output in Low-Z    |               | tSLZ   | 1   |      | 1   |      | 1   |      | ns   | 2    |
| CLK to output in Hi-Z     | CAS Latency=3 | tSHZ   |     | 6    |     | 6    |     | 6    | ns   |      |
|                           | CAS Latency=2 |        |     | 6    |     | 6    |     | 7    |      |      |

**Note :** 1. Parameters depend on programmed CAS latency.2. If clock rising time is longer than 1ns,  $(tr/2-0.5)ns$  should be added to the parameter.3. Assumed input rise and fall time ( $tr$  &  $tf$ )=1ns.If  $tr$  &  $tf$  is longer than 1ns, transient time compensation should be considered,  
i.e.,  $[(tr + tf)/2-1]ns$  should be added to the parameter.

# KMM374S203CT

# PC100 SDRAM MODULE

## FREQUENCY vs. AC PARAMETER RELATIONSHIP TABLE

### KMM374S203CT-G8

(Unit : number of clock)

| Frequency       | CAS Latency | tRC  | tRAS | tRP  | tRRD | tRCD | tCCD | tCDL | tRDL |
|-----------------|-------------|------|------|------|------|------|------|------|------|
|                 |             | 68ns | 48ns | 20ns | 16ns | 20ns | 8ns  | 8ns  | 8ns  |
| 125MHz (8.0ns)  | 3           | 9    | 6    | 3    | 2    | 3    | 1    | 1    | 1    |
| 100MHz (10.0ns) | 3           | 7    | 5    | 2    | 2    | 2    | 1    | 1    | 1    |
| 83MHz (12.0ns)  | 2           | 6    | 4    | 2    | 2    | 2    | 1    | 1    | 1    |
| 75MHz (13.0ns)  | 2           | 6    | 4    | 2    | 2    | 2    | 1    | 1    | 1    |
| 66MHz (15.0ns)  | 2           | 6    | 4    | 2    | 2    | 2    | 1    | 1    | 1    |

### KMM374S203CT-GH

(Unit : number of clock)

| Frequency       | CAS Latency | tRC  | tRAS | tRP  | tRRD | tRCD | tCCD | tCDL | tRDL |
|-----------------|-------------|------|------|------|------|------|------|------|------|
|                 |             | 70ns | 50ns | 20ns | 20ns | 20ns | 10ns | 10ns | 10ns |
| 100MHz (10.0ns) | 2           | 7    | 5    | 2    | 2    | 2    | 1    | 1    | 1    |
| 83MHz (12.0ns)  | 2           | 6    | 5    | 2    | 2    | 2    | 1    | 1    | 1    |
| 75MHz (13.0ns)  | 2           | 6    | 4    | 2    | 2    | 2    | 1    | 1    | 1    |
| 66MHz (15.0ns)  | 2           | 5    | 4    | 2    | 2    | 2    | 1    | 1    | 1    |
| 60MHz (16.7ns)  | 2           | 5    | 3    | 2    | 2    | 2    | 1    | 1    | 1    |

### KMM374S203CT-GL

(Unit : number of clock)

| Frequency       | CAS Latency | tRC  | tRAS | tRP  | tRRD | tRCD | tCCD | tCDL | tRDL |
|-----------------|-------------|------|------|------|------|------|------|------|------|
|                 |             | 70ns | 50ns | 20ns | 20ns | 20ns | 10ns | 10ns | 10ns |
| 100MHz (10.0ns) | 3           | 7    | 5    | 2    | 2    | 2    | 1    | 1    | 1    |
| 83MHz (12.0ns)  | 2           | 6    | 5    | 2    | 2    | 2    | 1    | 1    | 1    |
| 75MHz (13.0ns)  | 2           | 6    | 4    | 2    | 2    | 2    | 1    | 1    | 1    |
| 66MHz (15.0ns)  | 2           | 5    | 4    | 2    | 2    | 2    | 1    | 1    | 1    |
| 60MHz (16.7ns)  | 2           | 5    | 3    | 2    | 2    | 2    | 1    | 1    | 1    |

## SIMPLIFIED TRUTH TABLE

| COMMAND                            |                        |       | CKEn-1 | CKEn | $\overline{CS}$ | $\overline{RAS}$ | $\overline{CAS}$ | $\overline{WE}$ | DQM | BA0     | A10/AP      | A9 ~ A0                | Note |
|------------------------------------|------------------------|-------|--------|------|-----------------|------------------|------------------|-----------------|-----|---------|-------------|------------------------|------|
| Register                           | Mode Register Set      |       | H      | X    | L               | L                | L                | L               | X   | OP CODE |             |                        | 1, 2 |
| Refresh                            | Auto Refresh           |       | H      | H    | L               | L                | L                | H               | X   | X       |             |                        | 3    |
|                                    | Self Refresh           | Entry |        | L    |                 |                  |                  |                 |     |         |             |                        | 3    |
|                                    |                        | Exit  | L      | H    | L               | H                | H                | H               | X   | X       |             |                        | 3    |
|                                    |                        |       |        |      | H               | X                | X                | X               |     |         |             |                        | 3    |
| Bank Active & Row Addr.            |                        |       | H      | X    | L               | L                | H                | H               | X   | V       | Row Address |                        |      |
| Read & Column Address              | Auto Precharge Disable |       | H      | X    | L               | H                | L                | H               | X   | V       | L           | Column Address (A0~A9) | 4    |
|                                    | Auto Precharge Enable  |       |        |      |                 |                  |                  |                 |     |         | H           |                        | 4, 5 |
| Write & Column Address             | Auto Precharge Disable |       | H      | X    | L               | H                | L                | L               | X   | V       | L           | Column Address (A0~A9) | 4    |
|                                    | Auto Precharge Enable  |       |        |      |                 |                  |                  |                 |     |         | H           |                        | 4, 5 |
| Burst Stop                         |                        |       | H      | X    | L               | H                | H                | L               | X   | X       |             |                        | 6    |
| Precharge                          | Bank Selection         |       | H      | X    | L               | L                | H                | L               | X   | V       | L           | X                      |      |
|                                    | Both Banks             |       |        |      |                 |                  |                  |                 |     | X       | H           |                        |      |
| Clock Suspend or Active Power Down |                        | Entry | H      | L    | H               | X                | X                | X               | X   | X       |             |                        |      |
|                                    |                        |       |        |      | L               | V                | V                | V               |     |         |             |                        |      |
|                                    |                        | Exit  | L      | H    | X               | X                | X                | X               | X   |         |             |                        |      |
| Precharge Power Down Mode          |                        | Entry | H      | L    | H               | X                | X                | X               | X   | X       |             |                        |      |
|                                    |                        |       |        |      | L               | H                | H                | H               |     |         |             |                        |      |
|                                    |                        | Exit  | L      | H    | H               | X                | X                | X               | X   |         |             |                        |      |
|                                    |                        |       |        |      | L               | V                | V                | V               |     |         |             |                        |      |
| DQM                                |                        |       | H      | X    |                 |                  |                  |                 | V   | X       |             |                        | 7    |
| No Operation Command               |                        |       | H      | X    | H               | X                | X                | X               | X   | X       |             |                        |      |
|                                    |                        |       |        |      | L               | H                | H                | H               |     |         |             |                        |      |

(V=Valid, X=Don't Care, H=Logic High, L=Logic Low)

**Note :** 1. OP Code : Operand Code

A0 ~ A10/AP, BA0 : Program keys. (@MRS)

2. MRS can be issued only at both banks precharge state.

A new command can be issued after 2 clock cycle of MRS.

3. Auto refresh functions are as same as CBR refresh of DRAM.

The automatical precharge without row precharge command is meant by "Auto".

Auto/self refresh can be issued only at both banks precharge state.

4. BA0 : Bank select address.

If "Low" at read, write, row active and precharge, bank A is selected.

If "High" at read, write, row active and precharge, bank B is selected.

If A10/AP is "High" at row precharge, BA0 is ignored and both banks are selected.

5. During burst read or write with auto precharge, new read/write command can not be issued.

Another bank read/write command can be issued after the end of burst.

New row active of the associated bank can be issued at t<sub>RP</sub> after the end of burst.


6. Burst stop command is valid at every burst length.

7. DQM sampled at positive going edge of a CLK masks the data-in at the very CLK (Write DQM latency is 0),

but makes Hi-Z state the data-out of 2 CLK cycles after. (Read DQM latency is 2)

## PACKAGE DIMENSIONS

Units : Inches (millimeters)

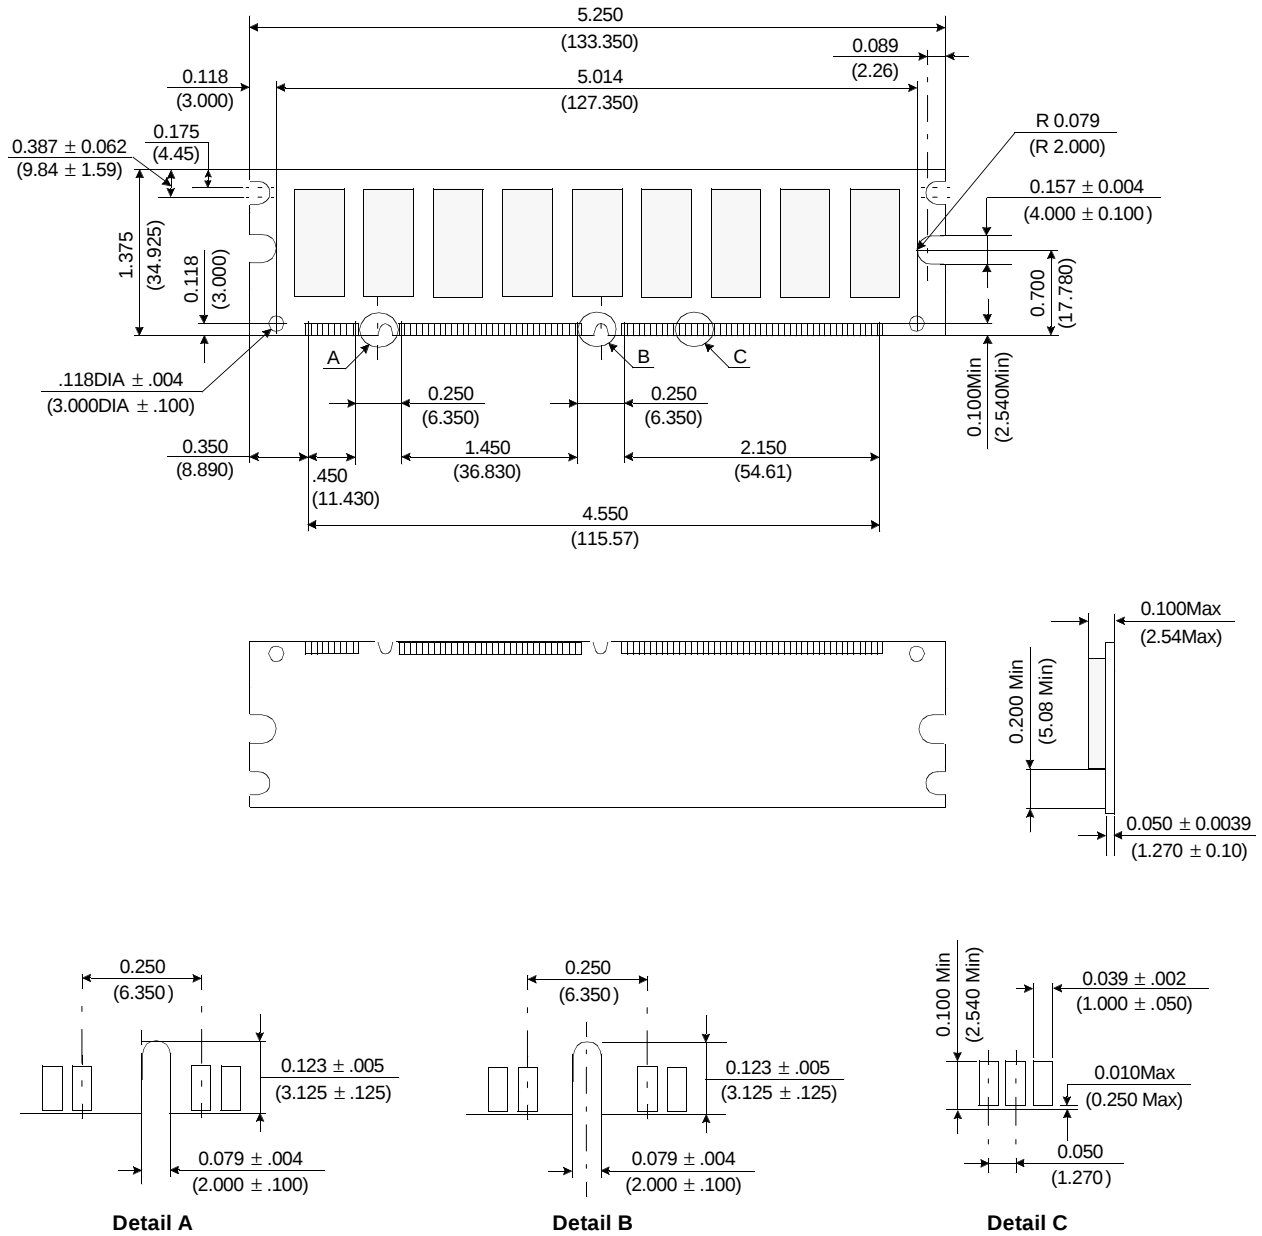Tolerances :  $\pm .005(.13)$  unless otherwise specified

The used device is 2Mx8 SDRAM, TSOP  
 SDRAM Part No. : KM48S2020CT