

## KMM53216000BK/BKG Fast Page Mode

16M x 32 DRAM SIMM Using 16Mx4, 4K Refresh, 5V

### GENERAL DESCRIPTION

The Samsung KMM53216000B is a 16Mx32bits Dynamic RAM high density memory module. The Samsung KMM53216000B consists of eight CMOS 16Mx4bits DRAMs in SOJ packages mounted on a 72-pin glass-epoxy substrate. A 0.1 or 0.22uF decoupling capacitor is mounted on the printed circuit board for each DRAM. The KMM53216000B is a Single In-line Memory Module with edge connections and is intended for mounting into 72 pin edge connector sockets.

### PERFORMANCE RANGE

| Speed | t <sub>RAC</sub> | t <sub>CAC</sub> | t <sub>RC</sub> | t <sub>PC</sub> |
|-------|------------------|------------------|-----------------|-----------------|
| -5    | 50ns             | 13ns             | 90ns            | 35ns            |
| -6    | 60ns             | 15ns             | 110ns           | 40ns            |

### FEATURES

- Part Identification
  - KMM53216000BK(4K cycles/64ms Ref, SOJ, Solder)
  - KMM53216000BKG(4K cycles/64ms Ref, SOJ, Gold)
- Fast Page Mode Operation
- $\overline{\text{CAS}}$ -before- $\overline{\text{RAS}}$  & Hidden Refresh capability
- $\overline{\text{RAS}}$ -only refresh capability
- TTL compatible inputs and outputs
- Single +5V±10% power supply
- JEDEC standard PDpin & pinout
- PCB : Height(1250mil), double sided component

### PIN CONFIGURATIONS

| Pin | Symbol                   | Pin | Symbol                   |
|-----|--------------------------|-----|--------------------------|
| 1   | Vss                      | 37  | NC                       |
| 2   | DQ0                      | 38  | NC                       |
| 3   | DQ18                     | 39  | Vss                      |
| 4   | DQ1                      | 40  | $\overline{\text{CAS0}}$ |
| 5   | DQ19                     | 41  | $\overline{\text{CAS2}}$ |
| 6   | DQ2                      | 42  | $\overline{\text{CAS3}}$ |
| 7   | DQ20                     | 43  | $\overline{\text{CAS1}}$ |
| 8   | DQ3                      | 44  | $\overline{\text{RAS0}}$ |
| 9   | DQ21                     | 45  | NC                       |
| 10  | Vcc                      | 46  | NC                       |
| 11  | NC                       | 47  | $\overline{\text{W}}$    |
| 12  | A0                       | 48  | NC                       |
| 13  | A1                       | 49  | DQ9                      |
| 14  | A2                       | 50  | DQ27                     |
| 15  | A3                       | 51  | DQ10                     |
| 16  | A4                       | 52  | DQ28                     |
| 17  | A5                       | 53  | DQ11                     |
| 18  | A6                       | 54  | DQ29                     |
| 19  | A10                      | 55  | DQ12                     |
| 20  | DQ4                      | 56  | DQ30                     |
| 21  | DQ22                     | 57  | DQ13                     |
| 22  | DQ5                      | 58  | DQ31                     |
| 23  | DQ23                     | 59  | Vcc                      |
| 24  | DQ6                      | 60  | DQ32                     |
| 25  | DQ24                     | 61  | DQ14                     |
| 26  | DQ7                      | 62  | DQ33                     |
| 27  | DQ25                     | 63  | DQ15                     |
| 28  | A7                       | 64  | DQ34                     |
| 29  | A11                      | 65  | DQ16                     |
| 30  | Vcc                      | 66  | NC                       |
| 31  | A8                       | 67  | PD1                      |
| 32  | A9                       | 68  | PD2                      |
| 33  | NC                       | 69  | PD3                      |
| 34  | $\overline{\text{RAS2}}$ | 70  | PD4                      |
| 35  | NC                       | 71  | NC                       |
| 36  | NC                       | 72  | Vss                      |

### PIN NAMES


| Pin Name                                          | Function              |
|---------------------------------------------------|-----------------------|
| A0 - A11                                          | Address Inputs        |
| DQ0-7, DQ9-16<br>DQ18-25, DQ27-34                 | Data In/Out           |
| $\overline{\text{W}}$                             | Read/Write Enable     |
| $\overline{\text{RAS0}}, \overline{\text{RAS2}}$  | Row Address Strobe    |
| $\overline{\text{CAS0}} - \overline{\text{CAS3}}$ | Column Address Strobe |
| PD1 -PD4                                          | Presence Detect       |
| Vcc                                               | Power(+5V)            |
| Vss                                               | Ground                |
| NC                                                | No Connection         |

### PRESENCE DETECT PINS (Optional)

| Pin | 50NS | 60NS |
|-----|------|------|
| PD1 | Vss  | Vss  |
| PD2 | NC   | NC   |
| PD3 | Vss  | NC   |
| PD4 | Vss  | NC   |

SAMSUNG ELECTRONICS CO., LTD. reserves the right to change products and specifications without notice.

FUNCTIONAL BLOCK DIAGRAM

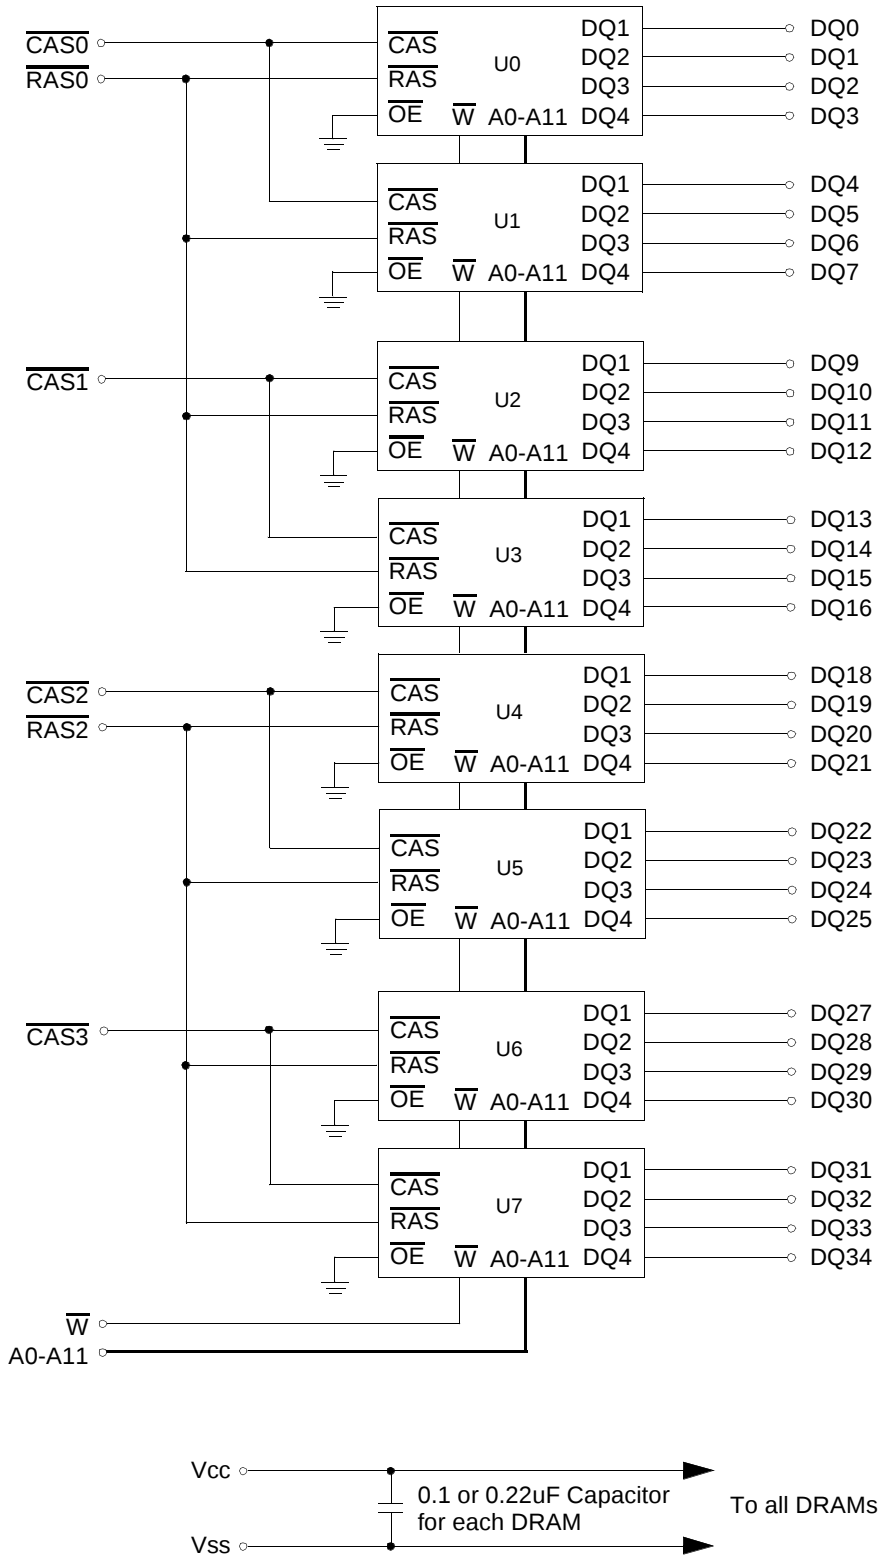

## ABSOLUTE MAXIMUM RATINGS \*

| Item                                  | Symbol                             | Rating      | Unit |
|---------------------------------------|------------------------------------|-------------|------|
| Voltage on any pin relative to Vss    | V <sub>IN</sub> , V <sub>OUT</sub> | -1 to +7.0  | V    |
| Voltage on Vcc supply relative to Vss | V <sub>CC</sub>                    | -1 to +7.0  | V    |
| Storage Temperature                   | T <sub>stg</sub>                   | -55 to +125 | °C   |
| Power Dissipation                     | P <sub>d</sub>                     | 8           | W    |
| Short Circuit Output Current          | I <sub>OS</sub>                    | 50          | mA   |

\* Permanent device damage may occur if ABSOLUTE MAXIMUM RATINGS are exceeded. Functional operation should be restricted to the conditions as detailed in the operational sections of this data sheet. Exposure to absolute maximum rating conditions for intended periods may affect device reliability.

## RECOMMENDED OPERATING CONDITIONS (Voltage referenced to Vss, TA = 0 to 70°C)

| Item               | Symbol          | Min    | Typ | Max                | Unit |
|--------------------|-----------------|--------|-----|--------------------|------|
| Supply Voltage     | V <sub>CC</sub> | 4.5    | 5.0 | 5.5                | V    |
| Ground             | V <sub>SS</sub> | 0      | 0   | 0                  | V    |
| Input High Voltage | V <sub>IH</sub> | 2.4    | -   | V <sub>CC</sub> *1 | V    |
| Input Low Voltage  | V <sub>IL</sub> | -1.0*2 | -   | 0.8                | V    |

\*1 : V<sub>CC</sub>+2.0V at pulse width ≤ 20ns, which is measured at V<sub>CC</sub>.

\*2 : -2.0V at pulse width ≤ 20ns, which is measured at V<sub>SS</sub>.

## DC AND OPERATING CHARACTERISTICS (Recommended operating conditions unless otherwise noted)

| Symbol            | Speed      | KMM53216000BK/BKG |     | Unit |
|-------------------|------------|-------------------|-----|------|
|                   |            | Min               | Max |      |
| I <sub>CC1</sub>  | -5         | -                 | 960 | mA   |
|                   | -6         | -                 | 880 | mA   |
| I <sub>CC2</sub>  | Don't care | -                 | 16  | mA   |
| I <sub>CC3</sub>  | -5         | -                 | 960 | mA   |
|                   | -6         | -                 | 880 | mA   |
| I <sub>CC4</sub>  | -5         | -                 | 560 | mA   |
|                   | -6         | -                 | 480 | mA   |
| I <sub>CC5</sub>  | Don't care | -                 | 8   | mA   |
| I <sub>CC6</sub>  | -5         | -                 | 960 | mA   |
|                   | -6         | -                 | 880 | mA   |
| I <sub>I(L)</sub> | Don't care | -10               | 10  | uA   |
| I <sub>O(L)</sub> |            | -5                | 5   | uA   |
| V <sub>OH</sub>   | Don't care | 2.4               | -   | V    |
| V <sub>OL</sub>   |            | -                 | 0.4 | V    |

I<sub>CC1</sub> : Operating Current \* ( $\overline{RAS}$ ,  $\overline{CAS}$ , Address cycling @t<sub>RC</sub>=min)

I<sub>CC2</sub> : Standby Current ( $\overline{RAS}=\overline{CAS}=\overline{W}=V_{IH}$ )

I<sub>CC3</sub> :  $\overline{RAS}$  Only Refresh Current \* ( $\overline{CAS}=V_{IH}$ ,  $\overline{RAS}$  cycling @t<sub>RC</sub>=min)

I<sub>CC4</sub> : Fast Page Mode Current \* ( $\overline{RAS}=V_{IL}$ ,  $\overline{CAS}$  cycling : t<sub>PC</sub>=min)

I<sub>CC5</sub> : Standby Current ( $\overline{RAS}=\overline{CAS}=\overline{W}=V_{CC}-0.2V$ )

I<sub>CC6</sub> :  $\overline{CAS}$ -Before- $\overline{RAS}$  Refresh Current \* ( $\overline{RAS}$  and  $\overline{CAS}$  cycling @t<sub>RC</sub>=min)

I<sub>I(L)</sub> : Input Leakage Current (Any input 0≤V<sub>IN</sub>≤V<sub>CC</sub>+0.5V, all other pins not under test=0 V)

I<sub>O(L)</sub> : Output Leakage Current(Data Out is disabled, 0V≤V<sub>OUT</sub>≤V<sub>CC</sub>)

V<sub>OH</sub> : Output High Voltage Level (I<sub>OH</sub> = -5mA)

V<sub>OL</sub> : Output Low Voltage Level (I<sub>OL</sub> = 4.2mA)

\* **NOTE** : I<sub>CC1</sub>, I<sub>CC3</sub>, I<sub>CC4</sub> and I<sub>CC6</sub> are dependent on output loading and cycle rates. Specified values are obtained with the output open. I<sub>CC</sub> is specified as an average current. In I<sub>CC1</sub> and I<sub>CC3</sub>, address can be changed maximum once while  $\overline{RAS}=V_{IL}$ . In I<sub>CC4</sub>, address can be changed maximum once within one Fast page mode cycle time, t<sub>PC</sub>.

## CAPACITANCE (TA = 25°C, VCC=5V, f = 1MHz)

| Item                                               | Symbol | Min | Max | Unit |
|----------------------------------------------------|--------|-----|-----|------|
| Input capacitance[A0-A11]                          | CIN1   | -   | 50  | pF   |
| Input capacitance[W]                               | CIN2   | -   | 66  | pF   |
| Input capacitance[RAS0, RAS2]                      | CIN3   | -   | 38  | pF   |
| Input capacitance[CAS0 - CAS3]                     | CIN4   | -   | 24  | pF   |
| Input/Output capacitance[DQ0-7, 9-16,18-25, 27-34] | CDQ    | -   | 17  | pF   |

## AC CHARACTERISTICS (0°C≤TA≤70°C, VCC=5.0V±10%. See notes 1,2.)

Test condition : Vih/Vil=2.4/0.8V, Voh/Vol=2.4/0.4V, output loading CL=100pF

| Parameter                              | Symbol | -5  |     | -6  |     | Unit | Note   |
|----------------------------------------|--------|-----|-----|-----|-----|------|--------|
|                                        |        | Min | Max | Min | Max |      |        |
| Random read or write cycle time        | tRC    | 90  |     | 110 |     | ns   |        |
| Access time from RAS                   | tRAC   |     | 50  |     | 60  | ns   | 3,4,10 |
| Access time from CAS                   | tCAC   |     | 13  |     | 15  | ns   | 3,4,5  |
| Access time from column address        | tAA    |     | 25  |     | 30  | ns   | 3,10   |
| CAS to output in Low-Z                 | tCLZ   | 0   |     | 0   |     | ns   | 3      |
| Output buffer turn-off delay           | tOFF   | 0   | 13  | 0   | 15  | ns   | 6      |
| Transition time(rise and fall)         | tT     | 1   | 50  | 1   | 50  | ns   | 2      |
| RAS precharge time                     | tRP    | 30  |     | 40  |     | ns   |        |
| RAS pulse width                        | tRAS   | 50  | 10K | 60  | 10K | ns   |        |
| RAS hold time                          | tRSH   | 13  |     | 15  |     | ns   |        |
| CAS hold time                          | tCSH   | 50  |     | 60  |     | ns   |        |
| CAS pulse width                        | tCAS   | 13  | 10K | 15  | 10K | ns   |        |
| RAS to CAS delay time                  | tRCD   | 20  | 37  | 20  | 45  | ns   | 4      |
| RAS to column address delay time       | tRAD   | 15  | 25  | 15  | 30  | ns   | 10     |
| CAS to RAS precharge time              | tCRP   | 5   |     | 5   |     | ns   |        |
| Row address set-up time                | tASR   | 0   |     | 0   |     | ns   |        |
| Row address hold time                  | tRAH   | 10  |     | 10  |     | ns   |        |
| Column address set-up time             | tASC   | 0   |     | 0   |     | ns   |        |
| Column address hold time               | tCAH   | 10  |     | 10  |     | ns   |        |
| Column address to RAS lead time        | tRAL   | 25  |     | 30  |     | ns   |        |
| Read command set-up time               | tRCS   | 0   |     | 0   |     | ns   |        |
| Read command hold referenced to CAS    | tRCH   | 0   |     | 0   |     | ns   | 8      |
| Read command hold referenced to RAS    | tRRH   | 0   |     | 0   |     | ns   | 8      |
| Write command hold time                | tWCH   | 10  |     | 10  |     | ns   |        |
| Write command pulse width              | tWP    | 10  |     | 10  |     | ns   |        |
| Write command to RAS lead time         | tRWL   | 15  |     | 15  |     | ns   |        |
| Write command to CAS lead time         | tCWL   | 13  |     | 15  |     | ns   |        |
| Data set-up time                       | tDS    | 0   |     | 0   |     | ns   | 9      |
| Data hold time                         | tDH    | 10  |     | 10  |     | ns   | 9      |
| Refresh period                         | tREF   |     | 64  |     | 64  | ms   |        |
| Write command set-up time              | tWCS   | 0   |     | 0   |     | ns   | 7      |
| CAS setup time(CAS-before-RAS refresh) | tCSR   | 5   |     | 5   |     | ns   |        |
| CAS hold time(CAS-before-RAS refresh)  | tCHR   | 10  |     | 10  |     | ns   |        |
| RAS to CAS precharge time              | tRPC   | 5   |     | 5   |     | ns   |        |
| Access time from CAS precharge         | tCPA   |     | 30  |     | 35  | ns   | 3      |

## AC CHARACTERISTICS (0°C≤TA≤70°C, VCC=5.0V±10%. See notes 1,2.)


Test condition : Vih/Vil=2.4/0.8V, Voh/Vol=2.4/0.4V, output loading CL=100pF

| Parameter                                                                      | Symbol | -5  |      | -6  |      | Unit | Note |
|--------------------------------------------------------------------------------|--------|-----|------|-----|------|------|------|
|                                                                                |        | Min | Max  | Min | Max  |      |      |
| Fast page mode cycle time                                                      | tPC    | 35  |      | 40  |      | ns   |      |
| $\overline{\text{CAS}}$ precharge time(Fast page cycle)                        | tCP    | 10  |      | 10  |      | ns   |      |
| $\overline{\text{RAS}}$ pulse width(Fast page cycle)                           | tRASP  | 50  | 200K | 60  | 200K | ns   |      |
| $\overline{\text{W}}$ to $\overline{\text{RAS}}$ precharge time(C-B-R refresh) | tWRP   | 10  |      | 10  |      | ns   |      |
| $\overline{\text{W}}$ to $\overline{\text{RAS}}$ hold time(C-B-R refresh)      | tWRH   | 10  |      | 10  |      | ns   |      |

## NOTES

1. An initial pause of 200us is required after power-up followed by any 8  $\overline{\text{RAS}}$ -only or  $\overline{\text{CAS}}$ -before- $\overline{\text{RAS}}$  refresh cycles before proper device operation is achieved.
2. Input voltage levels are Vih/Vil. VIH(min) and VIL(max) are reference levels for measuring timing of input signals. Transition times are measured between VIH(min) and VIL(max) and are assumed to be 5ns for all inputs.
3. Measured with a load equivalent to 2 TTL loads and 100pF.
4. Operation within the tRCD(max) limit insures that tRAC(max) can be met. tRCD(max) is specified as a reference point only. If tRCD is greater than the specified tRCD(max) limit, then access time is controlled exclusively by tCAC.
5. Assumes that tRCD≥tRCD(max).
6. This parameter defines the time at which the output achieves the open circuit condition and is not referenced to Voh or Vol.
7. twcs is non-restrictive operating parameter. It is included in the data sheet as electrical characteristics only. If twcs≥twcs(min), the cycle is an early write cycle and the data out pin will remain high impedance for the duration of the cycle.
8. Either trCH or trRH must be satisfied for a read cycle.
9. These parameters are referenced to the  $\overline{\text{CAS}}$  leading edge in early write cycles.
10. Operation within the tRAD(max) limit insures that tRAC(max) can be met. tRAD(max) is specified as reference point only. If tRAD is greater than the specified tRAD(max) limit, then access time is controlled by tAA.


READ CYCLE

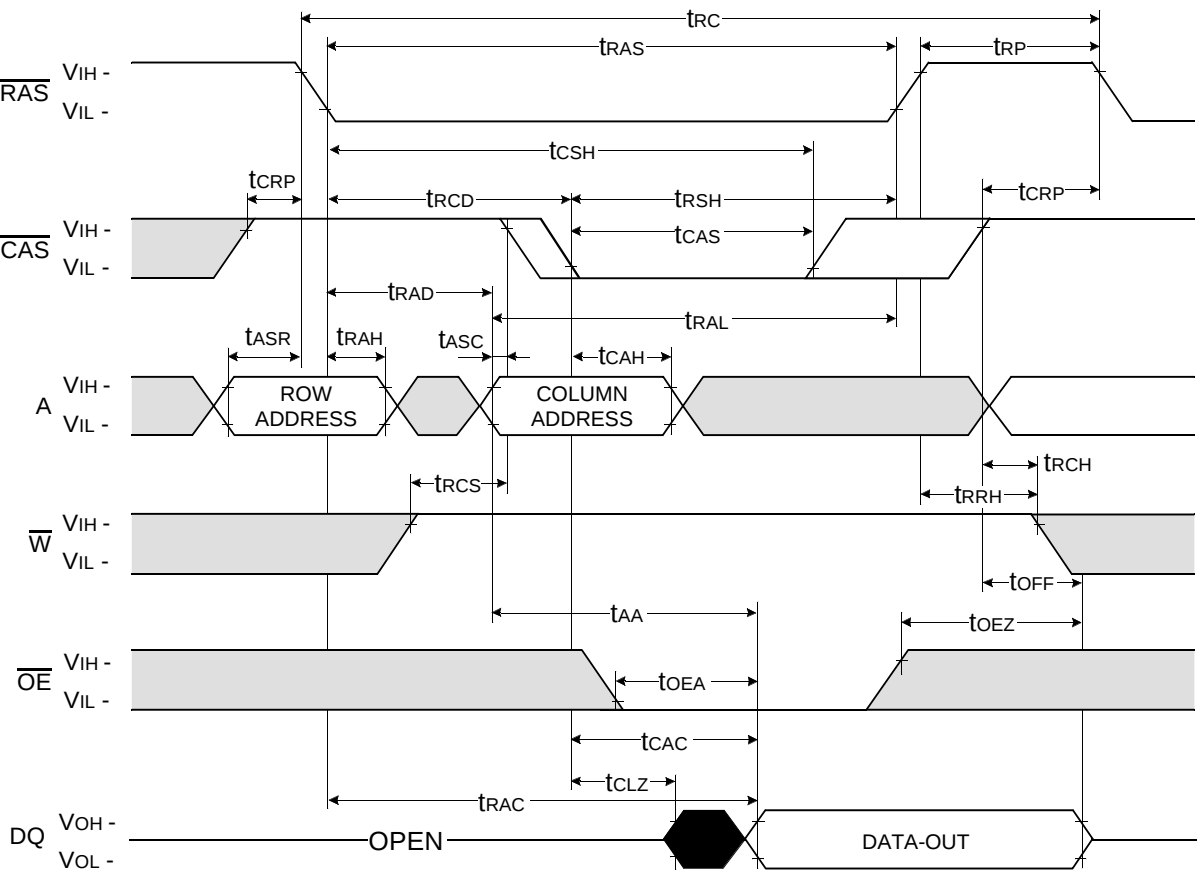

Don't care  
Undefined


WRITE CYCLE ( EARLY WRITE )

NOTE : DOUT = OPEN

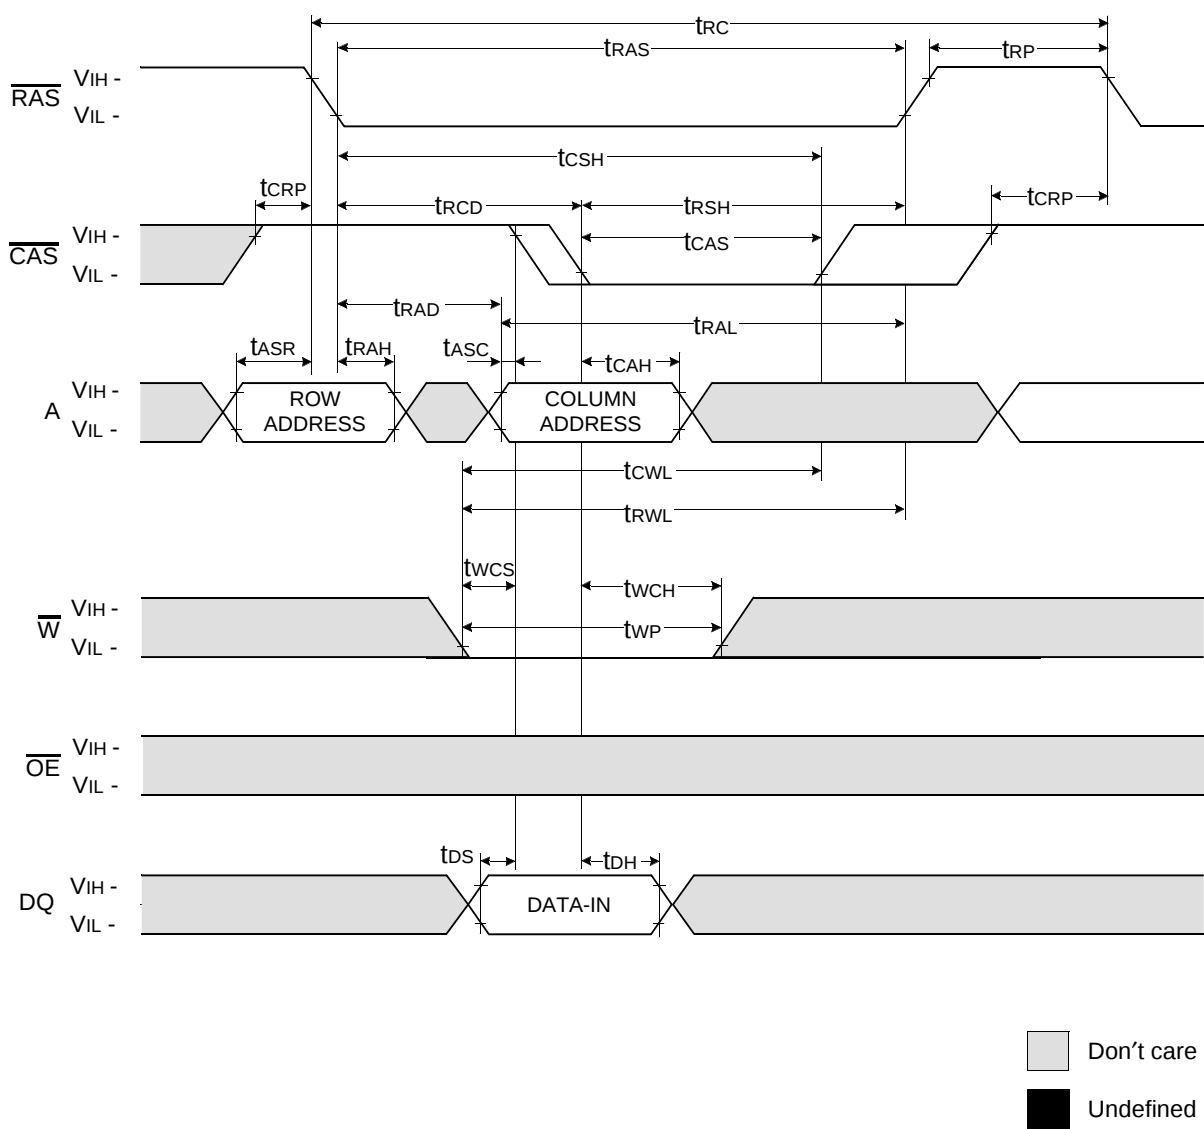


WRITE CYCLE (  $\overline{OE}$  CONTROLLED WRITE )

NOTE : DOUT = OPEN

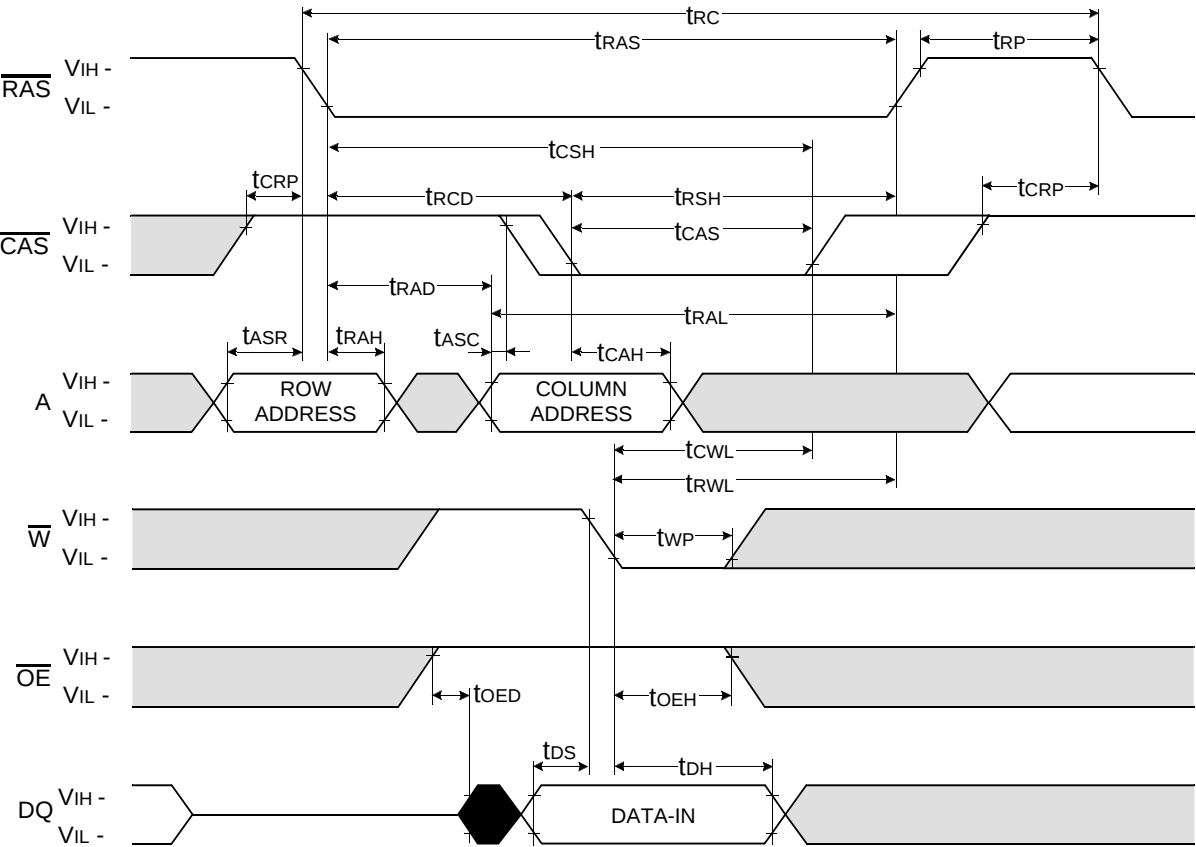

Don't care  
Undefined

READ - MODIFY - WRTIE CYCLE

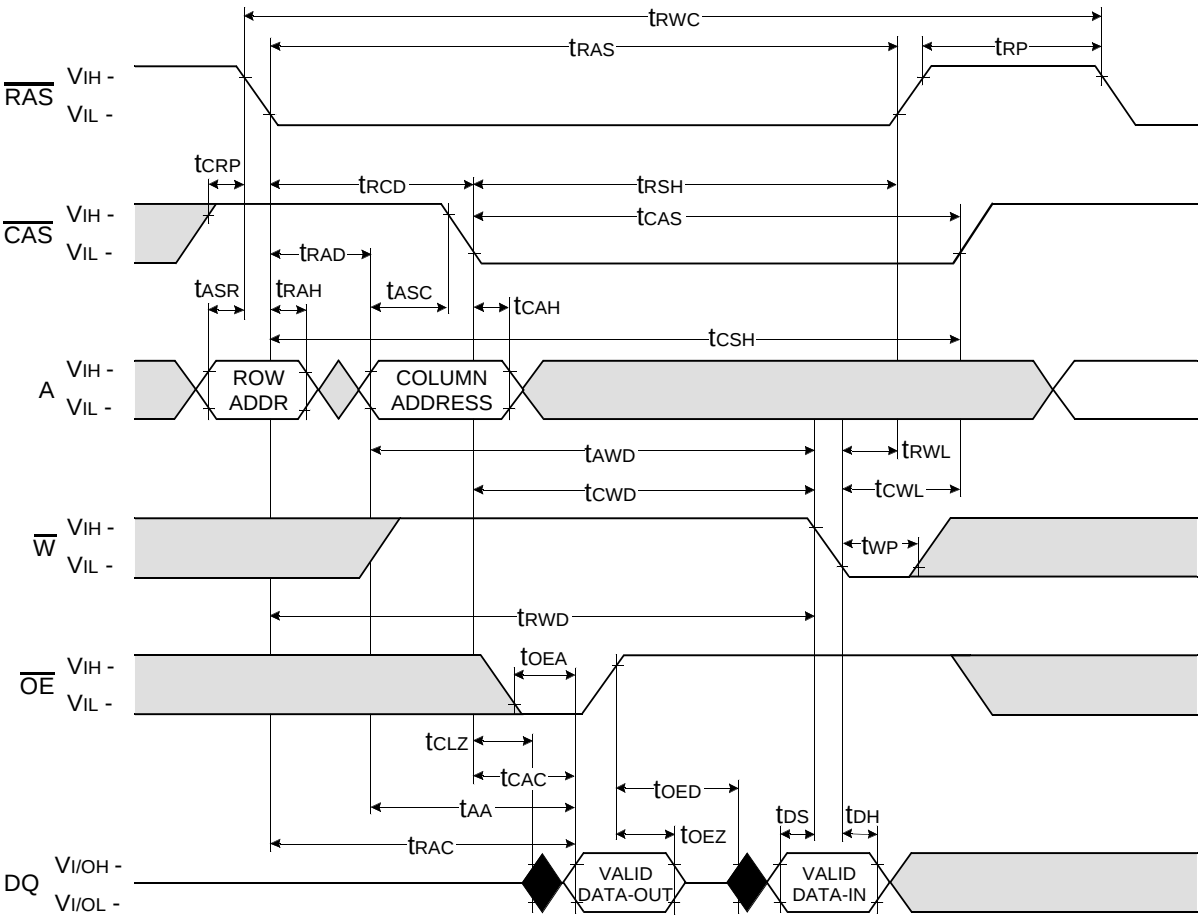


Don't care

Undefined


FAST PAGE READ CYCLE

NOTE : DOUT = OPEN

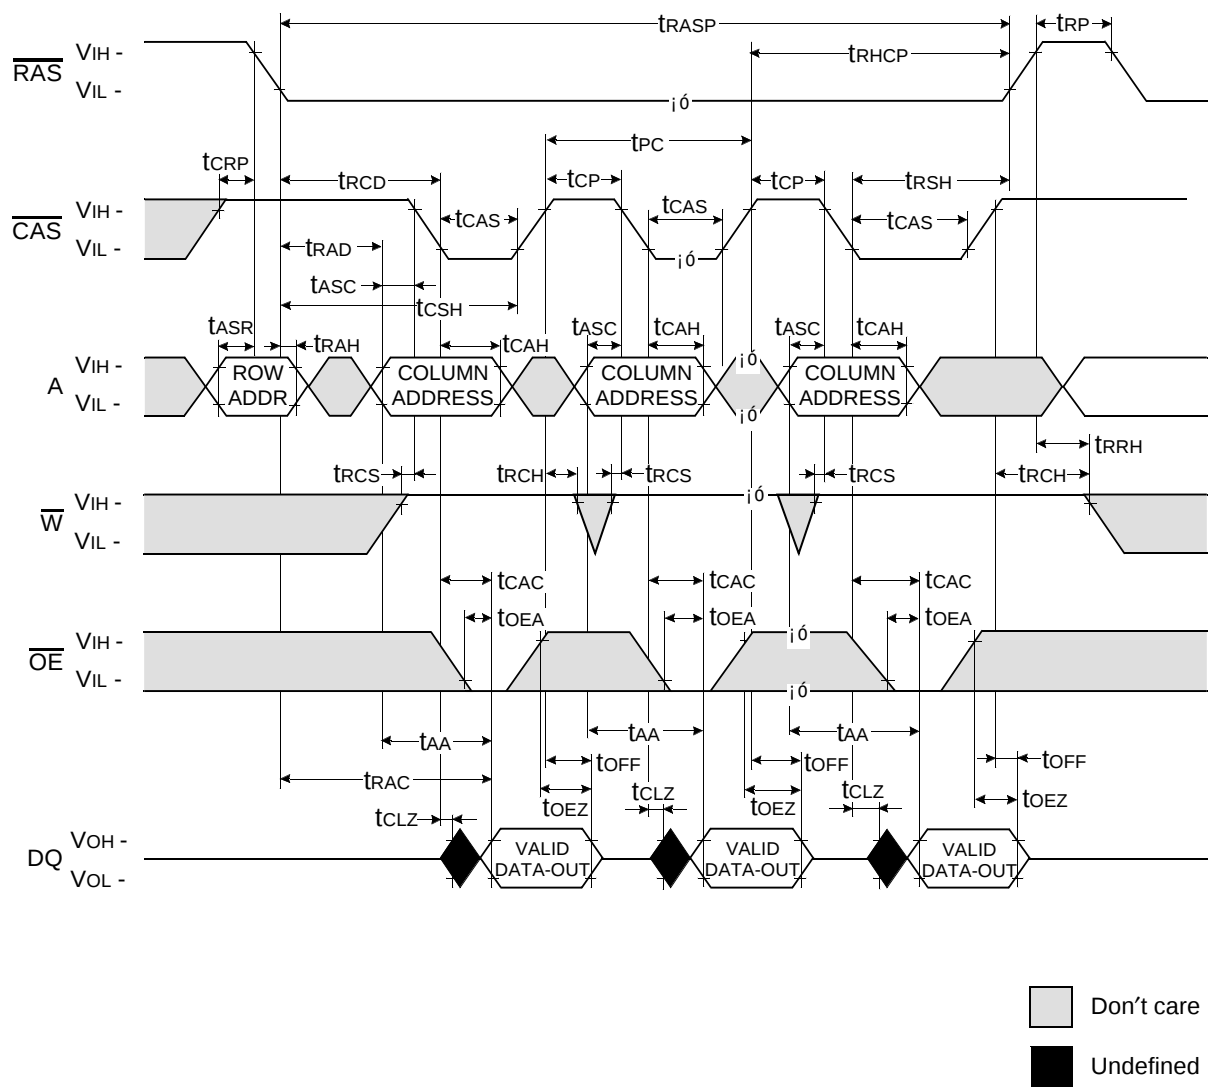


### FAST PAGE WRITE CYCLE ( EARLY WRITE )

NOTE : DOUT = OPEN

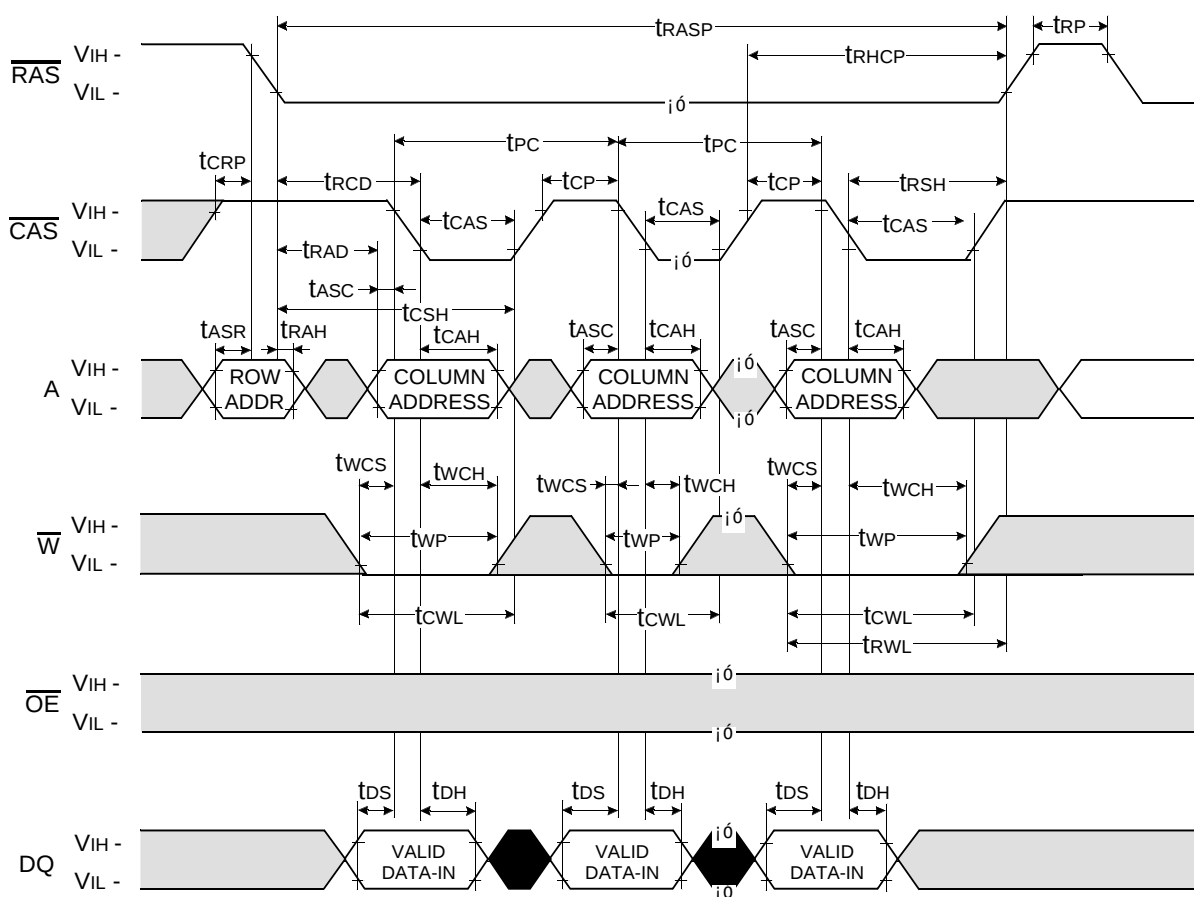☐ Don't care

■ Undefined

FAST PAGE READ - MODIFY - WRITE CYCLE

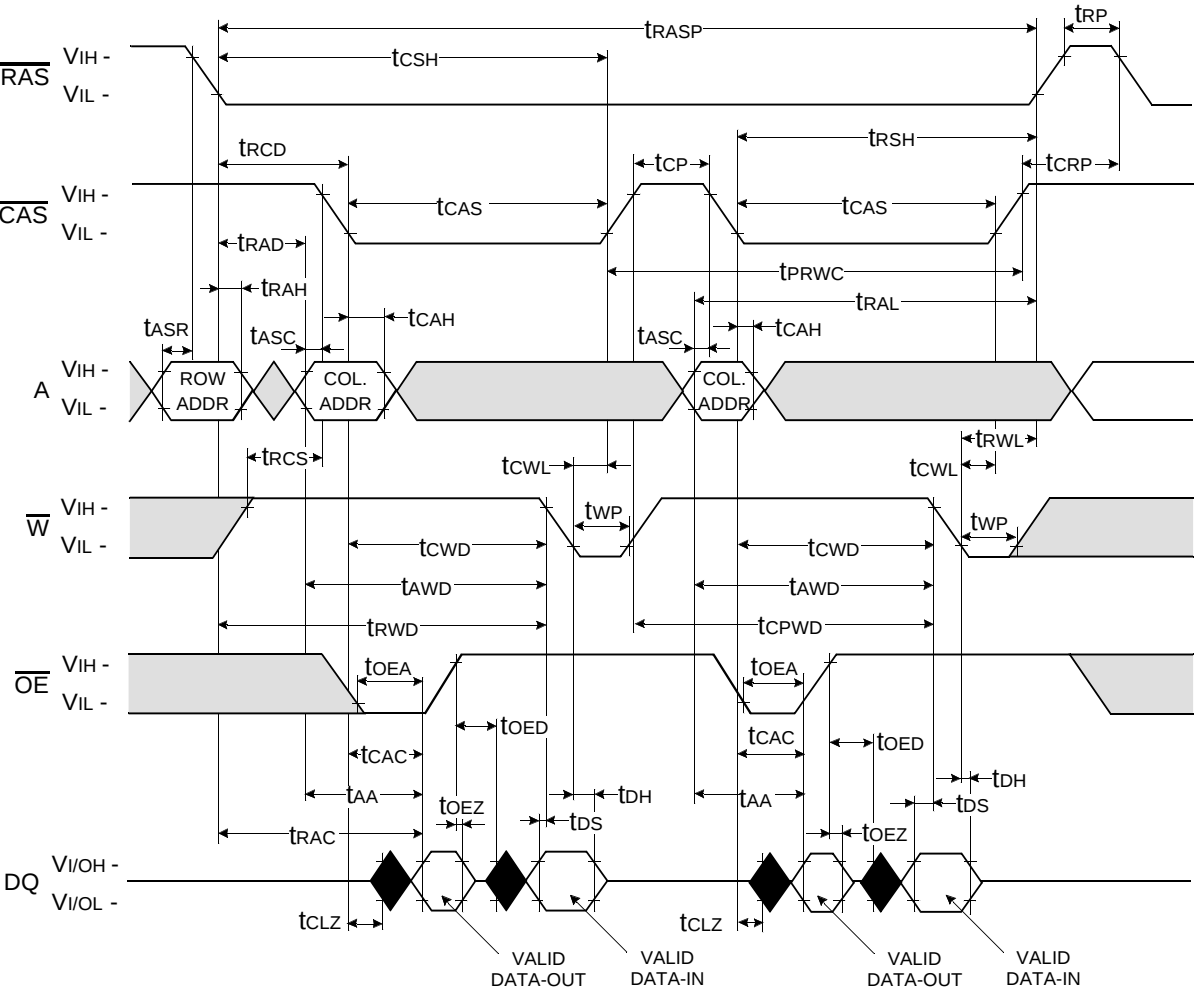


Don't care

Undefined

RAS - ONLY REFRESH CYCLE


NOTE :  $\overline{W}$ ,  $\overline{OE}$ , DIN = Don't care

DOUT = OPEN

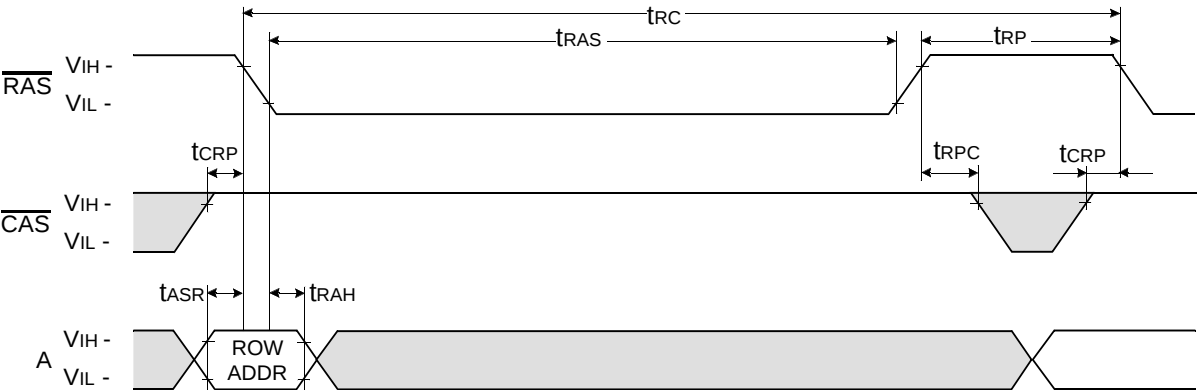


CAS - BEFORE - RAS REFRESH CYCLE

NOTE :  $\overline{OE}$ ,  $A$  = Don't care

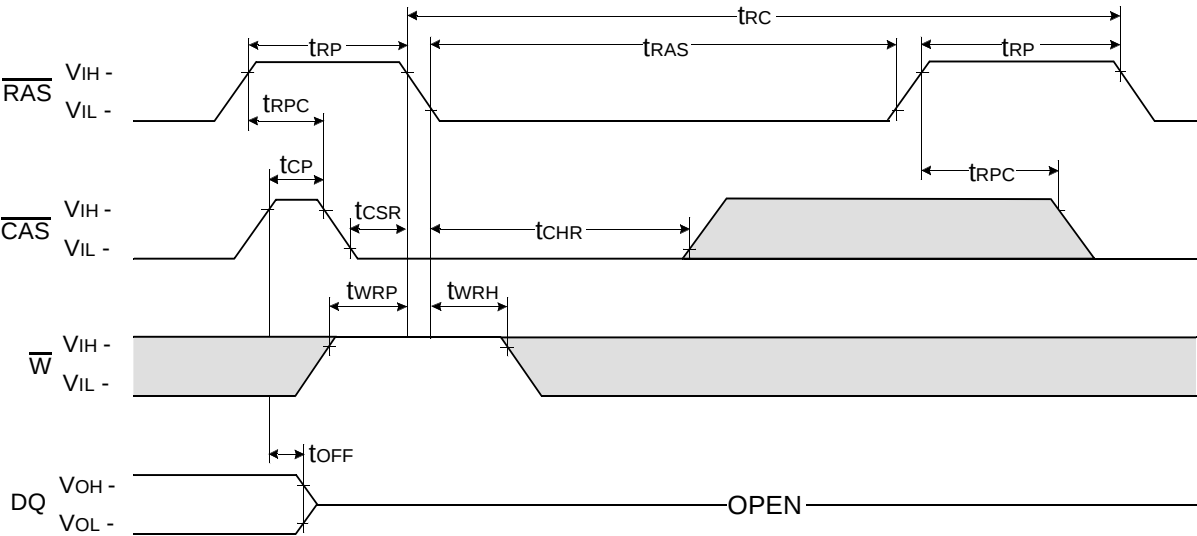


Don't care  
Undefined

HIDDEN REFRESH CYCLE ( READ )

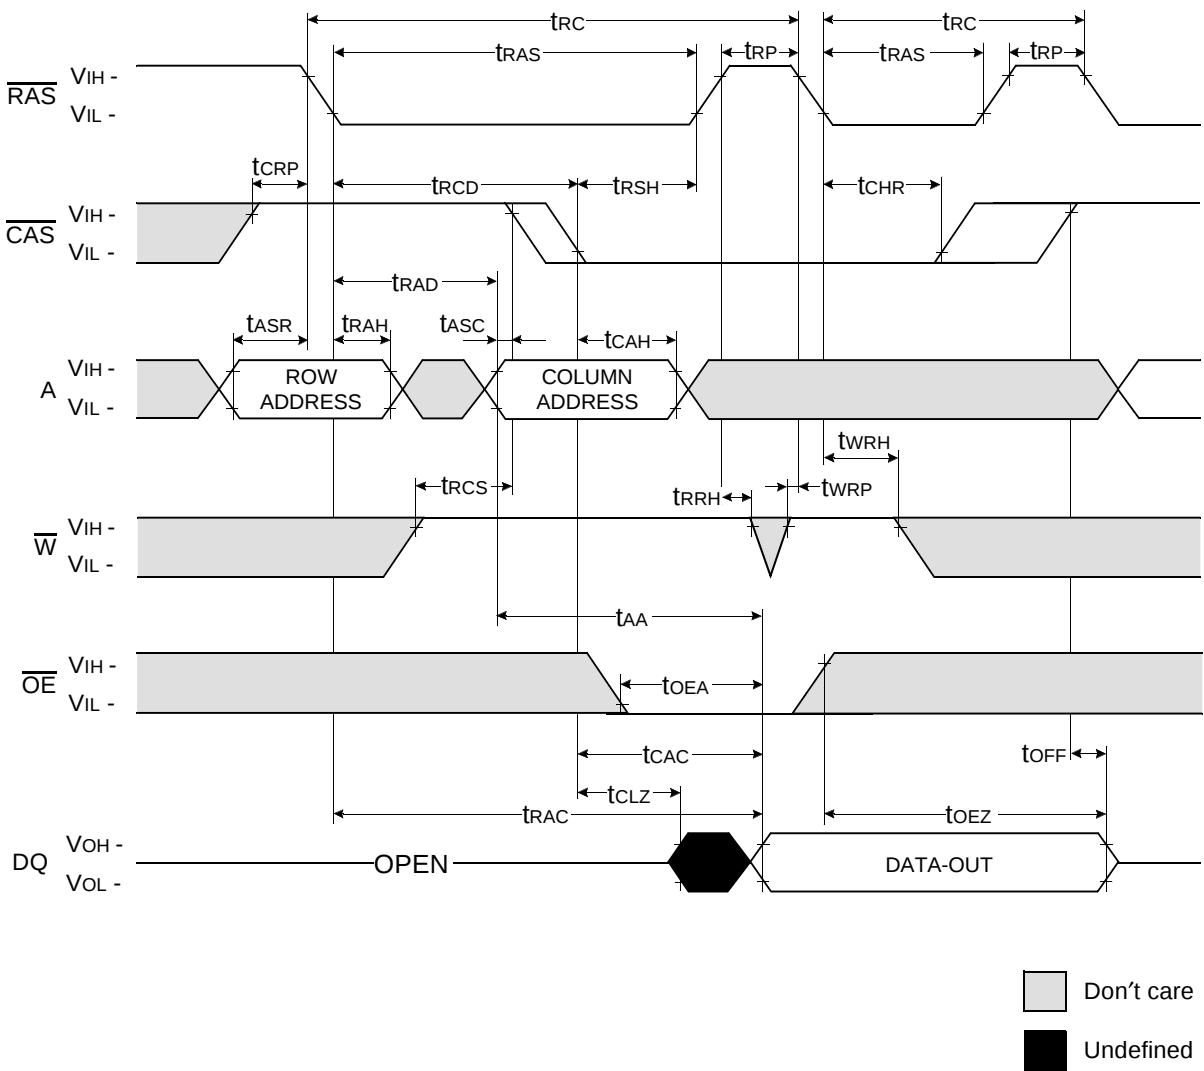


HIDDEN REFRESH CYCLE ( WRITE )

NOTE : DOUT = OPEN

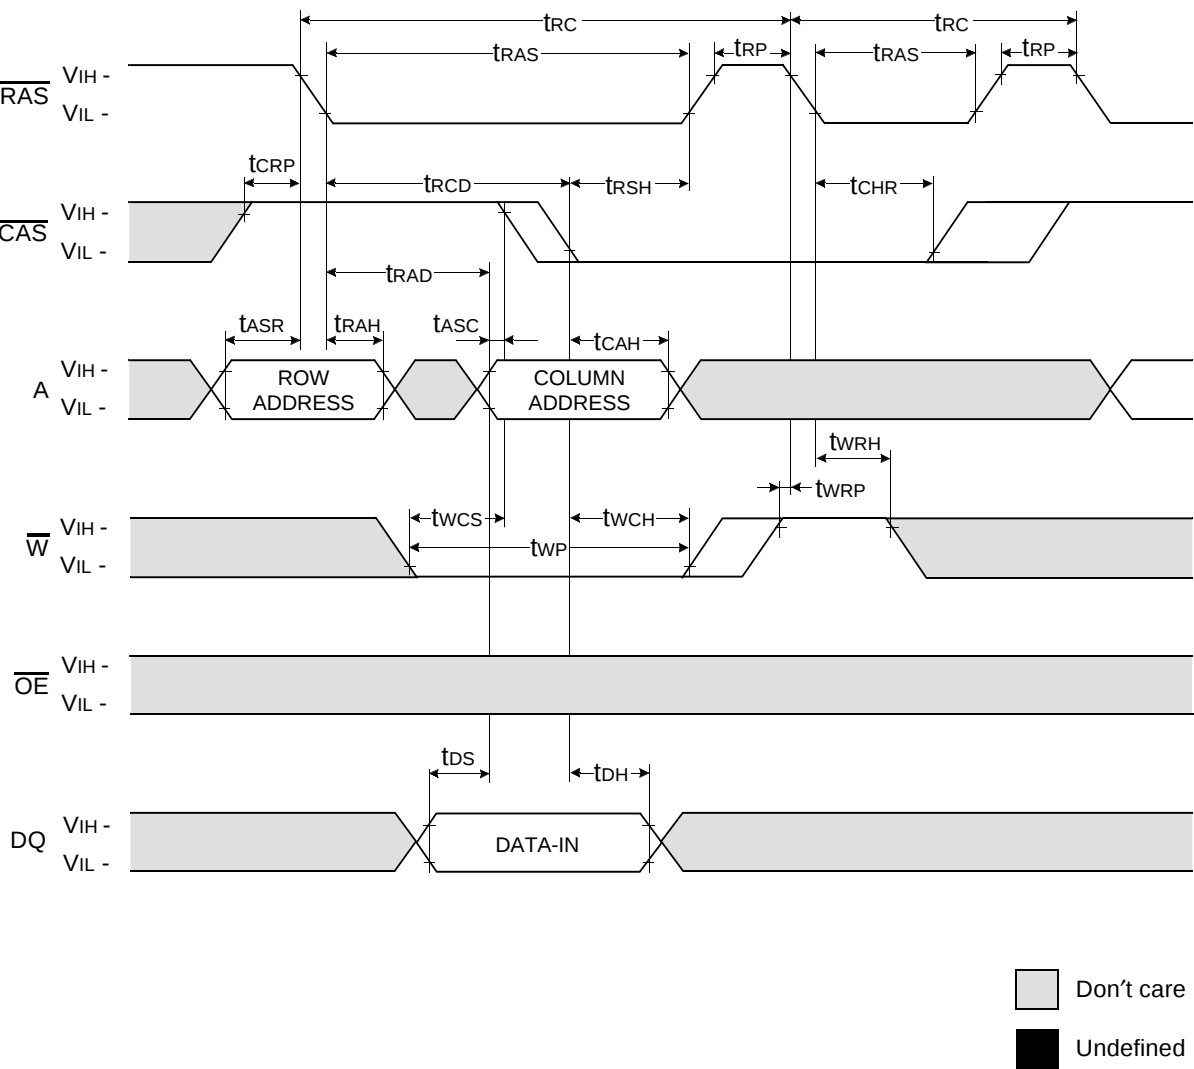


CAS-BEFORE-RAS REFRESH COUNTER TEST CYCLE

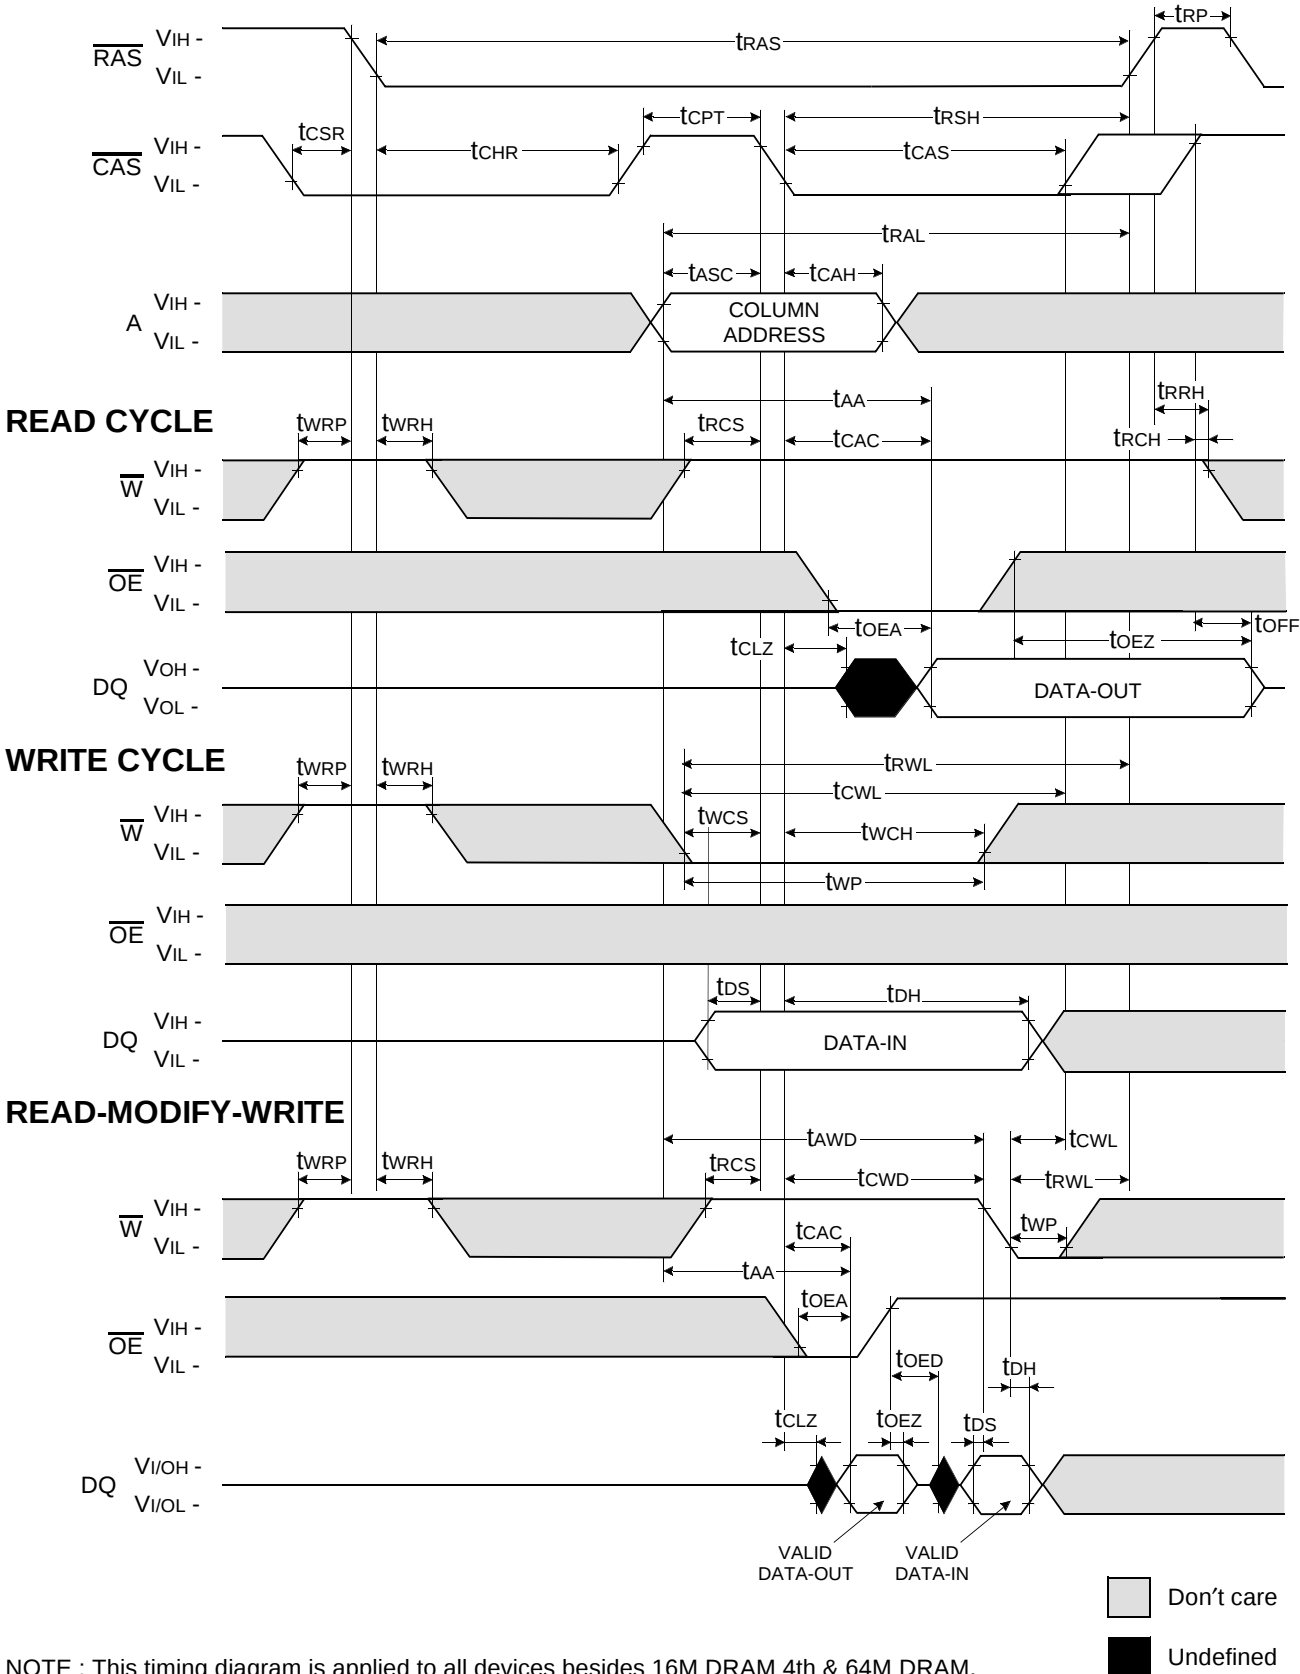

NOTE : This timing diagram is applied to all devices besides 16M DRAM 4th & 64M DRAM.


**CAS - BEFORE - RAS SELF REFRESH CYCLE**

NOTE :  $\overline{OE}$ , A = Don't care

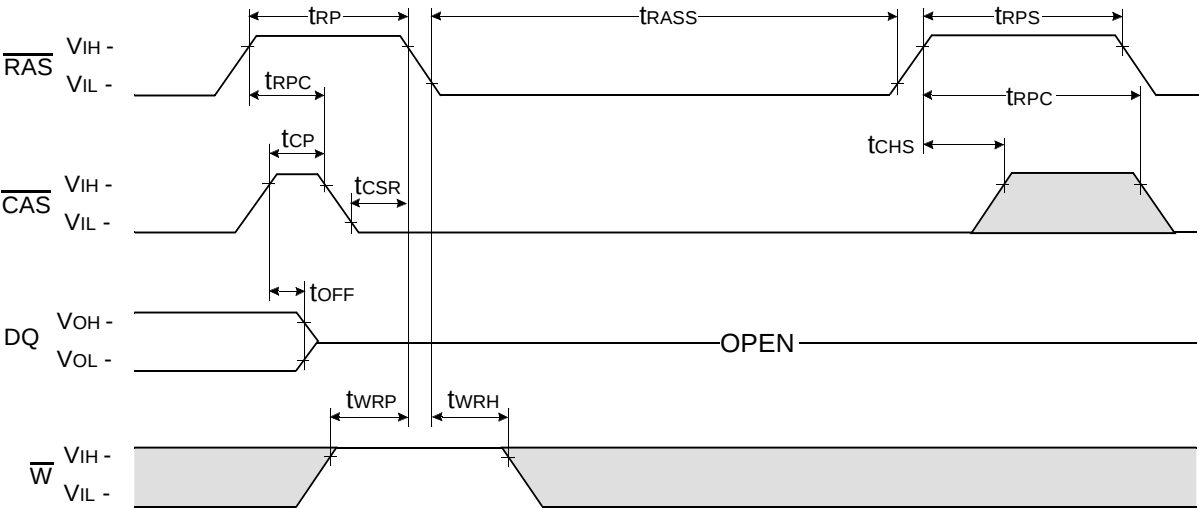

**TEST MODE IN CYCLE**

NOTE :  $\overline{OE}$ , A = Don't care

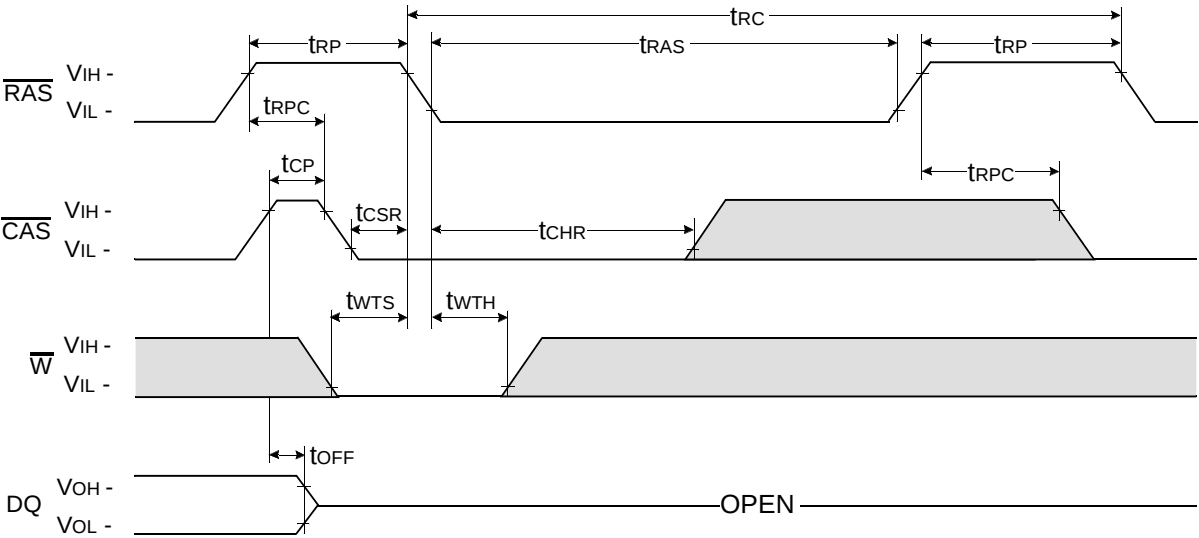


Don't care  
 Undefined

# DRAM MODULE


KMM53216000BK/BKG

## PACKAGE DIMENSIONS

Units : Inches (millimeters)

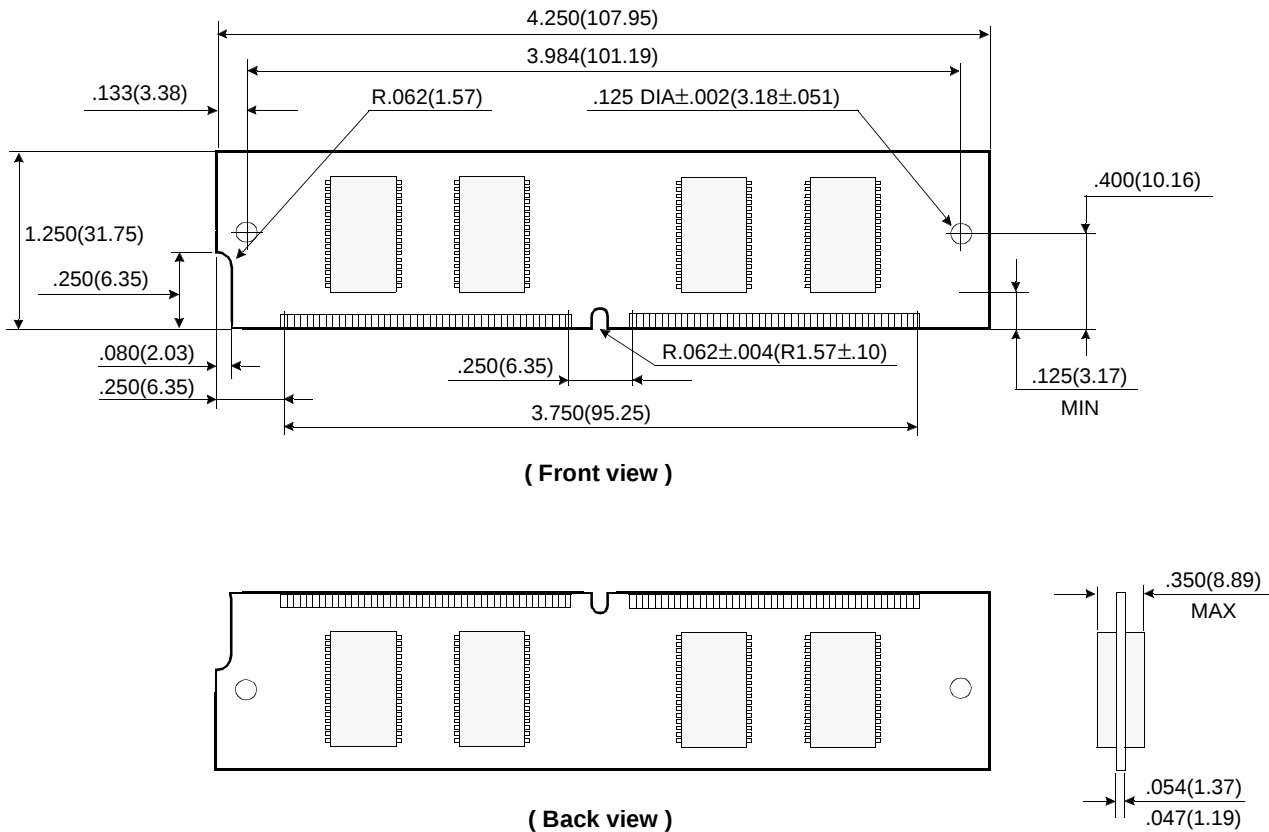

## Gold/Solder Plating Lead

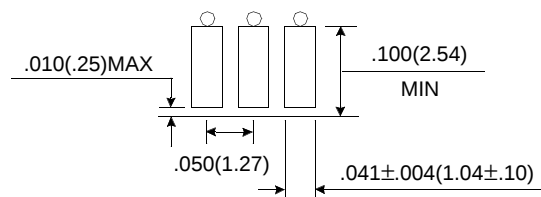

Tolerances : ±.005(.13) unless otherwise specified

NOTE : The used device is 16Mx4 DRAM, SOJ

DRAM Part No. : KMM53216000BK/BKG -- KM44C16100BK

SAMSUNG

ELECTRONICS