


3.3V 9x11mm Low Cost Surface Mount Voltage Controlled Crystal Oscillators

- **Applications:** Phase-Locked Loops (PLL's); Clock Recovery; Reference Signal Tracking; Synthesizers; Frequency Modulation/Demodulation
- Ceramic Construction, Medal Lid
- 2.0 to 80 MHz Frequency Range
- 0.3V to 3.3V Control Voltage
- ± 25 ppm Stability (Typical)
- -40°C to 85°C Operating Temperature Option
- Tape and Reel Available
- Ground Shielded Top and Bottom 6-Pin SOJ-20 Footprint
- J-Leads Seam-sealed, Resistance Welded Hermetic Package

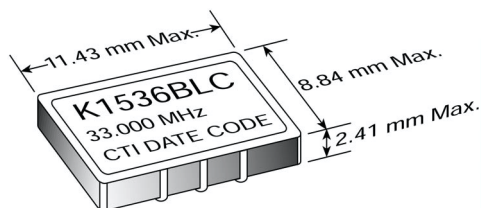

ELECTRICAL SPECIFICATIONS

MODEL	K1536BLC	
Frequency Range (MHz)	2 to 55	55.1 to 80
Frequency Stability (ppm)		
Overall (Typical)	Inclusive of calibration, temperature, voltage, load, shock, vibration, aging	
0°C to 70°C	± 25	± 40
-40°C to $+85^{\circ}\text{C}$	± 50	± 60
Frequency Control Function:	(for custom MTL, Vc range, transfer function, etc. -- consult factory)	
Deviation (Typical)	± 120	± 100
Minimum Tuning Limit 0°C to 70°C	± 60	± 40
Minimum Tuning Limit -40°C to 85°C	± 50	± 20
Linearity	$< 10\%$	
Modulation Bandwidth ($\pm 3\text{dB}$)	$> 20\text{ KHz}$	
Nominal Control Voltage (V)	1.65	
Control Voltage Range (V)	0.3 to 3.0	
Transfer Function	Positive	
Input Impedance	$> 50\text{ K } \Omega @ 10\text{ KHz}$	
Temperature Range ($^{\circ}\text{C}$)		
Operating	-40°C to $+85^{\circ}\text{C}$	
Storage	-40°C to $+125^{\circ}\text{C}$	
Supply Voltage (V)	$+3.3 \pm 10\%$	
Input Current (mA)	< 30	
Start Up Time (ms)	< 10	
Symmetry (%) CMOS	40/60	
Start up Time (ms)	< 10	
Typical SSB Phase Noise (dBc/Hz)	10Hz	-65
Offset from Carrier	100Hz	-95
	1KHz	-115
	10KHz	-130
	100KHz	-140

PART NUMBERING GUIDE


K1536BLC X X - Specify Frequency

“Blank” = CMOS 40%/60%

“C” = CMOS 45%/55%

“Blank” = 0°C to 70°C Operating Temp.


“M” = -40°C to $+85^{\circ}\text{C}$ Operating Temp.

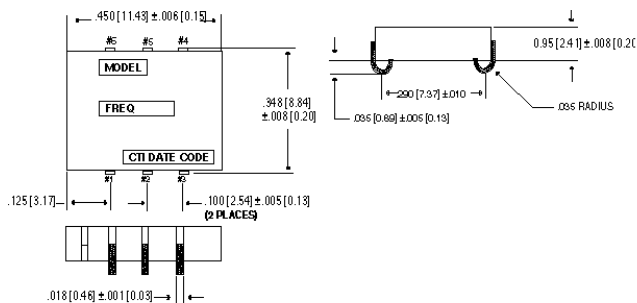

PIN	FUNCTION
1	Voltage Control
2	Tri-State
3	Gnd & Ground Plane
4	Output
5	N/C
6	+ V _{CC}


TAPE & REEL SPECIFICATIONS

Tape & Reel
Shipping Tape
 Size: 24mm
 Material: Black PVC,
 Conductive .012" thick
Shipping Reel
 Size: 13" diameter
 Material: Plastic




13" Reel
 Tape Length: 16.5 yds
 Max. No. of Pockets: 750
 Leader Length: 16" min.
 Trailer Length: 14" min.
 Q.C. Sample Quantity: 10 pcs.
 Product/Reel: 500
 Cover Tape Thickness: .002"
 Cover Peel Strength: 75g
 Note: Minimum Order is 500


SHIPPING TUBE CROSS SECTION

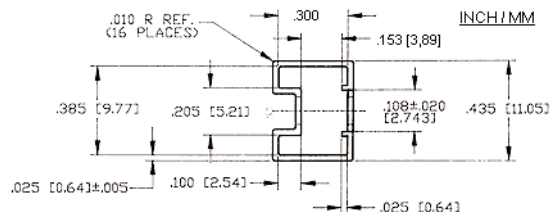

OUTPUT WAVEFORM

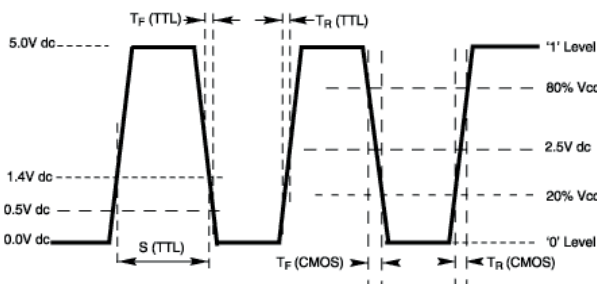

TEST CIRCUIT DIAGRAM

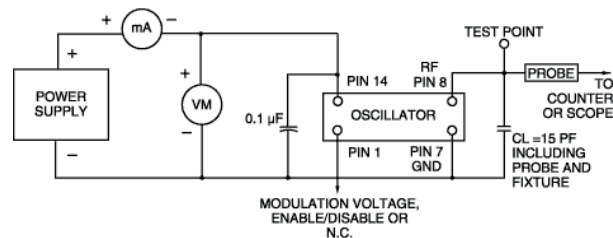

MECHANICAL AND ENVIRONMENTAL SPECIFICATIONS

TEST METHODS	REFERENCE PROCEDURES	DESCRIPTION
Temperature Cycle	MIL-STD-883, Mtd 1010, Cond. B	-55°C to +125°C; Air-to-Air; 100 cycles; 10 min. dwell
Mechanical Shock	MIL-STD-883, Mtd 2002, Cond. B	1500 g's
Vibration	MIL-STD 883, Mtd 2007, Cond. B	20-2000 Hz; 0.06 inch; 15g's; 3 planes
Humidity Steady State	MIL-STD-202, Mtd 103	40°C; 90%-95% R.H.; 56 days
Thermal Shock	MIL-STD-883, Mtd 1011.7 Cond. B	100°C to 0°C; Water-to-Water; 15 cycles
Electrostatic Discharge	MIL-STD-883, Mtd 3015 Class II	2 KV to 4 KV Threshold
Solderability	MIL-STD-883, Mtd 2022.2	Solder dip; Meniscograph Criteria
Hermeticity	MIL-STD-883, Mtd 1014.8, Cond. A1	Mass spectro. 2 x 10 ⁻⁸ atmos. CC/sec He
Resistance to Soldering	MIL-STD-202, Mtd 210D, Cond. J	235°C; 30 seconds
Lead Integrity	MIL-STD-883, Mtd 2004.5, Cond. A, B1	Lead tension & bend stress
Marking Permanence	MIL-STD-883, Mtd 2015.8	Resistance to solvents
Life Test	MIL-STD-883, Mtd 1005.6	125°C, powered. 1000 hours minimum