


## Silicon Piezoresistive Relative Pressure Sensor

KPY 41-R  
KPY 46-R

### Features


- Low pressure and temperature hysteresis
- Fast response
- High sensitivity and linearity
- Fatigue free monocrystalline silicon diaphragm giving high load cycle stability
- High long term stability
- Pressure coupled to rear side of silicon diaphragm
- Built in silicon temperature sensor

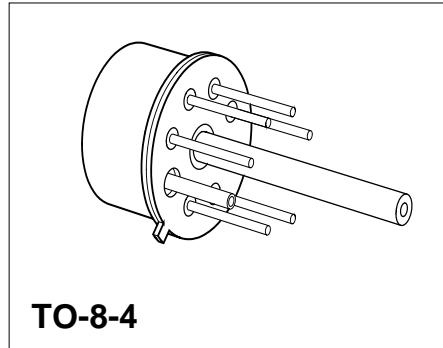

Type	Symbol	Pressure Range	Unit	Ordering Code
KPY 41-R	$P_0 \dots P_N$	0 ... 0.25	bar	Q62705-K159
KPY 42-R		0 ... 0.6		Q62705-K160
KPY 43-R		0 ... 1.6		Q62705-K161
KPY 44-R		0 ... 4		Q62705-K163
KPY 45-R		0 ... 10		Q62705-K165
KPY 46-R		0 ... 25		Q62705-K167

### Pin Configuration

1	Capillary tube
2	+ $V_{IN}$
3	- $V_{OUT}$
4	Temperature sensor (typ. $R_{25} = 2 \text{ k}\Omega$ )
5	Temperature sensor
6	- $V_{IN}$
7	+ $V_{OUT}$
8	Not connected

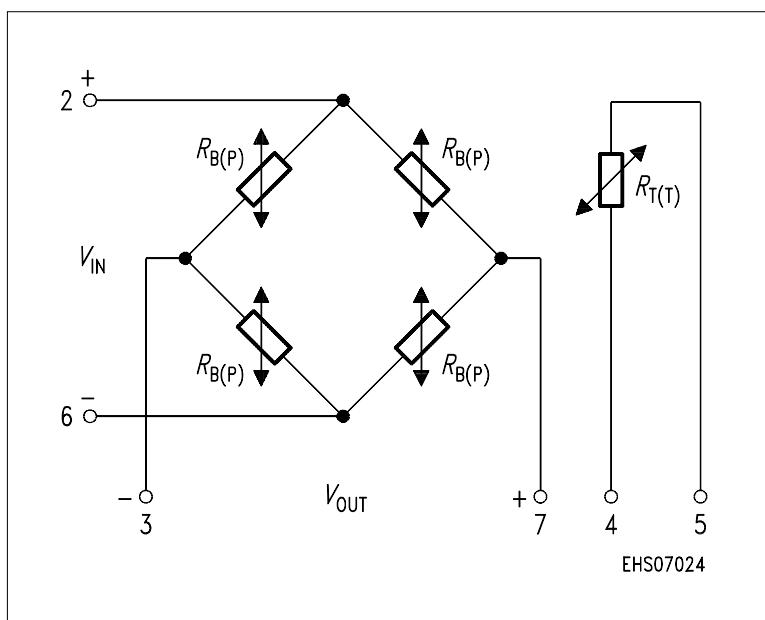

### Absolute Maximum Ratings

Parameter	Symbol	Limit Values		Unit
Pressure overload	$P_{\text{MAX}}$	2		bar
	KPY 41-R	6		
	KPY 42-R	10		
	KPY 43-R	16		
	KPY 44-R	30		
	KPY 45-R	40		
	KPY 46-R			
Operating temperature range	$T_A$	– 40 ... + 125		°C
Storage temperature range	$T_{\text{stg}}$	– 50 ... + 150		°C
Supply voltage	$V_{\text{IN}}$	12		V

### Electrical Characteristics

at  $T_A = 25$  °C and  $V_{\text{IN}} = 5$  V, unless otherwise specified.


Parameter	Symbol	Limit Values			Unit
		min.	typ.	max.	
Bridge resistance	$R_B$	4	–	8	kΩ
Sensitivity	$s$				mV/Vbar
	KPY 41-R	16.8	24.0	32.0	
	KPY 42-R	11.0	15.0	24.0	
	KPY 43-R	5.6	8.8	12.5	
	KPY 44-R	4.0	6.0	9.0	
	KPY 45-R	1.8	2.6	4.0	
	KPY 46-R	0.88	1.2	2.0	
Output voltage	$V_{\text{fin}}$				mV
	KPY 41-R	21	30	40	
	KPY 42-R	33	45	72	
	KPY 43-R	45	70	100	
	KPY 44-R	80	120	180	
	KPY 45-R	90	130	200	
	KPY 46-R	110	150	250	
Offset voltage $P = P_0$	$V_0$	– 25	–	+ 25	mV
Linearity error (Best fit straight line) $P_0 = P_0 \dots P_N$	$F_L$				% $V_{\text{fin}}$
	KPY 41 ... 45-R	–	± 0.15	± 0.35	
	KPY 46-R		± 0.15	–	
Pressure hysteresis $P_1 = P_0, P_2 = P_N,$ $P_3 = P_0$	$P_H$	–	± 0.1	–	% $V_{\text{fin}}$

## Electrical Characteristics

at  $T_1 = 25^\circ\text{C}$ ,  $T_2 = 125^\circ\text{C}$ ,  $T_3 = 25^\circ\text{C}$  and  $V_{\text{IN}} = 5\text{ V}$ , unless otherwise specified.

Parameter	Symbol	Limit Values			Unit
		min.	typ.	max.	
Temperature coefficient of $V_{\text{fin}}$ KPY 41-R KPY 42-R KPY 43-R KPY 44-R KPY 45-R KPY 46-R	$TC_{V_{\text{fin}}}$	– 0.19	– 0.13	– 0.09	%/K
Temperature coefficient of $V_0$ KPY 41-R KPY 42-R KPY 43-R KPY 44-R KPY 45-R KPY 46-R	$TC_{V_0}$	– 0.05	–	+ 0.05	%/K
Temperature coefficient of $R_B$ KPY 41 ... 46-R	$TC_{RB}$	–	+ 0.095	–	%/K
Temperature hysteresis of $V_0$ ; $V_{\text{fin}}$ KPY 41-R KPY 42-R KPY 43 ... 46-R	$TH$	– 0.7	–	+ 0.7	% v. $V_{\text{fin}}$

## Package Outline

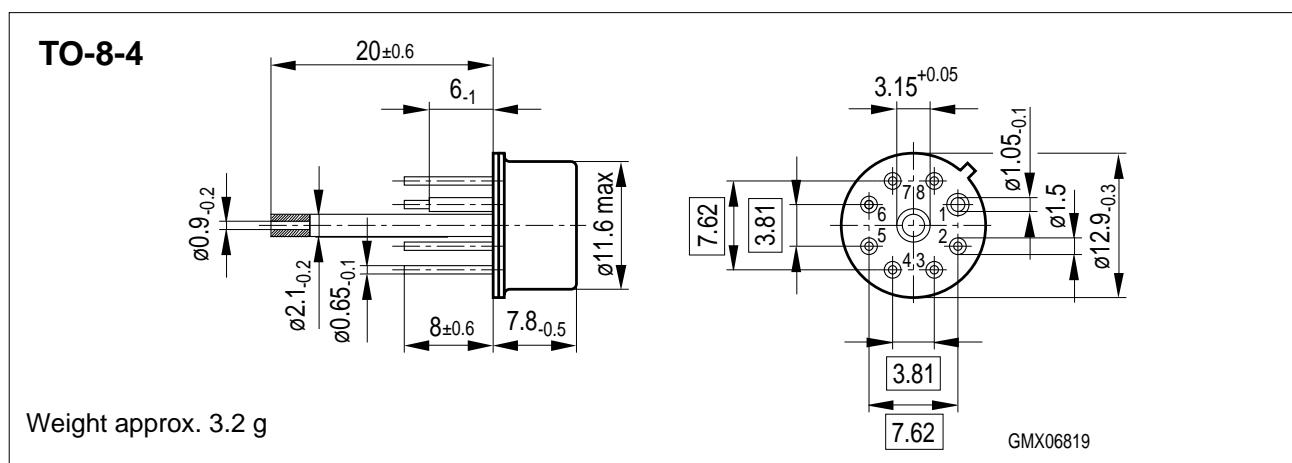

## Sorts of Packing

Package outlines for tubes, trays etc. are contained in our Data Book "Package Information".

Dimensions in mm